

ARCOHIGHLIGHT

15 YEARS

OF

YEARS

OF

LIGHT

AULIX lighting

návrhy osvětlení a prodej svítidel
inteligentní systémy, vypínače

SVĚTELNÉ STUDIO

Náměstí Na Sádkách 705
252 41 Dolní Břežany (Praha západ)


Telefon: +420 246 083 152

Mobil.: +420 702 061 783

E-mail: studio@aulix.cz

Web: www.aulix.cz

E-shop: <http://obchod.aulix.cz>



1	SUSPENDED	7
2	WALL	75
3	CEILING	97
4	RECESSED	163
5	SYSTEMS	193
6	TECHNICAL INFORMATION	223



SUSPENDED

1

SUSPENDED

BELO_GI_70/80 SUSPENDED	16
BELO_GI_70/110 SUSPENDED	18
BELO_GI_70/110L SUSPENDED	20
BELO_GI_110/80 SUSPENDED	24
BELO_LO_SQ_80 SUSPENDED	26
BELO_LO_OV_80 SUSPENDED	28
BELO_LO_S_80 SUSPENDED	30
BELO_LO_PO_80 SUSPENDED	32
BELO_LO_TR_80 SUSPENDED	34
BELO_BE_50 SUSPENDED	38
BELO_BE_80 SUSPENDED	40
BELO_BE_110 SUSPENDED	42
BELO_BE_SQ_50 SUSPENDED	44
BELO_BE_SQ_80 SUSPENDED	46
BELO_BE_SQ_110 SUSPENDED	48
BELO_QA_50 SUSPENDED	50
BELO_QA_80 SUSPENDED	52
BELO_QA_110 SUSPENDED	54
CUBUS_R SUSPENDED	56
CUBUS_S SUSPENDED	58
CUBUS_XL SUSPENDED	60
CUBUS SUSPENDED	62
DUAL SUSPENDED	64
LUCID SUSPENDED	66
DUAL STAR SUSPENDED	68
CUBUS SQUARE SUSPENDED	70
FLAT 200 SUSPENDED	72














□ BELO_GI_70/80 SUSPENDED



ARCHILIGHT



INSTALLATION

Suspended version
Ceiling version see page 102
Recessed version see page 168

CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block
Luminaires for dimming are delivered with 5-pole terminal block

MATERIAL

The body of the luminaire is curved extruded aluminium, powder coated finish

LIGHT SOURCE

LED Tridonic or TCI, min. 150Lm/W, 3000K or 4000K

DIFFUSER

PMMA OPAL
PRISMATIC

LIGHT DISTRIBUTION


Direct symmetrical
Direct symmetrical / Passive indirect symmetrical, see page 223

EMERGENCY LIGHTING

A unit with integrated emergency is an option

DIMMING

Most models can be delivered with ballast for dimming (TOUCHDIM, DALI)

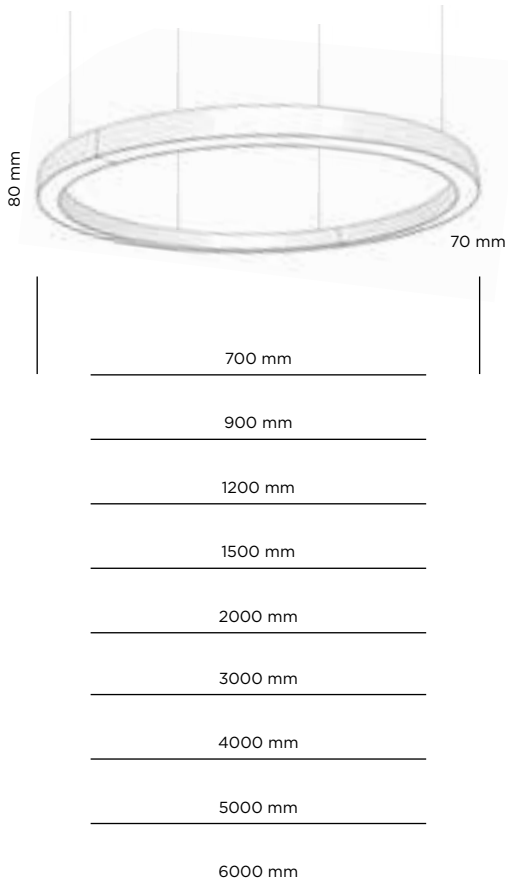

DIRECT CODE	Ø (mm)	W	Lm from 3000K/4000K
SBS/GI700	700	29	4690/4970
SBS/GI900	900	37	6030/6390
SBS/GI1220	1200	50	8040/8520
SBS/GI1500	1500	66	10720/11360
SBS/GI2000	2000	82	13400/14200
SBS/GI3000	3000	132	21440/22720
SBS/GI4000	4000	164	26800/28400
SBS/GI5000	5000	230	37520/39760
SBS/GI6000	6000	263	42880/45400

DIRECT/INDIRECT CODE	Ø (mm)	W	Lm from 3000K/4000K
SBS/GI700/DI	700	29	4690/4970
SBS/GI900/DI	900	37	6030/6390
SBS/GI1220/DI	1200	50	8040/8520
SBS/GI1500/DI	1500	66	10720/11360
SBS/GI2000/DI	2000	82	13400/14200
SBS/GI3000/DI	3000	132	21440/22720
SBS/GI4000/DI	4000	164	26800/28400
SBS/GI5000/DI	5000	230	37520/39760
SBS/GI6000/DI	6000	263	42880/45400

COLOR TEMPERATURE

3000K /3K
4000K /4K

OPTIC

PMMA OPAL /--
PRISMATIC /P


DIMMABLE OPTIONS

DALI, TOUCHDIM /DALI see page 223
WIRELESS /WRS see page 223

COLORS

	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACIT	/AT
	GOLD	/GL
	BRONZE	/BR

Delivered incl. 2 m self-locking suspensions

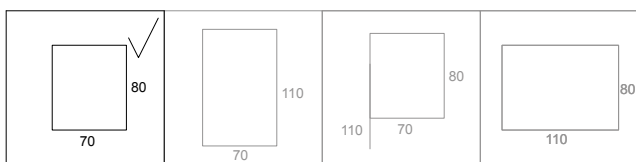

see page 18

see page 20

see page 24


ACCESSORIES

	SPPKBO3075 (3X0,75)
	SPPKBO5075 (5X0,75)
	TRANSPARENT CABLE 2 METRES WITH CEILING BOX

□ BELO_GI_70/110 SUSPENDED



ARCHILIGHT



INSTALLATION

Suspended version
Ceiling version see page 104

CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block
Luminaires for dimming are delivered with 5-pole terminal block

MATERIAL

The body of the luminaire is curved extruded aluminium, powder coated finish

LIGHT SOURCE

LED Tridonic or TCI, min. 150Lm/W, 3000K or 4000K

DIFFUSER

PMMA OPAL
PRISMATIC

LIGHT DISTRIBUTION

Direct symmetrical
Direct symmetrical / passive indirect symmetrical, see page 223

EMERGENCY LIGHTING

A unit with integrated emergency is an option

DIMMING

Most models can be delivered with ballast for dimming (TOUCHDIM, DALI)



700 mm
900 mm
1200 mm
1500 mm
2000 mm
3000 mm
4000 mm
5000 mm
6000 mm

DIRECT CODE	Ø (mm)	W	Lm from 3000K/4000K
SBS/110/GI700	700	29	4690/4970
SBS/110/GI900	900	37	6030/6390
SBS/110/GI1220	1200	50	8040/8520
SBS/110/GI1500	1500	66	10720/11360
SBS/110/GI2000	2000	82	13400/14200
SBS/110/GI3000	3000	132	21440/22720
SBS/110/GI4000	4000	164	26800/28400
SBS/110/GI5000	5000	230	37520/39760
SBS/110/GI6000	6000	263	42880/45400

DIRECT/ INDIRECT CODE	Ø (mm)	W	Lm from 3000K/4000K
SBS/110/GI700	700	29	4690/4970
SBS/110/GI900	900	37	6030/6390
SBS/110/GI1220	1200	50	8040/8520
SBS/110/GI1500	1500	66	10720/11360
SBS/110/GI2000	2000	82	13400/14200
SBS/110/GI3000	3000	132	21440/22720
SBS/110/GI4000	4000	164	26800/28400
SBS/110/GI5000	5000	230	37520/39760
SBS/110/GI6000	6000	263	42880/45400

COLORS

	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACIT	/AT
	GOLD	/GL
	BRONZE	/BR

COLOR TEMPERATURE

3000K	/3K
4000K	/4K


OPTIC

PMMA OPAL	/--
PRISMATIC	/P

DIMMABLE OPTIONS

DALI, TOUCHDIM	/DALI	see page 223
WIRELESS	/WRS	see page 223

Delivered incl. 2 m self-locking suspensions

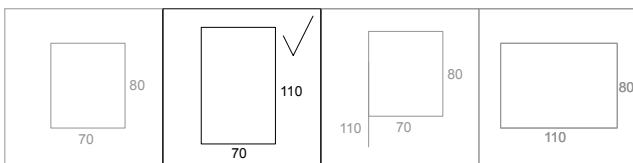

see page 16

see page 20

see page 24

ACCESSORIES

	SPPKBO3075 (3X0,75)
	SPPKBO5075 (5X0,75)
	TRANSPARENT CABLE 2 METRES WITH CEILING BOX




Detail of indirect part

□ BELO_GI_70/110L SUSPENDED



ARCHILIGHT



INSTALLATION

Suspended version
Ceiling version see page 106

CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block
Luminaires for dimming are delivered with 5-pole terminal block

MATERIAL

The body of the luminaire is curved extruded aluminium,
powder coated finish

LIGHT SOURCE

LED Tridonic or TCI, min. 150lm/W, 3000K or 4000K

DIFFUSER

PMMA OPAL
PRISMATIC

LIGHT DISTRIBUTION



Direct symmetrical
Direct symmetrical / passive indirect
symmetrical, see page 223

EMERGENCY LIGHTING

A unit with integrated emergency is an option

DIMMING

Most models can be delivered with ballast
for dimming (TOUCHDIM, DALI)

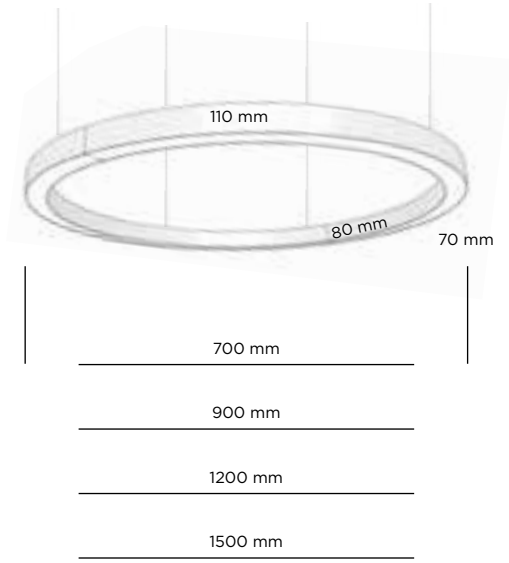

COLOR TEMPERATURE

3000K /3K
4000K /4K


OPTIC

PMMA OPAL /--
PRISMATIC /P

DIMMABLE OPTIONS

DALI, TOUCHDIM /DALI see page 223
WIRELESS /WRS see page 223

Delivered incl. 2 m self-locking suspensions

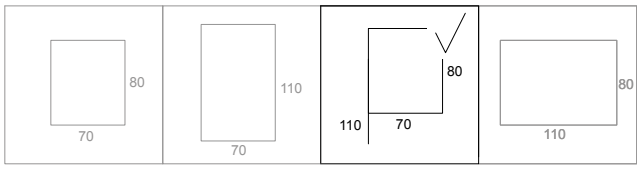

see page 16

see page 18

see page 24

DIRECT CODE	Ø (mm)	W	Lm from 3000K/4000K
SBS/110L/GI700	700	29	4690/4970
SBS/110L/GI900	900	37	6030/6390
SBS/110L/GI1220	1200	50	8040/8520
SBS/110L/GI1500	1500	66	10720/11360

DIRECT/INDIRECT CODE	Ø (mm)	W	Lm from 3000K/4000K
SBS/110L/GI700	700	29	4690/4970
SBS/110L/GI900	900	37	6030/6390
SBS/110L/GI1220	1200	50	8040/8520
SBS/110L/GI1500	1500	66	10720/11360

COLORS

	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACIT	/AT
	GOLD	/GL
	BRONZE	/BR

ACCESSORIES

- SPPKBO3075 (3X0,75)
- SPPKBO5075 (5X0,75)
- TRANSPARENT CABLE 2 METRES WITH CEILING BOX







□ BELO_GI_110/80 SUSPENDED




ARCHILIGHT

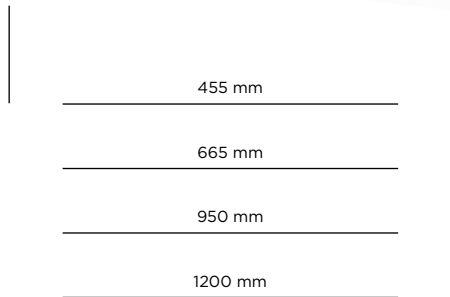

DIRECT CODE	Ø (mm)	W	Lm from 3000K/4000K
SBS/GI455	455	17	2680/2840
SBS/GI665	665	26	4020/4260
SBS/GI950	950	37	6030/6390
SBS/GI1200	1200	50	8040/8520

DIRECT/INDIRECT CODE	Ø (mm)	W	Lm from 3000K/4000K
SBS/GI455/DI	455	17	2680/2840
SBS/GI665/DI	665	26	4020/4260
SBS/GI950/DI	950	37	6030/6390
SBS/GI1200/DI	1200	50	8040/8520

Delivered incl. 2 m self-locking suspensions

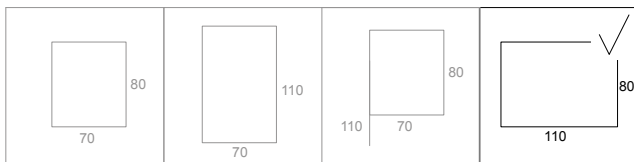

see page 16

see page 18

see page 20

INSTALLATION

Suspended version
Ceiling version see page 108
Recessed version see page 170

CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block
Luminaires for dimming are delivered with 5-pole terminal block

MATERIAL

The body of the luminaire is curved extruded aluminium, powder coated finish

LIGHT SOURCE

LED Tridonic or TCI, min. 150Lm/W, 3000K or 4000K

DIFFUSER

PMMA OPAL
PRISMATIC

LIGHT DISTRIBUTION


Direct symmetrical
Direct symmetrical / Passive indirect symmetrical, see page 223

EMERGENCY LIGHTING

A unit with integrated emergency is an option

DIMMING

Most models can be delivered with ballast for dimming (TOUCHDIM, DALI)



Prismatic diffuser

COLOR TEMPERATURE

3000K /3K
4000K /4K

OPTIC

PMMA OPAL /--
PRISMATIC /P

DIMMABLE OPTIONS

DALI, TOUCHDIM /DALI see page 223
WIRELESS /WRS see page 223

COLORS

	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACIT	/AT
	GOLD	/GL
	BRONZE	/BR


ACCESSORIES

SPPKBO3075 (3X0,75)
 SPPKBO5075 (5X0,75)
 TRANSPARENT CABLE 2 METRES WITH CEILING BOX

□ BELO_LO_SQ_80 SUSPENDED



ARCHILIGHT

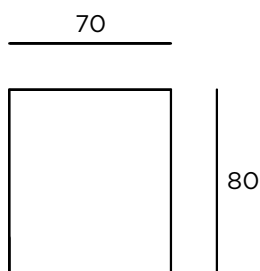

INSTALLATION

Suspended version
Ceiling version see page 110
Recessed version see page 180

CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block
Luminaires for dimming are delivered with 5-pole terminal block

MATERIAL

The body of the luminaire is curved extruded aluminium, powder coated finish

LIGHT SOURCE

LED Tridonic or TCI, min. 150Lm/W, 3000K or 4000K

DIFFUSER

PMMA OPAL
PRISMATIC

LIGHT DISTRIBUTION

Direct symmetrical
Direct symmetrical / Passive indirect symmetrical, see page 223

EMERGENCY LIGHTING



A unit with integrated emergency is an option

DIMMING

Most models can be delivered with ballast for dimming (TOUCHDIM, DALI)



- A 1225 _____
- B 1507 _____
- C 1789 _____
- D 2071 _____

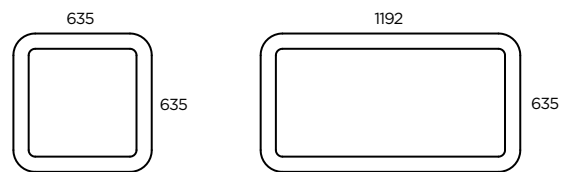

DIRECT CODE	(mm)	W	Lm from 3000K/4000K
SBS/80/SQ/600	635x635x80	33	5360/5680
SBS/80/SQ/1200	1192x635x80	50	8040/8520
SBS/80/SQ/AA	1225x1225x80	66	10720/11360
SBS/80/SQ/AB	1225x1507x80	74	12060/12780
SBS/80/SQ/AC	1225x1789x80	81	13400/14200
SBS/80/SQ/AD	1225x2071x80	91	14740/15620
SBS/80/SQ/BB	1507x1507x80	81	13400/14200
SBS/80/SQ/BC	1507x1789x80	91	14740/15620
SBS/80/SQ/BD	1507x2071x80	98	16080/17040
SBS/80/SQ/CC	1789x1789x80	98	16080/17040
SBS/80/SQ/CD	1789x2071x80	114	17420/18460
SBS/80/SQ/DD	2071x2071x80	115	18760/19880

DIRECT/ INDIRECT CODE	(mm)	W	Lm from 3000K/4000K
SBS/80/SQ/600/DI	635x635x80	33	5360/5680
SBS/80/SQ/1200/DI	1192x635x80	50	8040/8520
SBS/80/SQ/AA/DI	1225x1225x80	66	10720/11360
SBS/80/SQ/AB/DI	1225x1507x80	74	12060/12780
SBS/80/SQ/AC/DI	1225x1789x80	81	13400/14200
SBS/80/SQ/AD/DI	1225x2071x80	91	14740/15620
SBS/80/SQ/BB/DI	1507x1507x80	81	13400/14200
SBS/80/SQ/BC/DI	1507x1789x80	91	14740/15620
SBS/80/SQ/BD/DI	1507x2071x80	98	16080/17040
SBS/80/SQ/CC/DI	1789x1789x80	98	16080/17040
SBS/80/SQ/CD/DI	1789x2071x80	114	17420/18460
SBS/80/SQ/DD/DI	2071x2071x80	115	18760/19880

COLOR TEMPERATURE

3000K	/3K
4000K	/4K

OPTIC

PMMA OPAL	/--
PRISMATIC	/P

DIMMABLE OPTIONS

DALI, TOUCHDIM	/DALI	see page 223
WIRELESS	/WRS	see page 223

COLORS

	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACIT	/AT
	GOLD	/GL
	BRONZE	/BR

ACCESSORIES


	SPPKB03075 (3X0,75)
	SPPKB05075 (5X0,75)
	TRANSPARENT CABLE 2 METRES WITH CEILING BOX

Delivered incl. 2 m self-locking suspensions

□ BELO_LO_OV_80 SUSPENDED



ARCHILIGHT



INSTALLATION

Suspended version
Ceiling version see page 112
Recessed version see page 182

CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block
Luminaires for dimming are delivered with 5-pole terminal block

MATERIAL

The body of the luminaire is curved extruded aluminium, powder coated finish

LIGHT SOURCE

LED Tridonic or TCI, min. 150Lm/W, 3000K or 4000K

DIFFUSER

PMMA OPAL
PRISMATIC

LIGHT DISTRIBUTION

Direct symmetrical
Direct symmetrical / Passive indirect symmetrical, see page 223

EMERGENCY LIGHTING

A unit with integrated emergency is an option

DIMMING


Most models can be delivered with ballast for dimming (TOUCHDIM, DALI)



A 847 _____

B 1129 _____

C 1411 _____

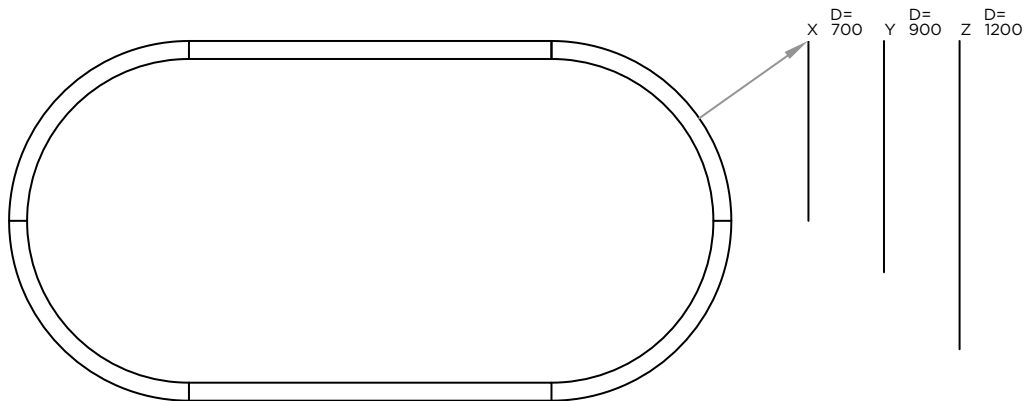

DIRECT CODE	(mm)	W	Lm from 3000K/4000K
SBS/80/OV/AX	700x1547x80	54	8710/9230
SBS/80/OV/AY	900x1747x80	62	10050/10650
SBS/80/OV/AZ	1200x2047x80	74	12060/12780
SBS/80/OV/BX	700x1829x80	62	10050/10650
SBS/80/OV/BY	900x2029x80	70	11390/12070
SBS/80/OV/BZ	1200x2329x80	81	13400/14200
SBS/80/OV/CX	700x2111x80	70	11390/12070
SBS/80/OV/CY	900x2311x80	78	12730/13490
SBS/80/OV/CZ	1200x2611x80	91	14740/15620

DIRECT/INDIRECT CODE	(mm)	W	Lm from 3000K/4000K
SBS/80/OV/AX/DI	700x1547x80	54	8710/9230
SBS/80/OV/AY/DI	900x1747x80	62	10050/10650
SBS/80/OV/AZ/DI	1200x2047x80	74	12060/12780
SBS/80/OV/BX/DI	700x1829x80	62	10050/10650
SBS/80/OV/BY/DI	900x2029x80	70	11390/12070
SBS/80/OV/BZ/DI	1200x2329x80	81	13400/14200
SBS/80/OV/CX/DI	700x2111x80	70	11390/12070
SBS/80/OV/CY/DI	900x2311x80	78	12730/13490
SBS/80/OV/CZ/DI	1200x2611x80	91	14740/15620

COLOR TEMPERATURE

3000K /3K
4000K /4K

OPTIC

PMMA OPAL /--
PRISMATIC /P

DIMMABLE OPTIONS

DALI, TOUCHDIM /DALI see page 223
WIRELESS /WRS see page 223

COLORS

	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACIT	/AT
	GOLD	/GL
	BRONZE	/BR

ACCESSORIES

- SPPKBO3075 (3X0,75)
- SPPKBO5075 (5X0,75)
- TRANSPARENT CABLE 2 METRES WITH CEILING BOX

Delivered incl. 2 m self-locking suspensions

□ BELO_LO_S_80 SUSPENDED



INSTALLATION

Suspended version
Ceiling version see page 114
Recessed version see page 184
System version see page 214

CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block
Luminaires for dimming are delivered with 5-pole terminal block

MATERIAL

The body of the luminaire is curved extruded aluminium,
powder coated finish

LIGHT SOURCE

LED Tridonic or TCI, min. 150Lm/W, 3000K or 4000K

DIFFUSER

PMMA OPAL
PRISMATIC

LIGHT DISTRIBUTION


Direct symmetrical
Direct symmetrical / Passive indirect symmetrical, see page 223

EMERGENCY LIGHTING

A unit with integrated emergency is an option

DIMMING


Most models can be delivered with ballast
for dimming (TOUCHDIM, DALI)

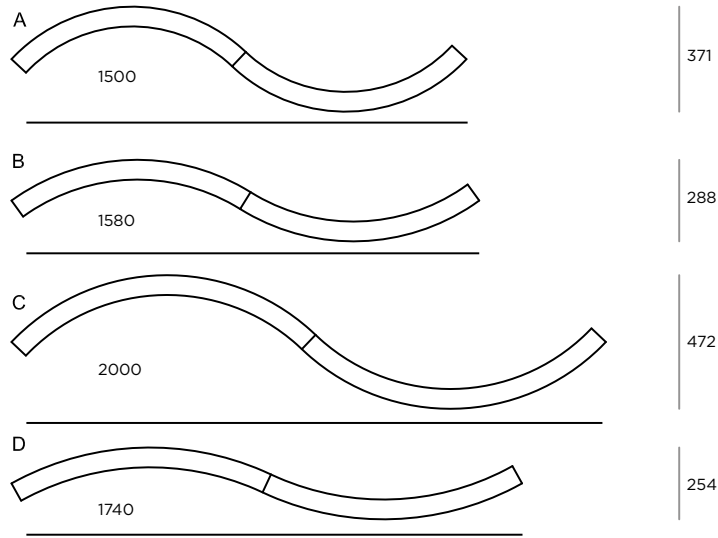

DIRECT CODE	(mm)	W	Lm from 3000K/4000K
SBS/80/LO/SA	1500x70x80 (D=1200)	26	4020/4260
SBS/80/LO/SB	1580x70x80 (D=1500)	26	4020/4260
SBS/80/LO/SC	2000x70x80 (D=1500)	33	5360/5680
SBS/80/LO/SD	1740x70x80 (D=2000)	26	4020/4260

DIRECT/INDIRECT CODE	(mm)	W	Lm from 3000K/4000K
SBS/80/LO/SA/DI	1500x70x80 (D=1200)	26	4020/4260
SBS/80/LO/SB/DI	1580x70x80 (D=1500)	26	4020/4260
SBS/80/LO/SC/DI	2000x70x80 (D=1500)	33	5360/5680
SBS/80/LO/SD/DI	1740x70x80 (D=2000)	26	4020/4260

Delivered incl. 2 m self-locking suspensions

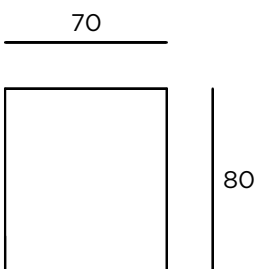

COLOR TEMPERATURE

3000K /3K
4000K /4K

OPTIC

PMMA OPAL /--
PRISMATIC /P

DIMMABLE OPTIONS

DALI, TOUCHDIM /DALI see page 223
WIRELESS /WRS see page 223

COLORS

	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACIT	/AT
	GOLD	/GL
	BRONZE	/BR

ACCESSORIES


SPPKBO3075 (3X0,75)
 SPPKBO5075 (5X0,75)
 TRANSPARENT CABLE 2 METRES WITH CEILING BOX

SBSLOPKK
 END CAP
 2PCS

□ BELO_LO_PO_80 SUSPENDED



ARCHILIGHT



INSTALLATION

Suspended version
Ceiling version see page 116
Recessed version see page 186

CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block
Luminaires for dimming are delivered with 5-pole terminal block

MATERIAL

The body of the luminaire is curved extruded aluminium, powder coated finish

LIGHT SOURCE

LED Tridonic or TCI, min. 150Lm/W, 3000K or 4000K

DIFFUSER

PMMA OPAL
PRISMATIC

LIGHT DISTRIBUTION


Direct symmetrical
Direct symmetrical / Passive indirect symmetrical, see page 223

EMERGENCY LIGHTING

A unit with integrated emergency is an option

DIMMING

Most models can be delivered with ballast for dimming (TOUCHDIM, DALI)

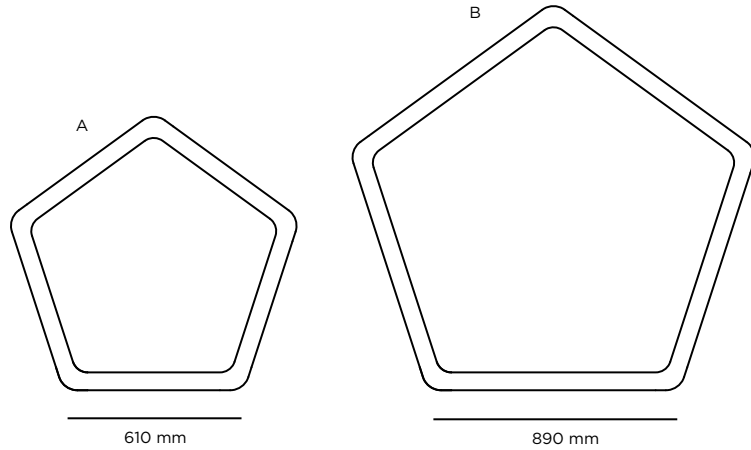

DIRECT CODE	(mm)	W	Lm from 3000K/4000K
SBS/80/PO/A	610x80	41	6700/7100
SBS/80/PO/B	890x80	62	10050/10650

DIRECT/INDIRECT CODE	(mm)	W	Lm from 3000K/4000K
SBS/80/PO/A/DI	610x80	41	6700/7100
SBS/80/PO/B/DI	890x80	62	10050/10650

COLOR TEMPERATURE	
3000K	/3K
4000K	/4K

OPTIC	
PMMA OPAL	/--
PRISMATIC	/P

DIMMABLE OPTIONS		
DALI, TOUCHDIM	/DALI	see page 223
WIRELESS	/WRS	see page 223

Delivered incl. 2 m self-locking suspensions



Bronze color

COLORS		
	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACIT	/AT
	GOLD	/GL
	BRONZE	/BR


ACCESSORIES

- SPPKB03075 (3X0,75)
- SPPKB05075 (5X0,75)
- TRANSPARENT CABLE 2 METRES WITH CEILING BOX

□ BELO_LO_TR_80 SUSPENDED



ARCHILIGHT

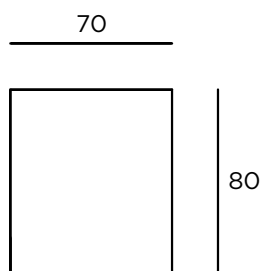

INSTALLATION

Suspended version
Ceiling version see page 118
Recessed version see page 188

CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block
Luminaires for dimming are delivered with 5-pole terminal block

MATERIAL

The body of the luminaire is curved extruded aluminium, powder coated finish

LIGHT SOURCE

LED Tridonic or TCI, min. 150Lm/W, 3000K or 4000K

DIFFUSER

PMMA OPAL
PRISMATIC

LIGHT DISTRIBUTION


Direct symmetrical
Direct symmetrical / Passive indirect symmetrical, see page 223

EMERGENCY LIGHTING

A unit with integrated emergency is an option

DIMMING

Most models can be delivered with ballast for dimming (TOUCHDIM, DALI)

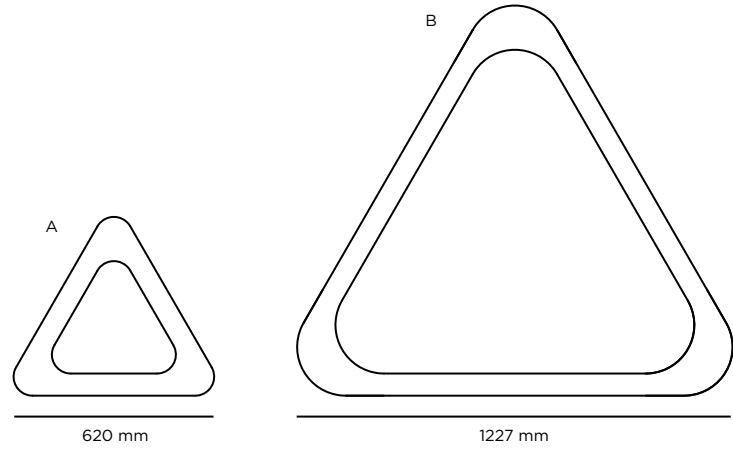

COLOR TEMPERATURE

3000K	/3K
4000K	/4K

OPTIC

PMMA OPAL	/--
PRISMATIC	/P

DIMMABLE OPTIONS

DALI, TOUCHDIM	/DALI	see page 223
WIRELESS	/WRS	see page 223

DIRECT CODE	(mm)	W	Lm from 3000K/4000K
SBS/80/LO/TR/A	620x80	25	4020/4260
SBS/80/LO/TR/B	1227x80	58	9380/9940

DIRECT/INDIRECT CODE	(mm)	W	Lm from 3000K/4000K
SBS/80/LO/TR/A/DI	620x80	25	4020/4260
SBS/80/LO/TR/B/DI	1227x80	58	9380/9940

Delivered incl. 2 m self-locking suspensions

COLORS

	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACIT	/AT
	GOLD	/GL
	BRONZE	/BR

ACCESSORIES

	SPPKBO3075 (3X0,75)
	SPPKBO5075 (5X0,75)
	TRANSPARENT CABLE 2 METRES WITH CEILING BOX






□ BELO_BE_50 SUSPENDED




ARCHILIGHT

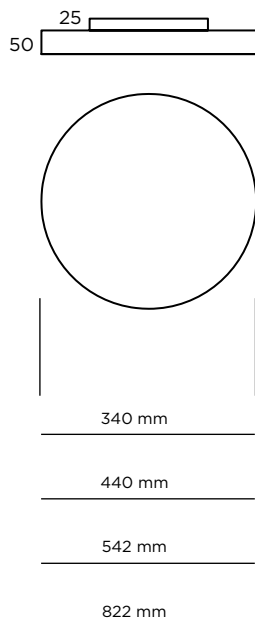

DIRECT CODE	Ø (mm)	W	Lm from 3000K/4000K
SBS/50/BE300	340	17	2680/2820
SBS/50/BE440	440	18	3020/3170
SBS/50/BE542	542	36	6120/6380
SBS/50/BE822	822	64	11980/13320

DIRECT/INDIRECT CODE	Ø (mm)	W	Lm from 3000K/4000K
SBS/50/BE300/DI	340	17	2680/2820
SBS/50/BE440/DI	440	18	3020/3170
SBS/50/BE542/DI	542	36	6120/6380
SBS/50/BE822/DI	822	64	11980/13320

Delivered incl. 2 m self-locking suspensions

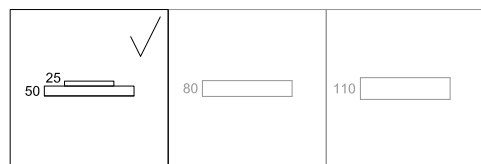

see page 40

see page 42

INSTALLATION

Suspended version
Ceiling version see page 126
Recessed version see page 166

CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block
Luminaires for dimming are delivered with 5-pole terminal block

MATERIAL

The body of the luminaire is curved extruded aluminium, powder coated finish

LIGHT SOURCE

LED Tridonic or TCI, min. 150Lm/W, 3000K or 4000K

DIFFUSER

PMMA OPAL
PRISMATIC

LIGHT DISTRIBUTION

Direct symmetrical
Direct symmetrical / Passive indirect symmetrical, see page 223

EMERGENCY LIGHTING

A unit with integrated emergency is an option

DIMMING

Most models can be delivered with ballast for dimming (TOUCHDIM, DALI)

COLOR TEMPERATURE

3000K /3K
4000K /4K

OPTIC

PMMA OPAL /--
PRISMATIC /P

DIMMABLE OPTIONS

DALI, TOUCHDIM /DALI see page 223
WIRELESS /WRS see page 223

COLORS

	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACIT	/AT
	GOLD	/GL
	BRONZE	/BR

ACCESSORIES

	SPPKBO3075 (3X0,75)
	SPPKBO5075 (5X0,75)
	TRANSPARENT CABLE 2 METRES WITH CEILING BOX

□ BELO_BE_80 SUSPENDED



INSTALLATION

Suspended version
Ceiling version see page 128
Recessed version see page 166

CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block
Luminaires for dimming are delivered with 5-pole terminal block

MATERIAL

The body of the luminaire is curved extruded aluminium, powder coated finish

LIGHT SOURCE

LED Tridonic or TCI, min. 150Lm/W, 3000K or 4000K

DIFFUSER

PMMA OPAL
PRISMATIC

LIGHT DISTRIBUTION

Direct symmetrical
Direct symmetrical / Passive indirect symmetrical, see page 223

EMERGENCY LIGHTING

A unit with integrated emergency is an option

DIMMING


Most models can be delivered with ballast for dimming (TOUCHDIM, DALI)



DIRECT CODE	Ø (mm)	W	Lm from 3000K/4000K
SBS/80/BE300	340	17	2680/2820
SBS/80/BE440	440	18	3020/3170
SBS/80/BE542	542	36	6120/6380
SBS/80/BE822	822	64	11980/13320

DIRECT/INDIRECT CODE	Ø (mm)	W	Lm from 3000K/4000K
SBS/80/BE300/DI	340	17	2680/2820
SBS/80/BE440/DI	440	18	3020/3170
SBS/80/BE542/DI	542	36	6120/6380
SBS/80/BE822/DI	822	64	11980/13320

Delivered incl. 2 m self-locking suspensions

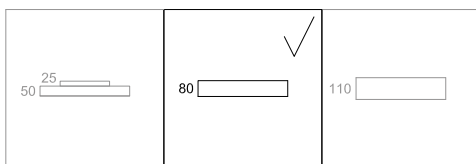

see page 38

see page 42

COLOR TEMPERATURE

3000K	/3K
4000K	/4K

OPTIC

PMMA OPAL	/--
PRISMATIC	/P

DIMMABLE OPTIONS

DALI, TOUCHDIM WIRELESS	/DALI /WRS	see page 223 see page 223
-------------------------	------------	------------------------------

COLORS

	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACIT	/AT
	GOLD	/GL
	BRONZE	/BR

ACCESSORIES

	SPPKBO3075 (3X0,75)
	SPPKBO5075 (5X0,75)
	TRANSPARENT CABLE 2 METRES WITH CEILING BOX

□ BELO_BE_110 SUSPENDED





INSTALLATION

Suspended version
 Ceiling version see page 130
 Recessed version see page 166

CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block
 Luminaires for dimming are delivered with 5-pole terminal block

MATERIAL

The body of the luminaire is curved extruded aluminium,
 powder coated finish

LIGHT SOURCE

LED Tridonic or TCI, min. 150Lm/W, 3000K or 4000K

DIFFUSER

PMMA OPAL
 PRISMATIC

LIGHT DISTRIBUTION

Direct symmetrical
 Direct symmetrical / Active indirect symmetrical

EMERGENCY LIGHTING

A unit with integrated emergency is an option


DIMMING

Most models can be delivered with ballast
 for dimming (TOUCHDIM, DALI)

DIRECT CODE	Ø (mm)	W	Lm from 3000K/4000K
SBS/110/BE440	440	18	3020/3170
SBS/110/BE542	542	36	6120/6380
SBS/110/BE822	822	64	11980/13320
SBS/110/BE1110	1110	87	16140/16500

DIRECT/INDIRECT CODE	Ø (mm)	W	Lm from 3000K/4000K
SBS/110/BE440/DI	440	18	3020/3170
SBS/110/BE542/DI	542	36	6120/6380
SBS/110/BE822/DI	822	64	11980/13320
SBS/110/BE1110/DI	1110	87	16140/16500

Delivered incl. 2 m self-locking suspensions

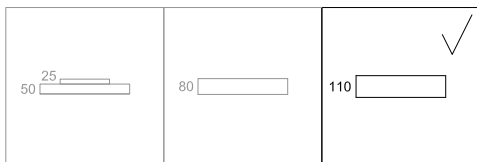

see page 38

see page 40

COLOR TEMPERATURE

3000K /3K
 4000K /4K

OPTIC

PMMA OPAL /--
 PRISMATIC /P

DIMMABLE OPTIONS

DALI, TOUCHDIM /DALI see page 223
 WIRELESS /WRS see page 223

COLORS

	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACIT	/AT
	GOLD	/GL
	BRONZE	/BR

ACCESSORIES

SPPKBO3075 (3X0,75)
 SPPKBO5075 (5X0,75)
 TRANSPARENT CABLE 2 METRES
 WITH CEILING BOX

□ BELO_BE_SQ_50 SUSPENDED



INSTALLATION

Suspended version
Ceiling version see page 132
Recessed version see page 172

CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block
Luminaires for dimming are delivered with 5-pole terminal block

MATERIAL

The body of the luminaire is curved extruded aluminium,
powder coated finish

LIGHT SOURCE

LED Tridonic or TCI, min. 150Lm/W, 3000K or 4000K

DIFFUSER

PMMA OPAL
PRISMATIC

LIGHT DISTRIBUTION


Direct symmetrical
Direct symmetrical / Passive indirect symmetrical, see page 223

EMERGENCY LIGHTING

A unit with integrated emergency is an option

DIMMING


Most models can be delivered with ballast
for dimming (TOUCHDIM, DALI)

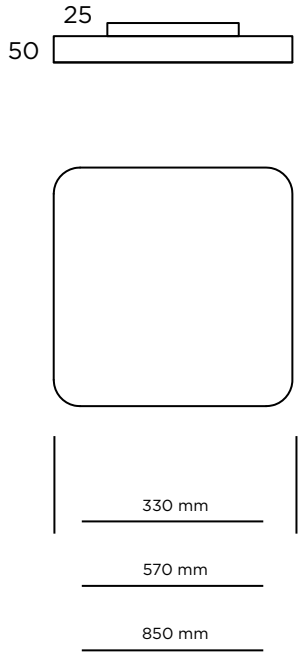

DIRECT CODE	(mm)	W	Lm from 3000K/4000K
SBS/50/BE/SQ/330	330x330x50	8	1340/1400
SBS/50/BE/SQ/570	570x570x50	32	5360/5600
SBS/50/BE/SQ/850	850x850x50	72	11160/12600

DIRECT/INDIRECT CODE	(mm)	W	Lm from 3000K/4000K
SBS/50/BE/SQ/330/DI	330x330x50	8	1340/1400
SBS/50/BE/SQ/570/DI	570x570x50	32	5360/5600
SBS/50/BE/SQ/850/DI	850x850x50	72	11160/12600

Delivered incl. 2 m self-locking suspensions

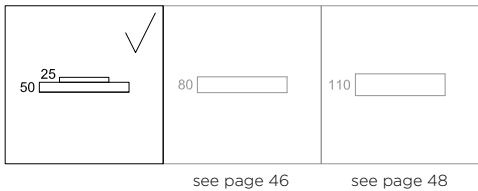

COLOR TEMPERATURE

3000K	/3K
4000K	/4K

OPTIC

PMMA OPAL	/--
PRISMATIC	/P

DIMMABLE OPTIONS

DALI, TOUCHDIM	/DALI	see page 223
WIRELESS	/WRS	see page 223

COLORS

	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACIT	/AT
	GOLD	/GL
	BRONZE	/BR

ACCESSORIES

	SPPKBO3075 (3X0,75)
	SPPKBO5075 (5X0,75)
	TRANSPARENT CABLE 2 METRES WITH CEILING BOX

□ BELO_BE_SQ_80 SUSPENDED



INSTALLATION

Suspended version
Ceiling version see page 134
Recessed version see page 172

CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block
Luminaires for dimming are delivered with 5-pole terminal block

MATERIAL

The body of the luminaire is curved extruded aluminium, powder coated finish

LIGHT SOURCE

LED Tridonic or TCI, min. 150Lm/W, 3000K or 4000K

DIFFUSER

PMMA OPAL
PRISMATIC

LIGHT DISTRIBUTION

Direct symmetrical
Direct symmetrical / Passive indirect symmetrical, see page 223

EMERGENCY LIGHTING




A unit with integrated emergency is an option

DIMMING

Most models can be delivered with ballast for dimming (TOUCHDIM, DALI)




80



DIRECT CODE	(mm)	W	Lm from 3000K/4000K
SBS/80/BE/SQ/330	330x330x50	8	1340/1400
SBS/80/BE/SQ/570	570x570x50	32	5360/5600
SBS/80/BE/SQ/850	850x850x50	72	11160/12600

DIRECT/INDIRECT CODE	(mm)	W	Lm from 3000K/4000K
SBS/80/BE/SQ/330/DI	330x330x50	8	1340/1400
SBS/80/BE/SQ/570/DI	570x570x50	32	5360/5600
SBS/80/BE/SQ/850/DI	850x850x50	72	11160/12600

Delivered incl. 2 m self-locking suspensions

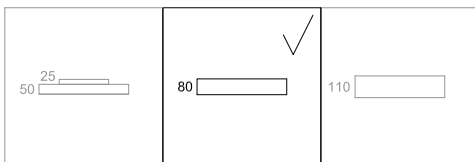

see page 44

see page 48

COLOR TEMPERATURE

3000K /3K
4000K /4K

OPTIC

PMMA OPAL /--
PRISMATIC /P

DIMMABLE OPTIONS

DALI, TOUCHDIM /DALI see page 223
WIRELESS /WRS see page 223

COLORS

	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACIT	/AT
	GOLD	/GL
	BRONZE	/BR

ACCESSORIES

- SPPKBO3075 (3X0,75)
- SPPKBO5075 (5X0,75)
- TRANSPARENT CABLE 2 METRES WITH CEILING BOX

□ BELO_BE_SQ_110 SUSPENDED



INSTALLATION

Suspended version
Ceiling version see page 136
Recessed version see page 172

CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block
Luminaires for dimming are delivered with 5-pole terminal block

MATERIAL

The body of the luminaire is curved extruded aluminium, powder coated finish

LIGHT SOURCE

LED Tridonic or TCI, min. 150Lm/W, 3000K or 4000K

DIFFUSER

PMMA OPAL
PRISMATIC

LIGHT DISTRIBUTION


Direct symmetrical
Direct symmetrical / Passive indirect symmetrical, see page 223

EMERGENCY LIGHTING

A unit with integrated emergency is an option

DIMMING


Most models can be delivered with ballast for dimming (TOUCHDIM, DALI)

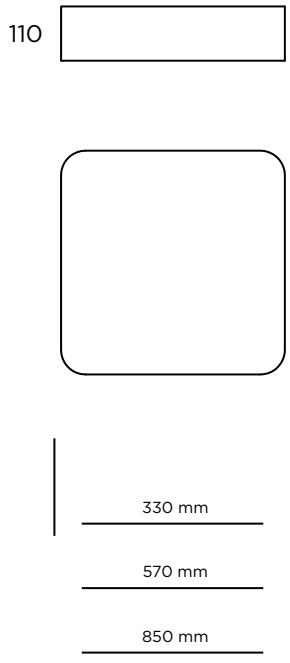

DIRECT CODE	(mm)	W	Lm from 3000K/4000K
SBS/110/BE/SQ/330	330x330x50	8	1340/1400
SBS/110/BE/SQ/570	570x570x50	32	5360/5600
SBS/110/BE/SQ/850	850x850x50	72	11160/12600

DIRECT/INDIRECT CODE	(mm)	W	Lm from 3000K/4000K
SBS/110/BE/SQ/330/DI	330x330x50	8	1340/1400
SBS/110/BE/SQ/570/DI	570x570x50	32	5360/5600
SBS/110/BE/SQ/850/DI	850x850x50	72	11160/12600

Delivered incl. 2 m self-locking suspensions

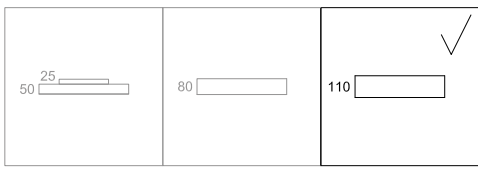

see page 44

see page 46

COLOR TEMPERATURE

3000K	/3K
4000K	/4K

OPTIC

PMMA OPAL	/--
PRISMATIC	/P

DIMMABLE OPTIONS

DALI, TOUCHDIM	/DALI	see page 223
WIRELESS	/WRS	see page 223

COLORS

	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACIT	/AT
	GOLD	/GL
	BRONZE	/BR

ACCESSORIES

	SPPKBO3075 (3X0,75)
	SPPKBO5075 (5X0,75)
	TRANSPARENT CABLE 2 METRES WITH CEILING BOX

□ BELO_QA_50 SUSPENDED



INSTALLATION

Suspended version
Ceiling version see page 138

CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block
Luminaires for dimming are delivered with 5-pole terminal block

MATERIAL

The body of the luminaire is curved extruded aluminium, powder coated finish

LIGHT SOURCE

LED Tridonic or TCI, min. 150Lm/W, 3000K or 4000K

DIFFUSER

PMMA OPAL
PRISMATIC

LIGHT DISTRIBUTION




Direct symmetrical
Direct symmetrical / Passive indirect symmetrical, see page 223

EMERGENCY LIGHTING

A unit with integrated emergency is an option

DIMMING


Most models can be delivered with ballast for dimming (TOUCHDIM, DALI)

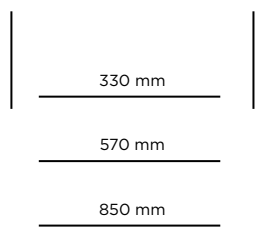

DIRECT CODE	(mm)	W	Lm from 3000K/4000K
SBS/50/QA/330	330x330x50	8	1340/1400
SBS/50/QA/570	570x570x50	32	5360/5600
SBS/50/QA/850	850x850x50	72	11160/12600

DIRECT/INDIRECT CODE	(mm)	W	Lm from 3000K/4000K
SBS/50/QA/330/DI	330x330x50	8	1340/1400
SBS/50/QA/570/DI	570x570x50	32	5360/5600
SBS/50/QA/850/DI	850x850x50	72	11160/12600

Delivered incl. 2 m self-locking suspensions

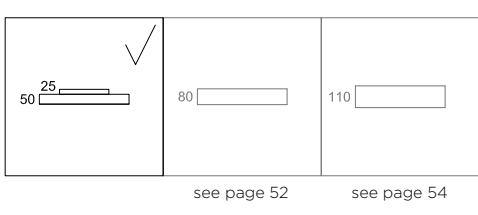

COLOR TEMPERATURE

3000K	/3K
4000K	/4K

OPTIC

PMMA OPAL	/--
PRISMATIC	/P

DIMMABLE OPTIONS

DALI, TOUCHDIM	/DALI	see page 223
WIRELESS	/WRS	see page 223

COLORS

	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACIT	/AT
	GOLD	/GL
	BRONZE	/BR

ACCESSORIES

	75	SPPKB3075 (3X0,75)
	75	SPPKB5075 (5X0,75)
	75	TRANSPARENT CABLE 2 METRES WITH CEILING BOX
	25	

□ BELO_QA_80 SUSPENDED



INSTALLATION

Suspended version
Ceiling version see page 140

CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block
Luminaires for dimming are delivered with 5-pole terminal block

MATERIAL

The body of the luminaire is curved extruded aluminium,
powder coated finish

LIGHT SOURCE

LED Tridonic or TCI, min. 150Lm/W, 3000K or 4000K

DIFFUSER

PMMA OPAL
PRISMATIC

LIGHT DISTRIBUTION

Direct symmetrical
Direct symmetrical / Passive indirect symmetrical, see page 223

EMERGENCY LIGHTING



A unit with integrated emergency is an option

DIMMING

Most models can be delivered with ballast
for dimming (TOUCHDIM, DALI)




80



DIRECT CODE	(mm)	W	Lm from 3000K/4000K
SBS/80/QA/330	330x330x50	8	1340/1400
SBS/80/QA/570	570x570x50	32	5360/5600
SBS/80/QA/850	850x850x50	72	11160/12600

DIRECT/INDIRECT CODE	(mm)	W	Lm from 3000K/4000K
SBS/80/QA/330/DI	330x330x50	8	1340/1400
SBS/80/QA/570/DI	570x570x50	32	5360/5600
SBS/80/QA/850/DI	850x850x50	72	11160/12600

Delivered incl. 2 m self-locking suspensions

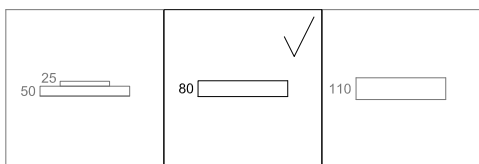

see page 50

see page 54

INSTALLATION

Suspended version
Ceiling version see page 140

CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block
Luminaires for dimming are delivered with 5-pole terminal block

MATERIAL

The body of the luminaire is curved extruded aluminium, powder coated finish

LIGHT SOURCE

LED Tridonic or TCI, min. 150Lm/W, 3000K or 4000K

DIFFUSER

PMMA OPAL
PRISMATIC

LIGHT DISTRIBUTION

Direct symmetrical
Direct symmetrical / Passive indirect symmetrical, see page 223

EMERGENCY LIGHTING

A unit with integrated emergency is an option

DIMMING

Most models can be delivered with ballast for dimming (TOUCHDIM, DALI)

COLOR TEMPERATURE

3000K /3K
4000K /4K

OPTIC

PMMA OPAL /--
PRISMATIC /P

DIMMABLE OPTIONS

DALI, TOUCHDIM /DALI see page 223
WIRELESS /WRS see page 223

COLORS

	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACIT	/AT
	GOLD	/GL
	BRONZE	/BR

	75	SPPKB3075 (3X0,75) SPPKB5075 (5X0,75)
	75	TRANSPARENT CABLE 2 METRES WITH CEILING BOX
	25	

□ BELO_QA_110 SUSPENDED



INSTALLATION

Suspended version
Ceiling version see page 142

CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block
Luminaires for dimming are delivered with 5-pole terminal block

MATERIAL

The body of the luminaire is curved extruded aluminium,
powder coated finish

LIGHT SOURCE

LED Tridonic or TCI, min. 150Lm/W, 3000K or 4000K

DIFFUSER

PMMA OPAL
PRISMATIC

LIGHT DISTRIBUTION

Direct symmetrical
Direct symmetrical / Passive indirect symmetrical, see page 223

EMERGENCY LIGHTING




A unit with integrated emergency is an option

DIMMING

Most models can be delivered with ballast
for dimming (TOUCHDIM, DALI)




110



DIRECT CODE	(mm)	W	Lm from 3000K/4000K
SBS/110/QA/330	330x330x50	8	1340/1400
SBS/110/QA/570	570x570x50	32	5360/5600
SBS/110/QA/850	850x850x50	72	11160/12600

DIRECT/INDIRECT CODE	(mm)	W	Lm from 3000K/4000K
SBS/110/QA/330/DI	330x330x50	8	1340/1400
SBS/110/QA/570/DI	570x570x50	32	5360/5600
SBS/110/QA/850/DI	850x850x50	72	11160/12600

Delivered incl. 2 m self-locking suspensions

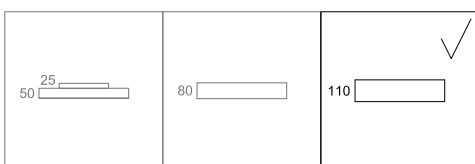

see page 50

see page 52

COLOR TEMPERATURE

3000K	/3K
4000K	/4K

OPTIC

PMMA OPAL	/--
PRISMATIC	/P

DIMMABLE OPTIONS


DALI, TOUCHDIM	/DALI	see page 223
WIRELESS	/WRS	see page 223

COLORS

	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACIT	/AT
	GOLD	/GL
	BRONZE	/BR

	75	SPPKB3075 (3X0,75)
	75	SPPKB5075 (5X0,75) TRANSPARENT CABLE 2 METRES WITH CEILING BOX
	25	

□ CUBUS_R SUSPENDED

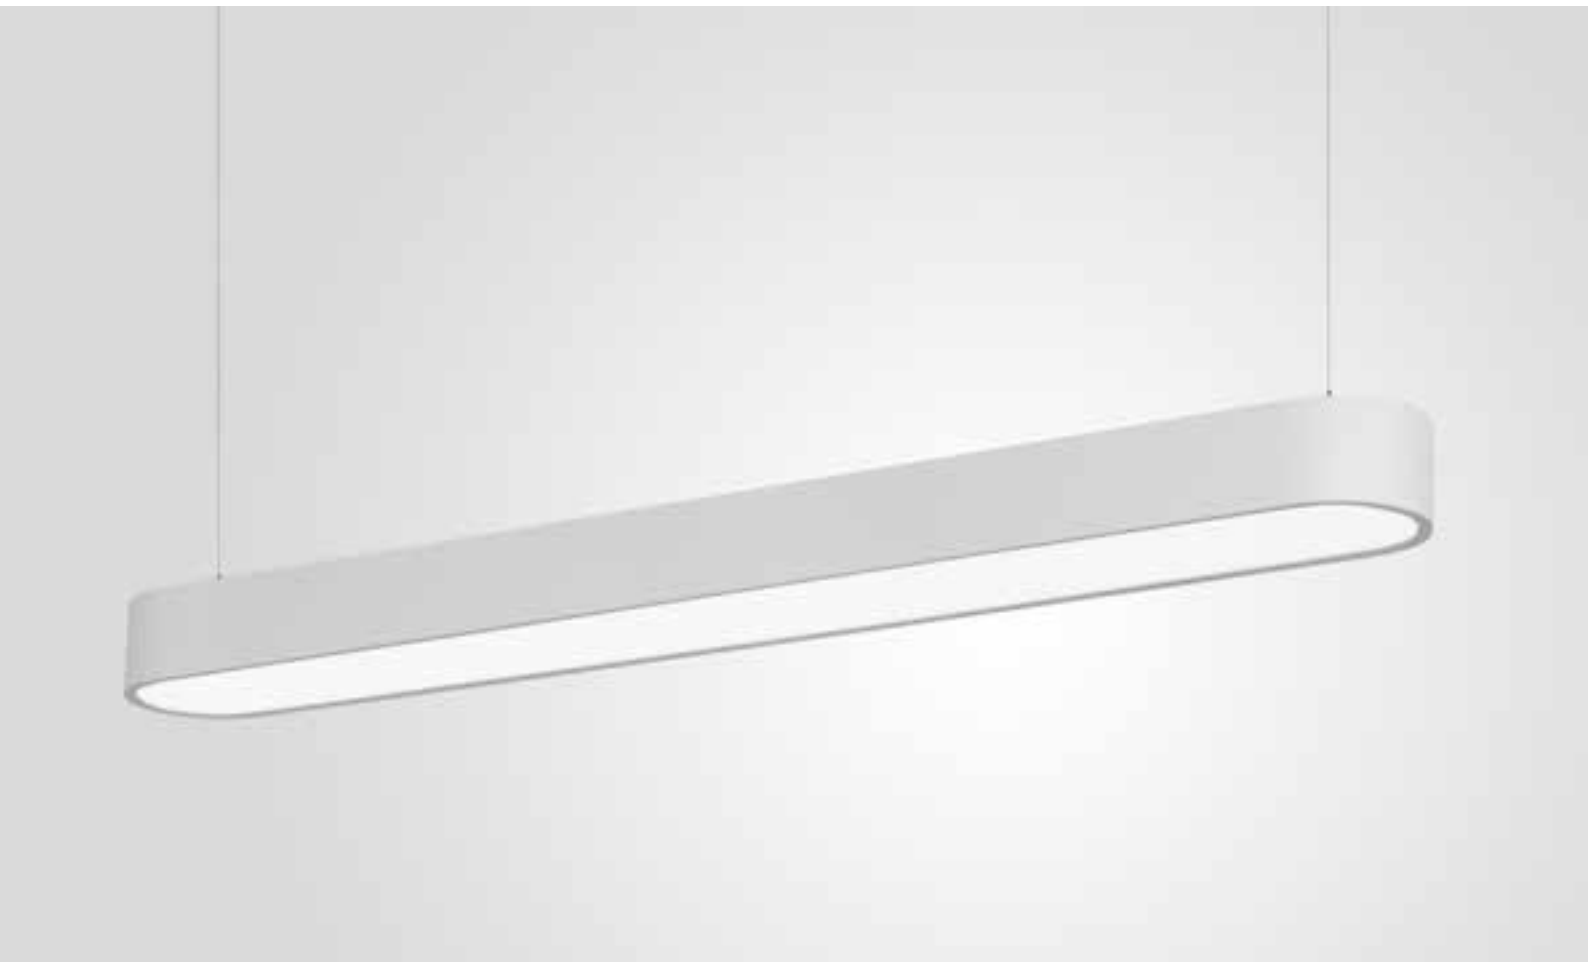


ARCHILIGHT

140



80



600

900

1200

1500



INSTALLATION

Suspended version
 Ceiling version see page 144
 Wall version see page 78

CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block
 Luminaires for dimming are delivered with 5-pole terminal block

MATERIAL

The body of the luminaire is curved extruded aluminium,
 powder coated finish

LIGHT SOURCE

LED Tridonic or TCI, min. 150Lm/W, 3000K or 4000K

DIFFUSER

PMMA OPAL
 PRISMATIC

LIGHT DISTRIBUTION

Direct symmetrical
 Direct symmetrical / Passive indirect symmetrical, see page 223

EMERGENCY LIGHTING

A unit with integrated emergency is an option

DIMMING

Most models can be delivered with ballast
 for dimming (TOUCHDIM, DALI)

DIRECT CODE	(mm)	W	Lm from 3000K/4000K
SCSR130	600x140x80	16	2680/2840
SCSR250	600x140x80	24	3720/3920
SCSR195	900x140x80	26	4020/4260
SCSR375	900x140x80	37	5580/5880
SCSR260	1200x140x80	33	5360/5680
SCSR500	1200x140x80	49	7440/7840
SCSR325	1500x140x80	41	6700/7100
SCSR625	1500x140x80	61	9300/9800

DIRECT/INDIRECT CODE	(mm)	W	Lm from 3000K/4000K
SCSR130/DI	600x140x80	16	2680/2840
SCSR250/DI	600x140x80	24	3720/3920
SCSR195/DI	900x140x80	26	4020/4260
SCSR375/DI	900x140x80	37	5580/5880
SCSR260/DI	1200x140x80	33	5360/5680
SCSR500/DI	1200x140x80	49	7440/7840
SCSR325/DI	1500x140x80	41	6700/7100
SCSR625/DI	1500x140x80	61	9300/9800

COLOR TEMPERATURE

3000K /3K
 4000K /4K

OPTIC

PMMA OPAL /--
 PRISMATIC /P

DIMMABLE OPTIONS

DALI, TOUCHDIM /DALI see page 223
 WIRELESS /WRS see page 223

COLORS

	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACIT	/AT
	GOLD	/GL
	BRONZE	/BR

ACCESSORIES

	SPPKBO3075 (3X0,75)
	SPPKBO5075 (5X0,75)
	TRANSPARENT CABLE 2 METRES WITH CEILING BOX

Delivered incl. 2 m self-locking suspensions

□ CUBUS_S SUSPENDED



ARCHILIGHT

35



80

INSTALLATION

Suspended version
Ceiling version see page 146
Wall version see page 80

CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block
Luminaires for dimming are delivered with 5-pole terminal block

MATERIAL

The body of the luminaire is extruded aluminium,
powder coated finish

LIGHT SOURCE

LED Tridonic or TCI, min. 150Lm/W, 3000K or 4000K

DIFFUSER

PMMA OPAL
PRISMATIC

LIGHT DISTRIBUTION

Direct symmetrical

EMERGENCY LIGHTING

A unit with integrated emergency is an option

DIMMING

Most models can be delivered with ballast
for dimming (TOUCHDIM, DALI)



COLOR TEMPERATURE

3000K /3K
4000K /4K

OPTIC

PMMA OPAL /--
PRISMATIC /P

DIMMABLE OPTIONS

DALI, TOUCHDIM /DALI see page 223
WIRELESS /WRS see page 223



COLORS

	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACIT	/AT
	GOLD	/GL
	BRONZE	/BR

DIRECT CODE	(mm)	W	Lm from 3000K/4000K
SCSS90	850x35x80	13	2010/2130
SCSS120	1135x35x80	17	2680/2840
SCSS150	1415x35x80	21	3350/3550

Delivered incl. 2 m self-locking suspensions

ACCESSORIES

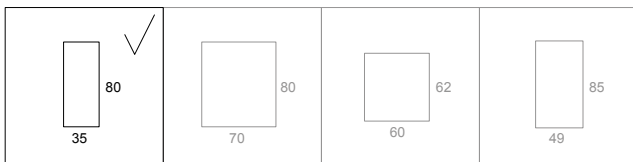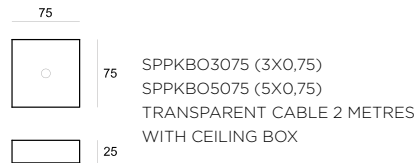

see page 60

see page 62


see page 64



□ CUBUS_XL SUSPENDED



ARCHILIGHT

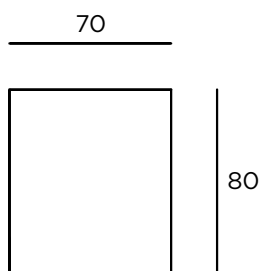

INSTALLATION

Suspended version
Ceiling version see page 148
Wall version see page 82
Recessed version see page 176
System version see page 202

CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block
Luminaires for dimming are delivered with 5-pole terminal block

MATERIAL

The body of the luminaire is extruded aluminium,
powder coated finish

LIGHT SOURCE

LED Tridonic or TCI, min. 150Lm/W, 3000K or 4000K

DIFFUSER

PMMA OPAL
PRISMATIC

LIGHT DISTRIBUTION

Direct symmetrical
Direct symmetrical / Passive indirect symmetrical,
see page 223

EMERGENCY LIGHTING

A unit with integrated emergency is an option

DIMMING

Most models can be delivered with ballast
for dimming (TOUCHDIM, DALI)



DIRECT CODE	(mm)	W	Lm from 3000K/4000K
SCSXL60	595x70x80	9	1340/1420
SCSXL90	850x70x80	13	2010/2130
SCSXL120	1135x70x80	17	2680/2840
SCSXL150	1415x70x80	21	3350/3550
SCSXL170	1700x70x80	26	4020/4260
SCSXL200	1980x70x80	29	4690/4970
SCSXL230	2265x70x80	33	5360/5680
SCSXL280	2825x70x80	41	6700/7100

DIRECT/ INDIRECT CODE	(mm)	W	Lm from 3000K/4000K
SCSXL60/DI	595x70x80	9	1340/1420
SCSXL90/DI	850x70x80	13	2010/2130
SCSXL120/DI	1135x70x80	17	2680/2840
SCSXL150/DI	1415x70x80	21	3350/3550
SCSXL170/DI	1700x70x80	26	4020/4260
SCSXL200/DI	1980x70x80	29	4690/4970
SCSXL230/DI	2265x70x80	33	5360/5680
SCSXL280/DI	2825x70x80	41	6700/7100

Delivered incl. 2 m self-locking suspensions

COLOR TEMPERATURE

3000K /3K
4000K /4K

OPTIC

PMMA OPAL /--
PRISMATIC /P



DIMMABLE OPTIONS

DALI, TOUCHDIM /DALI see page 223
WIRELESS /WRS see page 223

COLORS

	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACIT	/AT
	GOLD	/GL
	BRONZE	/BR

ACCESSORIES

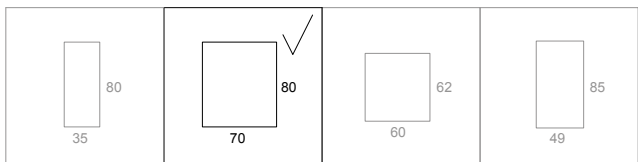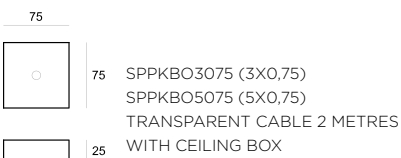

see page 58

see page 62


see page 64

□ CUBUS SUSPENDED



ARCHILIGHT





DIRECT CODE	(mm)	W	Lm from 3000K/4000K
SCS130	595x60x62	9	1340/1420
SCS250	595x60x62	13	1860/1960
SCS195	850x60x62	13	2010/2130
SCS375	850x60x62	19	2790/2940
SCS260	1135x60x62	17	2680/2840
SCS500	1135x60x62	25	3720/3920
SCS325	1415x60x62	21	3350/3550
SCS625	1415x60x62	31	4650/4900
SCS2x195	1700x60x62	26	4020/4260
SCS2x375	1700x60x62	37	5580/5880
SCS2x230	1980x60x62	29	4690/4970
SCS2x440	1980x60x62	43	6510/6860
SCS2x260	2265x60x62	33	5360/5680
SCS2x500	2265x60x62	49	7440/7840
SCS2x325	2825x60x62	41	6700/7100
SCS2x625	2825x60x62	61	9300/9800

Delivered incl. 2 m self-locking suspensions

COLOR TEMPERATURE

3000K	/3K
4000K	/4K

OPTIC


PMMA OPAL	/--
PRISMATIC	/P

DIMMABLE OPTIONS

DALI, TOUCHDIM	/DALI	see page 223
WIRELESS	/WRS	see page 223

COLORS

	ELOX	/...
	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACIT	/AT
	GOLD	/GL
	BRONZE	/BR

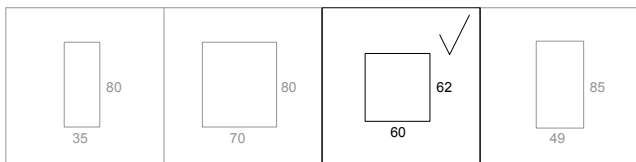

see page 58

see page 60

see page 64

INSTALLATION

Suspended version
Ceiling version see page 150
Wall version see page 86
Recessed version see page 174
System version see page 198

CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block
Luminaires for dimming are delivered with 5-pole terminal block

MATERIAL

The body of the luminaire is extruded aluminium, eloxed or powder coated finish

LIGHT SOURCE

LED Tridonic or TCI, min. 150Lm/W, 3000K or 4000K

DIFFUSER

PMMA OPAL
PRISMATIC

LIGHT DISTRIBUTION

Direct symmetrical



EMERGENCY LIGHTING

A unit with integrated emergency is an option

DIMMING

Most models can be delivered with ballast for dimming (TOUCHDIM, DALI)


ACCESSORIES

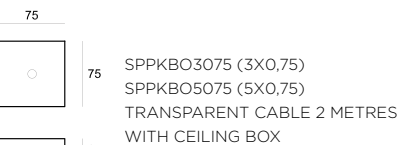

□ DUAL SUSPENDED



ARCHILIGHT



INSTALLATION

Suspended version
Ceiling version see page 152
Wall version see page 88
System version see page 206

CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block
Luminaires for dimming are delivered with 5-pole terminal block

MATERIAL

The body of the luminaire is extruded aluminium, eloxed or powder coated finish

LIGHT SOURCE

LED Tridonic or TCI, min. 150Lm/W, 3000K or 4000K

DIFFUSER

PMMA OPAL
PRISMATIC

LIGHT DISTRIBUTION

Direct symmetrical
Direct symmetrical / active indirect symmetrical

EMERGENCY LIGHTING

A unit with integrated emergency is an option

DIMMING


Most models can be delivered with ballast for dimming (TOUCHDIM, DALI)



DIRECT CODE	(mm)	W	Lm from 3000K/4000K
SDS130	595x49x85	9	1340/1420
SDS250	595x49x85	13	1860/1960
SDS195	850x49x85	13	2010/2130
SDS375	850x49x85	19	2790/2940
SDS260	1135x49x85	17	2680/2840
SDS500	1135x49x85	25	3720/3920
SDS325	1415x49x85	21	3350/3550
SDS625	1415x49x85	31	4650/4900
SDS2x195	1700x49x85	26	4020/4260
SDS2x375	1700x49x85	37	5580/5880
SDS2x230	1980x49x85	29	4690/4970
SDS2x440	1980x49x85	43	6510/6860
SDS2x260	2265x49x85	33	5360/5680
SDS2x500	2265x49x85	49	7440/7840
SDS2x325	2825x49x85	41	6700/7100
SDS2x625	2825x49x85	61	9300/9800

DIRECT/ INDIRECT CODE	(mm)	W	Lm from 3000K/4000K
SDS130/DI	595x49x85	17	2680/2840
SDS250/DI	595x49x85	25	3720/3920
SDS195/DI	850x49x85	25	4020/4260
SDS375/DI	850x49x85	37	5580/5880
SDS260/DI	1135x49x85	33	5360/5680
SDS500/DI	1135x49x85	49	7440/7840
SDS325/DI	1415x49x85	41	6700/7100
SDS625/DI	1415x49x85	61	9300/9800
SDS2x195/DI	1700x49x85	52	8040/8520
SDS2x375/DI	1700x49x85	74	11160/11760
SDS2x230/DI	1980x49x85	58	9380/9940
SDS2x440/DI	1980x49x85	86	13020/13720
SDS2x260/DI	2265x49x85	66	10720/11360
SDS2x500/DI	2265x49x85	98	14880/15680
SDS2x325/DI	2825x49x85	83	13400/14200
SDS2x625/DI	2825x49x85	123	18600/19600

Delivered incl. 2 m self-locking suspensions

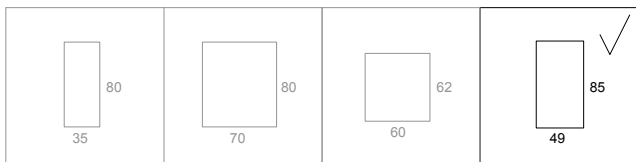

see page 58

see page 60

see page 62

COLOR TEMPERATURE

3000K	/3K
4000K	/4K

OPTIC

PMMA OPAL	/--
PRISMATIC	/P

DIMMABLE OPTIONS

DALI, TOUCHDIM WIRELESS	/DALI /WRS	see page 223 see page 223
-------------------------	------------	------------------------------

COLORS


	ELOX	/...
	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACIT	/AT
	GOLD	/GL
	BRONZE	/BR

ACCESSORIES

	85	SDPKK END CAP 2PCS
	75	SPPKBO3075 (3X0,75) SPPKBO5075 (5X0,75) TRANSPARENT CABLE 2 METRES WITH CEILING BOX
	25	



□ LUCID SUSPENDED



INSTALLATION

Suspended version
Ceiling version see page 154
Wall version see page 90
System version see page 210

CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block
Luminaires for dimming are delivered with 5-pole terminal block

MATERIAL

The body of the luminaire is extruded aluminium, eloxated or powder coated finish

LIGHT SOURCE

LED Tridonic or TCI, min. 150Lm/W, 3000K or 4000K

DIFFUSER

PMMA OPAL

LIGHT DISTRIBUTION

Direct and sidewalls

EMERGENCY LIGHTING

A unit with integrated emergency is an option

DIMMING

Most models can be delivered with ballast for dimming (TOUCHDIM, DALI)



DIRECT CODE	(mm)	W	Lm from 3000K/4000K
SLS130	585x57x70	8	1500/1580
SLS250	585x57x70	14	2340/2450
SLS195	860x57x70	13	2250/2370
SLS375	860x57x70	21	3510/3690
SLS260	1145x57x70	16	3000/3160
SLS500	1145x57x70	28	4680/4900
SLS325	1425x57x70	21	3750/3950
SLS625	1425x57x70	35	5850/6150
SLS2x195	1710x57x70	26	4500/4740
SLS2x375	1710x57x70	42	700/7380
SLS2x230	1990x57x70	29	5250/5530
SLS2x440	1990x57x70	49	8190/8610
SLS2x260	2280x57x70	32	6000/6320
SLS2x500	2280x57x70	56	9360/9800
SLS2x325	2840x57x70	42	7500/7900
SLS2x625	2840x57x70	70	11700/12300

Delivered incl. 2 m self-locking suspensions

COLOR TEMPERATURE

3000K /3K
4000K /4K

OPTIC

PMMA OPAL /--

DIMMABLE OPTIONS

DALI, TOUCHDIM /DALI see page 223
WIRELESS /WRS see page 223

COLORS

ELOX /...


ACCESSORIES

57
70
SLPKK
END CAP
2PCS


75
75
SPPKBO3075 (3X0,75)
SPPKBO5075 (5X0,75)
TRANSPARENT CABLE 2 METRES
WITH CEILING BOX
25



□ DUAL STAR SUSPENDED

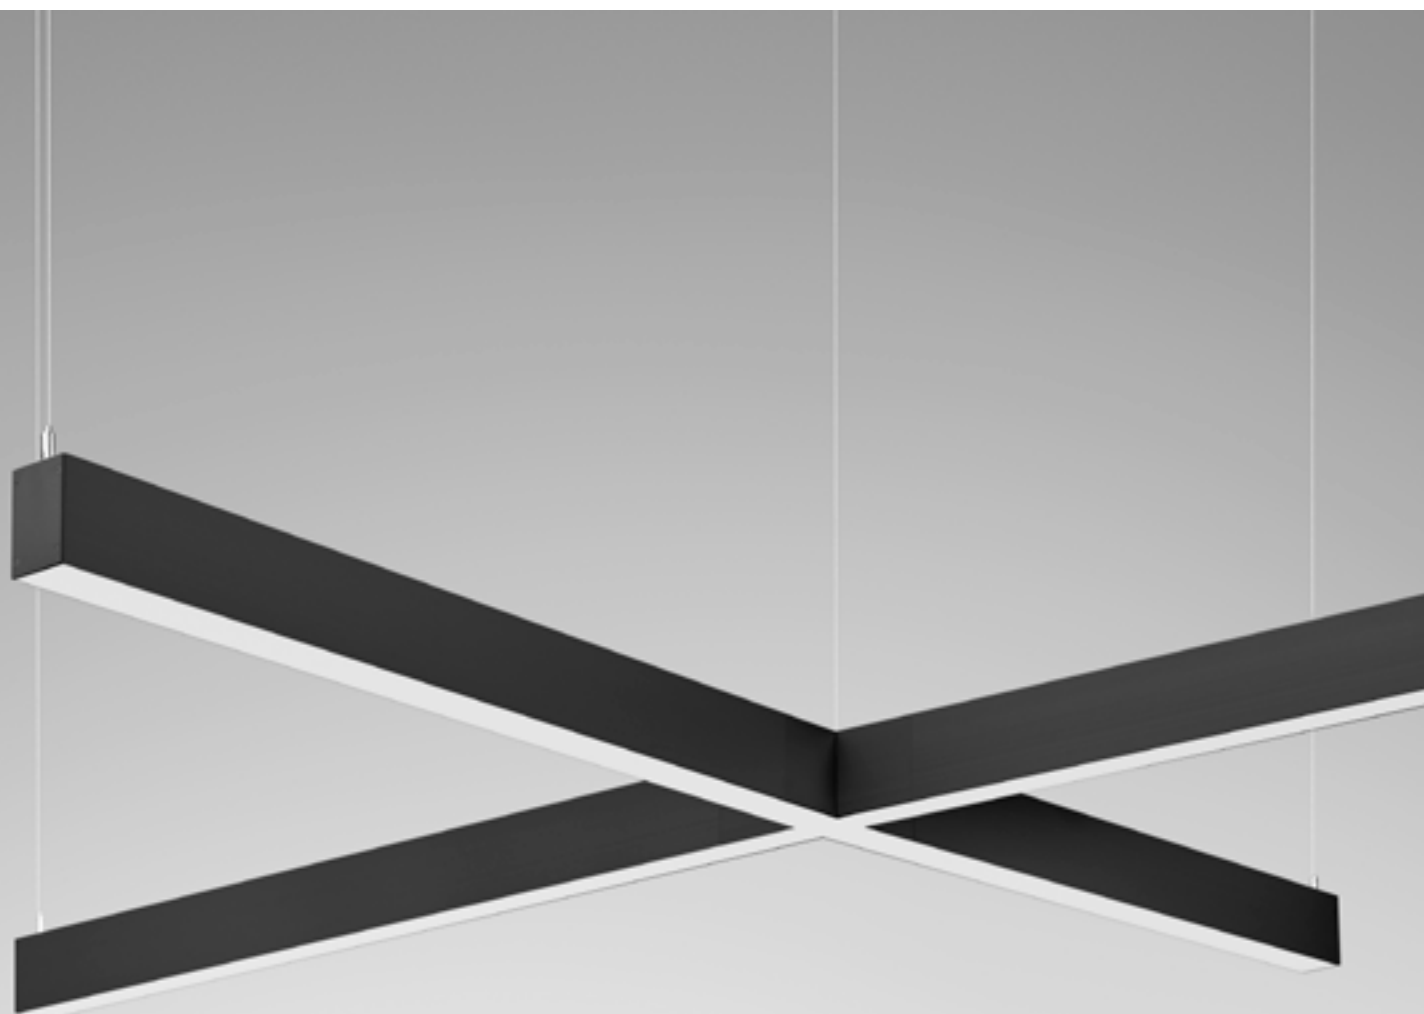

ARCHILIGHT



INSTALLATION

Suspended version
Ceiling version see page 156

CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block
Luminaires for dimming are delivered with 5-pole terminal block

MATERIAL

The body of the luminaire is extruded aluminium,
powder coated finish

LIGHT SOURCE

LED Tridonic or TCI, min. 150Lm/W, 3000K or 4000K

DIFFUSER

PMMA OPAL
PRISMATIC

LIGHT DISTRIBUTION


Direct symmetrical
Direct symmetrical / active indirect symmetrical

EMERGENCY LIGHTING

A unit with integrated emergency is an option

DIMMING

Most models can be delivered with ballast
for dimming (TOUCHDIM, DALI)

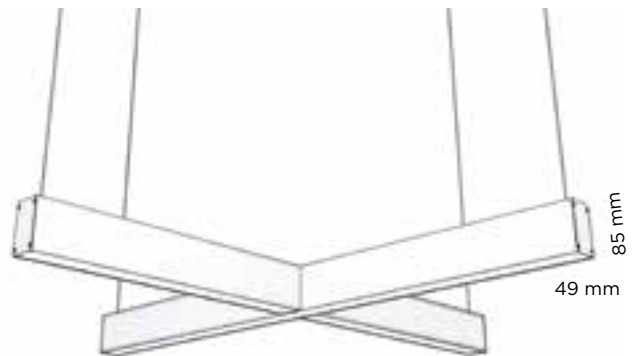

COLOR TEMPERATURE

3000K /3K
4000K /4K







OPTIC

PMMA OPAL /--
PRISMATIC /P



DIMMABLE OPTIONS

DALI, TOUCHDIM /DALI see page 223
WIRELESS /WRS see page 223

COLORS

	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACIT	/AT
	GOLD	/GL
	BRONZE	/BR

ACCESSORIES

	75	SPPKBO3075 (3X0,75) SPPKBO5075 (5X0,75) TRANSPARENT CABLE 2 METRES WITH CEILING BOX
	25	

DIRECT CODE	(mm)	W	Lm from 3000K/4000K
SDST130	1200x1200x85	50	8040/8520
SDST250	1200x1200x85	74	11160/11760

DIRECT/INDIRECT CODE	(mm)	W	Lm from 3000K/4000K
SDST130/DI	1200x1200x85	100	16080/17040

Delivered incl. 2 m self-locking suspensions

□ CUBUS SQUARE SUSPENDED



ARCHILIGHT



INSTALLATION

Suspended version
 Ceiling version see page 158
 Recessed version see page 178

CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block
 Luminaires for dimming are delivered with 5-pole terminal block

MATERIAL

The body of the luminaire is extruded aluminium, powder coated finish

LIGHT SOURCE

LED Tridonic or TCI, min. 150Lm/W, 3000K or 4000K

DIFFUSER

PMMA OPAL
 PRISMATIC

LIGHT DISTRIBUTION

Direct symmetrical

EMERGENCY LIGHTING

A unit with integrated emergency is an option

DIMMING

Most models can be delivered with ballast for dimming (TOUCHDIM, DALI)

COLOR TEMPERATURE

3000K /3K
 4000K /4K

OPTIC


PMMA OPAL /--
 PRISMATIC /P

DIMMABLE OPTIONS

DALI, TOUCHDIM /DALI see page 223
 WIRELESS /WRS see page 223

DIRECT CODE	(mm)	W	Lm from 3000K/4000K
SCSQ130	630x630x62	33	5360/5680
SCSQ195	915x915x62	49	8040/8520

Delivered incl. 2 m self-locking suspensions




COLORS

	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACIT	/AT
	GOLD	/GL
	BRONZE	/BR

ACCESSORIES

	75	SPPKBO3075 (3X0,75) SPPKBO5075 (5X0,75) TRANSPARENT CABLE 2 METRES WITH CEILING BOX
	25	

□ FLAT 200 SUSPENDED



INSTALLATION

Suspended version
Ceiling version see page 160

CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block
Luminaires for dimming are delivered with 5-pole terminal block

MATERIAL

The body of the luminaire is extruded aluminium, eloxed or powder coated finish

LIGHT SOURCE

LED Tridonic or TCI, min. 150Lm/W, 3000K or 4000K

DIFFUSER

PMMA OPAL
PRISMATIC

LIGHT DISTRIBUTION


Direct symmetrical
Direct symmetrical / active indirect symmetrical

EMERGENCY LIGHTING

A unit with integrated emergency is an option

DIMMING

Most models can be delivered with ballast for dimming (TOUCHDIM, DALI)

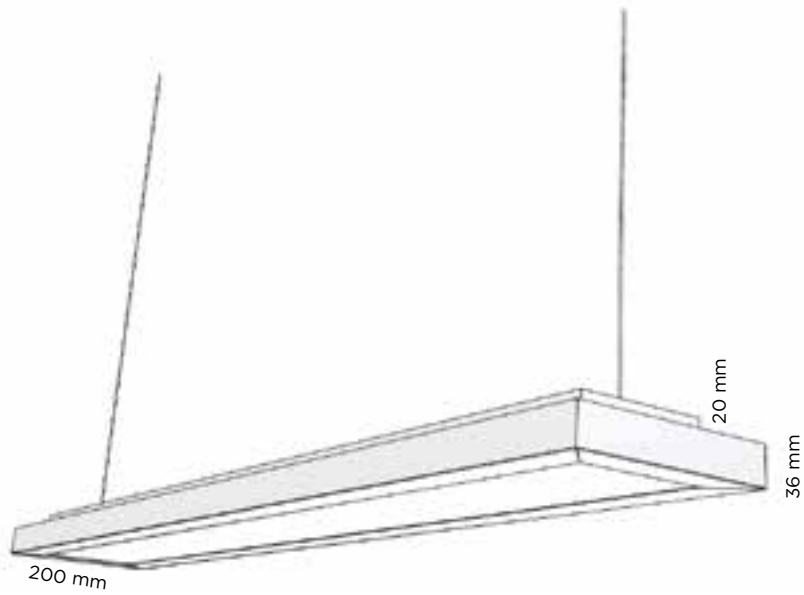

COLOR TEMPERATURE

3000K /3K
4000K /4K

OPTIC

PMMA OPAL /--
PRISMATIC /P

DIMMABLE OPTIONS

DALI, TOUCHDIM /DALI see page 223
WIRELESS /WRS see page 223

DIRECT CODE	(mm)	W	Lm from 3000K/4000K
SFS2500	1200x200x36	33	5360/5680
SFS2625	1500x200x36	41	6700/7100

DIRECT/INDIRECT CODE	(mm)	W	Lm from 3000K/4000K
SFS2500/DI	1200x200x36	55	7110/7820
SFS2625/DI	1500x200x36	62	8400/8980

Delivered incl. 2 m self-locking suspensions

COLORS

	ELOX	/...
	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACIT	/AT
	GOLD	/GL
	BRONZE	/BR

ACCESSORIES

	75	SPPKBO3075 (3X0,75) SPPKBO5075 (5X0,75) TRANSPARENT CABLE 2 METRES WITH CEILING BOX
	25	



WALL

2



WALL

CUBUS_R WALL	78
CUBUS_S WALL	80
CUBUS_XL WALL	82
BELO_LO_70/110L WALL	84
CUBUS WALL	86
DUAL WALL	88
LUCID WALL	90
CUBUS ROTARY WALL	92
DUAL MINI	94

□ CUBUS_R WALL



ARCHILIGHT



140

- 600
- 900
- 1200
- 1500



INSTALLATION

Wall version
 Ceiling version see page 144
 Suspended version see page 56

CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block
 Luminaires for dimming are delivered with 5-pole terminal block

MATERIAL

The body of the luminaire is extruded aluminium,
 powder coated finish

LIGHT SOURCE

LED Tridonic or TCI, min. 150Lm/W, 3000K or 4000K

DIFFUSER

PMMA OPAL
 PRISMATIC

LIGHT DISTRIBUTION

Direct symmetrical
 Direct symmetrical / Passive indirect symmetrical, see page 223

EMERGENCY LIGHTING

A unit with integrated emergency is an option

DIMMING

Most models can be delivered with ballast
 for dimming (TOUCHDIM, DALI)

DIRECT CODE	(mm)	W	Lm from 3000K/4000K
SCWR130	600x140x80	16	2680/2840
SCWR250	600x140x80	24	3720/3920
SCWR195	900x140x80	26	4020/4260
SCWR375	900x140x80	37	5580/5880
SCWR260	1200x140x80	33	5360/5680
SCWR500	1200x140x80	49	7440/7840
SCWR325	1500x140x80	41	6700/7100
SCWR625	1500x140x80	61	9300/9800

DIRECT/INDIRECT CODE	(mm)	W	Lm from 3000K/4000K
SCWR130/DI	600x140x80	16	2680/2840
SCWR250/DI	600x140x80	24	3720/3920
SCWR195/DI	900x140x80	26	4020/4260
SCWR375/DI	900x140x80	37	5580/5880
SCWR260/DI	1200x140x80	33	5360/5680
SCWR500/DI	1200x140x80	49	7440/7840
SCWR325/DI	1500x140x80	41	6700/7100
SCWR625/DI	1500x140x80	61	9300/9800

COLOR TEMPERATURE

3000K /3K
 4000K /4K

OPTIC

PMMA OPAL /--
 PRISMATIC /P

DIMMABLE OPTIONS

DALI, TOUCHDIM /DALI see page 223
 WIRELESS /WRS see page 223


COLORS

	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACIT	/AT
	GOLD	/GL
	BRONZE	/BR

□ CUBUS_S WALL



ARCHILIGHT

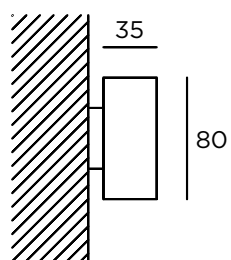



INSTALLATION

Wall version
 Ceiling version see page 146
 Suspended version see page 58

CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block
 Luminaires for dimming are delivered with 5-pole terminal block

MATERIAL

The body of the luminaire is extruded aluminium,
 powder coated finish

LIGHT SOURCE

LED Tridonic or TCI, min. 150Lm/W, 3000K or 4000K

DIFFUSER

PMMA OPAL
 PRISMATIC

LIGHT DISTRIBUTION

Direct symmetrical

EMERGENCY LIGHTING

A unit with integrated emergency is an option

DIMMING

Most models can be delivered with ballast
 for dimming (TOUCHDIM, DALI)

DIRECT CODE	(mm)	W	Lm from 3000K/4000K
SCWS90	850x35x80	13	2010/2130
SCWS120	1135x35x80	17	2680/2840
SCWS150	1415x35x80	21	3350/3550

COLOR TEMPERATURE

3000K /3K
 4000K /4K

OPTIC

PMMA OPAL /--
 PRISMATIC /P

DIMMABLE OPTIONS

DALI, TOUCHDIM /DALI see page 223
 WIRELESS /WRS see page 223

ACCESSORIES




COLORS

	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACIT	/AT
	GOLD	/GL
	BRONZE	/BR

□ CUBUS_XL WALL



ARCHILIGHT

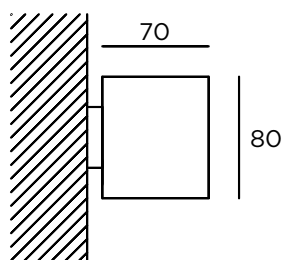




DIRECT CODE	(mm)	W	Lm from 3000K/4000K
SCWXL60	595x70x80	9	1340/1420
SCWXL90	850x70x80	13	2010/2130
SCWXL120	1135x70x80	17	2680/2840
SCWXL150	1415x70x80	21	3350/3550
SCWXL170	1700x70x80	26	4020/4260
SCWXL200	1980x70x80	29	4690/4970
SCWXL230	2265x70x80	33	5360/5680
SCWXL280	2825x70x80	41	6700/7100

DIRECT/INDIRECT CODE	(mm)	W	Lm from 3000K/4000K
SCWXL60/DI	595x70x80	9	1340/1420
SCWXL90/DI	850x70x80	13	2010/2130
SCWXL120/DI	1135x70x80	17	2680/2840
SCWXL150/DI	1415x70x80	21	3350/3550
SCWXL170/DI	1700x70x80	26	4020/4260
SCWXL200/DI	1980x70x80	29	4690/4970
SCWXL230/DI	2265x70x80	33	5360/5680
SCWXL280/DI	2825x70x80	41	6700/7100

ACCESSORIES



INSTALLATION

Wall version
Ceiling version see page 148
Suspended version see page 60
Recessed version see page 176

CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block
Luminaires for dimming are delivered with 5-pole terminal block

MATERIAL

The body of the luminaire is extruded aluminium, powder coated finish

LIGHT SOURCE

LED Tridonic or TCI, min. 150Lm/W, 3000K or 4000K

DIFFUSER

PMMA OPAL
PRISMATIC

LIGHT DISTRIBUTION

Direct symmetrical
Direct symmetrical / Passive indirect symmetrical, see page 223

EMERGENCY LIGHTING

A unit with integrated emergency is an option

DIMMING

Most models can be delivered with ballast for dimming (TOUCHDIM, DALI)

COLOR TEMPERATURE

3000K /3K
4000K /4K

OPTIC

PMMA OPAL /--
PRISMATIC /P

DIMMABLE OPTIONS

DALI, TOUCHDIM /DALI see page 223
WIRELESS /WRS see page 223


COLORS

	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACIT	/AT
	GOLD	/GL
	BRONZE	/BR

□ BELO_LO_70/110L WALL



ARCHILIGHT

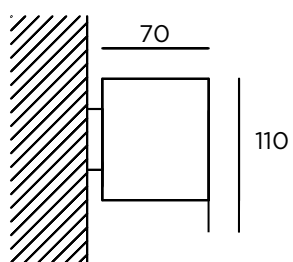




DIRECT CODE	(mm)	W	Lm from 3000K/4000K
SBW/110L/LO/60	595x70x80	9	1340/1420
SBW/110L/LO/90	850x70x80	13	2010/2130
SBW/110L/LO/120	1135x70x80	17	2680/2840
SBW/110L/LO/150	1415x70x80	21	3350/3550
SBW/110L/LO/170	1700x70x80	26	4020/4260
SBW/110L/LO/200	1980x70x80	29	4690/4970
SBW/110L/LO/230	2265x70x80	33	5360/5680
SBW/110L/LO/280	2825x70x80	41	6700/7100

DIRECT/INDIRECT CODE	(mm)	W	Lm from 3000K/4000K
SBW/110L/LO/60/DI	595x70x80	9	1340/1420
SBW/110L/LO/90/DI	850x70x80	13	2010/2130
SBW/110L/LO/120/DI	1135x70x80	17	2680/2840
SBW/110L/LO/150/DI	1415x70x80	21	3350/3550
SBW/110L/LO/170/DI	1700x70x80	26	4020/4260
SBW/110L/LO/200/DI	1980x70x80	29	4690/4970
SBW/110L/LO/230/DI	2265x70x80	33	5360/5680
SBW/110L/LO/280/DI	2825x70x80	41	6700/7100

ACCESSORIES



INSTALLATION

Wall version

CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block
Luminaires for dimming are delivered with 5-pole terminal block

MATERIAL

The body of the luminaire is extruded aluminium, powder coated finish

LIGHT SOURCE

LED Tridonic or TCI, min. 150Lm/W, 3000K or 4000K

DIFFUSER

PMMA OPAL
PRISMATIC

LIGHT DISTRIBUTION

Direct symmetrical
Direct symmetrical / Passive indirect symmetrical, see page 223

EMERGENCY LIGHTING

A unit with integrated emergency is an option

DIMMING

Most models can be delivered with ballast for dimming (TOUCHDIM, DALI)

COLOR TEMPERATURE

3000K /3K
4000K /4K

OPTIC

PMMA OPAL /--
PRISMATIC /P

DIMMABLE OPTIONS

DALI, TOUCHDIM /DALI see page 223
WIRELESS /WRS see page 223

COLORS

	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACIT	/AT
	GOLD	/GL
	BRONZE	/BR


□ CUBUS WALL



ARCHILIGHT



DIRECT CODE	(mm)	W	Lm from 3000K/4000K
SCW130	595x60x62	9	1340/1420
SCW250	595x60x62	12	1860/1960
SCW195	850x60x62	12	2010/2130
SCW375	850x60x62	18	2790/2940
SCW260	1135x60x62	16	2680/2840
SCW500	1135x60x62	24	3720/3920
SCW325	1415x60x62	21	3350/3550
SCW625	1415x60x62	31	4650/4900
SCW2x195	1700x60x62	26	4020/4260
SCW2x375	1700x60x62	37	5580/5880
SCW2x230	1980x60x62	29	4690/4970
SCW2x440	1980x60x62	43	6510/6860
SCW2x260	2265x60x62	33	5360/5680
SCW2x500	2265x60x62	49	7440/7840
SCW2x325	2825x60x62	41	6700/7100
SCW2x625	2825x60x62	61	9300/9800

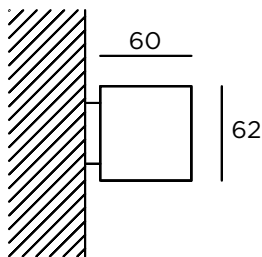

INSTALLATION

Wall version
 Ceiling version see page 150
 Suspended version see page 62
 Recessed version see page 174
 System version see page 198

CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block
 Luminaires for dimming are delivered with 5-pole terminal block

MATERIAL

The body of the luminaire is extruded aluminium, eloxed or powder coated finish

LIGHT SOURCE

LED Tridonic or TCI, min. 150Lm/W, 3000K or 4000K

DIFFUSER

PMMA OPAL
 PRISMATIC

LIGHT DISTRIBUTION

Direct symmetrical

EMERGENCY LIGHTING

A unit with integrated emergency is an option

DIMMING

Most models can be delivered with ballast for dimming (TOUCHDIM, DALI)

COLOR TEMPERATURE

3000K /3K
 4000K /4K

OPTIC

PMMA OPAL /--
 PRISMATIC /P


DIMMABLE OPTIONS

DALI, TOUCHDIM /DALI see page 223
 WIRELESS /WRS see page 223

COLORS

	ELOX	/...
	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACIT	/AT
	GOLD	/GL
	BRONZE	/BR

ACCESSORIES



□ DUAL WALL




ARCHILIGHT



DIRECT CODE	(mm)	W	Lm from 3000K/4000K
SDW130	595x49x85	9	1340/1420
SDW250	595x49x85	12	1860/1960
SDW195	850x49x85	12	2010/2130
SDW375	850x49x85	18	2790/2940
SDW260	1135x49x85	16	2680/2840
SDW500	1135x49x85	24	3720/3920
SDW325	1415x49x85	21	3350/3550
SDW625	1415x49x85	31	4650/4900
SDW2x195	1700x49x85	26	4020/4260
SDW2x375	1700x49x85	37	5580/5880
SDW2x230	1980x49x85	29	4690/4970
SDW2x440	1980x49x85	43	6510/6860
SDW2x260	2265x49x85	33	5360/5680
SDW2x500	2265x49x85	49	7440/7840
SDW2x325	2825x49x85	41	6700/7100
SDW2x625	2825x49x85	61	9300/9800

DIRECT/ INDIRECT CODE	(mm)	W	Lm from 3000K/4000K
SDW130/DI	595x49x85	17	2680/2840
SDW250/DI	595x49x85	25	3720/3920
SDW195/DI	850x49x85	25	4020/4260
SDW375/DI	850x49x85	37	5580/5880
SDW260/DI	1135x49x85	33	5360/5680
SDW500/DI	1135x49x85	49	7440/7840
SDW325/DI	1415x49x85	41	6700/7100
SDW625/DI	1415x49x85	61	9300/9800
SDW2x195/DI	1700x49x85	52	8040/8520
SDW2x375/DI	1700x49x85	74	11160/11760
SDW2x230/DI	1980x49x85	58	9380/9940
SDW2x440/DI	1980x49x85	86	13020/13720
SDW2x260/DI	2265x49x85	66	10720/11360
SDW2x500/DI	2265x49x85	98	14880/15680
SDW2x325/DI	2825x49x85	83	13400/14200
SDW2x625/DI	2825x49x85	123	18600/19600

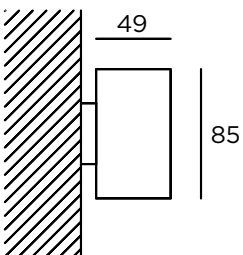

INSTALLATION

Wall version
 Ceiling version see page 152
 Suspended version see page 64
 System version see page 206

CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block
 Luminaires for dimming are delivered with 5-pole terminal block

MATERIAL

The body of the luminaire is extruded aluminium, eloxed or powder coated finish

LIGHT SOURCE

LED Tridonic or TCI, min. 150Lm/W, 3000K or 4000K

DIFFUSER

PMMA OPAL
 PRISMATIC

LIGHT DISTRIBUTION

Direct symmetrical
 Direct symmetrical / active indirect symmetrical

EMERGENCY LIGHTING

A unit with integrated emergency is an option

DIMMING

Most models can be delivered with ballast for dimming (TOUCHDIM, DALI)

COLOR TEMPERATURE

3000K /3K
 4000K /4K

OPTIC

PMMA OPAL /--
 PRISMATIC /P

DIMMABLE OPTIONS

DALI, TOUCHDIM /DALI see page 223
 WIRELESS /WRS see page 223

COLORS

	ELOX	/...
	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACIT	/AT
	GOLD	/GL
	BRONZE	/BR

ACCESSORIES

49

 85
 SDPKK
 END CAP
 2PCS

□ LUCID WALL



INSTALLATION

Wall version
Ceiling version see page 154
Suspended version see page 66
System version see page 210

CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block
Luminaires for dimming are delivered with 5-pole terminal block

MATERIAL

The body of the luminaire is extruded aluminium, eloxed finish

LIGHT SOURCE

LED Tridonic or TCI, min. 150Lm/W, 3000K or 4000K

DIFFUSER

PMMA OPAL
PRISMATIC

LIGHT DISTRIBUTION


Direct symmetrical
Direct symmetrical / active indirect symmetrical

EMERGENCY LIGHTING

A unit with integrated emergency is an option


DIMMING

Most models can be delivered with ballast for dimming (TOUCHDIM, DALI)

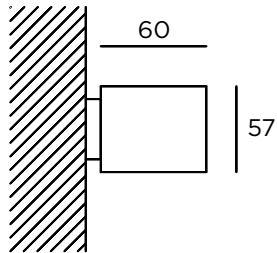

DIRECT CODE	(mm)	W	Lm from 3000K/4000K
SLW130	585x57x70	8	1500/1580
SLW250	585x57x70	14	2340/2450
SLW195	860x57x70	13	2250/2370
SLW375	860x57x70	21	3510/3690
SLW260	1145x57x70	16	3000/3160
SLW500	1145x57x70	28	4680/4900
SLW325	1425x57x70	21	3750/3950
SLW625	1425x57x70	35	5850/6150
SLW2x195	1710x57x70	26	4500/4740
SLW2x375	1710x57x70	42	700/7380
SLW2x230	1990x57x70	29	5250/5530
SLW2x440	1990x57x70	49	8190/8610
SLW2x260	2280x57x70	32	6000/6320
SLW2x500	2280x57x70	56	9360/9800
SLW2x325	2840x57x70	42	7500/7900
SLW2x625	2840x57x70	70	11700/12300

ACCESSORIES



COLOR TEMPERATURE

3000K /3K
4000K /4K

OPTIC

PMMA OPAL /--

DIMMABLE OPTIONS

DALI, TOUCHDIM /DALI see page 223
WIRELESS /WRS see page 223

COLORS

ELOX /...

□ CUBUS ROTARY WALL




703 mm

978 mm

1263 mm

1543 mm

ARCHILIGHT

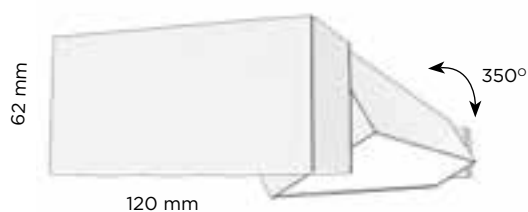

INSTALLATION

Wall version

CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block
Luminaires for dimming are delivered with 5-pole terminal block

MATERIAL

The body of the luminaire is extruded aluminium,
eloxed or powder coated finish

LIGHT SOURCE

LED Tridonic or TCI, min. 150Lm/W, 3000K or 4000K

DIFFUSER

PMMA OPAL
PRISMATIC

LIGHT DISTRIBUTION


Direct symmetrical
Direct symmetrical / active indirect symmetrical

EMERGENCY LIGHTING

A unit with integrated emergency is an option

DIMMING

Most models can be delivered with ballast
for dimming (TOUCHDIM, DALI)

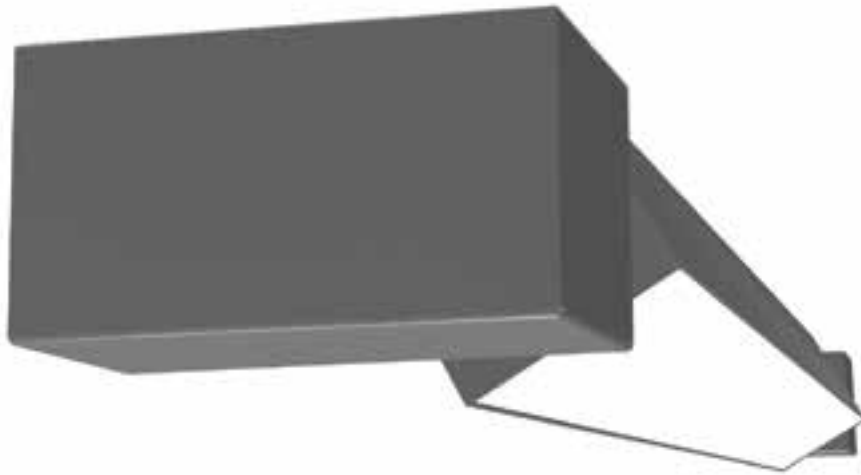

COLOR TEMPERATURE

3000K /3K
4000K /4K

OPTIC








PMMA OPAL /--
PRISMATIC /P

DIMMABLE OPTIONS

DALI, TOUCHDIM /DALI see page 223
WIRELESS /WRS see page 223

DIRECT CODE	(mm)	W	Lm from 3000K/4000K
SCRW130LED	703	9	1260/1340
SCRW250LED	703	17	2100/2260
SCRW195LED	978	13	1890/2010
SCRW375LED	978	26	3150/3390
SCRW260LED	1263	18	2520/2680
SCRW500LED	1263	34	4200/4520
SCRW325LED	1543	22	3150/3350
SCRW625LED	1543	43	5250/5650



COLORS

	ELOX	/...
	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACIT	/AT
	GOLD	/GL
	BRONZE	/BR

ACCESSORIES



□ DUAL MINI

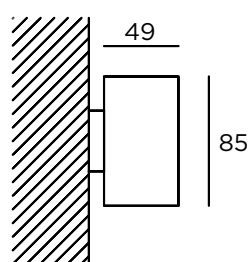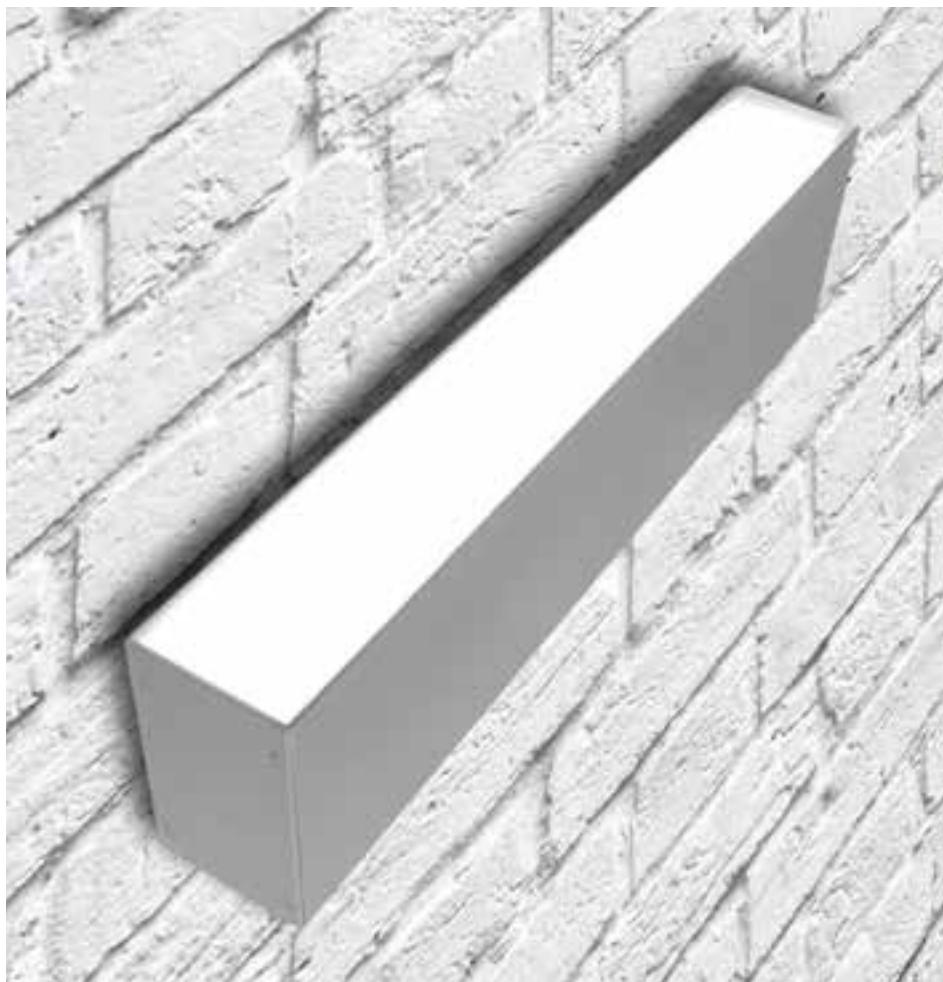

ARCHILIGHT



INSTALLATION

Wall version

CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block
Luminaires for dimming are delivered with 5-pole terminal block

MATERIAL

The body of the luminaire is extruded aluminium, powder coated finish

LIGHT SOURCE

LED Tridonic or TCI, min. 150Lm/W, 3000K or 4000K

DIFFUSER

PMMA OPAL
PRISMATIC

LIGHT DISTRIBUTION

Direct symmetrical
Direct symmetrical / Active indirect symmetrical, see page 223

DIMMING

Most models can be delivered with ballast for dimming (TOUCHDIM, DALI)

DIRECT CODE	(mm)	W	Lm from 3000K/4000K
SDSM100LED/D	300	8	950/1020


DIRECT/ INDIRECT CODE	(mm)	W	Lm from 3000K/4000K
SDSM100LED/DI	300	16	1900/2040

COLOR TEMPERATURE	
3000K	/3K
4000K	/4K

OPTIC	
PMMA OPAL	/--
PRISMATIC	/P

DIMMABLE OPTIONS		
DALI, TOUCHDIM	/DALI	see page 223

ACCESSORIES



COLORS

	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACIT	/AT
	GOLD	/GL
	BRONZE	/BR



CEILING

3

CEILING

BELO_GI_70/80 CEILING	102
BELO_GI_70/110 CEILING	104
BELO_GI_70/110L CEILING	106
BELO_GI_110/80 CEILING	108
BELO_LO_SQ_80 CEILING	110
BELO_LO_OV_80 CEILING	112
BELO_LO_S_80 CEILING	114
BELO_LO_PO_80 CEILING	116
BELO_LO_TR_80 CEILING	118
BELO_BE_50 CEILING	126
BELO_BE_80 CEILING	128
BELO_BE_110 CEILING	130
BELO_BE_SQ_50 CEILING	132
BELO_BE_SQ_80 CEILING	134
BELO_BE_SQ_110 CEILING	136
BELO_QA_50 CEILING	138
BELO_QA_80 CEILING	140
BELO_QA_110 CEILING	142
CUBUS_R CEILING	144
CUBUS_S CEILING	146
CUBUS_XL CEILING	148
CUBUS CEILING	150
DUAL CEILING	152
LUCID CEILING	154
DUAL STAR CEILING	156
CUBUS SQUARE CEILING	158
FLAT 200 CEILING	160





□ BELO_GI_70/80 CEILING



ARCHILIGHT



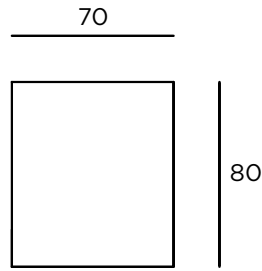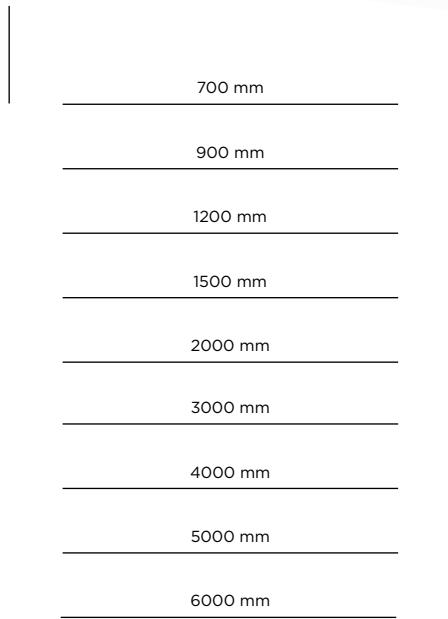

INSTALLATION

Ceiling version
Suspended version see page 16
Recessed version see page 168

CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block
Luminaires for dimming are delivered with 5-pole terminal block

MATERIAL

The body of the luminaire is curved extruded aluminium, powder coated finish

LIGHT SOURCE

LED Tridonic or TCI, min. 150Lm/W, 3000K or 4000K

DIFFUSER

PMMA OPAL
PRISMATIC

LIGHT DISTRIBUTION

Direct symmetrical

EMERGENCY LIGHTING

A unit with integrated emergency is an option

DIMMING

Most models can be delivered with ballast for dimming (TOUCHDIM, DALI)

DIRECT CODE	Ø (mm)	W	Lm from 3000K/4000K
SBC/GI700	700	29	4690/4970
SBC/GI900	900	37	6030/6390
SBC/GI1200	1200	50	8040/8520
SBC/GI1500	1500	66	10720/11360
SBC/GI2000	2000	82	13400/14200
SBC/GI3000	3000	132	21440/22720
SBC/GI4000	4000	164	26800/28400
SBC/GI5000	5000	230	37520/39760
SBC/GI6000	6000	263	42880/45400

COLOR TEMPERATURE

3000K /3K
4000K /4K

OPTIC


PMMA OPAL /--
PRISMATIC /P

DIMMABLE OPTIONS

DALI, TOUCHDIM /DALI see page 223
WIRELESS /WRS see page 223

COLORS

	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACIT	/AT
	GOLD	/GL
	BRONZE	/BR

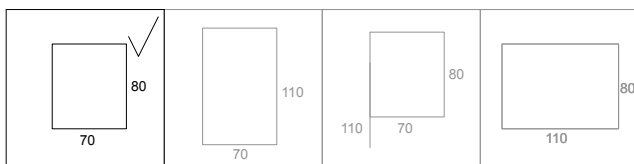

see page 104


see page 106

see page 108

□ BELO_GI_70/110 CEILING



ARCHILIGHT



INSTALLATION

Ceiling version
Suspended version see page 18
Recessed version see page 168

CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block
Luminaires for dimming are delivered with 5-pole terminal block

MATERIAL

The body of the luminaire is curved extruded aluminium, powder coated finish

LIGHT SOURCE

LED Tridonic or TCI, min. 150Lm/W, 3000K or 4000K

DIFFUSER

PMMA OPAL
PRISMATIC

LIGHT DISTRIBUTION


Direct symmetrical

EMERGENCY LIGHTING

A unit with integrated emergency is an option

DIMMING

Most models can be delivered with ballast for dimming (TOUCHDIM, DALI)

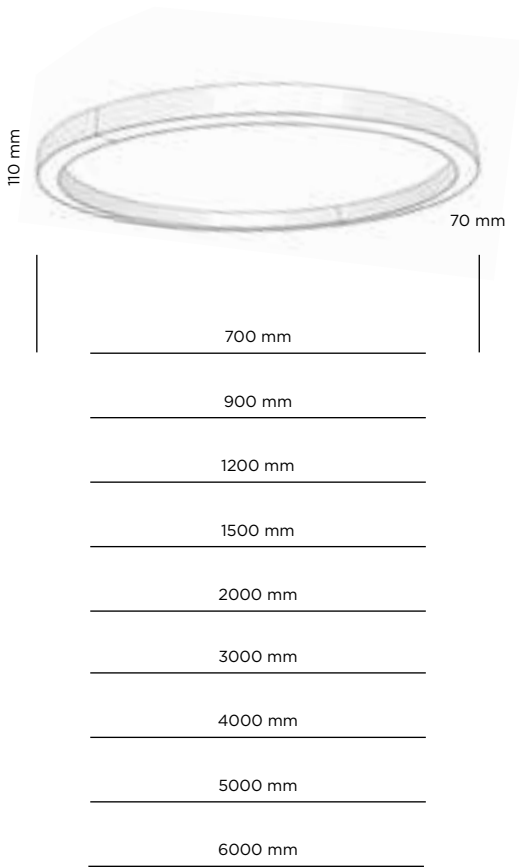

DIRECT CODE	Ø (mm)	W	Lm from 3000K/4000K
SBC/110/GI700	700	29	4690/4970
SBC/110/GI900	900	37	6030/6390
SBC/110/GI1220	1200	50	8040/8520
SBC/110/GI1500	1500	66	10720/11360
SBC/110/GI2000	2000	82	13400/14200
SBC/110/GI3000	3000	132	21440/22720
SBC/110/GI4000	4000	164	26800/28400
SBC/110/GI5000	5000	230	37520/39760
SBC/110/GI6000	6000	263	42880/45400

COLOR TEMPERATURE


3000K	/3K
4000K	/4K

OPTIC

PMMA OPAL	/--
PRISMATIC	/P

DIMMABLE OPTIONS

DALI, TOUCHDIM	/DALI	see page 223
WIRELESS	/WRS	see page 223

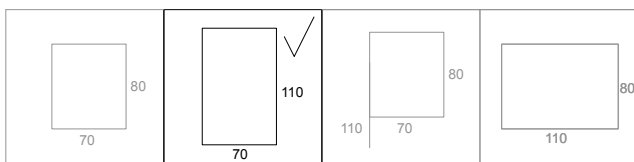

see page 102

see page 106

see page 108


COLORS

	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACIT	/AT
	GOLD	/GL
	BRONZE	/BR

□ BELO_GI_70/110L CEILING



ARCHILIGHT



INSTALLATION

Ceiling version
Suspended version see page 20

CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block
Luminaires for dimming are delivered with 5-pole terminal block

MATERIAL

The body of the luminaire is curved extruded aluminium, powder coated finish

LIGHT SOURCE

LED Tridonic or TCI, min. 150Lm/W, 3000K or 4000K

DIFFUSER

PMMA OPAL
PRISMATIC

LIGHT DISTRIBUTION



Direct symmetrical

EMERGENCY LIGHTING

A unit with integrated emergency is an option

DIMMING

Most models can be delivered with ballast for dimming (TOUCHDIM, DALI)

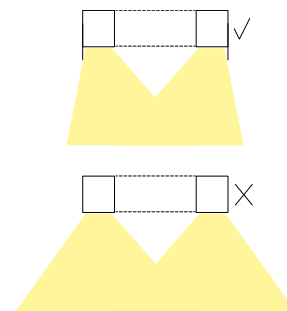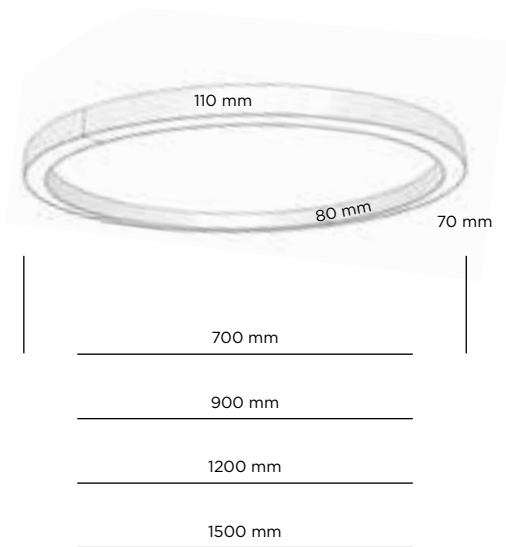

DIRECT CODE	Ø (mm)	W	Lm from 3000K/4000K
SBC/110L/GI700	700	29	4690/4970
SBC/110L/GI900	900	37	6030/6390
SBC/110L/GI1200	1200	50	8040/8520
SBC/110L/GI1500	1500	66	10720/11360

COLOR TEMPERATURE

3000K /3K
4000K /4K

OPTIC


PMMA OPAL /--
PRISMATIC /P

DIMMABLE OPTIONS

DALI, TOUCHDIM /DALI see page 223
WIRELESS /WRS see page 223

COLORS

	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACIT	/AT
	GOLD	/GL
	BRONZE	/BR

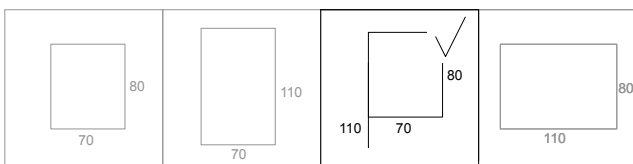


see page 102


see page 104


see page 108

□ BELO_GI_110/80 CEILING

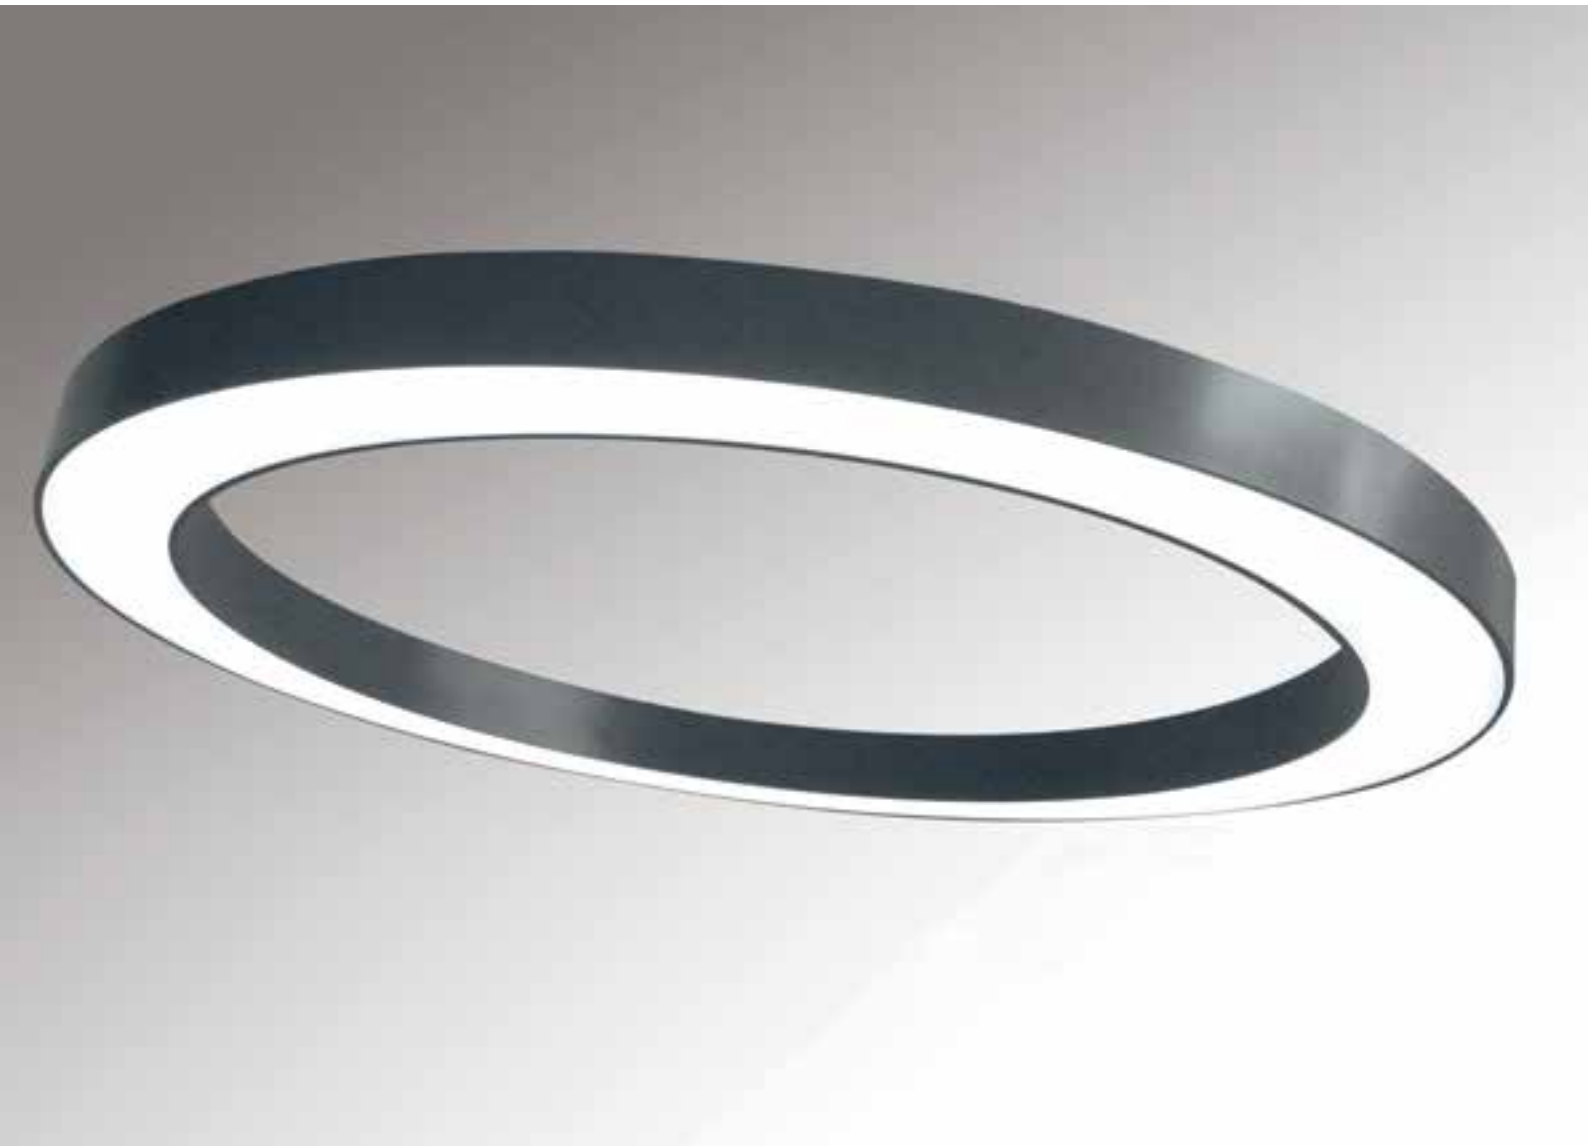

ARCHILIGHT



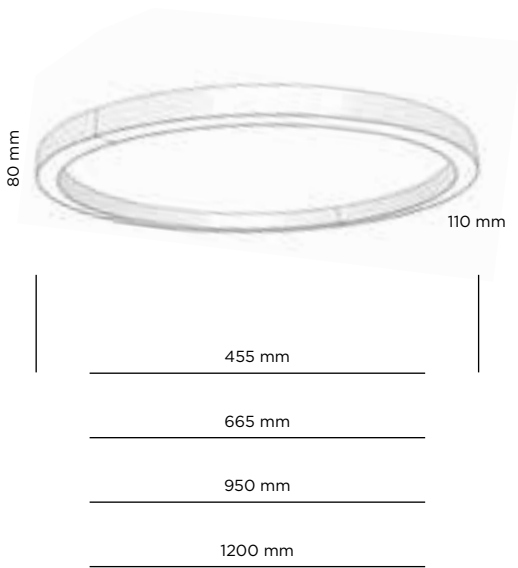

DIRECT CODE	Ø (mm)	W	Lm from 3000K/4000K
SBC/GI455	455	17	2680/2840
SBC/GI665	665	26	4020/4260
SBC/GI950	950	37	6030/6390
SBC/GI1200	1200	50	8040/8520

INSTALLATION

Ceiling version
Suspended version see page 24
Recessed version see page 170

CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block
Luminaires for dimming are delivered with 5-pole terminal block

MATERIAL

The body of the luminaire is curved extruded aluminium, powder coated finish

LIGHT SOURCE

LED Tridonic or TCI, min. 150Lm/W, 3000K or 4000K

DIFFUSER

PMMA OPAL
PRISMATIC

LIGHT DISTRIBUTION

Direct symmetrical

EMERGENCY LIGHTING

A unit with integrated emergency is an option

DIMMING

Most models can be delivered with ballast for dimming (TOUCHDIM, DALI)

COLOR TEMPERATURE

3000K /3K
4000K /4K

OPTIC


PMMA OPAL /--
PRISMATIC /P

DIMMABLE OPTIONS

DALI, TOUCHDIM /DALI see page 223
WIRELESS /WRS see page 223

COLORS

	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACIT	/AT
	GOLD	/GL
	BRONZE	/BR

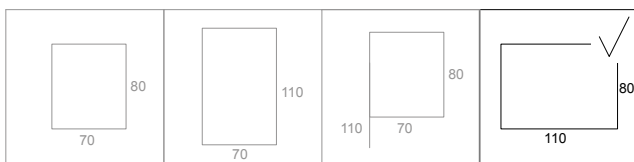


see page 102

see page 104

see page 106

□ BELO_LO_SQ_80 CEILING

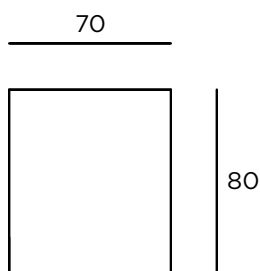

INSTALLATION

Ceiling version
Suspended version see page 26
Recessed version see page 180

CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block
Luminaires for dimming are delivered with 5-pole terminal block

MATERIAL

The body of the luminaire is curved extruded aluminium, powder coated finish

LIGHT SOURCE

LED Tridonic or TCI, min. 150Lm/W, 3000K or 4000K

DIFFUSER

PMMA OPAL
PRISMATIC

LIGHT DISTRIBUTION

Direct symmetrical

EMERGENCY LIGHTING



A unit with integrated emergency is an option

DIMMING

Most models can be delivered with ballast for dimming (TOUCHDIM, DALI)



- A 1225 _____
- B 1507 _____
- C 1789 _____
- D 2071 _____

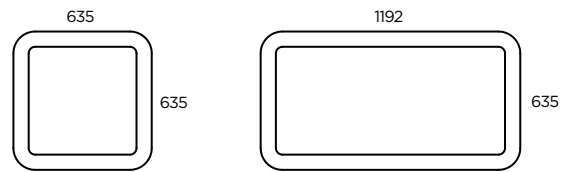

DIRECT CODE	(mm)	W	Lm from 3000K/4000K
SBC/80/SQ/600	635x635x80	33	5360/5680
SBC/80/SQ/1200	1192x635x80	50	8040/8520
SBC/80/SQ/AA	1225x1225x80	66	10720/11360
SBC/80/SQ/AB	1225x1507x80	74	12060/12780
SBC/80/SQ/AC	1225x1789x80	81	13400/14200
SBC/80/SQ/AD	1225x2071x80	91	14740/15620
SBC/80/SQ/BB	1507x1507x80	81	13400/14200
SBC/80/SQ/BC	1507x1789x80	91	14740/15620
SBC/80/SQ/BD	1507x2071x80	98	16080/17040
SBC/80/SQ/CC	1789x1789x80	98	16080/17040
SBC/80/SQ/CD	1789x2071x80	114	17420/18460
SBC/80/SQ/DD	2071x2071x80	115	18760/19880

COLOR TEMPERATURE

3000K	/3K
4000K	/4K

OPTIC

PMMA OPAL	/--
PRISMATIC	/P

DIMMABLE OPTIONS

DALI, TOUCHDIM	/DALI	see page 223
WIRELESS	/WRS	see page 223


COLORS

	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACIT	/AT
	GOLD	/GL
	BRONZE	/BR

□ BELO_LO_OV_80 CEILING



ARCHILIGHT

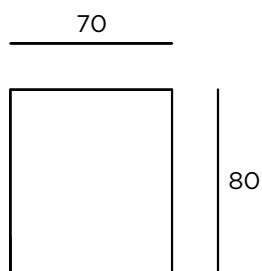

INSTALLATION

Ceiling version
Suspended version see page 28
Recessed version see page 182

CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block
Luminaires for dimming are delivered with 5-pole terminal block

MATERIAL

The body of the luminaire is curved extruded aluminium,
powder coated finish

LIGHT SOURCE

LED Tridonic or TCI, min. 150Lm/W, 3000K or 4000K

DIFFUSER

PMMA OPAL
PRISMATIC

LIGHT DISTRIBUTION

Direct symmetrical

EMERGENCY LIGHTING

A unit with integrated emergency is an option

DIMMING


Most models can be delivered with ballast
for dimming (TOUCHDIM, DALI)



A 847 _____

B 1129 _____

C 1411 _____

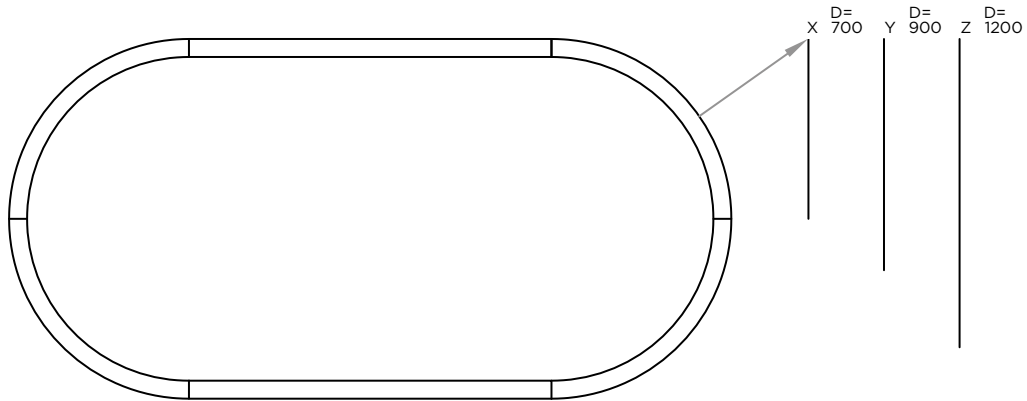

DIRECT CODE	(mm)	W	Lm from 3000K/4000K
SBC/80/OV/AX	700x1547x80	54	8710/9230
SBC/80/OV/AY	900x1747x80	62	10050/10650
SBC/80/OV/AZ	1200x2047x80	74	12060/12780
SBC/80/OV/BX	700x1829x80	62	10050/10650
SBC/80/OV/BY	900x2029x80	70	11390/12070
SBC/80/OV/BZ	1200x2329x80	81	13400/14200
SBC/80/OV/CX	700x2111x80	70	11390/12070
SBC/80/OV/CY	900x2311x80	78	12730/13490
SBC/80/OV/CZ	1200x2611x80	91	14740/15620

COLOR TEMPERATURE

3000K /3K
4000K /4K

OPTIC

PMMA OPAL /--
PRISMATIC /P


DIMMABLE OPTIONS

DALI, TOUCHDIM /DALI see page 223
WIRELESS /WRS see page 223

COLORS

	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACIT	/AT
	GOLD	/GL
	BRONZE	/BR

□ BELO_LO_S_80 CEILING

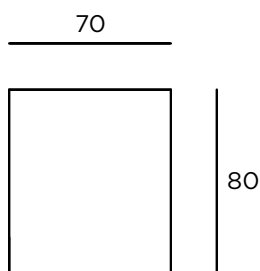

INSTALLATION

Ceiling version
Suspended version see page 30
Recessed version see page 184
System version see page 214

CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block
Luminaires for dimming are delivered with 5-pole terminal block

MATERIAL

The body of the luminaire is curved extruded aluminium, powder coated finish

LIGHT SOURCE

LED Tridonic or TCI, min. 150Lm/W, 3000K or 4000K

DIFFUSER

PMMA OPAL
PRISMATIC

LIGHT DISTRIBUTION



Direct symmetrical

EMERGENCY LIGHTING

A unit with integrated emergency is an option

DIMMING

Most models can be delivered with ballast for dimming (TOUCHDIM, DALI)

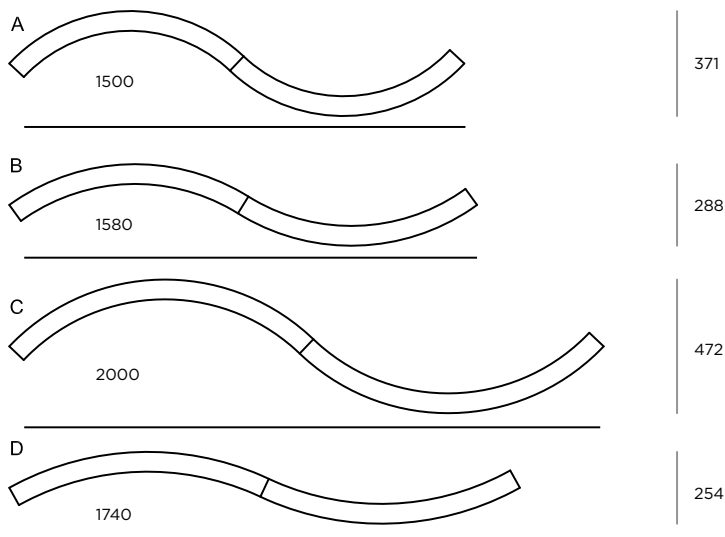

DIRECT CODE	(mm)	W	Lm from 3000K/4000K
SBC/80/LO/SA	1500x1200x80	26	4020/4260
SBC/80/LO/SB	1580x1500x80	26	4020/4260
SBC/80/LO/SC	2000x1500x80	33	5360/5680
SBC/80/LO/SD	1740x2000x80	26	4020/4260

COLOR TEMPERATURE

3000K	/3K
4000K	/4K


OPTIC

PMMA OPAL	/--
PRISMATIC	/P

DIMMABLE OPTIONS

DALI, TOUCHDIM	/DALI	see page 223
WIRELESS	/WRS	see page 223

ACCESSORIES




COLORS

	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACIT	/AT
	GOLD	/GL
	BRONZE	/BR

□ BELO_LO_PO_80 CEILING



ARCHILIGHT



INSTALLATION

Ceiling version
Suspended version see page 32
Recessed version see page 186

CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block
Luminaires for dimming are delivered with 5-pole terminal block

MATERIAL

The body of the luminaire is curved extruded aluminium, powder coated finish

LIGHT SOURCE

LED Tridonic or TCI, min. 150Lm/W, 3000K or 4000K

DIFFUSER

PMMA OPAL
PRISMATIC

LIGHT DISTRIBUTION


Direct symmetrical

EMERGENCY LIGHTING

A unit with integrated emergency is an option

DIMMING

Most models can be delivered with ballast for dimming (TOUCHDIM, DALI)

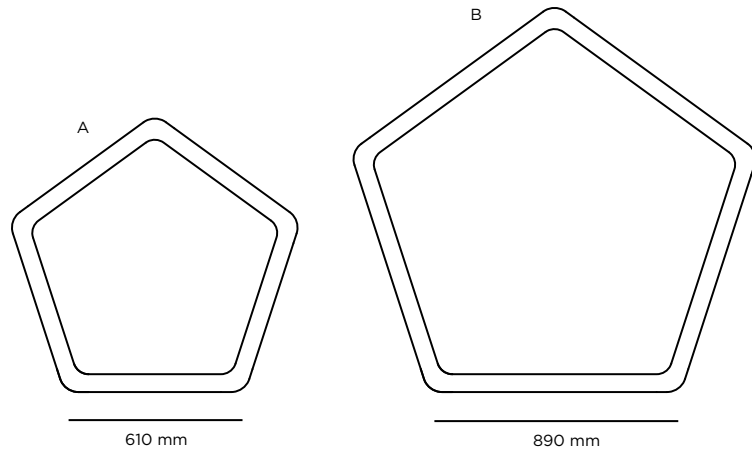

DIRECT CODE	(mm)	W	Lm from 3000K/4000K
SBC/80/PO/A	610x80	41	6700/7100
SBC/80/PO/B	890x80	62	10050/10650

COLOR TEMPERATURE

3000K	/3K
4000K	/4K

OPTIC

PMMA OPAL	/--
PRISMATIC	/P

DIMMABLE OPTIONS

DALI, TOUCHDIM	/DALI	see page 223
WIRELESS	/WRS	see page 223


COLORS

	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACIT	/AT
	GOLD	/GL
	BRONZE	/BR

□ BELO_LO_TR_80 CEILING



ARCHILIGHT

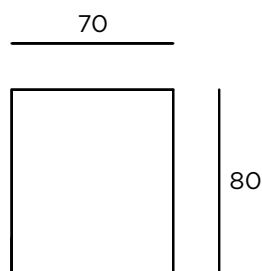

INSTALLATION

Ceiling version
Suspended version see page 34
Recessed version see page 188

CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block
Luminaires for dimming are delivered with 5-pole terminal block

MATERIAL

The body of the luminaire is curved extruded aluminium, powder coated finish

LIGHT SOURCE

LED Tridonic or TCI, min. 150Lm/W, 3000K or 4000K

DIFFUSER

PMMA OPAL
PRISMATIC

LIGHT DISTRIBUTION


Direct symmetrical

EMERGENCY LIGHTING

A unit with integrated emergency is an option

DIMMING

Most models can be delivered with ballast for dimming (TOUCHDIM, DALI)

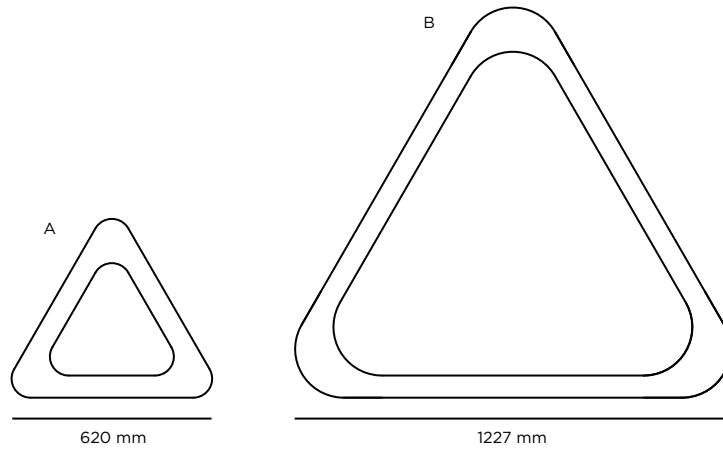

COLOR TEMPERATURE

3000K /3K
4000K /4K

OPTIC

PMMA OPAL /--
PRISMATIC /P

DIMMABLE OPTIONS

DALI, TOUCHDIM /DALI see page 223
WIRELESS /WRS see page 223

DIRECT CODE	(mm)	W	Lm from 3000K/4000K
SBC/80/PO/A	620x80	25	4020/4260
SBC/80/PO/B	1227x80	58	9380/9940

COLORS

	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACIT	/AT
	GOLD	/GL
	BRONZE	/BR














□ BELO_BE_50 CEILING



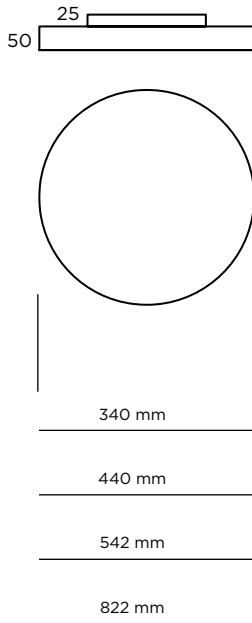

INSTALLATION

Ceiling version
Suspended version see page 38
Recessed version see page 66

CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block
Luminaires for dimming are delivered with 5-pole terminal block

MATERIAL

The body of the luminaire is curved extruded aluminium, powder coated finish

LIGHT SOURCE

LED Tridonic or TCI, min. 150Lm/W, 3000K or 4000K

DIFFUSER

PMMA OPAL
PRISMATIC

LIGHT DISTRIBUTION

Direct symmetrical
Direct symmetrical / Passive indirect symmetrical, see page 223

EMERGENCY LIGHTING

A unit with integrated emergency is an option

DIMMING

Most models can be delivered with ballast for dimming (TOUCHDIM, DALI)

DIRECT CODE	Ø (mm)	W	Lm from 3000K/4000K
SBC/50/BE300	340	17	2680/2820
SBC/50/BE440	440	18	3020/3170
SBC/50/BE542	542	36	6120/6380
SBC/50/BE822	822	64	11980/13320

DIRECT/INDIRECT CODE	Ø (mm)	W	Lm from 3000K/4000K
SBS/50/BE300/DI	340	17	2680/2820
SBS/50/BE440/DI	440	18	3020/3170
SBS/50/BE542/DI	542	36	6120/6380
SBS/50/BE822/DI	822	64	11980/13320

COLOR TEMPERATURE

3000K /3K
4000K /4K

OPTIC


PMMA OPAL /--
PRISMATIC /P

DIMMABLE OPTIONS

DALI, TOUCHDIM /DALI see page 223
WIRELESS /WRS see page 223

COLORS

	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACIT	/AT
	GOLD	/GL
	BRONZE	/BR

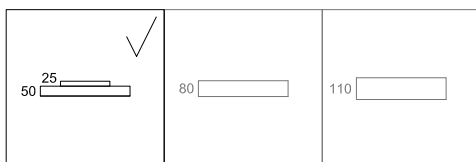


see page 128

see page 130

□ BELO_BE_80 CEILING



ARCHILIGHT

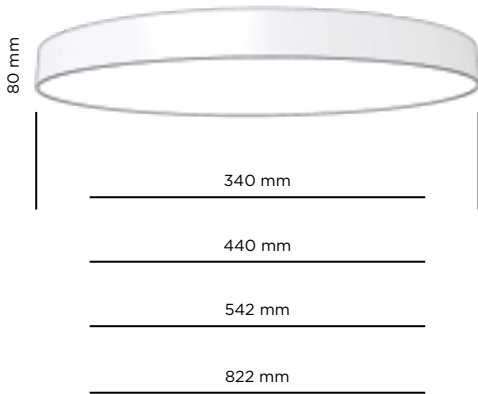

INSTALLATION

Ceiling version
Suspended version see page 40
Recessed version see page 166

CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block
Luminaires for dimming are delivered with 5-pole terminal block

MATERIAL

The body of the luminaire is curved extruded aluminium, powder coated finish

LIGHT SOURCE

LED Tridonic or TCI, min. 150Lm/W, 3000K or 4000K

DIFFUSER

PMMA OPAL
PRISMATIC

LIGHT DISTRIBUTION

Direct symmetrical
Direct symmetrical / Passive indirect symmetrical, see page 223

EMERGENCY LIGHTING

A unit with integrated emergency is an option

DIMMING

Most models can be delivered with ballast for dimming (TOUCHDIM, DALI)

DIRECT CODE	Ø (mm)	W	Lm from 3000K/4000K
SBC/80/BE300	340	17	2680/2820
SBC/80/BE440	440	18	3020/3170
SBC/80/BE542	542	36	6120/6380
SBC/80/BE822	822	64	11980/13320

DIRECT CODE	Ø (mm)	W	Lm from 3000K/4000K
SBC/80/BE300/DI	340	17	2680/2820
SBC/80/BE440/DI	440	18	3020/3170
SBC/80/BE542/DI	542	36	6120/6380
SBC/80/BE822/DI	822	64	11980/13320

COLOR TEMPERATURE

3000K /3K
4000K /4K

OPTIC


PMMA OPAL /--
PRISMATIC /P

DIMMABLE OPTIONS

DALI, TOUCHDIM /DALI see page 223
WIRELESS /WRS see page 223

COLORS

	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACIT	/AT
	GOLD	/GL
	BRONZE	/BR

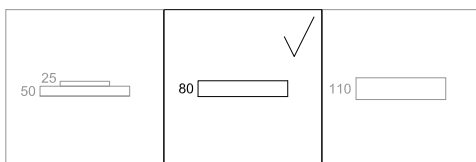

see page 126

see page 130

□ BELO_BE_110 CEILING



INSTALLATION

Ceiling version
Suspended version see page 42
Recessed version see page 166

CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block
Luminaires for dimming are delivered with 5-pole terminal block

MATERIAL

The body of the luminaire is curved extruded aluminium,
powder coated finish

LIGHT SOURCE

LED Tridonic or TCI, min. 150Lm/W, 3000K or 4000K

DIFFUSER

PMMA OPAL
PRISMATIC

LIGHT DISTRIBUTION


Direct symmetrical

EMERGENCY LIGHTING

A unit with integrated emergency is an option

DIMMING

Most models can be delivered with ballast
for dimming (TOUCHDIM, DALI)

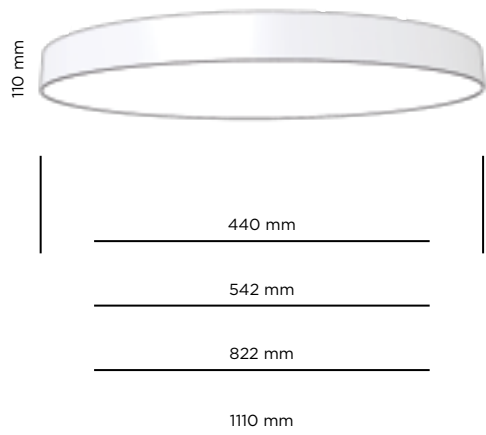

COLOR TEMPERATURE

3000K /3K
4000K /4K

OPTIC

PMMA OPAL /--
PRISMATIC /P


DIMMABLE OPTIONS

DALI, TOUCHDIM /DALI see page 223
WIRELESS /WRS see page 223

COLORS

	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACIT	/AT
	GOLD	/GL
	BRONZE	/BR


DIRECT CODE	Ø (mm)	W	Lm from 3000K/4000K
SBC/110/BE440	440	18	3020/3170
SBC/110/BE542	542	36	6120/6380
SBC/110/BE822	822	64	11980/13320
SBC/110/BE1110	1110	87	16140/16500

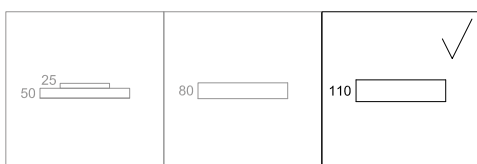

see page 126

see page 128

□ BELO_BE_SQ_50 CEILING

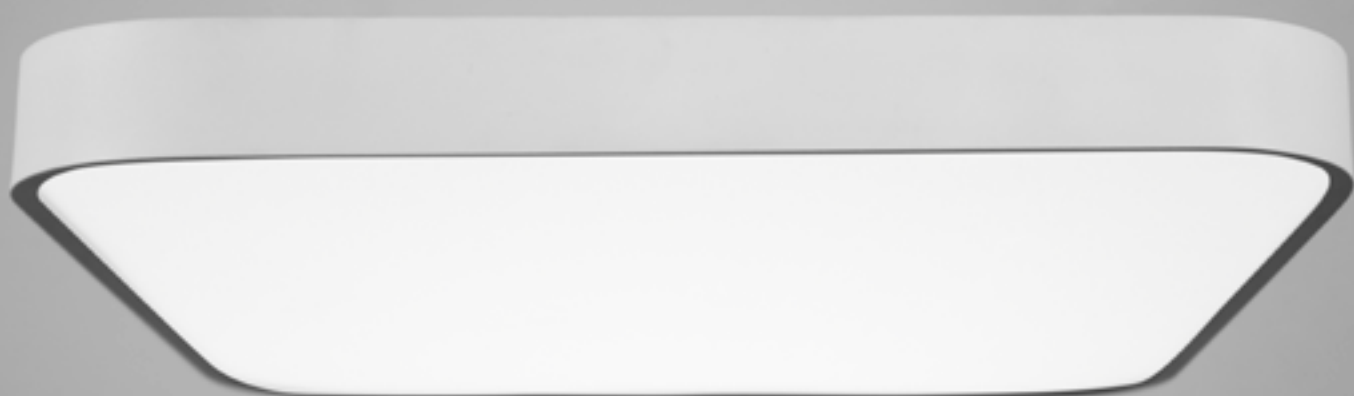

INSTALLATION

Ceiling version
Suspended version see page 44
Recessed version see page 172

CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block
Luminaires for dimming are delivered with 5-pole terminal block

MATERIAL

The body of the luminaire is curved extruded aluminium,
powder coated finish

LIGHT SOURCE

LED Tridonic or TCI, min. 150Lm/W, 3000K or 4000K

DIFFUSER

PMMA OPAL
PRISMATIC

LIGHT DISTRIBUTION




Direct symmetrical
Direct symmetrical / Passive indirect symmetrical, see page 223

EMERGENCY LIGHTING

A unit with integrated emergency is an option

DIMMING

Most models can be delivered with ballast
for dimming (TOUCHDIM, DALI)



DIRECT CODE	(mm)	W	Lm from 3000K/4000K
SBC/50/BE/SQ/330	330x330x50	8	1340/1400
SBC/50/BE/SQ/570	570x570x50	32	5360/5600
SBC/50/BE/SQ/850	850x850x50	72	11160/12600

DIRECT/INDIRECT CODE	(mm)	W	Lm from 3000K/4000K
SBC/50/BE/SQ/330/DI	330x330x50	8	1340/1400
SBC/50/BE/SQ/570/DI	570x570x50	32	5360/5600
SBC/50/BE/SQ/850/DI	850x850x50	72	11160/12600

COLOR TEMPERATURE

3000K	/3K
4000K	/4K

OPTIC


PMMA OPAL	/--
PRISMATIC	/P

DIMMABLE OPTIONS

DALI, TOUCHDIM	/DALI	see page 223
WIRELESS	/WRS	see page 223

COLORS


	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACIT	/AT
	GOLD	/GL
	BRONZE	/BR

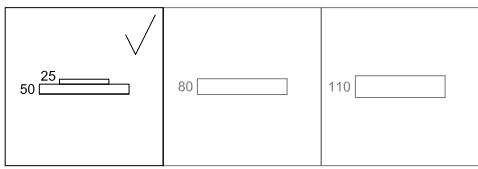

see page 134

see page 136

□ BELO_BE_SQ_80 CEILING

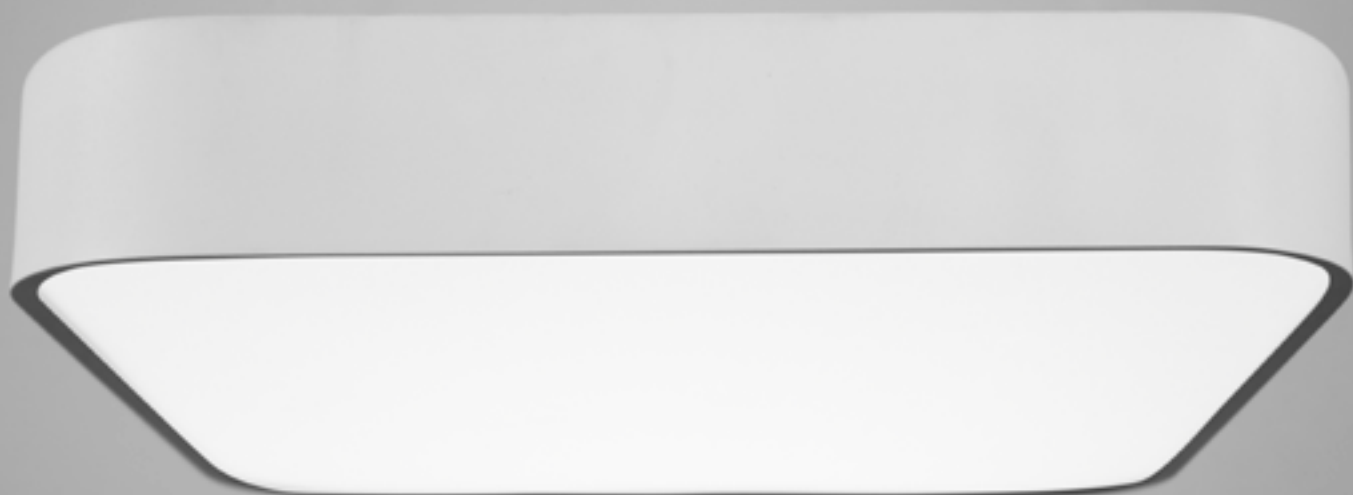

INSTALLATION

Ceiling version
Suspended version see page 46
Recessed version see page 172

CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block
Luminaires for dimming are delivered with 5-pole terminal block

MATERIAL

The body of the luminaire is curved extruded aluminium,
powder coated finish

LIGHT SOURCE

LED Tridonic or TCI, min. 150Lm/W, 3000K or 4000K

DIFFUSER

PMMA OPAL
PRISMATIC

LIGHT DISTRIBUTION


Direct symmetrical
Direct symmetrical / Passive indirect symmetrical, see page 223

EMERGENCY LIGHTING

A unit with integrated emergency is an option

DIMMING

Most models can be delivered with ballast
for dimming (TOUCHDIM, DALI)

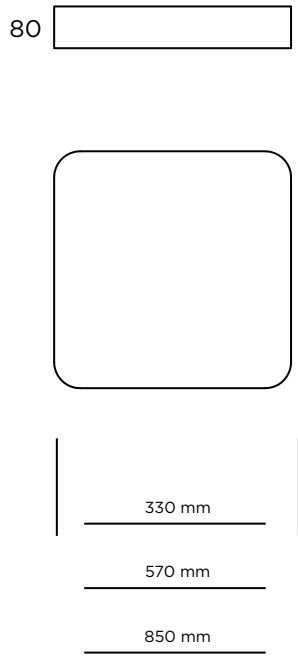

DIRECT CODE	(mm)	W	Lm from 3000K/4000K
SBC/80/BE/SQ/330	330x330x50	8	1340/1400
SBC/80/BE/SQ/570	570x570x50	32	5360/5600
SBC/80/BE/SQ/850	850x850x50	72	11160/12600


DIRECT/INDIRECT CODE	(mm)	W	Lm from 3000K/4000K
CODE	330x330x50	8	1340/1400
SBC/80/BE/SQ/570/DI	570x570x50	32	5360/5600
SBC/80/BE/SQ/850/DI	850x850x50	72	11160/12600

COLOR TEMPERATURE	
3000K	/3K
4000K	/4K

OPTIC	
PMMA OPAL	/--
PRISMATIC	/P

DIMMABLE OPTIONS		
DALI, TOUCHDIM	/DALI	see page 223
WIRELESS	/WRS	see page 223


COLORS		
	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACIT	/AT
	GOLD	/GL
	BRONZE	/BR

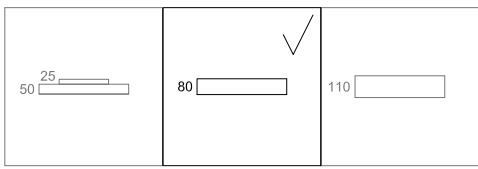

see page 132

see page 136

□ BELO_BE_SQ_110 CEILING

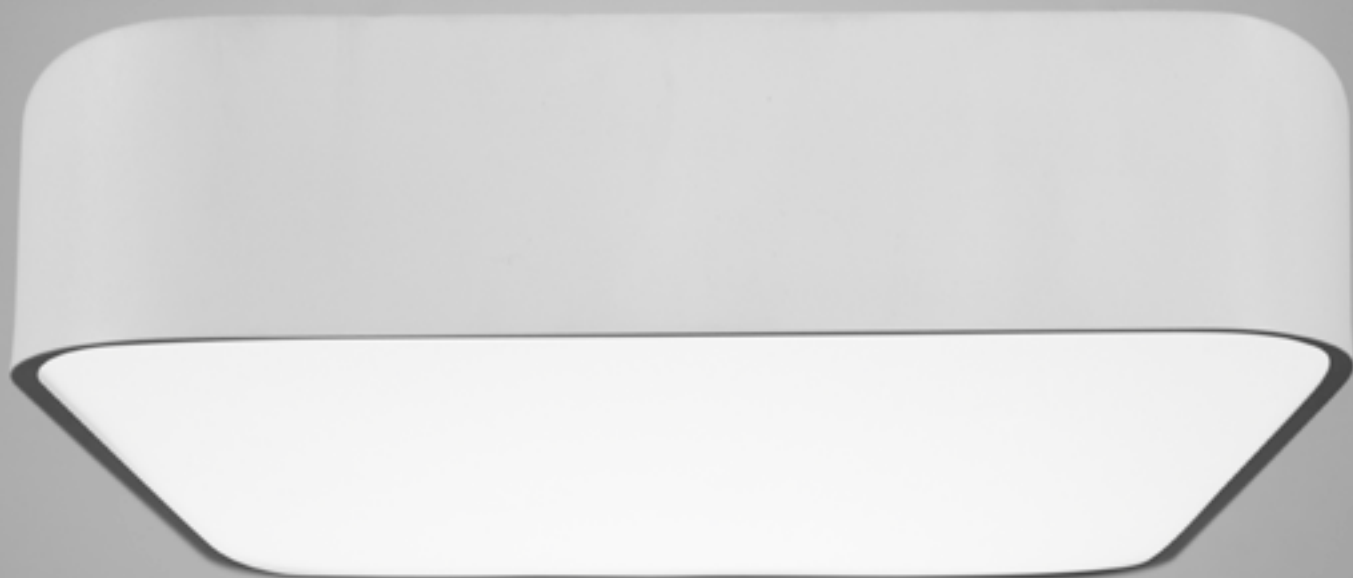

INSTALLATION

Ceiling version
Suspended version see page 48
Recessed version see page 172

CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block
Luminaires for dimming are delivered with 5-pole terminal block

MATERIAL

The body of the luminaire is curved extruded aluminium,
powder coated finish

LIGHT SOURCE

LED Tridonic or TCI, min. 150Lm/W, 3000K or 4000K

DIFFUSER

PMMA OPAL
PRISMATIC

LIGHT DISTRIBUTION

Direct symmetrical


EMERGENCY LIGHTING



A unit with integrated emergency is an option

DIMMING

Most models can be delivered with ballast
for dimming (TOUCHDIM, DALI)



110 



DIRECT CODE	(mm)	W	Lm from 3000K/4000K
SBC/110/BE/SQ/330	330x330x50	8	1340/1400
SBC/110/BE/SQ/570	570x570x50	32	5360/5600
SBC/110/BE/SQ/850	850x850x50	72	11160/12600

COLOR TEMPERATURE

3000K	/3K
4000K	/4K







OPTIC


PMMA OPAL	/--
PRISMATIC	/P

DIMMABLE OPTIONS

DALI, TOUCHDIM	/DALI	see page 223
WIRELESS	/WRS	see page 223

COLORS

	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACIT	/AT
	GOLD	/GL
	BRONZE	/BR

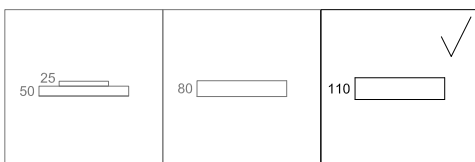

see page 132

see page 134

□ BELO_QA_50 CEILING



INSTALLATION

Ceiling version
Suspended version see page 50

CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block
Luminaires for dimming are delivered with 5-pole terminal block

MATERIAL

The body of the luminaire is curved extruded aluminium,
powder coated finish

LIGHT SOURCE

LED Tridonic or TCI, min. 150Lm/W, 3000K or 4000K

DIFFUSER

PMMA OPAL
PRISMATIC

LIGHT DISTRIBUTION




Direct symmetrical
Direct symmetrical / Passive indirect symmetrical, see page 223

EMERGENCY LIGHTING

A unit with integrated emergency is an option

DIMMING

Most models can be delivered with ballast
for dimming (TOUCHDIM, DALI)



DIRECT CODE	(mm)	W	Lm from 3000K/4000K
SBC/50/QA/330	330x330x50	8	1340/1400
SBC/50/QA/570	570x570x50	32	5360/5600
SBC/50/QA/850	850x850x50	72	11160/12600

DIRECT/ INDIRECT CODE	(mm)	W	Lm from 3000K/4000K
SBC/50/QA/330/DI	330x330x50	8	1340/1400
SBC/50/QA/570/DI	570x570x50	32	5360/5600
SBC/50/QA/850/DI	850x850x50	72	11160/12600

COLOR TEMPERATURE

3000K	/3K
4000K	/4K

OPTIC


PMMA OPAL	/--
PRISMATIC	/P

DIMMABLE OPTIONS

DALI, TOUCHDIM	/DALI	see page 223
WIRELESS	/WRS	see page 223

COLORS

	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACIT	/AT
	GOLD	/GL
	BRONZE	/BR

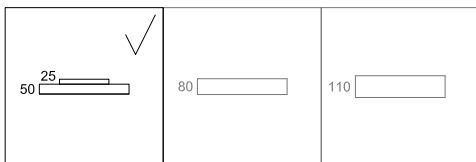

see page 140

see page 142

□ BELO_QA_80 CEILING



INSTALLATION

Ceiling version
Suspended version see page 52

CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block
Luminaires for dimming are delivered with 5-pole terminal block

MATERIAL

The body of the luminaire is curved extruded aluminium,
powder coated finish

LIGHT SOURCE

LED Tridonic or TCI, min. 150Lm/W, 3000K or 4000K

DIFFUSER

PMMA OPAL
PRISMATIC

LIGHT DISTRIBUTION

Direct symmetrical

EMERGENCY LIGHTING



A unit with integrated emergency is an option

DIMMING

Most models can be delivered with ballast
for dimming (TOUCHDIM, DALI)



80



DIRECT CODE	(mm)	W	Lm from 3000K/4000K
SBC/80/QA/330	330x330x50	8	1340/1400
SBC/80/QA/570	570x570x50	32	5360/5600
SBC/80/QA/850	850x850x50	72	11160/12600

COLOR TEMPERATURE

3000K	/3K
4000K	/4K

OPTIC


PMMA OPAL	/--
PRISMATIC	/P

DIMMABLE OPTIONS

DALI, TOUCHDIM	/DALI	see page 223
WIRELESS	/WRS	see page 223

COLORS

	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACIT	/AT
	GOLD	/GL
	BRONZE	/BR

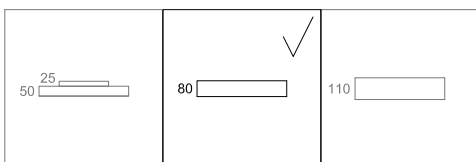

see page 138

see page 142

□ BELO_QA_110 CEILING



INSTALLATION

Ceiling version
Suspended version see page 54

CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block
Luminaires for dimming are delivered with 5-pole terminal block

MATERIAL

The body of the luminaire is curved extruded aluminium, powder coated finish

LIGHT SOURCE

LED Tridonic or TCI, min. 150Lm/W, 3000K or 4000K

DIFFUSER

PMMA OPAL
PRISMATIC

LIGHT DISTRIBUTION

Direct symmetrical

EMERGENCY LIGHTING



A unit with integrated emergency is an option

DIMMING

Most models can be delivered with ballast for dimming (TOUCHDIM, DALI)



110 



DIRECT CODE	(mm)	W	Lm from 3000K/4000K
SBC/110/QA/330	330x330x50	8	1340/1400
SBC/110/QA/570	570x570x50	32	5360/5600
SBC/110/QA/850	850x850x50	72	11160/12600

COLOR TEMPERATURE

3000K	/3K
4000K	/4K







OPTIC


PMMA OPAL	/--
PRISMATIC	/P

DIMMABLE OPTIONS

DALI, TOUCHDIM	/DALI	see page 223
WIRELESS	/WRS	see page 223

COLORS

	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACIT	/AT
	GOLD	/GL
	BRONZE	/BR

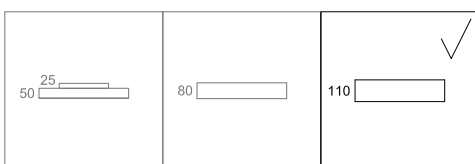

see page 138

see page 140

□ CUBUS_R CEILING




ARCHILIGHT

140



80



600

900

1200

1500



INSTALLATION

Ceiling version
Suspended version see page 56
Wall version see page 78

CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block
Luminaires for dimming are delivered with 5-pole terminal block

MATERIAL

The body of the luminaire is curved extruded aluminium, powder coated finish

LIGHT SOURCE

LED Tridonic or TCI, min. 150Lm/W, 3000K or 4000K

DIFFUSER

PMMA OPAL
PRISMATIC

LIGHT DISTRIBUTION

Direct symmetrical

EMERGENCY LIGHTING

A unit with integrated emergency is an option

DIMMING

Most models can be delivered with ballast for dimming (TOUCHDIM, DALI)

DIRECT CODE	(mm)	W	Lm from 3000K/4000K
SCCR130	600x90x80	16	2680/2840
SCCR250	600x90x80	24	3720/3920
SCCR195	900x90x80	26	4020/4260
SCCR375	900x90x80	37	5580/5880
SCCR260	1200x90x80	33	5360/5680
SCCR500	1200x90x80	49	7440/7840
SCCR325	1500x90x80	41	6700/7100
SCCR625	1500x90x80	61	9300/9800

COLOR TEMPERATURE

3000K /3K
4000K /4K







OPTIC

PMMA OPAL /--
PRISMATIC /P

DIMMABLE OPTIONS

DALI, TOUCHDIM /DALI see page 223
WIRELESS /WRS see page 223

COLORS

	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACIT	/AT
	GOLD	/GL
	BRONZE	/BR

□ CUBUS_S CEILING



INSTALLATION

Ceiling version
Suspended version see page 58
Wall version see page 80

CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block
Luminaires for dimming are delivered with 5-pole terminal block

MATERIAL

The body of the luminaire is extruded aluminium,
powder coated finish

LIGHT SOURCE

LED Tridonic or TCI, min. 150Lm/W, 3000K or 4000K

DIFFUSER

PMMA OPAL
PRISMATIC

LIGHT DISTRIBUTION


Direct symmetrical

EMERGENCY LIGHTING

A unit with integrated emergency is an option

DIMMING

Most models can be delivered with ballast
for dimming (TOUCHDIM, DALI)





DIRECT CODE	(mm)	W	Lm from 3000K/4000K
SCCS90	850x35x80	12,3	2010/2130
SCCS120	1135x35x80	16,4	2680/2840
SCCS150	1415x35x80	20,5	3350/3550

COLOR TEMPERATURE

3000K	/3K
4000K	/4K


OPTIC

PMMA OPAL	/--
PRISMATIC	/P

DIMMABLE OPTIONS


DALI, TOUCHDIM	/DALI	see page 223
WIRELESS	/WRS	see page 223

ACCESSORIES



COLORS


	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACIT	/AT
	GOLD	/GL
	BRONZE	/BR

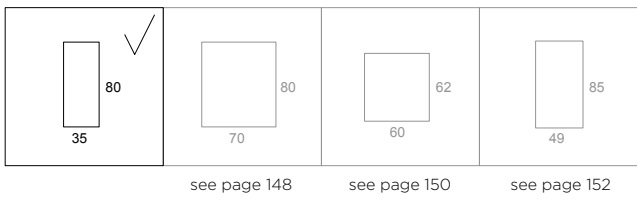


□ CUBUS_XL CEILING



ARCHILIGHT

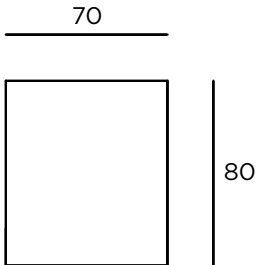

DIRECT CODE	(mm)	W	Lm from 3000K/4000K
SCCXL60	595x70x80	9	1340/1420
SCCXL90	850x70x80	13	2010/2130
SCCXL120	1135x70x80	17	2680/2840
SCCXL150	1415x70x80	21	3350/3550
SCCXL170	1700x70x80	26	4020/4260
SCCXL200	1980x70x80	29	4690/4970
SCCXL230	2265x70x80	33	5360/5680
SCCXL280	2825x70x80	41	6700/7100

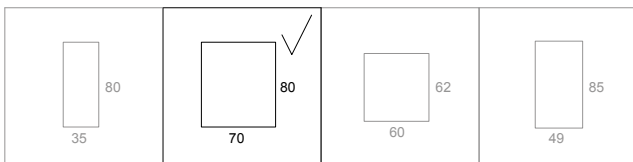

see page 146

see page 150

see page 152

INSTALLATION

Ceiling version
Suspended version see page 60
Wall version see page 82
Recessed version see page 176
System version see page 202

CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block
Luminaires for dimming are delivered with 5-pole terminal block

MATERIAL

The body of the luminaire is extruded aluminium, powder coated finish

LIGHT SOURCE

LED Tridonic or TCI, min. 150Lm/W, 3000K or 4000K

DIFFUSER

PMMA OPAL
PRISMATIC

LIGHT DISTRIBUTION

Direct symmetrical

EMERGENCY LIGHTING

A unit with integrated emergency is an option

DIMMING

Most models can be delivered with ballast for dimming (TOUCHDIM, DALI)

COLOR TEMPERATURE

3000K /3K
4000K /4K

OPTIC

PMMA OPAL /--
PRISMATIC /P


DIMMABLE OPTIONS

DALI, TOUCHDIM /DALI see page 223
WIRELESS /WRS see page 223

COLORS

	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACIT	/AT
	GOLD	/GL
	BRONZE	/BR


ACCESSORIES




□ CUBUS CEILING



ARCHILIGHT



DIRECT CODE	(mm)	W	Lm from 3000K/4000K
SCC130	595x60x62	9	1340/1420
SCC250	595x60x62	13	1860/1960
SCC195	850x60x62	13	2010/2130
SCC375	850x60x62	19	2790/2940
SCC260	1135x60x62	17	2680/2840
SCC500	1135x60x62	25	3720/3920
SCC325	1415x60x62	21	3350/3550
SCC625	1415x60x62	31	4650/4900
SCC2x195	1700x60x62	26	4020/4260
SCC2x375	1700x60x62	37	5580/5880
SCC2x230	1980x60x62	29	4690/4970
SCC2x440	1980x60x62	43	6510/6860
SCC2x260	2265x60x62	33	5360/5680
SCC2x500	2265x60x62	49	7440/7840
SCC2x325	2825x60x62	41	6700/7100
SCC2x625	2825x60x62	61	9300/9800

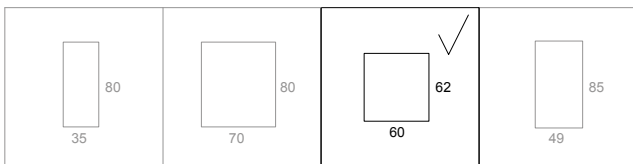

see page 146

see page 148

see page 152

INSTALLATION

Ceiling version
 Suspended version see page 62
 Wall version see page 86
 Recessed version see page 174
 System version see page 198

CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block
 Luminaires for dimming are delivered with 5-pole terminal block

MATERIAL

The body of the luminaire is extruded aluminium, eloxed or powder coated finish

LIGHT SOURCE

LED Tridonic or TCI, min. 150Lm/W, 3000K or 4000K

DIFFUSER

PMMA OPAL
 PRISMATIC

LIGHT DISTRIBUTION

Direct symmetrical

EMERGENCY LIGHTING

A unit with integrated emergency is an option

DIMMING

Most models can be delivered with ballast for dimming (TOUCHDIM, DALI)

COLOR TEMPERATURE

3000K /3K
 4000K /4K

OPTIC

PMMA OPAL /--
 PRISMATIC /P

DIMMABLE OPTIONS

DALI, TOUCHDIM /DALI see page 223
 WIRELESS /WRS see page 223


COLORS

	ELOX	/...
	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACIT	/AT
	GOLD	/GL
	BRONZE	/BR

ACCESSORIES

60
 SCCPKK
 END CAP
 2PCS

□ DUAL CEILING



INSTALLATION

Suspended version
Ceiling version see page 64
Wall version see page 88
System version see page 206

CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block
Luminaires for dimming are delivered with 5-pole terminal block

MATERIAL

The body of the luminaire is extruded aluminium, powder coated finish

LIGHT SOURCE

LED Tridonic or TCI, min. 150Lm/W, 3000K or 4000K

DIFFUSER

PMMA OPAL
PRISMATIC

LIGHT DISTRIBUTION

Direct symmetrical

EMERGENCY LIGHTING

A unit with integrated emergency is an option

DIMMING

Most models can be delivered with ballast for dimming (TOUCHDIM, DALI)



DIRECT CODE	(mm)	W	Lm from 3000K/4000K
SDC130	595x49x85	9	1340/1420
SDC250	595x49x85	12	1860/1960
SDC195	850x49x85	12	2010/2130
SDC375	850x49x85	18	2790/2940
SDC260	1135x49x85	16	2680/2840
SDC500	1135x49x85	24	3720/3920
SDC325	1415x49x85	21	3350/3550
SDC625	1415x49x85	31	4650/4900
SDC2x195	1700x49x85	26	4020/4260
SDC2x375	1700x49x85	37	5580/5880
SDC2x230	1980x49x85	29	4690/4970
SDC2x440	1980x49x85	43	6510/6860
SDC2x260	2265x49x85	33	5360/5680
SDC2x500	2265x49x85	49	7440/7840
SDC2x325	2825x49x85	41	6700/7100
SDC2x625	2825x49x85	61	9300/9800

COLOR TEMPERATURE

3000K /3K
4000K /4K


OPTIC

PMMA OPAL /--
PRISMATIC /P

DIMMABLE OPTIONS


DALI, TOUCHDIM /DALI see page 223
WIRELESS /WRS see page 223

ACCESSORIES



COLORS

	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACIT	/AT
	GOLD	/GL
	BRONZE	/BR

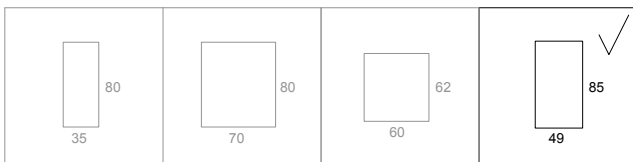


see page 146

see page 148

see page 150

□ LUCID CEILING



INSTALLATION

Ceiling version
Suspended version see page 66
Wall version see page 90
System version see page 210

CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block
Luminaires for dimming are delivered with 5-pole terminal block

MATERIAL

The body of the luminaire is extruded aluminium, anodized finish

LIGHT SOURCE

LED Tridonic or TCI, min. 150Lm/W, 3000K or 4000K

DIFFUSER

PMMA OPAL

LIGHT DISTRIBUTION

Direct and sidewalls

EMERGENCY LIGHTING

A unit with integrated emergency is an option

DIMMING

Most models can be delivered with ballast for dimming (TOUCHDIM, DALI)



DIRECT CODE	(mm)	W	Lm from 3000K/4000K
SLC130	585x57x70	8	1500/1580
SLC250	585x57x70	14	2340/2450
SLC195	860x57x70	13	2250/2370
SLC375	860x57x70	21	3510/3690
SLC260	1145x57x70	16	3000/3160
SLC500	1145x57x70	28	4680/4900
SLC325	1425x57x70	21	3750/3950
SLC625	1425x57x70	35	5850/6150
SLC2x195	1710x57x70	26	4500/4740
SLC2x375	1710x57x70	42	700/7380
SLC2x230	1990x57x70	29	5250/5530
SLC2x440	1990x57x70	49	8190/8610
SLC2x260	2280x57x70	32	6000/6320
SLC2x500	2280x57x70	56	9360/9800
SLC2x325	2840x57x70	42	7500/7900
SLC2x625	2840x57x70	70	11700/12300

COLOR TEMPERATURE

3000K /3K
4000K /4K

OPTIC

PMMA OPAL /--

DIMMABLE OPTIONS

DALI, TOUCHDIM /DALI see page 223
WIRELESS /WRS see page 223


COLORS

ELOX /...


ACCESSORIES

57
70
SLPKK
END CAP
2PCS

□ DUAL STAR CEILING

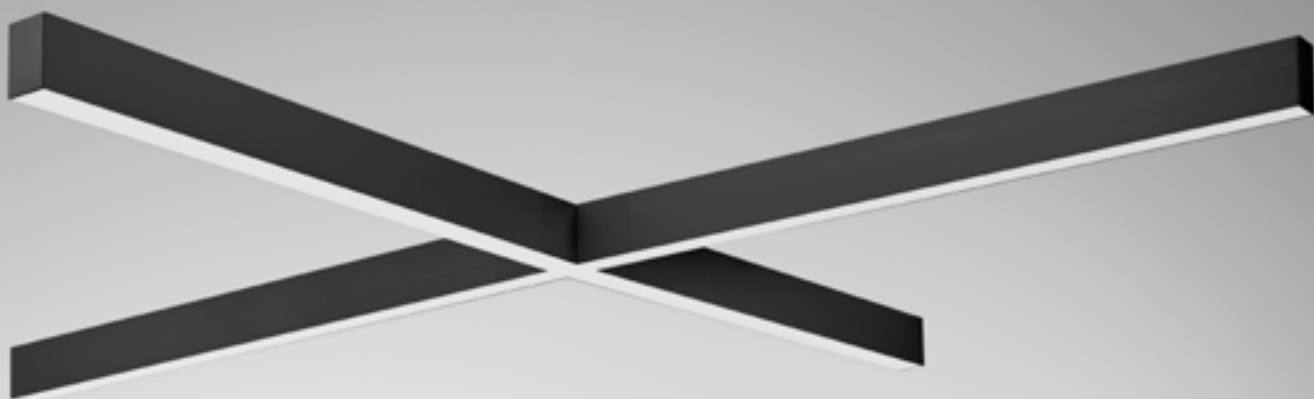

ARCHILIGHT

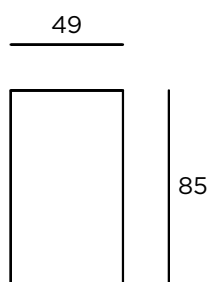



INSTALLATION

Ceiling version
Suspended version see page 68

CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block
Luminaires for dimming are delivered with 5-pole terminal block

MATERIAL

The body of the luminaire is extruded aluminium,
powder coated finish

LIGHT SOURCE

LED Tridonic or TCI, min. 150Lm/W, 3000K or 4000K

DIFFUSER

PMMA OPAL
PRISMATIC

LIGHT DISTRIBUTION

Direct symmetrical

EMERGENCY LIGHTING

A unit with integrated emergency is an option

DIMMING

Most models can be delivered with ballast
for dimming (TOUCHDIM, DALI)

DIRECT CODE	(mm)	W	Lm from 3000K/4000K
SDCT130	1200x1200x85	50	8040/8520
SDCT250	1200x1200x85	74	11160/11760

COLOR TEMPERATURE

3000K /3K
4000K /4K







OPTIC

PMMA OPAL /--
PRISMATIC /P


DIMMABLE OPTIONS

DALI, TOUCHDIM /DALI see page 223
WIRELESS /WRS see page 223


COLORS

	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACIT	/AT
	GOLD	/GL
	BRONZE	/BR

□ CUBUS SQUARE CEILING

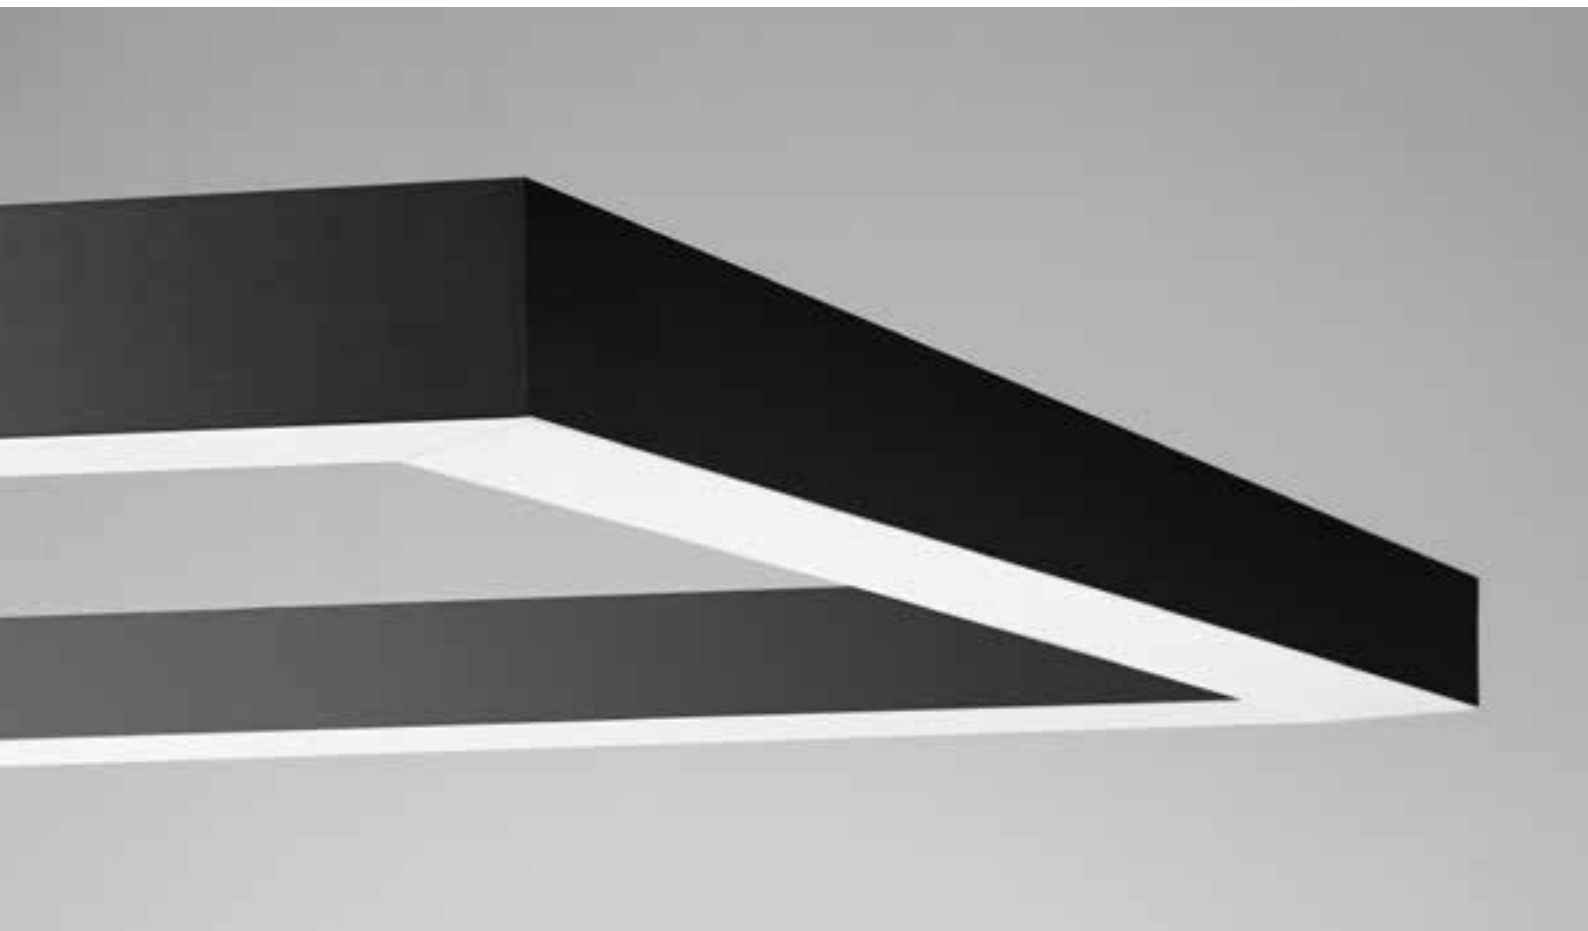

ARCHILIGHT





INSTALLATION

Ceiling version
Suspended version see page 70
Recessed version see page 178

CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block
Luminaires for dimming are delivered with 5-pole terminal block

MATERIAL

The body of the luminaire is extruded aluminium,
powder coated finish

LIGHT SOURCE

LED Tridonic or TCI, min. 150Lm/W, 3000K or 4000K

DIFFUSER

PMMA OPAL
PRISMATIC

LIGHT DISTRIBUTION

Direct symmetrical

EMERGENCY LIGHTING

A unit with integrated emergency is an option

DIMMING

Most models can be delivered with ballast
for dimming (TOUCHDIM, DALI)

DIRECT CODE	(mm)	W	Lm from 3000K/4000K
SCCQ130	630x630x62	33	5360/5680
SCCQ195	915x915x62	49	8040/8520

COLOR TEMPERATURE

3000K /3K
4000K /4K







OPTIC

PMMA OPAL /--
PRISMATIC /P



DIMMABLE OPTIONS

DALI, TOUCHDIM /DALI see page 223
WIRELESS /WRS see page 223

COLORS

	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACIT	/AT
	GOLD	/GL
	BRONZE	/BR

□ FLAT 200 CEILING

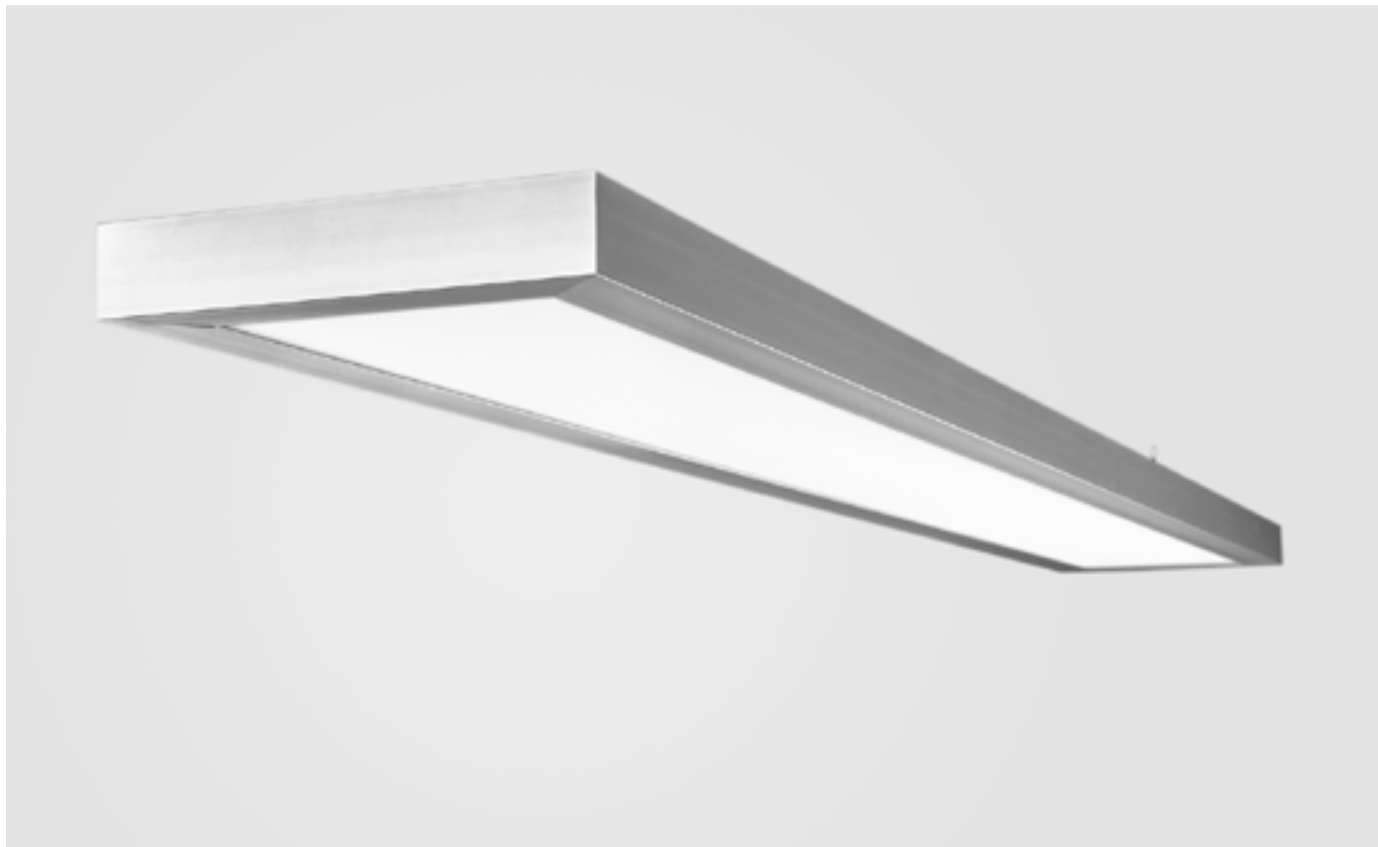

INSTALLATION

Ceiling version
Suspended version see page 72

CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block
Luminaires for dimming are delivered with 5-pole terminal block

MATERIAL

The body of the luminaire is extruded aluminium, eloxed or powder coated finish

LIGHT SOURCE

LED Tridonic or TCI, min. 150Lm/W, 3000K or 4000K

DIFFUSER

PMMA OPAL
PRISMATIC

LIGHT DISTRIBUTION


Direct symmetrical

EMERGENCY LIGHTING

A unit with integrated emergency is an option

DIMMING

Most models can be delivered with ballast for dimming (TOUCHDIM, DALI)

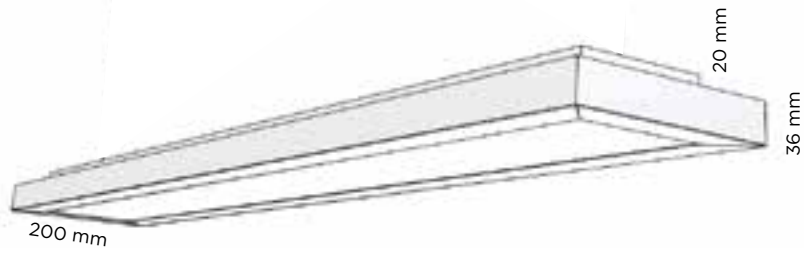

DIRECT CODE	(mm)	W	Lm from 3000K/4000K
SFC2500	1200x200x36	32.8	5360/5680
SFC2625	1500x200x36	41	6700/7100

COLOR TEMPERATURE

3000K	/3K
4000K	/4K

OPTIC

PMMA OPAL	/--
PRISMATIC	/P

DIMMABLE OPTIONS

DALI, TOUCHDIM	/DALI	see page 223
WIRELESS	/WRS	see page 223

COLORS

	ELOX	/...
	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACIT	/AT
	GOLD	/GL
	BRONZE	/BR




RECESSED

4

RECESSED

BELO_BE_80 RECESSED	166
BELO_GI_70/80 RECESSED	168
BELO_GI_110/80 RECESSED	170
BELO_BE_SQ_80 RECESSED	172
CUBUS RECESSED	174
CUBUS_XL RECESSED	176
CUBUS SQUARE RECESSED	178
BELO_LO_SQ_80 RECESSED	180
BELO_LO_OV_80 RECESSED	182
BELO_LO_S_80 RECESSED	184
BELO_LO_PO_80 RECESSED	186
BELO_LO_TR_80 RECESSED	188
DOWNLIGHT RECESSED	190

□ BELO_BE_80 RECESSED

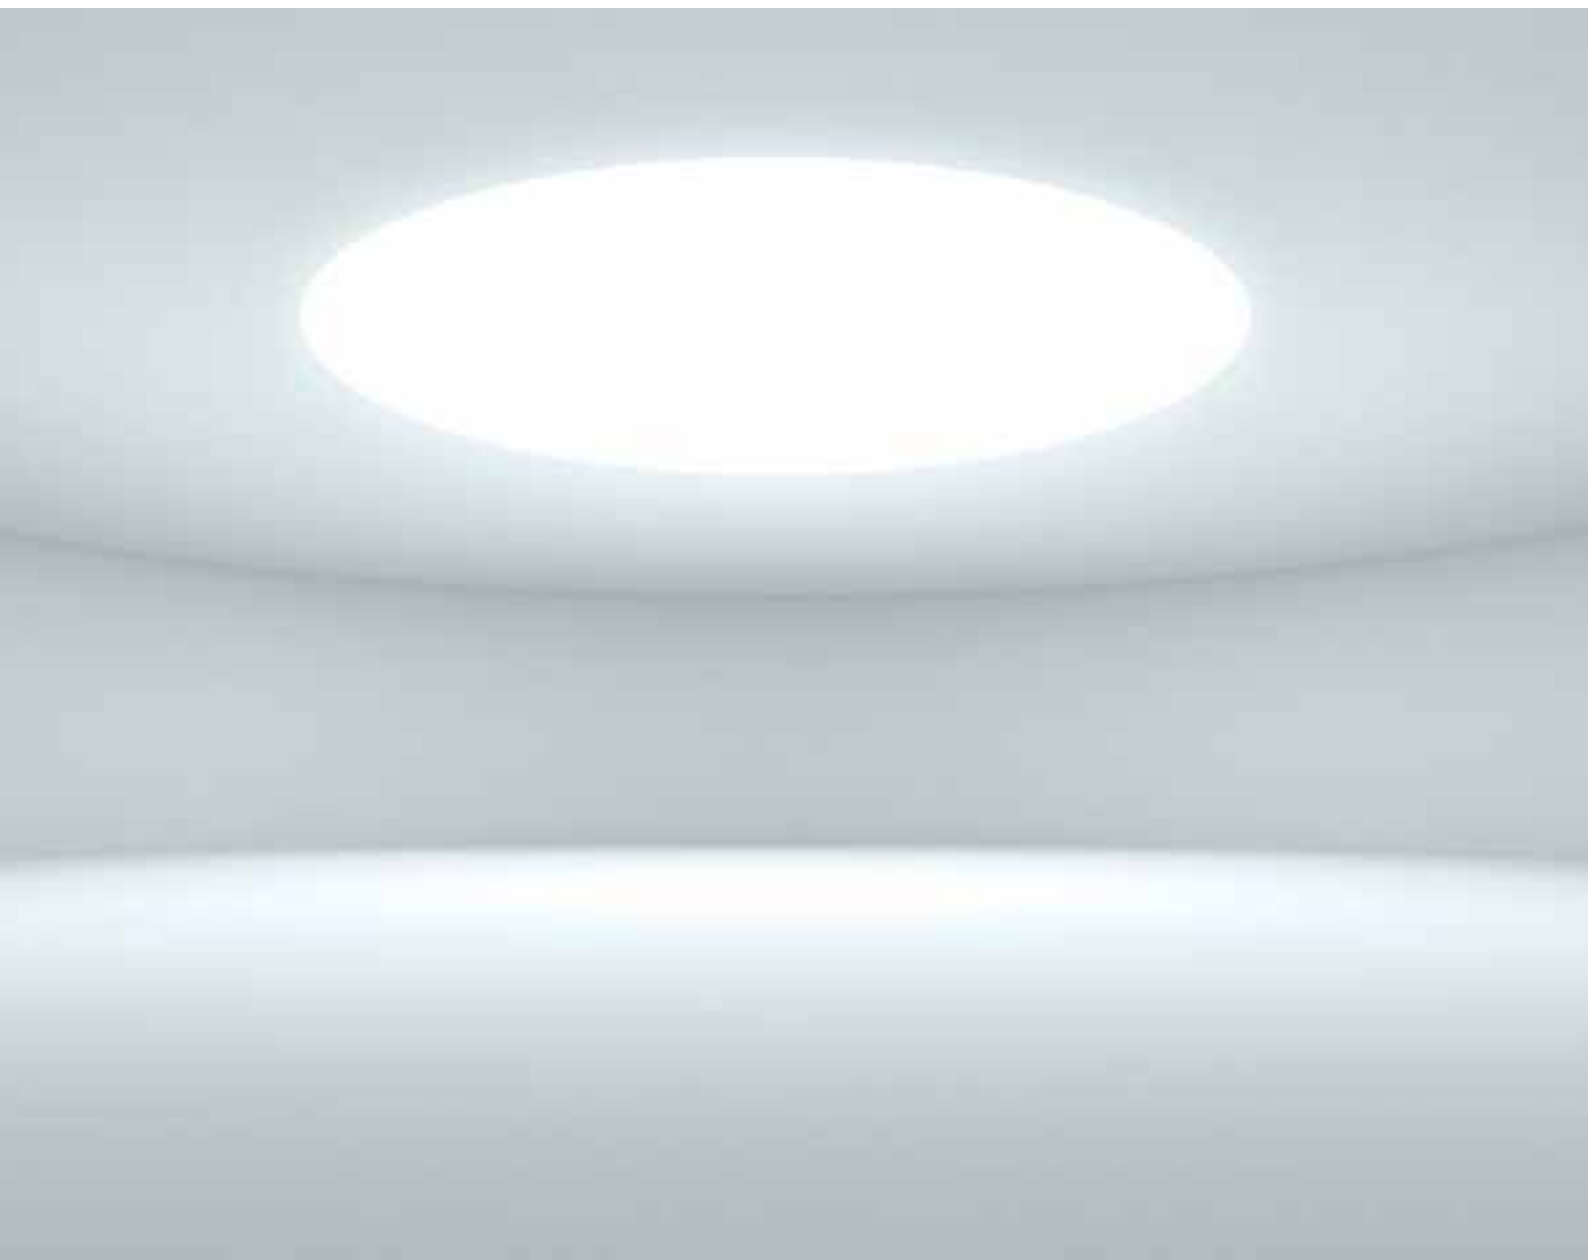

INSTALLATION

Recessed version
Suspended version see page 40
Ceiling version see page 128

CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block
Luminaires for dimming are delivered with 5-pole terminal block

MATERIAL

The body of the luminaire is curved extruded aluminium,
powder coated finish

LIGHT SOURCE

LED Tridonic or TCI, min. 150Lm/W, 3000K or 4000K

DIFFUSER

PMMA OPAL
PRISMATIC

LIGHT DISTRIBUTION


Direct symmetrical

EMERGENCY LIGHTING

A unit with integrated emergency is an option

DIMMING

Most models can be delivered with ballast
for dimming (TOUCHDIM, DALI)

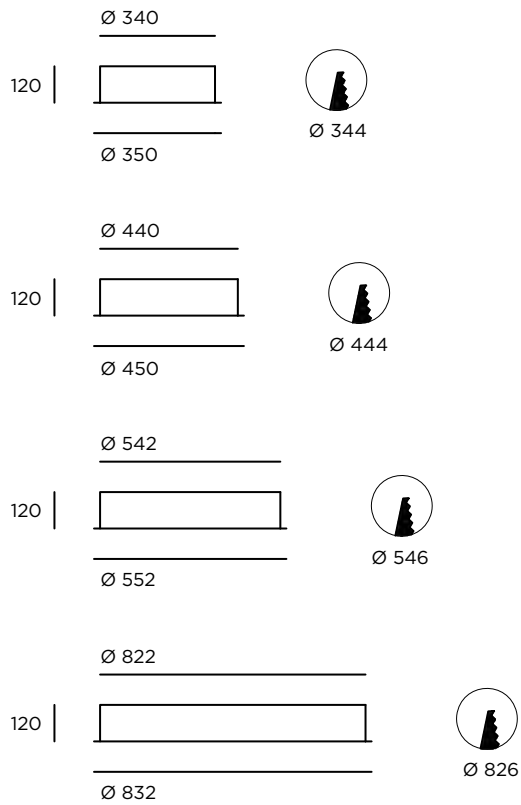

DIRECT CODE	Ø (mm)	W	Lm from 3000K/4000K
SBV/80/BE300	340	17	2680/2820
SBV/80/BE440	440	18	3020/3170
SBV/80/BE542	542	36	6120/6380
SBV/80/BE822	822	64	11980/13320

COLOR TEMPERATURE

3000K /3K
4000K /4K

OPTIC


PMMA OPAL /--
PRISMATIC /P

DIMMABLE OPTIONS

DALI, TOUCHDIM /DALI see page 223
WIRELESS /WRS see page 223

COLORS




	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACIT	/AT
	GOLD	/GL
	BRONZE	/BR

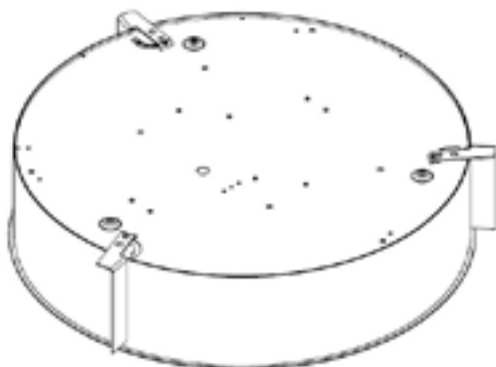

□ BELO_GI_70/80 RECESSED



ARCHILIGHT

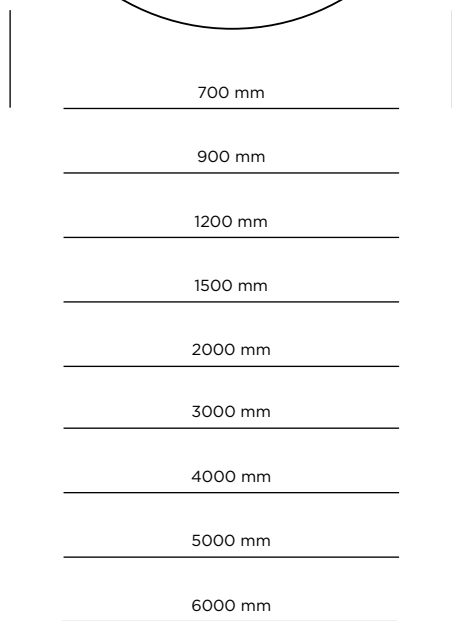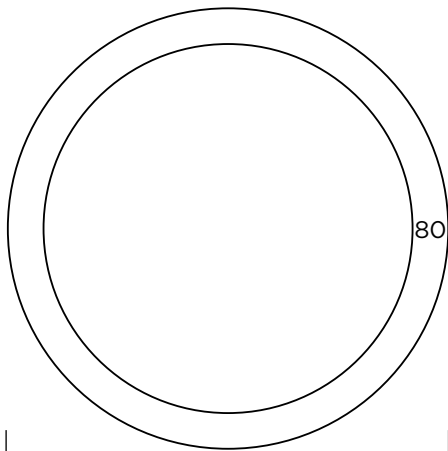

INSTALLATION

Recessed version
Suspended version see page 16
Ceiling version see page 102

CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block
Luminaires for dimming are delivered with 5-pole terminal block

MATERIAL

The body of the luminaire is curved extruded aluminium, powder coated finish

LIGHT SOURCE

LED Tridonic or TCI, min. 150Lm/W, 3000K or 4000K

DIFFUSER

PMMA OPAL
PRISMATIC

LIGHT DISTRIBUTION

Direct symmetrical


EMERGENCY LIGHTING

A unit with integrated emergency is an option

DIMMING

Most models can be delivered with ballast for dimming (TOUCHDIM, DALI)

DIRECT CODE	Ø (mm)	W	Lm from 3000K/4000K
SBV/GI700	700	29	4690/4970
SBV/GI900	900	37	6030/6390
SBV/GI1220	1200	50	8040/8520
SBV/GI1500	1500	66	10720/11360
SBV/GI2000	2000	82	13400/14200
SBV/GI3000	3000	132	21440/22720
SBV/GI4000	4000	164	26800/28400
SBV/GI5000	5000	230	37520/39760
SBV/GI6000	6000	263	42880/45400



COLOR TEMPERATURE

3000K /3K
4000K /4K

OPTIC

PMMA OPAL /--
PRISMATIC /P

DIMMABLE OPTIONS

DALI, TOUCHDIM /DALI see page 223
WIRELESS /WRS see page 223




COLORS

	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACIT	/AT
	GOLD	/GL
	BRONZE	/BR


□ BELO_GI_110/80 RECESSED



ARCHILIGHT

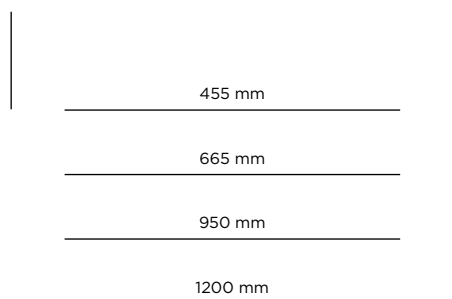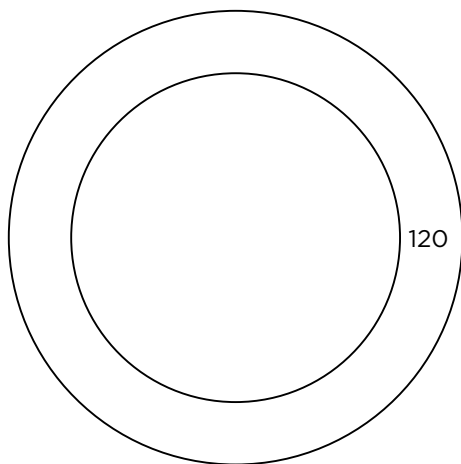

DIRECT CODE	Ø (mm)	W	Lm from 3000K/4000K
SBV/GI455	455	17	2680/2840
SBV/GI665	665	26	4020/4260
SBV/GI950	950	37	6030/6390
SBV/GI1200	1200	50	8040/8520



INSTALLATION

Recessed version
Suspended version see page 24
Ceiling version see page 108

CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block
Luminaires for dimming are delivered with 5-pole terminal block

MATERIAL

The body of the luminaire is curved extruded aluminium, powder coated finish

LIGHT SOURCE

LED Tridonic or TCI, min. 150Lm/W, 3000K or 4000K

DIFFUSER

PMMA OPAL
PRISMATIC

LIGHT DISTRIBUTION

Direct symmetrical

EMERGENCY LIGHTING

A unit with integrated emergency is an option

DIMMING

Most models can be delivered with ballast for dimming (TOUCHDIM, DALI)

COLOR TEMPERATURE

3000K /3K
4000K /4K

OPTIC

PMMA OPAL /--
PRISMATIC /P

DIMMABLE OPTIONS




DALI, TOUCHDIM /DALI see page 223
WIRELESS /WRS see page 223

COLORS

	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACIT	/AT
	GOLD	/GL
	BRONZE	/BR

□ BELO_BE_SQ_80 RECESSED



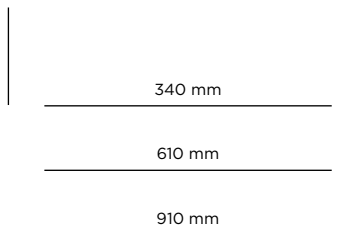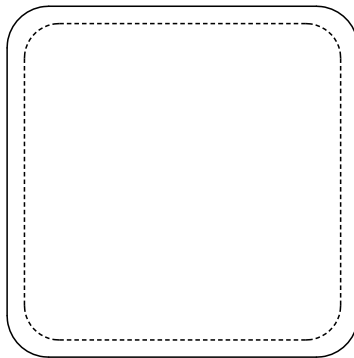

DIRECT CODE	(mm)	W	Lm from 3000K/4000K
SBV/BE/SQ/330	340x340x90	8	1340/1400
SBV/BE/SQ/600	610x610x90	32	5360/5600
SBV/BE/SQ/900	910x910x90	72	11160/12600

INSTALLATION

Recessed version
Suspended version see page 46
Ceiling version see page 134

CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block
Luminaires for dimming are delivered with 5-pole terminal block

MATERIAL

The body of the luminaire is curved extruded aluminium, powder coated finish

LIGHT SOURCE

LED Tridonic or TCI, min. 150Lm/W, 3000K or 4000K

DIFFUSER

PMMA OPAL
PRISMATIC

LIGHT DISTRIBUTION

Direct symmetrical
Direct symmetrical / Passive indirect symmetrical, see page 223

EMERGENCY LIGHTING

A unit with integrated emergency is an option

DIMMING

Most models can be delivered with ballast for dimming (TOUCHDIM, DALI)

COLOR TEMPERATURE

3000K /3K
4000K /4K

OPTIC

PMMA OPAL /--
PRISMATIC /P

DIMMABLE OPTIONS

DALI, TOUCHDIM /DALI see page 223
WIRELESS /WRS see page 223


COLORS

	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACIT	/AT
	GOLD	/GL
	BRONZE	/BR

□ CUBUS RECESSED




ARCHILIGHT





DIRECT CODE	(mm)	W	Lm from 3000K/4000K
SCV130	595x60x62	9	1340/1420
SCV250	595x60x62	12	1860/1960
SCV195	850x60x62	12	2010/2130
SCV375	850x60x62	18	2790/2940
SCV260	1135x60x62	16	2680/2840
SCV500	1135x60x62	24	3720/3920
SCV325	1415x60x62	21	3350/3550
SCV625	1415x60x62	31	4650/4900
SCV2x195	1700x60x62	26	4020/4260
SCV2x375	1700x60x62	37	5580/5880
SCV2x230	1980x60x62	29	4690/4970
SCV2x440	1980x60x62	43	6510/6860
SCV2x260	2265x60x62	33	5360/5680
SCV2x500	2265x60x62	49	7440/7840
SCV2x325	2825x60x62	41	6700/7100
SCV2x625	2825x60x62	61	9300/9800

ACCESSORIES



INSTALLATION

Recessed version
Suspended version see page 62
Ceiling version see page 150
Wall version see page 86
System version see page 198

CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block
Luminaires for dimming are delivered with 5-pole terminal block

MATERIAL

The body of the luminaire is extruded aluminium, powder coated finish

LIGHT SOURCE

LED Tridonic or TCI, min. 150Lm/W, 3000K or 4000K

DIFFUSER

PMMA OPAL
PRISMATIC

LIGHT DISTRIBUTION

Direct symmetrical

EMERGENCY LIGHTING

A unit with integrated emergency is an option

DIMMING

Most models can be delivered with ballast for dimming (TOUCHDIM, DALI)

COLOR TEMPERATURE

3000K /3K
4000K /4K

OPTIC

PMMA OPAL /--
PRISMATIC /P

DIMMABLE OPTIONS

DALI, TOUCHDIM /DALI see page 223
WIRELESS /WRS see page 223


COLORS

	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACIT	/AT
	GOLD	/GL
	BRONZE	/BR

□ CUBUS_XL RECESSED



ARCHILIGHT

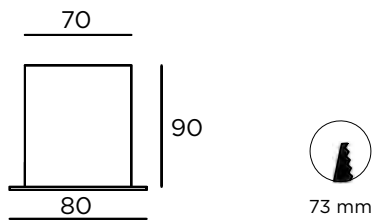

DIRECT CODE	(mm)	W	Lm from 3000K/4000K
SCVXL60	595x80x90	9	1340/1420
SCVXL90	850x80x90	13	2010/2130
SCVXL120	1135x80x90	17	2680/2840
SCVXL150	1415x80x90	21	3350/3550
SCVXL170	1700x80x90	26	4020/4260
SCVXL200	1980x80x90	29	4690/4970
SCVXL230	2265x80x90	33	5360/5680
SCVXL280	2825x80x90	41	6700/7100

INSTALLATION

Recessed version
Suspended version see page 60
Ceiling version see page 148
Wall version see page 82
System version see page 202

CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block
Luminaires for dimming are delivered with 5-pole terminal block

MATERIAL

The body of the luminaire is extruded aluminium, powder coated finish

LIGHT SOURCE

LED Tridonic or TCI, min. 150Lm/W, 3000K or 4000K

DIFFUSER

PMMA OPAL
PRISMATIC

LIGHT DISTRIBUTION

Direct symmetrical

EMERGENCY LIGHTING

A unit with integrated emergency is an option

DIMMING

Most models can be delivered with ballast for dimming (TOUCHDIM, DALI)

COLOR TEMPERATURE

3000K /3K
4000K /4K

OPTIC

PMMA OPAL /--
PRISMATIC /P

DIMMABLE OPTIONS

DALI, TOUCHDIM /DALI see page 223
WIRELESS /WRS see page 223

COLORS




	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACIT	/AT
	GOLD	/GL
	BRONZE	/BR

ACCESSORIES

	SCVXLPKK END CAP 2PCS
--	-----------------------------

□ CUBUS SQUARE RECESSED



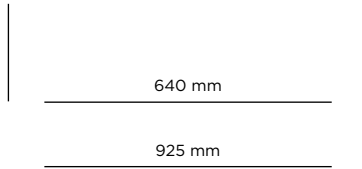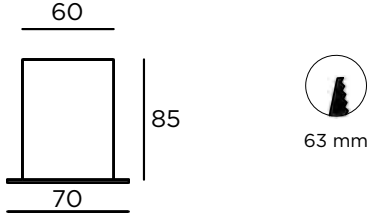

INSTALLATION

Recessed version
Suspended version see page 70
Ceiling version see page 158

CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block
Luminaires for dimming are delivered with 5-pole terminal block

MATERIAL

The body of the luminaire is extruded aluminium, powder coated finish

LIGHT SOURCE

LED Tridonic or TCI, min. 150Lm/W, 3000K or 4000K

DIFFUSER

PMMA OPAL
PRISMATIC

LIGHT DISTRIBUTION

Direct symmetrical

EMERGENCY LIGHTING

A unit with integrated emergency is an option

DIMMING

Most models can be delivered with ballast for dimming (TOUCHDIM, DALI)

COLOR TEMPERATURE

3000K /3K
4000K /4K

OPTIC

PMMA OPAL /--
PRISMATIC /P

DIMMABLE OPTIONS

DALI, TOUCHDIM /DALI see page 223
WIRELESS /WRS see page 223

DIRECT CODE	(mm)	W	Lm from 3000K/4000K
SCVSQ130	630x630x85	33	5360/5680
SCVSQ195	915x915x85	49	8040/8520

COLORS

	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACIT	/AT
	GOLD	/GL
	BRONZE	/BR




□ BELO_LO_SQ_80 RECESSED



ARCHILIGHT



- A 1225 _____
- B 1507 _____
- C 1789 _____
- D 2071 _____

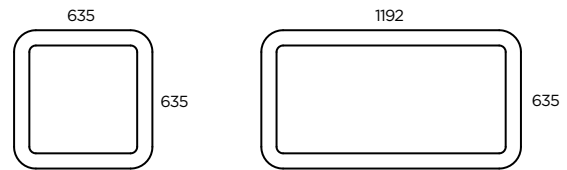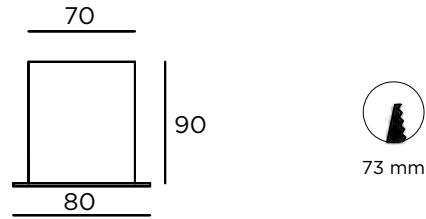

INSTALLATION

Recessed version
Suspended version see page 26
Ceiling version see page 110

CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block
Luminaires for dimming are delivered with 5-pole terminal block

MATERIAL

The body of the luminaire is curved extruded aluminium, powder coated finish

LIGHT SOURCE

LED Tridonic or TCI, min. 150Lm/W, 3000K or 4000K

DIFFUSER

PMMA OPAL
PRISMATIC

LIGHT DISTRIBUTION

Direct symmetrical

EMERGENCY LIGHTING

A unit with integrated emergency is an option

DIMMING

Most models can be delivered with ballast for dimming (TOUCHDIM, DALI)

DIRECT CODE	(mm)	W	Lm from 3000K/4000K
SBV/LO/SQ/AA	1225x1225x80	66	10720/11360
SBV/LO/SQ/AB	1225x1507x80	74	12060/12780
SBV/LO/SQ/AC	1225x1789x80	81	13400/14200
SBV/LO/SQ/AD	1225x2071x80	91	14740/15620
SBV/LO/SQ/BB	1507x1507x80	81	13400/14200
SBV/LO/SQ/BC	1507x1789x80	91	14740/15620
SBV/LO/SQ/BD	1507x2071x80	98	16080/17040
SBV/LO/SQ/CC	1789x1789x80	98	16080/17040
SBV/LO/SQ/CD	1789x2071x80	114	17420/18460
SBV/LO/SQ/DD	2071x2071x80	115	18760/19880

COLOR TEMPERATURE

3000K /3K
4000K /4K

OPTIC

PMMA OPAL /--
PRISMATIC /P


DIMMABLE OPTIONS

DALI, TOUCHDIM /DALI see page 223
WIRELESS /WRS see page 223

COLORS

	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACIT	/AT
	GOLD	/GL
	BRONZE	/BR

ACCESSORIES



SCVLOPKK
END CAP
2PCS

□ BELO_LO_OV_80 RECESSED






A 847

B 1129

C 1411

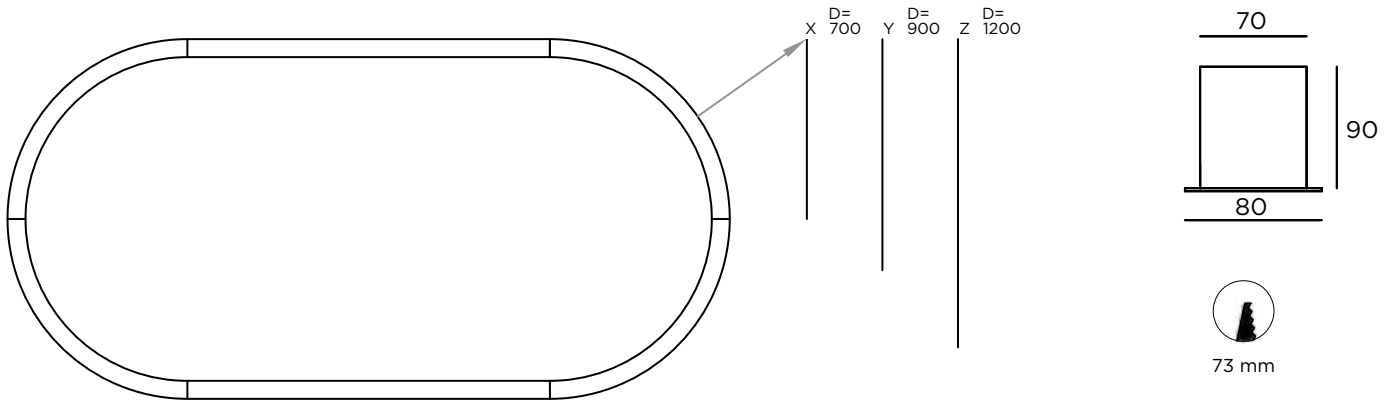

DIRECT CODE	(mm)	W	Lm from 3000K/4000K
SBV/80/OV/AX	700x1547x90	54	8710/9230
SBV/80/OV/AY	900x1747x90	62	10050/10650
SBV/80/OV/AZ	1200x2047x90	74	12060/12780
SBV/80/OV/BX	700x1829x90	62	10050/10650
SBV/80/OV/BY	900x2029x90	70	11390/12070
SBV/80/OV/BZ	1200x2329x90	81	13400/14200
SBV/80/OV/CX	700x2111x90	70	11390/12070
SBV/80/OV/CY	900x2311x90	78	12730/13490
SBV/80/OV/CZ	1200x2611x90	91	14740/15620

INSTALLATION

Recessed version
Suspended version see page 28
Ceiling version see page 112

CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block
Luminaires for dimming are delivered with 5-pole terminal block

MATERIAL

The body of the luminaire is curved extruded aluminium, powder coated finish

LIGHT SOURCE

LED Tridonic or TCI, min. 150Lm/W, 3000K or 4000K

DIFFUSER

PMMA OPAL
PRISMATIC

LIGHT DISTRIBUTION

Direct symmetrical

EMERGENCY LIGHTING

A unit with integrated emergency is an option

DIMMING

Most models can be delivered with ballast for dimming (TOUCHDIM, DALI)

COLOR TEMPERATURE

3000K /3K
4000K /4K

OPTIC

PMMA OPAL /--
PRISMATIC /P

DIMMABLE OPTIONS

DALI, TOUCHDIM /DALI see page 223
WIRELESS /WRS see page 223



COLORS

	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACIT	/AT
	GOLD	/GL
	BRONZE	/BR

□ BELO_LO_S_80 RECESSED



HIGH

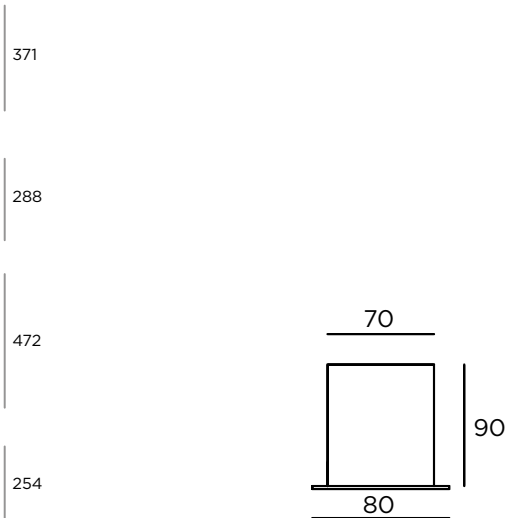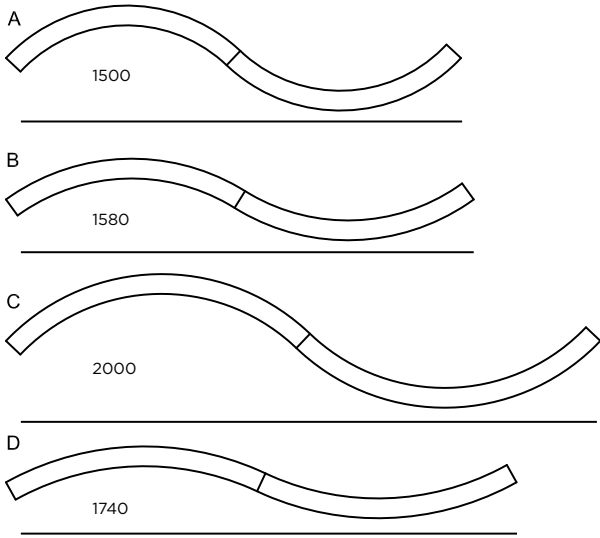

DIRECT CODE	(mm)	W	Lm from 3000K/4000K
SBV/LO/SA	1500x80x90 (D=1200)	26	4020/4260
SBV/LO/SB	1580x80x90 (D=1500)	26	4020/4260
SBV/LO/SC	2000x80x90 (D=1500)	33	5360/5680
SBV/LO/SD	1740x80x90 (D=2000)	26	4020/4260

COLOR TEMPERATURE

3000K	/3K
4000K	/4K

OPTIC

PMMA OPAL	/--
PRISMATIC	/P

DIMMABLE OPTIONS

DALI, TOUCHDIM	/DALI	see page 223
WIRELESS	/WRS	see page 223

INSTALLATION

Recessed version
 Suspended version see page 30
 Ceiling version see page 114
 System version see page 214

CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block
 Luminaires for dimming are delivered with 5-pole terminal block

MATERIAL

The body of the luminaire is curved extruded aluminium, powder coated finish

LIGHT SOURCE

LED Tridonic or TCI, min. 150Lm/W, 3000K or 4000K

DIFFUSER

PMMA OPAL
 PRISMATIC

LIGHT DISTRIBUTION

Direct symmetrical

EMERGENCY LIGHTING

A unit with integrated emergency is an option

DIMMING

Most models can be delivered with ballast for dimming (TOUCHDIM, DALI)

COLORS

	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACIT	/AT
	GOLD	/GL
	BRONZE	/BR


ACCESSORIES

70		SCVLOPKK END CAP 2PCS
80		

□ BELO_LO_PO_80 RECESSED



ARCHILIGHT

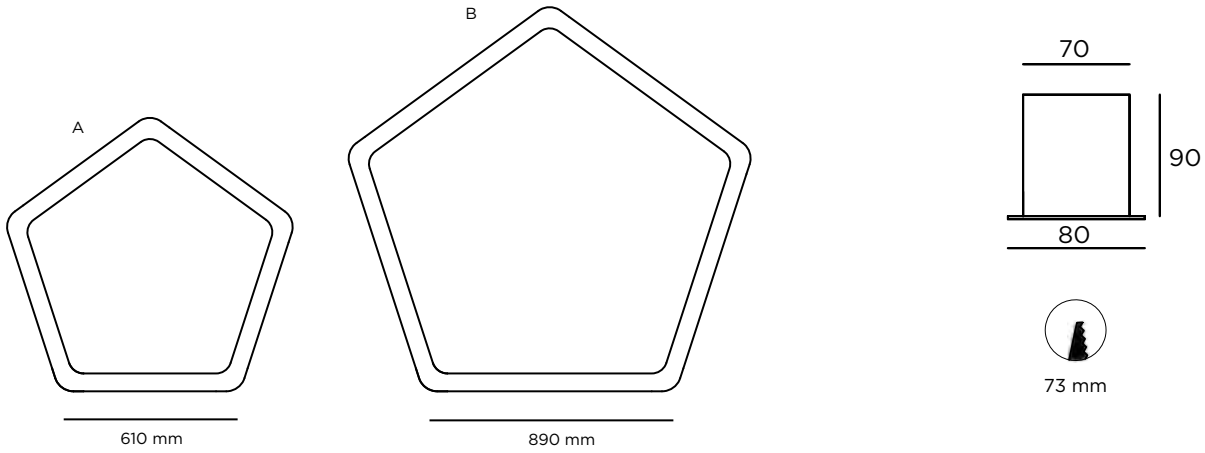

INSTALLATION

Recessed version
Suspended version see page 32
Ceiling version see page 116

CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block
Luminaires for dimming are delivered with 5-pole terminal block

MATERIAL

The body of the luminaire is curved extruded aluminium, powder coated finish

LIGHT SOURCE

LED Tridonic or TCI, min. 150Lm/W, 3000K or 4000K

DIFFUSER

PMMA OPAL
PRISMATIC

LIGHT DISTRIBUTION

Direct symmetrical

EMERGENCY LIGHTING

A unit with integrated emergency is an option

DIMMING

Most models can be delivered with ballast for dimming (TOUCHDIM, DALI)

DIRECT CODE	(mm)	W	Lm from 3000K/4000K
SBV/PO/A	610x80	41	6700/7100
SBV/PO/B	890x80	62	10050/10650

COLOR TEMPERATURE

3000K /3K
4000K /4K

OPTIC

PMMA OPAL /--
PRISMATIC /P

DIMMABLE OPTIONS

DALI, TOUCHDIM /DALI see page 223
WIRELESS /WRS see page 223


COLORS

	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACIT	/AT
	GOLD	/GL
	BRONZE	/BR

□ BELO_LO_TR_80 RECESSED



ARCHILIGHT

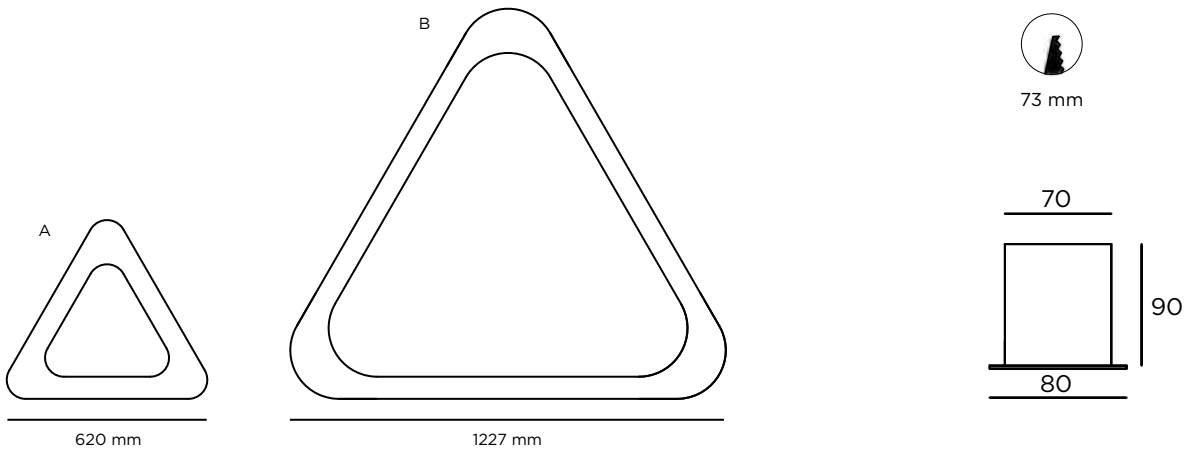

INSTALLATION

Recessed version
 Suspended version see page 34
 Ceiling version see page 118

CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block
 Luminaires for dimming are delivered with 5-pole terminal block

MATERIAL

The body of the luminaire is curved extruded aluminium,
 powder coated finish

LIGHT SOURCE

LED Tridonic or TCI, min. 150Lm/W, 3000K or 4000K

DIFFUSER

PMMA OPAL
 PRISMATIC

LIGHT DISTRIBUTION

Direct symmetrical

EMERGENCY LIGHTING

A unit with integrated emergency is an option

DIMMING

Most models can be delivered with ballast
 for dimming (TOUCHDIM, DALI)

DIRECT CODE	(mm)	W	Lm from 3000K/4000K
SBV/LO/TR/A	620x80	25	4020/4260
SBV/LO/TR/B	1227x80	58	9380/9940

COLOR TEMPERATURE

3000K /3K
 4000K /4K

OPTIC

PMMA OPAL /--
 PRISMATIC /P

DIMMABLE OPTIONS

DALI, TOUCHDIM /DALI see page 223
 WIRELESS /WRS see page 223


COLORS

	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACIT	/AT
	GOLD	/GL
	BRONZE	/BR

□ DOWNLIGHT RECESSED



ARCHILIGHT



DIRECT CODE	(mm)	W	Lm from 3000K/4000K
SKV/100/1000/60°	100	11	1060/1110
SKV/100/1000/90°	100	11	1060/1110
SKV/150/1000/60°	150	11	1060/1110
SKV/150/1000/90°	150	11	1060/1110
SKV/150/2000/60°	150	22	2130/2210
SKV/150/2000/90°	150	22	2130/2210
SKV/200/2000/60°	200	22	2130/2210
SKV/200/2000/90°	200	22	2130/2210
SKV/200/3000/60°	200	32	3070/3180
SKV/200/3000/90°	200	32	3070/3180

INSTALLATION

Recessed version

CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block
Luminaires for dimming are delivered with 5-pole terminal block

MATERIAL

The body of the luminaire is extruded aluminium, powder coated finish

LIGHT SOURCE

LED Tridonic

REFLECTOR

60° and 90°

LIGHT DISTRIBUTION

Direct symmetrical

DIMMING

Most models can be delivered with ballast for dimming (TOUCHDIM, DALI)

COLOR TEMPERATURE

3000K /3K
4000K /4K

OPTIC

PMMA OPAL /--
PRISMATIC /P

DIMMABLE OPTIONS

DALI, TOUCHDIM /DALI see page 223
WIRELESS /WRS see page 223

COLORS

WHITE /WH



SYSTEMS

5


SYSTEMS

CUBUS	198
CUBUS XL	202
DUAL	206
LUCID	210
BELO_LO	214





□ CUBUS SUSPENDED, CEILING, WALL, RECESSED



INSTALLATION

Suspended, ceiling, wall or recessed version

CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block, through wired
Luminaires for dimming are delivered with 5-pole terminal block, through wired

MATERIAL

The body of the luminaire is extruded aluminium, eloxed or powder coated finish

LIGHT SOURCE

LED Tridonic or TCI, min. 125Lm/W, 3000K or 4000K

DIFFUSER

PMMA OPAL
PRISMATIC

LIGHT DISTRIBUTION

Direct symmetrical

EMERGENCY LIGHTING


A unit with integrated emergency is an option

DIMMING


All models can be delivered with ballast for dimming (TOUCHDIM, DALI)

EXAMPLES OF ASSEMBLY CUBUS SYSTEM


1. SUSPENDED / CEILING / RECESSED

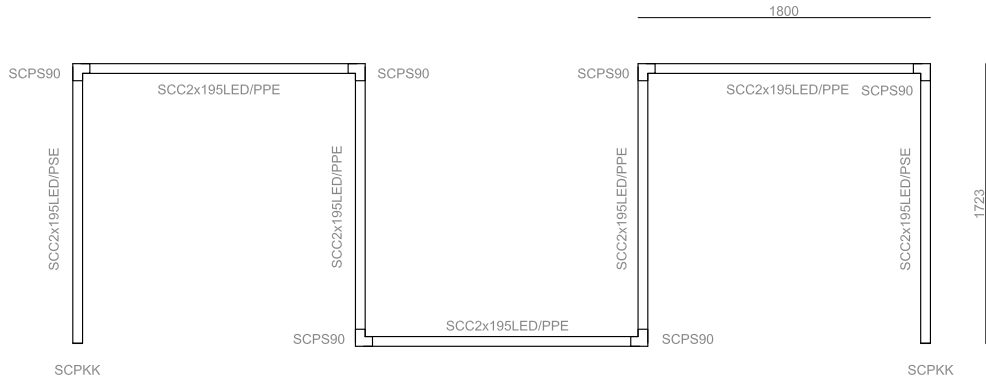


2. SUSPENDED / CEILING / RECESSED

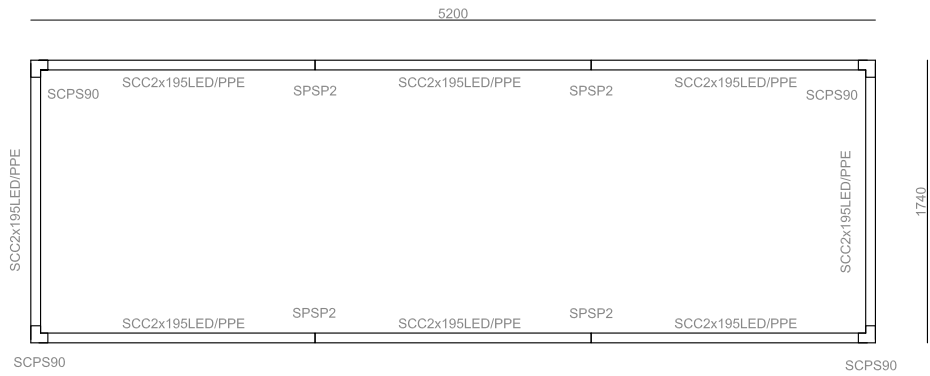

3. SUSPENDED / CEILING / WALL / RECESSED



4. SUSPENDED / CEILING / RECESSED

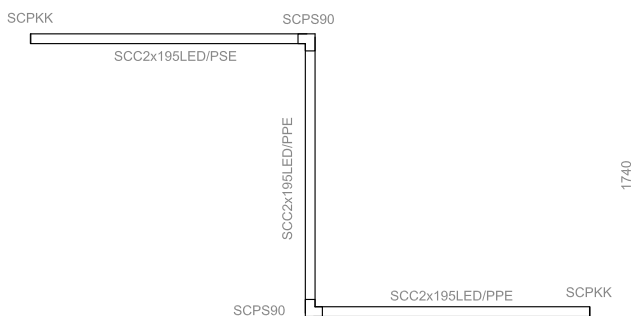





□ CUBUS

SUSPENDED, CEILING, WALL



CODE SUSPENDED	CODE CEILING	CODE WALL	L (mm)	W	Lm from 3000K/4000K
SCS130PSE	SCC130PSE	SCW130PSE	595x60x62	9	1340/1420
SCS250PSE	SCC250PSE	SCW250PSE	595x60x62	13	1860/1960
SCS195PSE	SCC195PSE	SCW195PSE	850x60x62	13	2010/2130
SCS375PSE	SCC375PSE	SCW375PSE	850x60x62	19	2790/2940
SCS260PSE	SCC260PSE	SCW260PSE	1135x60x62	17	2680/2840
SCS500PSE	SCC500PSE	SCW500PSE	1135x60x62	25	3720/3920
SCS325PSE	SCC325PSE	SCW325PSE	1415x60x62	21	3350/3550
SCS625PSE	SCC625PSE	SCW625PSE	1415x60x62	31	4650/4900
SCS2x195PSE	SCC2x195PSE	SCW2x195PSE	1700x60x62	26	4020/4260
SCS2x375PSE	SCC2x375PSE	SCW2x375PSE	1700x60x62	37	5580/5880
SCS2x230PSE	SCC2x230PSE	SCW2x230PSE	1980x60x62	29	4690/4970
SCS2x440PSE	SCC2x440PSE	SCW2x440PSE	1980x60x62	43	6510/6860
SCS2x260PSE	SCC2x260PSE	SCW2x260PSE	2265x60x62	33	5360/5680
SCS2x500PSE	SCC2x500PSE	SCW2x500PSE	2265x60x62	49	7440/7840
SCS2x325PSE	SCC2x325PSE	SCW2x325PSE	2825x60x62	41	6700/7100
SCS2x625PSE	SCC2x625PSE	SCW2x625PSE	2825x60x62	61	9300/9800

ACCESSORIES



RECESSED





CODE	L (mm)	W	Lm from 3000K/4000K
SCV130PSE	595x70x85	9	1340/1420
SCV250PSE	595x70x85	13	1860/1960
SCV195PSE	850x70x85	13	2010/2130
SCV375PSE	850x70x85	19	2790/2940
SCV260PSE	1135x70x85	17	2680/2840
SCV500PSE	1135x70x85	25	3720/3920
SCV325PSE	1415x70x85	21	3350/3550
SCV625PSE	1415x70x85	31	4650/4900
SCV2x195PSE	1700x70x85	26	4020/4260
SCV2x375PSE	1700x70x85	37	5580/5880
SCV2x230PSE	1980x70x85	29	4690/4970
SCV2x440PSE	1980x70x85	43	6510/6860
SCV2x260PSE	2265x70x85	33	5360/5680
SCV2x500PSE	2265x70x85	49	7440/7840
SCV2x325PSE	2825x70x85	41	6700/7100
SCV2x625PSE	2825x70x85	61	9300/9800



63 mm

ACCESSORIES



COLOR TEMPERATURE

3000K	/3K
4000K	/4K








OPTIC

PMMA OPAL	/--
PRISMATIC	/P

DIMMABLE OPTIONS


DALI, TOUCHDIM	/DALI	see page 223
WIRELESS	/WRS	see page 223

COLORS

	ELOX	/..
	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACIT	/AT
	GOLD	/GL
	BRONZE	/BR

LENGTH of modules for assembly when delivered with SCPS90


- 55 mm (for 1 pc SCSP9090)	/L1
- 85 mm (for 1 pc SCSP9090)	/L2
- 140 mm (for 2 pcs SCSP9090)	/L3

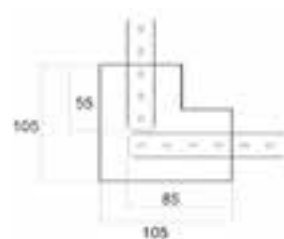

□ CUBUS XL SUSPENDED, CEILING, WALL, RECESSED



ARCHILIGHT



INSTALLATION

Suspended, ceiling, wall or recessed version

CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block, through wired
Luminaires for dimming are delivered with 5-pole terminal block, through wired

MATERIAL

The body of the luminaire is extruded aluminium, powder coated finish

LIGHT SOURCE

LED Tridonic or TCI, min. 125Lm/W, 3000K or 4000K

DIFFUSER

PMMA OPAL
PRISMATIC

LIGHT DISTRIBUTION

Direct symmetrical

EMERGENCY LIGHTING


A unit with integrated emergency is an option

DIMMING


All models can be delivered with ballast for dimming (TOUCHDIM, DALI)

EXAMPLES OF ASSEMBLY CUBUS XL SYSTEM


1. SUSPENDED / CEILING / RECESSED

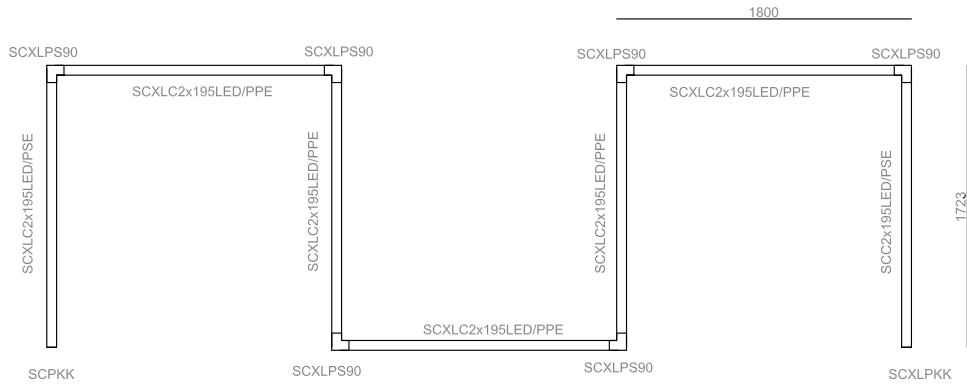


2. SUSPENDED / CEILING / RECESSED

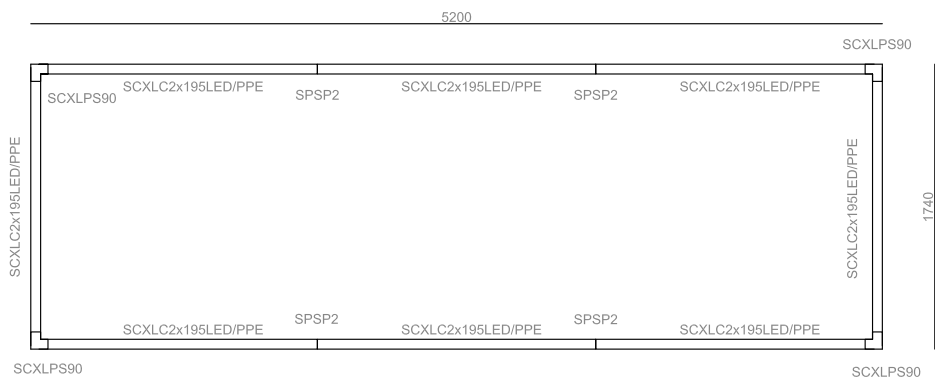

3. SUSPENDED / CEILING / WALL / RECESSED



4. SUSPENDED / CEILING / RECESSED

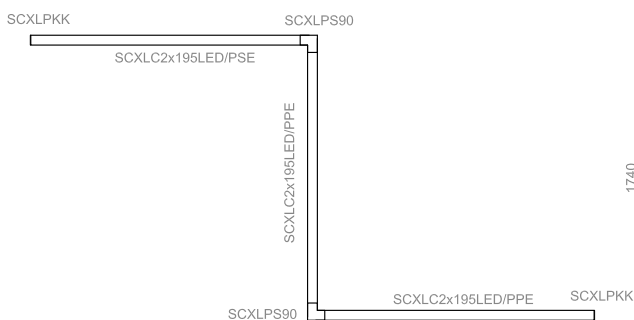


□ CUBUS XL



SUSPENDED, CEILING, WALL



CODE SUSPENDED	CODE CEILING	CODE WALL	L (mm)	W	Lm from 3000K/4000K
SCSXLPPES60	SCCXLPPES60	SCWXLPPES60	595x70x80	9	1340/1420
SCSXLPPES90	SCCXLPPES90	SCWXLPPES90	850x70x80	13	2010/2130
SCSXLPPES120	SCCXLPPES120	SCWXLPPES120	1135x70x80	17	2680/2840
SCSXLPPES150	SCCXLPPES150	SCWXLPPES150	1415x70x80	21	3350/3550
SCSXLPPES170	SCCXLPPES170	SCWXLPPES170	1700x70x80	26	4020/4260
SCSXLPPES200	SCCXLPPES200	SCWXLPPES200	1980x70x80	29	4690/4970
SCSXLPPES230	SCCXLPPES230	SCWXLPPES230	2265x70x80	33	5360/5680
SCSXLPPES280	SCCXLPPES280	SCWXLPPES280	2825x70x80	41	6700/7100



ACCESSORIES

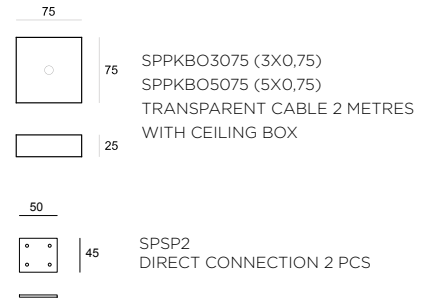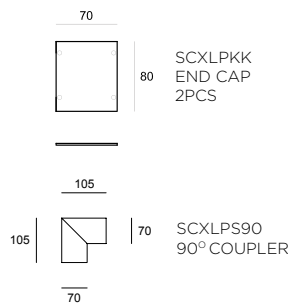


RECESSED




CODE	L (mm)	W	Lm from 3000K/4000K
SCVXLPPES60	595x80x90	9	1340/1420
SCVXLPPES90	850x80x90	13	2010/2130
SCVXLPPES120	1135x80x90	17	2680/2840
SCVXLPPES150	1415x80x90	21	3350/3550
SCVXLPPES170	1700x80x90	26	4020/4260
SCVXLPPES200	1980x90x80	29	4690/4970
SCVXLPPES230	2265x80x90	33	5360/5680
SCVXLPPES280	2825x80x90	41	6700/7100

ARCHILIGHT



ACCESSORIES

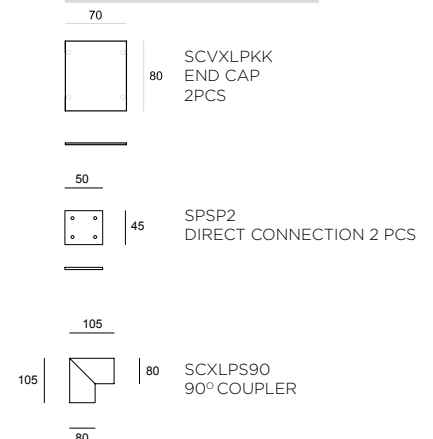

COLOR TEMPERATURE

3000K	/3K
4000K	/4K








OPTIC


PMMA OPAL	/--
PRISMATIC	/P

DIMMABLE OPTIONS

DALI, TOUCHDIM	/DALI	see page 223
WIRELESS	/WRS	see page 223

COLORS

	ELOX	/..
	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACIT	/AT
	GOLD	/GL
	BRONZE	/BR

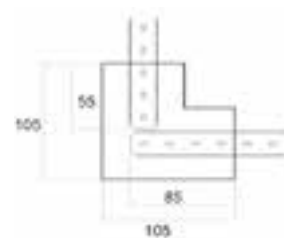

LENGTH of modules for assembly when delivered with SCXLPS90

- 55 mm (for 1 pc SCSP9090) /L1
- 85 mm (for 1 pc SCSP9090) /L2
- 140 mm (for 2 pcs SCSP9090) /L3

□ DUAL SUSPENDED, CEILING, WALL



ARCHILIGHT

49



85

INSTALLATION

Suspended, ceiling, wall or recessed version

CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block, through wired
Luminaires for dimming are delivered with 5-pole terminal block, through wired

MATERIAL

The body of the luminaire is extruded aluminium, eloxed or powder coated finish

LIGHT SOURCE

LED Tridonic or TCI, min. 125Lm/W, 3000K or 4000K

DIFFUSER

PMMA OPAL
PRISMATIC

LIGHT DISTRIBUTION

Direct symmetrical

EMERGENCY LIGHTING


A unit with integrated emergency is an option

DIMMING


All models can be delivered with ballast for dimming (TOUCHDIM, DALI)

EXAMPLES OF ASSEMBLY DUAL SYSTEM


1. SUSPENDED / CEILING

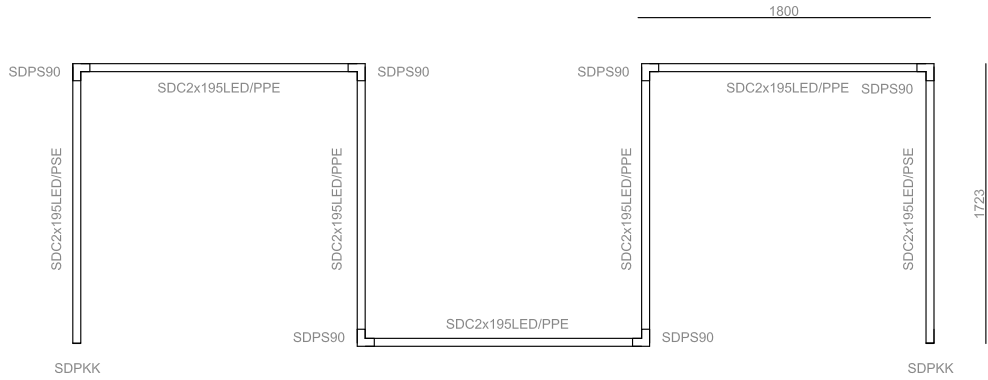


2. SUSPENDED / CEILING

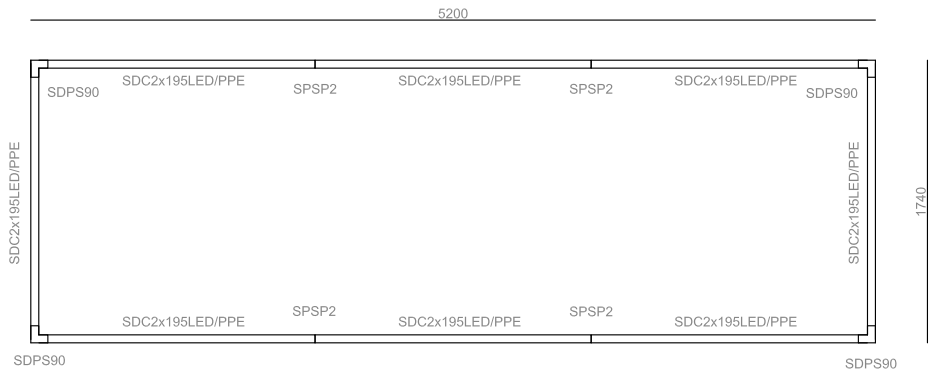

3. SUSPENDED / CEILING / WALL



4. SUSPENDED / CEILING

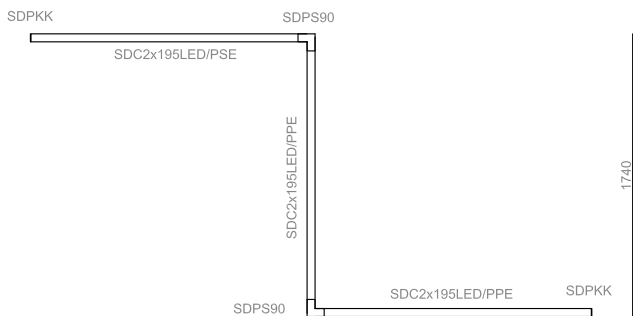

□ DUAL SUSPENDED, CEILING, WALL

CODE DIRECT SUSPENDED	CODE DIRECT CEILING	CODE DIRECT WALL	L (mm)	W	Lm from 3000K/4000K
SDS130PSE	SDC130PSE	SDW130PSE	595xS49x85	8	1340/1420
SDS250PSE	SDC250PSE	SDW250PSE	595xS49x85	12	1860/1960
SDS195PSE	SDC195PSE	SDW195PSE	850xS49x85	12	2010/2130
SDS375PSE	SDC375PSE	SDW375PSE	850xS49x85	18	2790/2940
SDS260PSE	SDC260PSE	SDW260PSE	1135xS49x85	16	2680/2840
SDS500PSE	SDC500PSE	SDW500PSE	1135xS49x85	24	3720/3920
SDS325PSE	SDC325PSE	SDW325PSE	1415xS49x85	21	3350/3550
SDS625PSE	SDC625PSE	SDW625PSE	1415xS49x85	31	4650/4900
SDS2x195PSE	SDC2x195PSE	SDW2x195PSE	1700xS49x85	26	4020/4260
SDS2x375PSE	SDC2x375PSE	SDW2x375PSE	1700xS49x85	37	5580/5880
SDS2x230PSE	SDC2x230PSE	SDW2x230PSE	1980xS49x85	29	4690/4970
SDS2x440PSE	SDC2x440PSE	SDW2x440PSE	1980xS49x85	43	6510/6860
SDS2x260PSE	SDC2x260PSE	SDW2x260PSE	2265xS49x85	33	5360/5680
SDS2x500PSE	SDC2x500PSE	SDW2x500PSE	2265xS49x85	49	7440/7840
SDS2x325PSE	SDC2x325PSE	SDW2x325PSE	2825xS49x85	41	6700/7100
SDS2x625PSE	SDC2x625PSE	SDW2x625PSE	2825xS49x85	61	9300/9800



CODE DIRECT / INDIRECT SUSPENDED	ODE DIRECT / INDIRECT CEILING	ODE DIRECT / INDIRECT WALL	L (mm)	W	Lm from 3000K/4000K
SDS130PSE/DI	---	SDW130PSE/DI	595xS49x85	2x8	2x1340/2x1420
SDS250PSE/DI	---	SDW250PSE/DI	595xS49x85	2x12	2x1860/2x1960
SDS195PSE/DI	---	SDW195PSE/DI	850xS49x85	2x12	2x2010/2x2130
SDS375PSE/DI	---	SDW375PSE/DI	850xS49x85	2x18	2x2790/2x2940
SDS260PSE/DI	---	SDW260PSE/DI	1135xS49x85	2x16	2x2680/2x2840
SDS500PSE/DI	---	SDW500PSE/DI	1135xS49x85	2x24	2x3720/2x3920
SDS325PSE/DI	---	SDW325PSE/DI	1415xS49x85	2x21	2x3350/2x3550
SDS625PSE/DI	---	SDW625PSE/DI	1415xS49x85	2x31	2x4650/2x4900
SDS2x195PSE/DI	---	SDW2x195PSE/DI	1700xS49x85	2x26	2x4020/2x4260
SDS2x375PSE/DI	---	SDW2x375PSE/DI	1700xS49x85	2x37	2x5580/2x5880
SDS2x230PSE/DI	---	SDW2x230PSE/DI	1980xS49x85	2x29	2x4690/2x4970
SDS2x440PSE/DI	---	SDW2x440PSE/DI	1980xS49x85	2x43	2x6510/2x6860
SDS2x260PSE/DI	---	SDW2x260PSE/DI	2265xS49x85	2x33	2x5360/2x5680
SDS2x500PSE/DI	---	SDW2x500PSE/DI	2265xS49x85	2x49	2x7440/2x7840
SDS2x325PSE/DI	---	SDW2x325PSE/DI	2825xS49x85	2x41	2x6700/2x7100
SDS2x625PSE/DI	---	SDW2x625PSE/DI	2825xS49x85	2x61	2x9300/2x9800

□ LUCID SUSPENDED, CEILING, WALL



EXAMPLE OF ASSEMBLY LUCID SYSTEM

1. SUSPENDED / CEILING-WALL



INSTALLATION

Suspended, ceiling, wall or recessed version

CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block, through wired
Luminaires for dimming are delivered with 5-pole terminal block, through wired

MATERIAL

The body of the luminaire is extruded aluminium, eloxed finish

LIGHT SOURCE

LED Tridonic or TCI, min. 125Lm/W, 3000K or 4000K

DIFFUSER

PMMA OPAL
PRISMATIC

LIGHT DISTRIBUTION

Direct and sidewalls

EMERGENCY LIGHTING

A unit with integrated emergency is an option

DIMMING

All models can be delivered with ballast for dimming (TOUCHDIM, DALI)



CODE SUSPENDED	CODE CEILING / WALL	L (MM) BY PSE	L (mm) by PPE	W	Lm from 3000K/4000K
SLS130/PSE	SLC130/PSE	580x57x70	590x57x70	8	1500/1580
SLS250/PSE	SLC250/PSE	580x57x70	590x57x70	14	2340/2450
SLS195/PSE	SLC195/PSE	850x57x70	860x57x70	13	2250/2370
SLS375/PSE	SLC375/PSE	850x57x70	860x57x70	21	3510/3690
SLS260/PSE	SLC260/PSE	1135x57x70	1145x57x70	16	3000/3160
SLS500/PSE	SLC500/PSE	1135x57x70	1145x57x70	28	4680/4900
SLS325/PSE	SLC325/PSE	1415x57x70	1425x57x70	21	3750/3950
SLS625/PSE	SLC625/PSE	1415x57x70	1425x57x70	35	5850/6150
SLS2x195/PSE	SLC2x195/PSE	1700x57x70	1710x57x70	26	4500/4740
SLS2x375/PSE	SLC2x375/PSE	1700x57x70	1710x57x70	42	700/7380
SLS2x230/PSE	SLC2x230/PSE	1990x57x70	2000x57x70	29	5250/5530
SLS2x440/PSE	SLC2x440/PSE	1990x57x70	2000x57x70	49	8190/8610
SLS2x260/PSE	SLC2x260/PSE	2265x57x70	2275x57x70	32	6000/6320
SLS2x500/PSE	SLC2x500/PSE	2265x57x70	2275x57x70	56	9360/9800
SLS2x325/PSE	SLC2x325/PSE	2825x57x70	2835x57x70	42	7500/7900
SLS2x625/PSE	SLC2x625/PSE	2825x57x70	2835x57x70	70	11700/12300

COLOR TEMPERATURE

3000K /3K
4000K /4K

OPTIC

PMMA OPAL /--

DIMMABLE OPTIONS

DALI, TOUCHDIM /DALI see page 223
WIRELESS /WRS see page 223

COLOR TEMPERATURE

3000K /3K
4000K /4K

OPTIC

PMMA OPAL /--

DIMMABLE OPTIONS

DALI, TOUCHDIM /DALI see page 223
WIRELESS /WRS

COLORS

ELOX /..

COLOR TEMPERATURE

3000K /3K
4000K /4K

OPTIC

PMMA OPAL /--
PRISMATIC /P

DIMMABLE OPTIONS

DALI, TOUCHDIM /DALI see page 223
WIRELESS /WRS see page 223

ACCESSORIES

57

70 SLPKK
END CAP
2PCS

75

75 SPPKBO3075 (3X0,75)
SPPKBO5075 (5X0,75)
TRANSPARENT CABLE 2 METRES
WITH CEILING BOX

25


50

45 SPSP2
DIRECT CONNECTION 2 PCS





□ BELO_LO SUSPENDED, CEILING, RECESSED



INSTALLATION

recessed

CONNECTION

Non dimmable luminaires are delivered with 3-pole terminal block, through wired
Luminaires for dimming are delivered with 5-pole terminal block, through wired

MATERIAL

The body of the luminaire is extruded aluminium, eloxed or powder coated finish

LIGHT SOURCE

LED Tridonic or TCI, min. 125Lm/W, 3000K or 4000K

DIFFUSER

PMMA OPAL
PRISMATIC

LIGHT DISTRIBUTION

Direct symmetrical


EMERGENCY LIGHTING

A unit with integrated emergency is an option


DIMMING

All models can be delivered with ballast for dimming (TOUCHDIM, DALI)

EXAMPLES OF ASSEMBLY BELO_LO SYSTEM

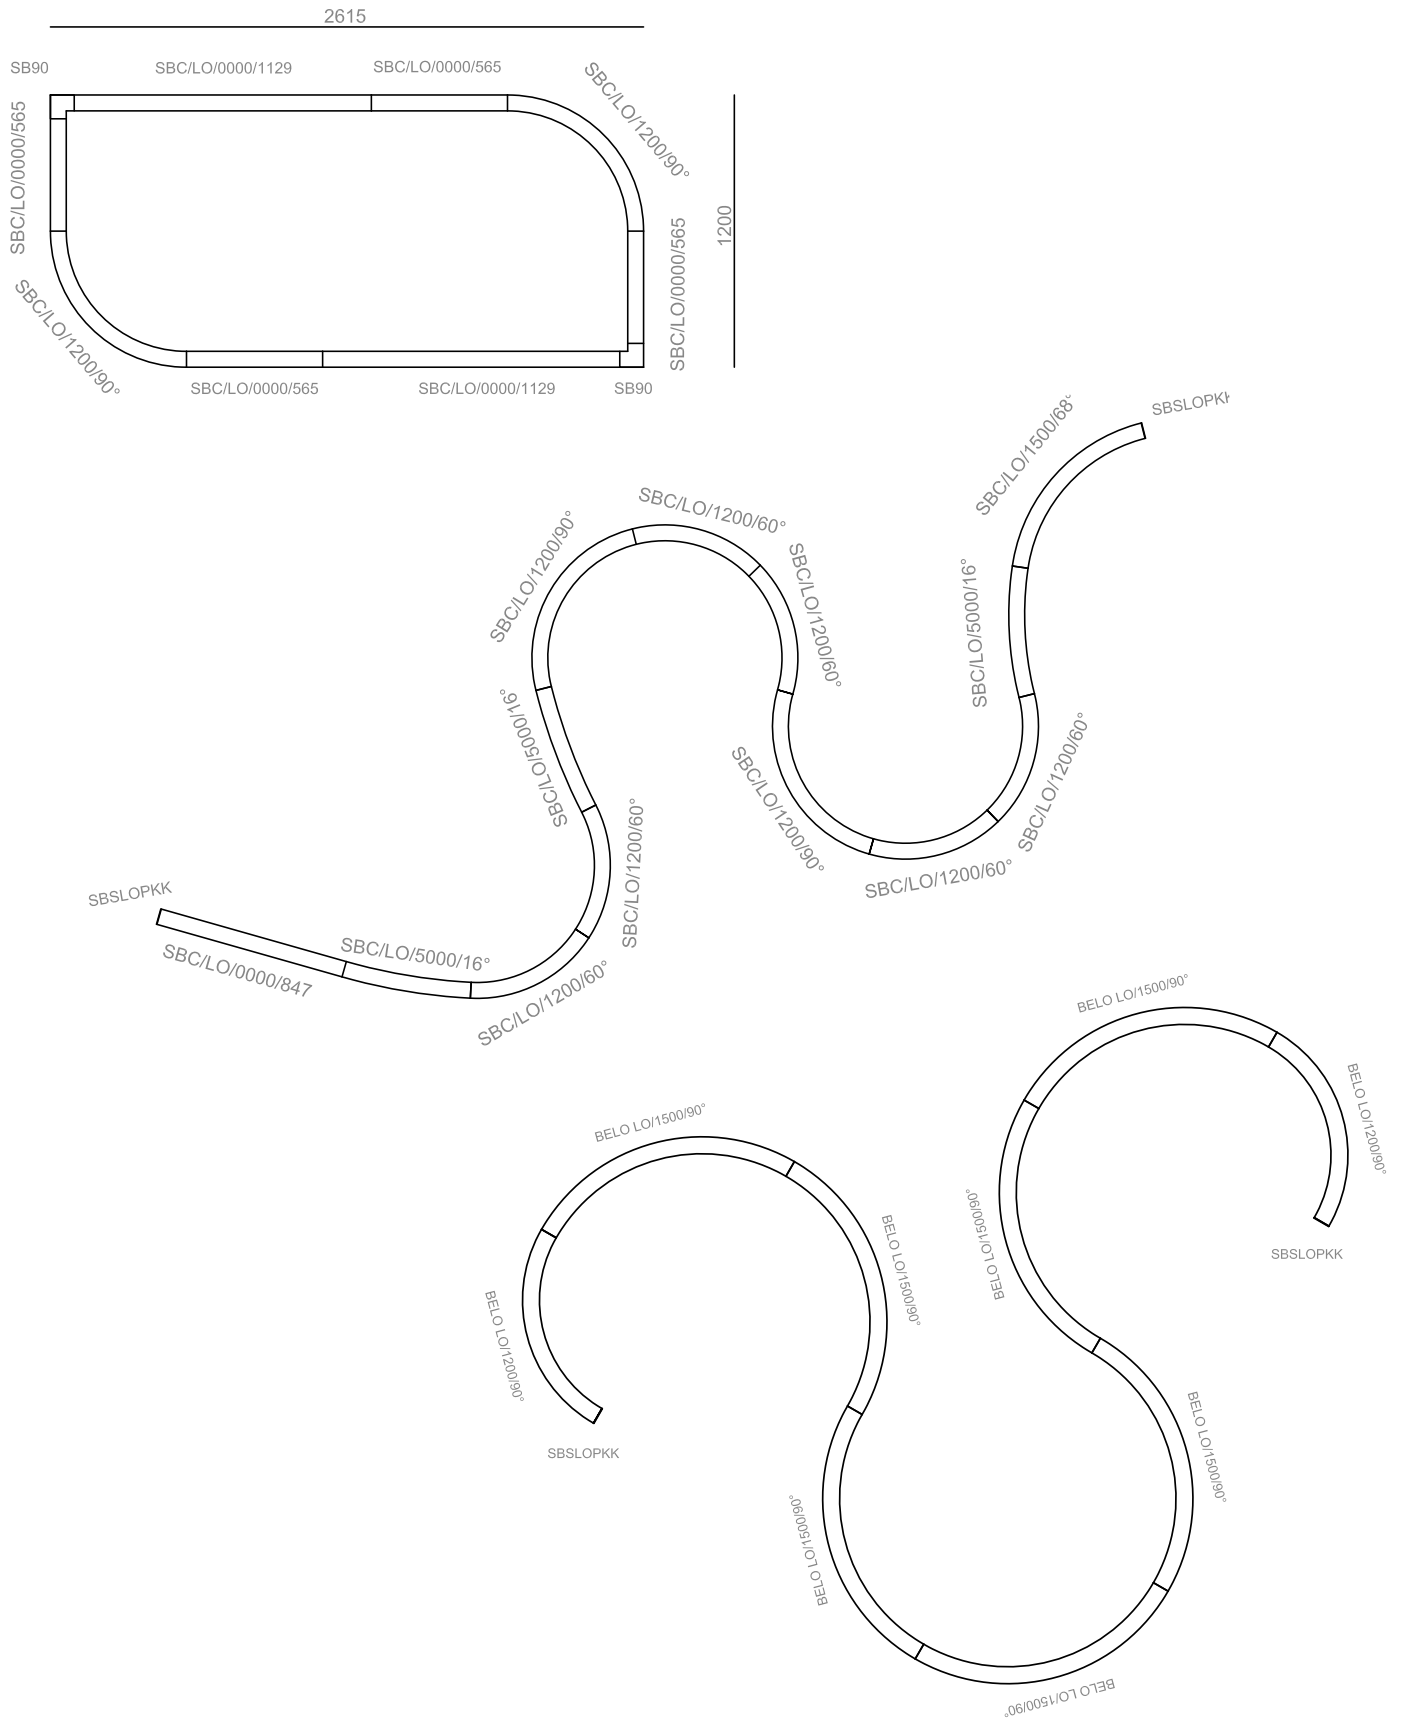

□ BELO_LO SUSPENDED, CEILING, RECESSED

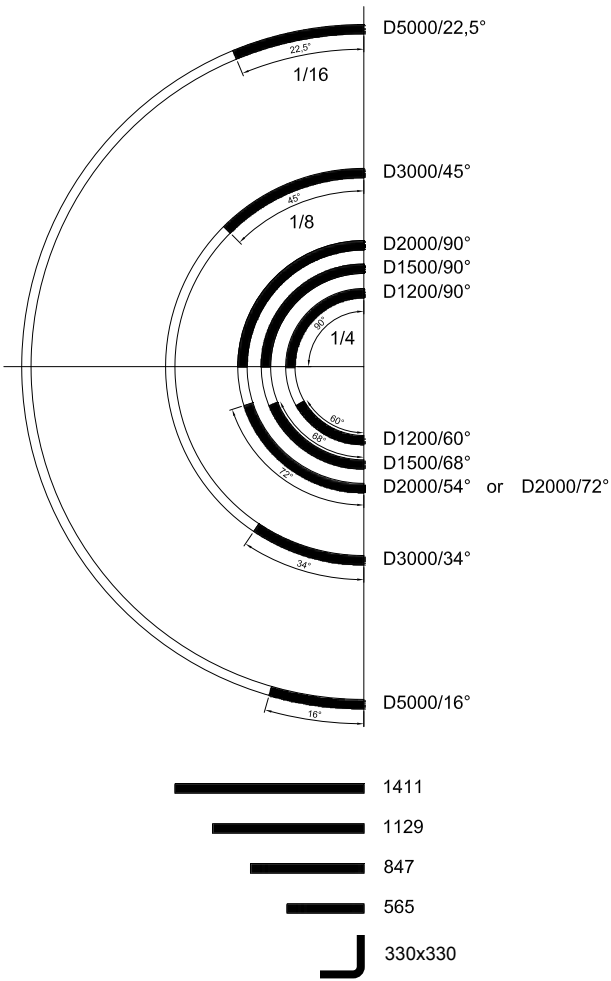

CODE SUSPENDED	CODE CEILING	CODE RECESSED	W	Lm from 3000K/4000K
SBS/LO/5000/22,5°	SBC/LO/5000/22,5°	SBV/LO/5000/22,5°	14	2170 / 2310
SBS/LO/3000/45°	SBC/LO/3000/45°	SBV/LO/3000/45°	16	2480 / 2640
SBS/LO/2000/90°	SBC/LO/2000/90°	SBV/LO/2000/90°	20	3100 / 3300
SBS/LO/1500/90	SBC/LO/1500/90	SBV/LO/1500/90	16	2480 / 2640
SBS/LO/1200/90°	SBC/LO/1200/90°	SBV/LO/1200/90°	12	1860 / 1980
SBS/LO/1200/60°	SBC/LO/1200/60°	SBV/LO/1200/60°	8	1240 / 1320
SBS/LO/1500/68°	SBC/LO/1500/68°	SBV/LO/1500/68°	12	1860 / 1980
SBS/LO/2000/54°	SBC/LO/2000/54°	SBV/LO/2000/54°	12	1860 / 1980
SBS/LO/2000/72°	SBC/LO/2000/72°	SBV/LO/2000/72°	16	2480 / 2640
SBS/LO/3000/34°	SBC/LO/3000/34°	SBV/LO/3000/34°	12	1860 / 1980
SBS/LO/5000/16°	SBC/LO/5000/16°	SBV/LO/5000/16°	10	1550 / 1650
SBS/LO/0000/1411	SBC/LO/0000/1411	SBV/LO/0000/1411	20	3100 / 3300
SBS/LO/0000/1129	SBC/LO/0000/1129	SBV/LO/0000/1129	16	2480 / 2640
SBS/LO/0000/847	SBC/LO/0000/847	SBV/LO/0000/847	12	1860 / 1980
SBS/LO/0000/847	SBC/LO/0000/847	SBV/LO/0000/847	8	1240 / 1320
SBS/LO/0000/90°	SBC/LO/0000/90°	SBV/LO/0000/90°	8	1240 / 1320

ARCHILIGHT

COLORS

	ELOX	/..
	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACIT	/AT
	GOLD	/GL
	BRONZE	/BR

COLOR TEMPERATURE

3000K	/3K
4000K	/4K

OPTIC

PMMA OPAL	/--
PRISMATIC	/P


DIMMABLE OPTIONS

DALI, TOUCHDIM	/DALI	see page 223
WIRELESS	/WRS	see page 223

SUSPENDED, CEILING, RECESSED




ACCESSORIES




SBLOPKK
END CAP
2PCS



SPPKBO3075 (3X0,75)
SPPKBO5075 (5X0,75)
TRANSPARENT CABLE 2 METRES
WITH CEILING BOX




SPSP2
DIRECT CONNECTION 2 PCS



RECESSED




ACCESSORIES




SBLOPKK
END CAP
2PCS



SPPKBO3075 (3X0,75)
SPPKBO5075 (5X0,75)
TRANSPARENT CABLE 2 METRES
WITH CEILING BOX




SPSP2
DIRECT CONNECTION 2 PCS



73 mm





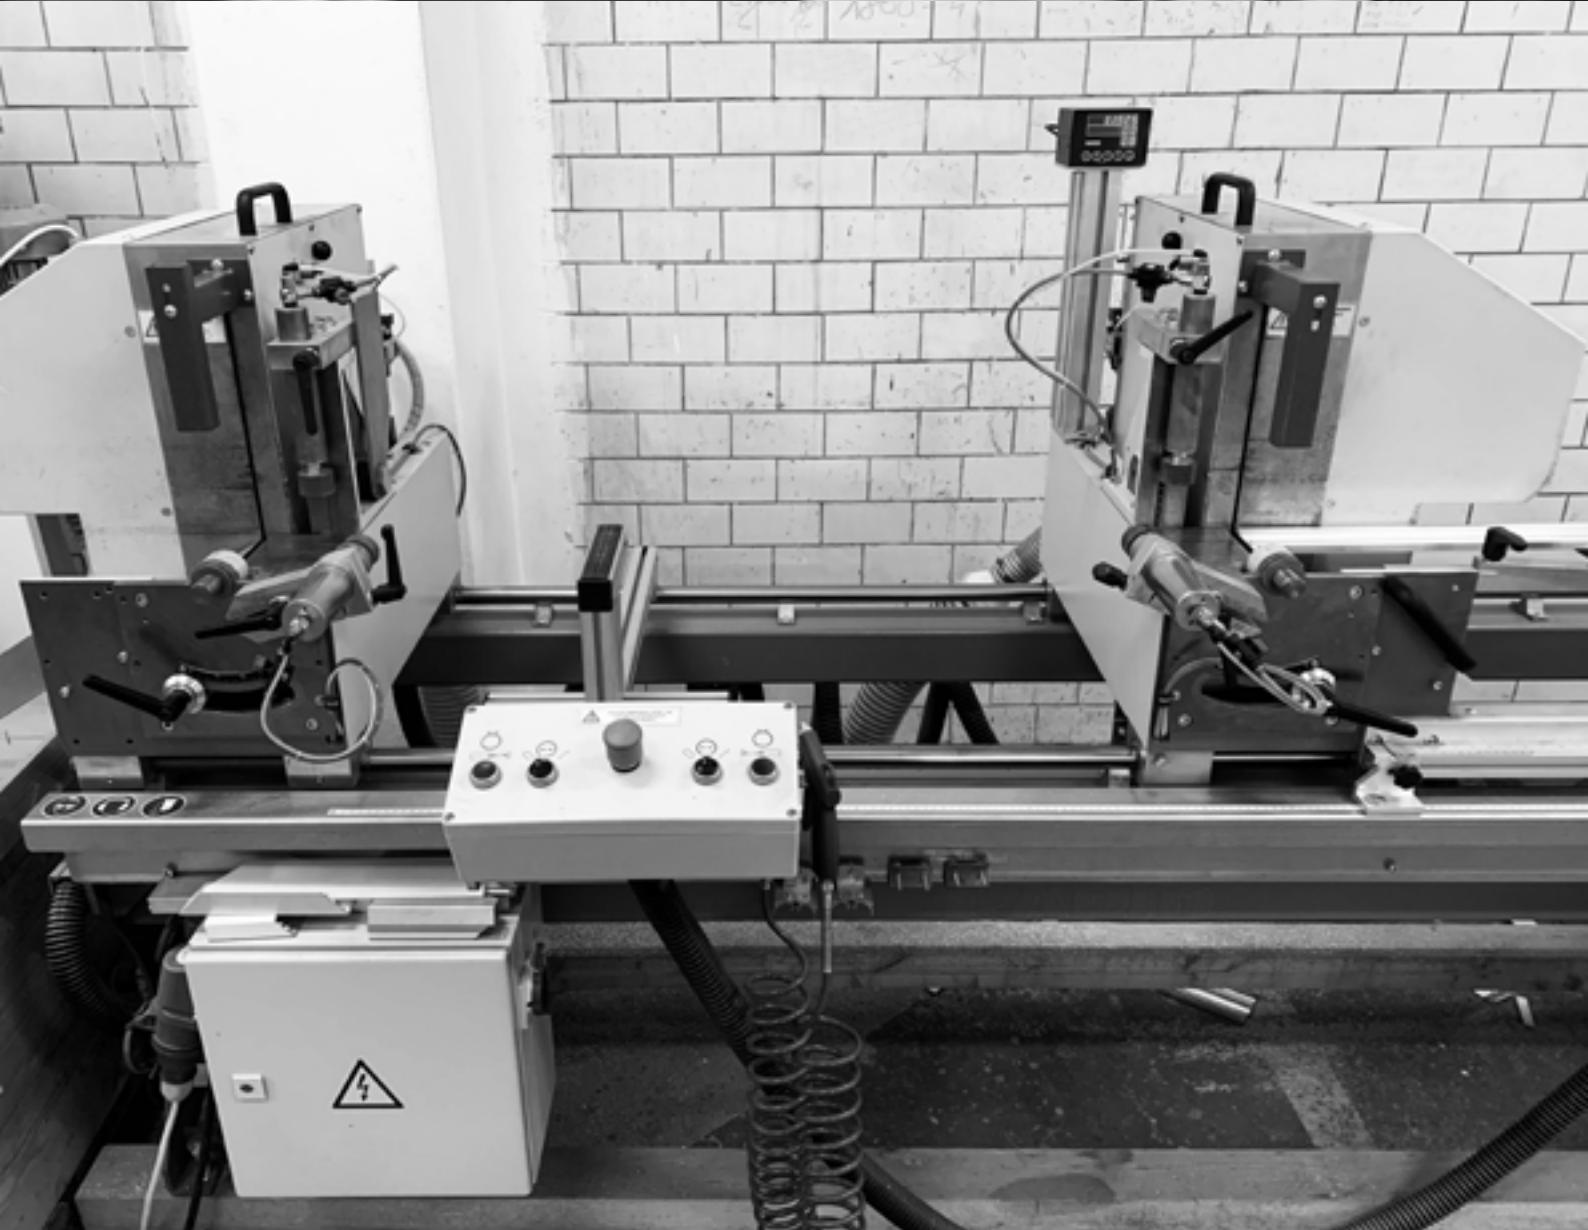










TECHNICAL INFORMATION

6

TECHNICAL INFORMATION

COLORS

Standard colors

	ELOX	/.
	WHITE	/WH
	BLACK	/BL
	SILVER	/SI
	ANTRACIT	/AT
	GOLD	/GL
	BRONZE	/BR


Other colors in RAL are an option

OPTICS

PMMA OPAL



PRISMATIC



CONNECTION

ON-OFF

- luminaire is delivered with 3-pole terminal block
- 3 core cable is needed

DALI

- luminaire is delivered with 5-pole terminal block
- 5 core cable is needed

TOUCHDIM

- luminaire is delivered with 4-pole terminal block
- 4 core cable is needed

WIRELESS

- luminaire is delivered with 3-pole terminal block
- 3 core cable is needed

SYMBOLS

	According to European directives
	Luminaire can not be covered with thermal insulation
	Lifetime
	Direct light
	Direct and indirect light
	Direct and sidewall light
	360° turnable light
	LED light source
	Driver inside luminaire
	Color Rendering Index
	Degree of protection against dust and humidity

COLOR TEMPERATURE

- 3000 Kelvin and 4000 Kelvin are standard
- 2700 Kelvin and 5600 Kelvin are an option depending on the type of luminaire

LUMINOUS FLUX

- Lumens data values are from light source
- Lumens data appearing in catalogue are the values provided by the manufacture of the light source

LIGHT DISTRIBUTION: DIRECT / INDIRECT VERSIONS

- Passive indirect symmetrical light distribution borrows light from direct light
- Active indirect symmetrical light distribution uses own LED light source for indirect light