


let's co-create
with ALARIK SLIM



 **BPM**Lighting®

Let's get brighter

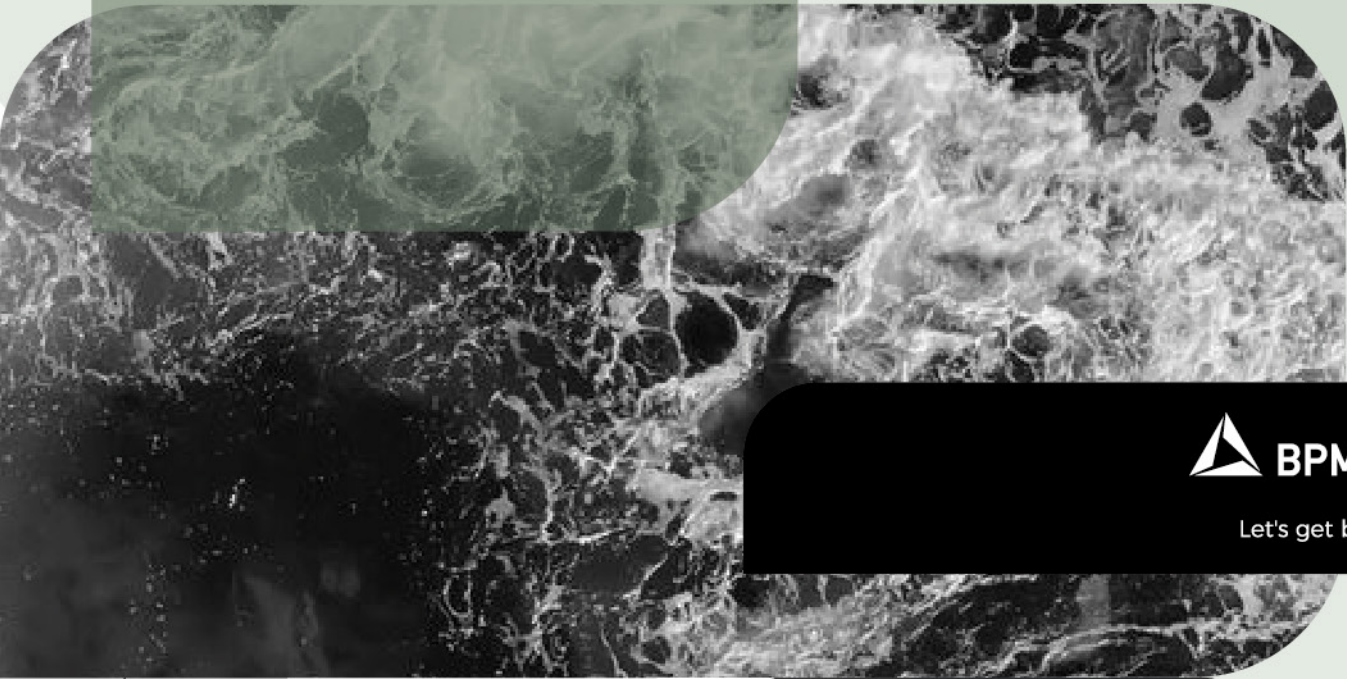



20224.TR

20224.SR
20224.PN

ALARIK SLIM

Infinite possibilities in mini version

 **BPM**Lighting®

Let's get brighter



Let's get brighter

ALARIK SLIM

Infinite possibilities in mini version

GENERAL DETAILS

REFERENCE:	20224
INSTALLATION:	Trimless Surface Pendant
EXTERNAL FINISH:	White · Black
MATERIAL:	Aluminium
IP DEGREE:	IP40
IK:	IK06
FORM:	Square
REGULATION:	DALI 1..10
UTILIZATION:	Indoor
WARRANTY:	5 years

GENERAL DIMENSIONS



20224.SR	: 26.5 X 54 X L mm.
20224.PN	: 26.5 X 54 X L mm.
20224.TR	: ext (70.1 X 54) 26.5 X 54 X L mm.

MAXIMUM CABLE LENGTH 3000 mm


20224.TR

20224.SR
20224.PN



20224.SR
20224.PN



ENERGY LABEL

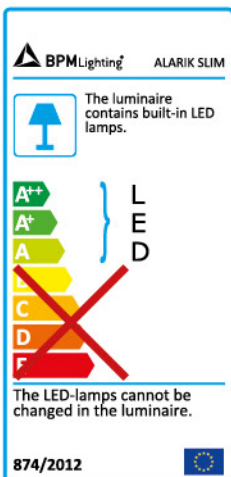

20224.TR

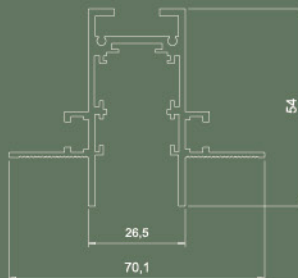



SLIM PATRICIA
S | M

FOR ALARIK SLIM

 **BPM**Lighting®

Let's get brighter

CE



Let's get brighter

SLIM PATRICIA S | M

FOR ALARIK SLIM

GENERAL DETAILS

REFERENCE:	11544 S 11545 M
INSTALLATION:	ALARIK SLIM MODULE
EXTERNAL FINISH:	.BK Black .W White
MATERIAL:	Aluminium
IP DEGREE:	IP20
IK:	IK06
REFLECTOR:	Round
LIGHT DIRECTION:	Oscillation
BEAM ANGLE:	15° 38° 60°

GENERAL DIMENSIONS


DIMENSIONS:	CROQUIS
MINIMUM DISTANCE TO ILLUMINATED OBJECT:	0.5 m

ELECTRICAL DETAILS

LAMP:	LED
LED TYPE:	BRIDGELUX
PROTECTION CLASS:	⏏
ENERGETIC EFFICIENCY:	A+
CONSTANT VOLTAGE:	48 V
VOLTAGE:	230 V
LIFE TIME:	50.000 h
LUMEN MAINTENANCE:	L80_B10: 50000
CRI:	≥90
MACADAM:	<3



ENERGY LABEL

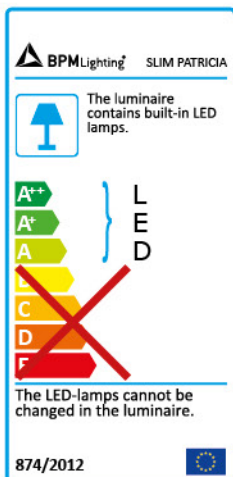




Let's get brighter

SLIM PATRICIA S | M

FOR ALARIK SLIM




SLIM PATRICIA S 11544

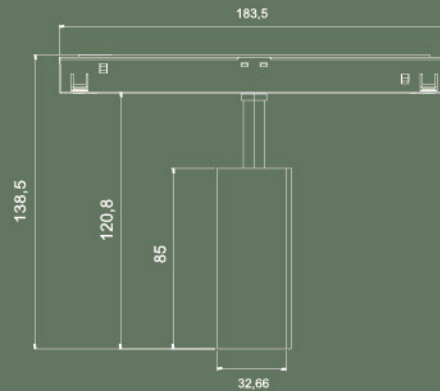

POWER	8W	EFFICIENCY	LUMENS
		EFF 2700K: 75 lm/w	2700K lm: 579 lm
		EFF 3000K: 79 lm/w	3000K lm: 607 lm
		EFF 4000K: 90 lm/w	4000K lm: 695 lm

SLIM PATRICIA M 11545

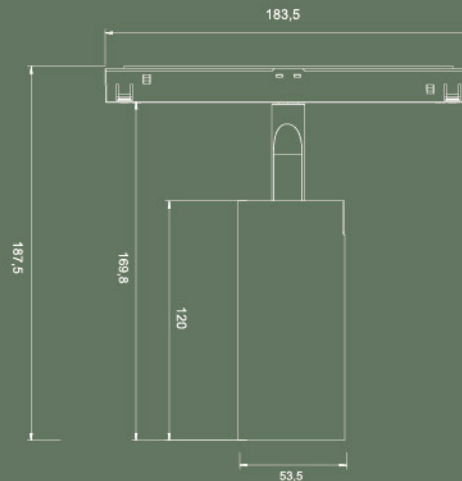

POWER	13W	EFFICIENCY	LUMENS
		EFF 2700K: 90 lm/w	2700K lm: 1173 lm
		EFF 3000K: 90 lm/w	3000K lm: 1181 lm
		EFF 4000K: 93 lm/w	4000K lm: 1207 lm

ENERGY LABEL

BPM Lighting SLIM PATRICIA

The luminaire contains built-in LED lamps.

A+
A
C
D
F

LED

The LED-lamps cannot be changed in the luminaire.

874/2012



SLIM PATRICIA
L

FOR ALARIK SLIM

 **BPM**Lighting®

Let's get brighter



Let's get brighter



SLIM PATRICIA L

FOR ALARIK SLIM

GENERAL DETAILS

REFERENCE:	11546 L
INSTALLATION:	ALARIK SLIM MODULE
EXTERNAL FINISH:	.BK Black .W White
MATERIAL:	Aluminium
IP DEGREE:	IP20
IK:	IK06
REFLECTOR:	Round
LIGHT DIRECTION:	Oscillation
BEAM ANGLE:	15° - 36° 36° - 60°


GENERAL DIMENSIONS

DIMENSIONS:	CROQUIS
MINIMUM DISTANCE TO ILLUMINATED OBJECT:	0.5 m

ELECTRICAL DETAILS

LAMP:	LED
LED TYPE:	BRIDGELUX
PROTECTION CLASS:	⏏
ENERGETIC EFFICIENCY:	A+
CONSTANT VOLTAGE:	48 V
VOLTAGE:	230 V
LIFE TIME:	50.000 h
LUMEN MAINTENANCE:	L80_B10: 50000
CRI:	≥90
MACADAM:	< 3

ENERGY LABEL

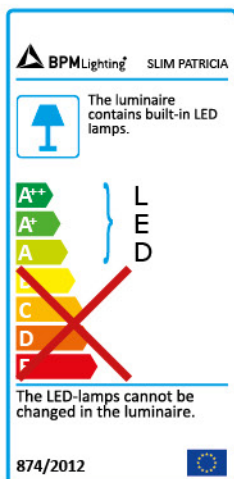

CE 

 **BPM**Lighting®



Let's get brighter

SLIM PATRICIA L


FOR ALARIK SLIM




SLIM PATRICIA L T1546

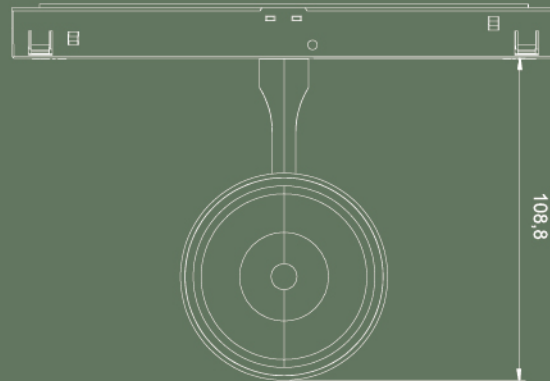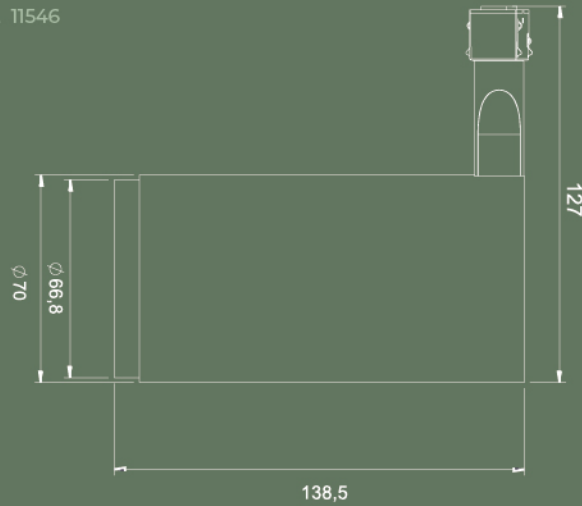

ENERGY LABEL


 **SLIM PATRICIA**

 The luminaire contains built-in LED lamps.


A++
A+
A
B
C
D
F

LED

The LED-lamps cannot be changed in the luminaire.

874/2012 

POWER	22W	EFFICIENCY	LUMENS
		EFF 2700K: 92 lm/w	2700K lm: 2038 lm
		EFF 3000K: 104 lm/w	3000K lm: 2254 lm
		EFF 4000K: 105 lm/w	4000K lm: 2320 lm

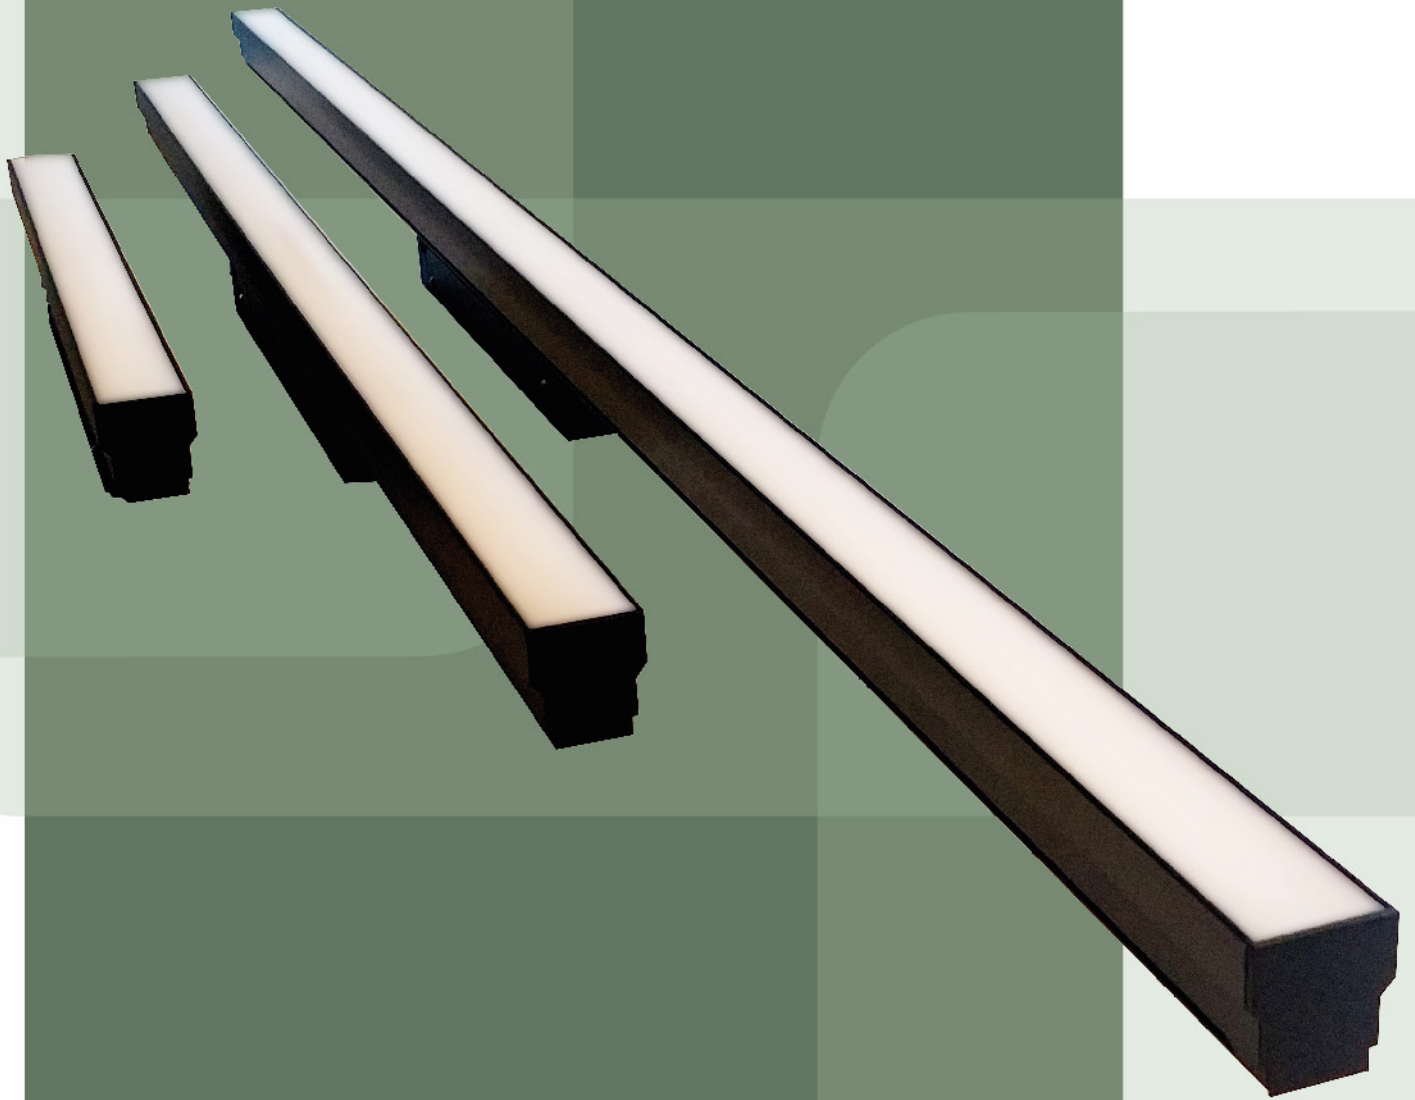

SLIM LED MODULES
FOR ALARIK SLIM



Let's get brighter



Let's get brighter

SLIM LED MODULES

FOR ALARIK SLIM

GENERAL DETAILS

REFERENCE:	11549.01 11549.02 11549.03
INSTALLATION:	ALARIK SLIM MODULE
EXTERNAL FINISH:	.BK Black
MATERIAL:	Aluminium
IP DEGREE:	IP20
IK:	IK06
LIGHT DIRECTION:	Fixed
OPTIC COVER:	Opal

GENERAL DIMENSIONS


DIMENSIONS:	11549.01: 303 X 43 X 22.8 mm. 11549.02 : 603 X 43 X 22.8 mm. 11549.03 : 903 X 43 X 22.8 mm.
MINIMUM DISTANCE TO ILLUMINATED OBJECT:	0.5 m

ELECTRICAL DETAILS

LAMP:	LED
LED TYPE:	OSRAM
PROTECTION CLASS:	⏏
ENERGETIC EFFICIENCY:	A+
CONSTANT VOLTAGE:	48 V
VOLTAGE:	230 V
LIFE TIME:	35.000 h
LUMEN MAINTENANCE:	L80_B10: 35000
CRI:	≥90
MACADAM:	< 3



ENERGY LABEL

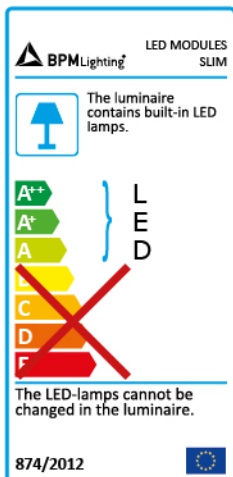



Let's get brighter

SLIM LED MODULES

FOR ALARIK SLIM




11549.01



POWER	8,9W	EFFICIENCY		LUMENS	
		EFF 2700K:	62 lm/w	2700K lm:	558 lm
		EFF 3000K:	63.6 lm/w	3000K lm:	560 lm
		EFF 4000K:	80 lm/w	4000K lm:	604 lm

15549.02

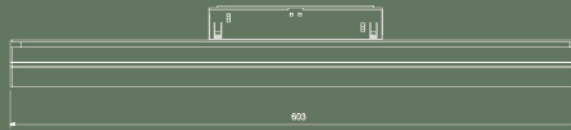

POWER	17.8W	EFFICIENCY		LUMENS	
		EFF 2700K:	62 lm/w	2700K lm:	1115 lm
		EFF 3000K:	63 lm/w	3000K lm:	1120 lm
		EFF 4000K:	80 lm/w	4000K lm:	1208 lm

15549.03



POWER	20.63W	EFFICIENCY		LUMENS	
		EFF 2700K:	62 lm/w	2700K lm:	1670 lm
		EFF 3000K:	63 lm/w	3000K lm:	1680 lm
		EFF 4000K:	80 lm/w	4000K lm:	1812 lm

ENERGY LABEL

BPM Lighting LED MODULES SLIM

The luminaire contains built-in LED lamps.

A⁺
A⁺
A
B
C
D
F

LED

The LED-lamps cannot be changed in the luminaire.

874/2012



 **BPM**Lighting®

Let's get brighter

Let's play

Versatility. Adding or removing magnetic accessories to achieve the desired atmosphere. Playing with light has never been so simple.



SLIM LENSES
FOR ALARIK SLIM



Let's get brighter



Let's get brighter



SLIM LENSES

FOR ALARIK SLIM

GENERAL DETAILS

REFERENCE:	11548.06 11548.12
INSTALLATION:	ALARIK SLIM MODULE
EXTERNAL FINISH:	.BK Black
MATERIAL:	Aluminium
IP DEGREE:	IP20
IK:	IK06
BEAM ANGLE:	15° 38°
LIGHT DIRECTION:	Fixed


GENERAL DIMENSIONS

DIMENSIONS:	* CROQUIS
MINIMUM DISTANCE TO ILLUMINATED OBJECT:	0.5 m

ELECTRICAL DETAILS

LAMP:	LED
LED TYPE:	OSRAM
PROTECTION CLASS:	⏏
ENERGETIC EFFICIENCY:	A+
CONSTANT VOLTAGE:	48 V
VOLTAGE:	230 V
LIFE TIME:	35.000 h
LUMEN MAINTENANCE:	L80_B10: 35000
CRI:	≥90
MACADAM:	<3

ENERGY LABEL

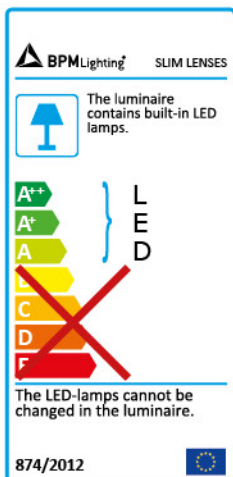




Let's get brighter

SLIM LENSES

FOR ALARIK SLIM




11548.12

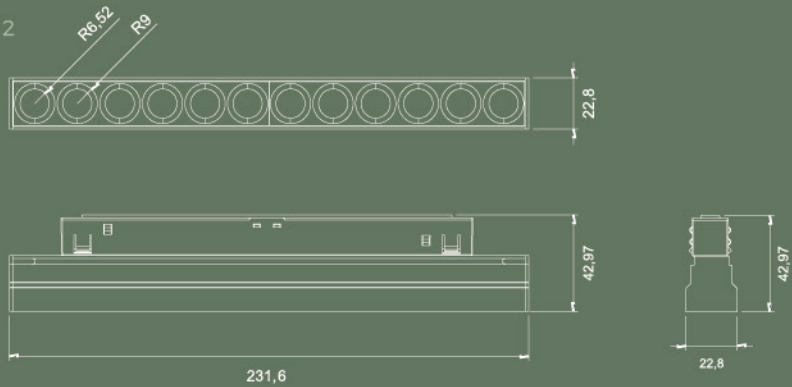

POWER	18 W	EFFICIENCY		LUMENS	
		EFF 2700K:	74 lm/w	2700K lm:	1320 lm
		EFF 3000K:	83 lm/w	3000K lm:	1511 lm
		EFF 4000K:	93 lm/w	4000K lm:	1654 lm

11548.06

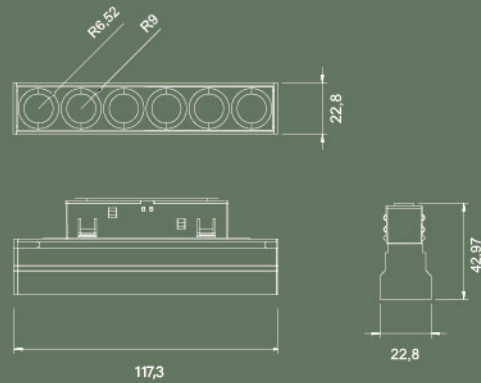

POWER	9 W	EFFICIENCY		LUMENS	
		EFF 2700K:	74 lm/w	2700K lm:	660 lm
		EFF 3000K:	83 lm/w	3000K lm:	750 lm
		EFF 4000K:	93 lm/w	4000K lm:	827 lm

ENERGY LABEL

BPM Lighting SLIM LENSES

The luminaire contains built-in LED lamps.

A+
A
C
D
F

LED

The LED-lamps cannot be changed in the luminaire.

874/2012



SLIM MOTION LENSES
FOR ALARIK SLIM



Let's get brighter



Let's get brighter

SLIM MOTION LENSES

FOR ALARIK SLIM




GENERAL DETAILS

REFERENCE:	11547
INSTALLATION:	ALARIK SLIM MODULE
EXTERNAL FINISH:	.BK Black
MATERIAL:	Aluminium
IP DEGREE:	IP20
IK:	IK06
BEAM ANGLE:	15° 38°
LIGHT DIRECTION:	Oscillation

GENERAL DIMENSIONS

DIMENSIONS:	* CROQUIS
MINIMUM DISTANCE TO ILLUMINATED OBJECT:	0.5 m

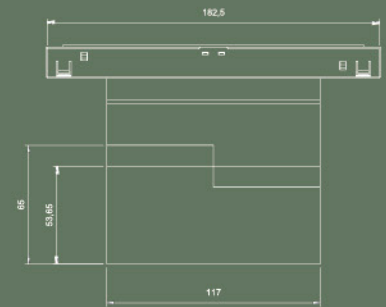


ELECTRICAL DETAILS

LAMP:	LED
LED TYPE:	OSRAM
PROTECTION CLASS:	III
ENERGETIC EFFICIENCY:	A+
CONSTANT VOLTAGE:	48 V
VOLTAGE:	230 V
LIFE TIME:	35.000 h
LUMEN MAINTENANCE:	L80_B10: 35000
CRI:	≥90
MACADAM:	<3



ENERGY LABEL

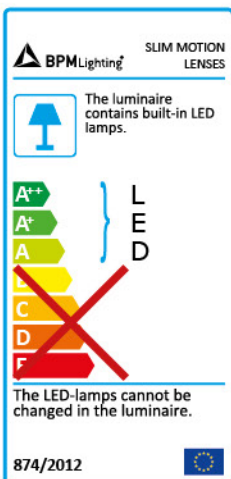

POWER	9,18 W	EFFICIENCY		LUMENS	
		EFF 2700K:	74 lm/w	2700K lm:	660 lm
		EFF 3000K:	82,86 lm/w	3000K lm:	750 lm
		EFF 4000K:	93 lm/w	4000K lm:	827 lm




SLIM WALL WASHER
FOR ALARIK SLIM

 **BPM**Lighting®

Let's get brighter



Let's get brighter



SLIM WALL WASHER


FOR ALARIK SLIM

GENERAL DETAILS

REFERENCE:	11550
INSTALLATION:	ALARIK SLIM MODULE
EXTERNAL FINISH:	.BK Black
MATERIAL:	Aluminium
IP DEGREE:	IP20
IK:	IK06
BEAM ANGLE:	Wall washer
LIGHT DIRECTION:	Fixed

GENERAL DIMENSIONS

DIMENSIONS:	* CROQUIS
MINIMUM DISTANCE TO ILLUMINATED OBJECT:	0.5 m

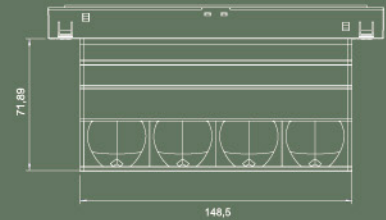

ELECTRICAL DETAILS

LAMP:	LED
LED TYPE:	CREE
PROTECTION CLASS:	⏏
ENERGETIC EFFICIENCY:	A+
CONSTANT VOLTAGE:	48 V
VOLTAGE:	230 V
LIFE TIME:	35.000 h
LUMEN MAINTENANCE:	L80_B10: 35000
CRI:	≥90
MACADAM:	<3

ENERGY LABEL

BPM Lighting WALL WASHER

The luminaire contains built-in LED lamps.

A++
A+
A
B
C
D
E
F

LED

The LED-lamps cannot be changed in the luminaire.

874/2012

		EFFICIENCY	LUMENS
POWER	13W	EFF 2700K: 85 lm/w	2700K lm: 1100 lm
		EFF 3000K: 87 lm/w	3000K lm: 1169 lm
		EFF 4000K: 100 lm/w	4000K lm: 1251 lm