



FACE
The Contemporary Classic

 **BPM**Lighting®

Let's get brighter



Let's get brighter

FACE

The Contemporary Classic



GENERAL DETAILS

REFERENCE:	20205.30.PN 20205.40.PN 20207.30.PN 20207.40.PN 20205.10.SR 20205.10.RF
INSTALLATION:	Pendant Surface Recessed with Frame
EXTERNAL FINISH:	White · Black
MATERIAL:	Aluminium
IP DEGREE:	IP20
FORM:	Round
IK:	IK06
LIGHT DIRECTION:	Fixed
REGULATION:	1..10V · Push · DALI · Non Dimm
BEAM ANGLE:	38°
UTILIZATION:	Indoor
WARRANTY:	5 years

GENERAL DIMENSIONS

	20205.30.PN: Ø40X300 20205.40.PN: Ø40X400 20207.30.PN: Ø60X300 20205.40.PN: Ø60X400 20205.10.SR: Ø40X140 20205.10.RF: Ø40X122
MAXIMUM CABLE LENGTH	3000 mm
MINIMUM DISTANCE TO ILLUMINATED OBJECT:	0.5 m

ELECTRICAL DETAILS

LAMP:	Bridgelux
PROTECTION CLASS:	⊕
ENERGETIC EFFICIENCY:	A
DRIVER:	Included (remote if dimmable) - * always remote
I:	20205.30.PN: 500mA 20205.40.PN: 500mA 20207.30.PN: 700mA 20205.40.PN: 700mA *20205.10.SR: 350mA *20205.10.RF: 350mA
VOLTAGE:	220 - 240 V
LIFE TIME:	50.000 h
LUMEN MAINTENANCE:	L80_B10: 50.000 h
CRI:	>90
MACADAM:	20205.30.PN: 4 20205.40.PN: 4 20207.30.PN: 3 20205.40.PN: 3 20205.10.SR: 3 20205.10.RF: 3

CE 

 **BPM**Lighting®

Let's get brighter




FACE

The Contemporary Classic

ELECTRICAL DETAILS

POWER	20205.30.PN	20205.40.PN	20207.30.PN	20207.40.PN	20205.10.SR	20205.10.RF
WATTS:	12	12	18	18	8	8
EFFICIENCY						
EFF 2700K:	54 lm/w	54 lm/w	66 lm/w	66 lm/w	62 lm/w	62 lm/w
EFF 3000K:	54 lm/w	54 lm/w	68 lm/w	68 lm/w	62 lm/w	62 lm/w
EFF 4000K:	55 lm/w	55 lm/w	70 lm/w	70 lm/w	68 lm/w	68 lm/w
LUMENS						
2700K lm:	587 lm	587 lm	1056 lm	1056 lm	469 lm	469 lm
3000K lm:	588 lm	588 lm	1078 lm	1078 lm	482 lm	482 lm
4000K lm:	597 lm	597 lm	1099 lm	1099 lm	495 lm	495 lm

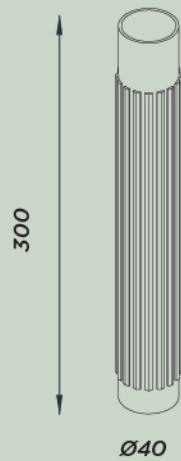

20205.30




20205.40

CE 

 **BPM**Lighting®

Let's get brighter

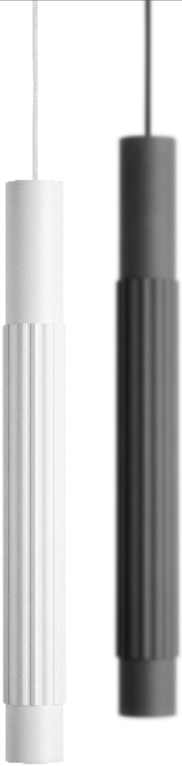


FACE


The Contemporary Classic




20207.30

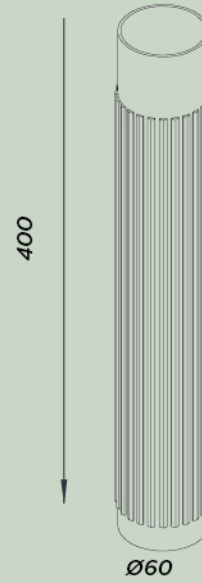

20207.40

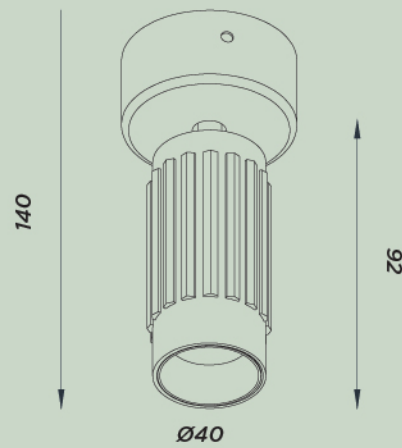

20205.SR

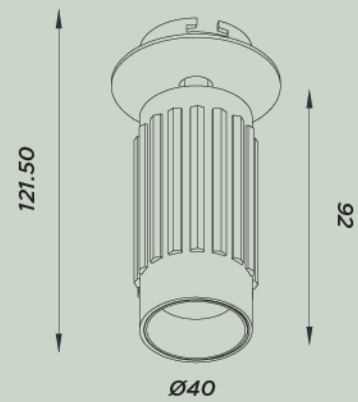

20205.RF