

KIERA CEM
SERENE AND ATEMPORAL

 **BPM**Lighting®

Let's get brighter

CE 



Let's get brighter



KIERA CEM

S | M | L


GENERAL DETAILS

| | |
|------------------|---------------------------------|
| REFERENCE: | 20208 S M L |
| INSTALLATION: | Pendant |
| EXTERNAL FINISH: | Black |
| MATERIAL: | Aluminium and Cement |
| IP DEGREE: | IP20 |
| FORM: | Round |
| IK: | IK06 |
| LIGHT DIRECTION: | Fixed |
| REGULATION: | 1..10V · Push · DALI · Non Dimm |
| BEAM ANGLE: | 38° |
| UTILIZATION: | Indoor |
| WARRANTY: | 5 years |

GENERAL DIMENSIONS

| | |
|---|-------------------------|
| | 20208 S : Ø56 x 197 mm |
| | 20208 M : Ø75 x 269mm |
| | 20208 L : Ø100 x 342 mm |
| MAXIMUM CABLE LENGTH | 3000 mm |
| MINIMUM DISTANCE TO ILLUMINATED OBJECT: | 0.5 m |

ELECTRICAL DETAILS

| | |
|-----------------------|---|
| LAMP: | LED |
| PROTECTION CLASS: |  |
| ENERGETIC EFFICIENCY: | A++ |
| DRIVER: | Included (remote if dimmable) |
| I: | S: 500 mA M: 700 mA L: 500 mA |
| VOLTAGE: | 220 - 240 V |
| LIFE TIME: | 35.000 h |
| LUMEN MAINTENANCE: | L80_B10: 35000 h |
| CRI: | >90 |
| MACADAM: | <3 |
| UGR: | 20 |

CE 



Let's get brighter





KIERA CEM



S | M | L

ELECTRICAL DETAILS



| POWER | S | M | L |
|------------|---------|---------|---------|
| WATTS: | 4,5 W | 7 W | 18 W |
| EFFICIENCY | | | |
| EFF 2700K: | 78 lm/w | 81 lm/w | 70 lm/w |
| EFF 3000K: | 79 lm/w | 82 lm/w | 83 lm/w |
| EFF 4000K: | 82 lm/w | 85 lm/w | 96 lm/w |
| LUMENS | | | |
| 2700K lm: | 411 lm | 572 lm | 1396 lm |
| 3000K lm: | 447 lm | 574 lm | 1655 lm |
| 4000K lm: | 488 lm | 594 lm | 1962 lm |

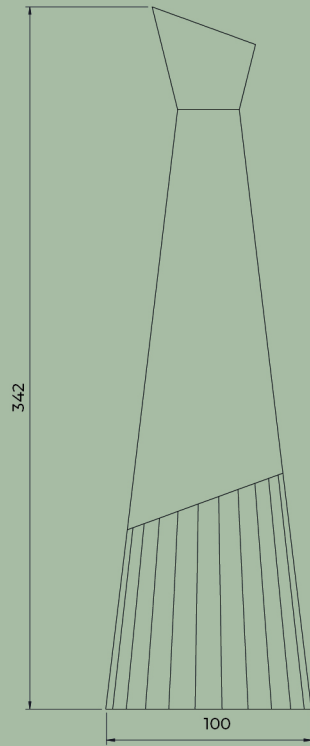


20208 L

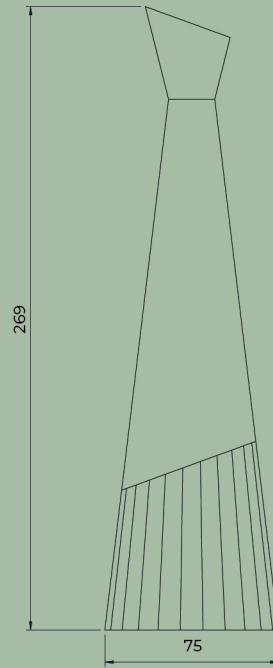

20208 M

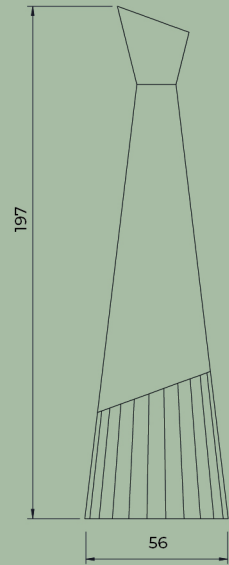

20208 S

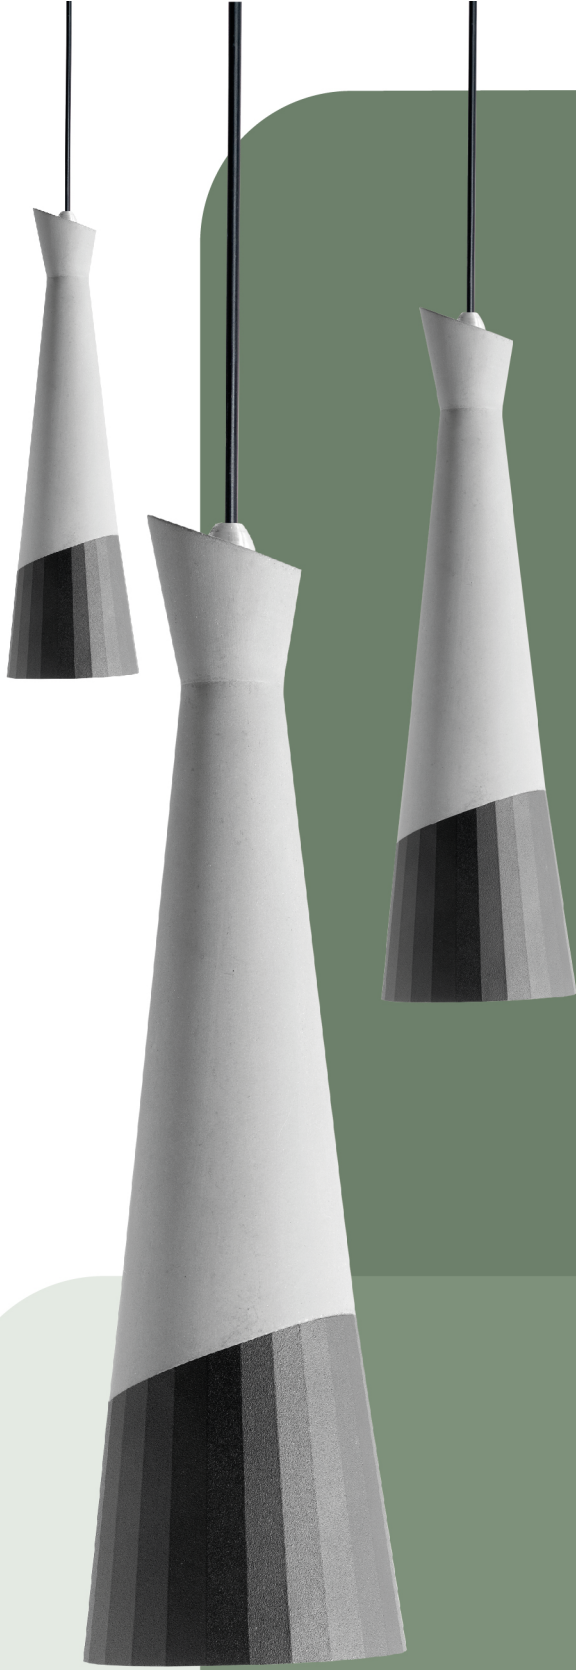

KIERA CEM

SERENE AND ATEMPORAL

 **BPM**Lighting®

Let's get brighter