

SLIM LED MODULES

FOR ALARIK SLIM

 **BPM**Lighting®

Let's get brighter



Let's get brighter

SLIM LED MODULES

FOR ALARIK SLIM

GENERAL DETAILS

REFERENCE:	11549.01 11549.02 11549.03
INSTALLATION:	ALARIK SLIM MODULE
EXTERNAL FINISH:	.BK Black .W White
MATERIAL:	Aluminium
IP DEGREE:	IP20
IK:	IK06
LIGHT DIRECTION:	Fixed
OPTIC COVER:	Opal

GENERAL DIMENSIONS


DIMENSIONS:	11549.01: 303 X 43 X 22.8 mm. 11549.02 : 603 X 43 X 22.8 mm. 11549.03 : 903 X 43 X 22.8 mm.
MINIMUM DISTANCE TO ILLUMINATED OBJECT:	0.5 m

ELECTRICAL DETAILS

LAMP:	LED
LED TYPE:	OSRAM
PROTECTION CLASS:	⚡
ENERGETIC EFFICIENCY:	A+
CONSTANT VOLTAGE:	48 V
VOLTAGE:	230 V
LIFE TIME:	35.000 h
LUMEN MAINTENANCE:	L80_B10: 35000
CRI:	≥90
MACADAM:	< 3



ENERGY LABEL

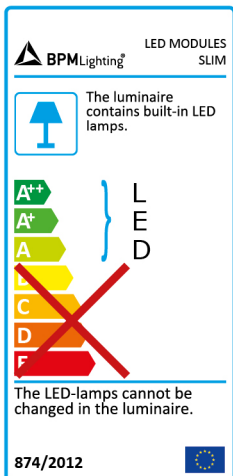




Let's get brighter

SLIM LED MODULES

FOR ALARIK SLIM




11549.01




POWER	8,9W	EFFICIENCY	LUMENS
		EFF 2700K: 62 lm/w	2700K lm: 558 lm
		EFF 3000K: 63.6 lm/w	3000K lm: 560 lm
		EFF 4000K: 80 lm/w	4000K lm: 604 lm

15549.02

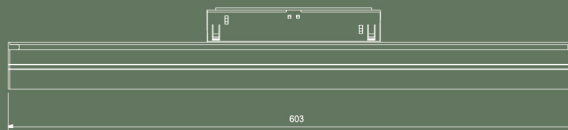

POWER	17.8W	EFFICIENCY	LUMENS
		EFF 2700K: 62 lm/w	2700K lm: 1115 lm
		EFF 3000K: 63 lm/w	3000K lm: 1120 lm
		EFF 4000K: 80 lm/w	4000K lm: 1208 lm

15549.03



POWER	20.63W	EFFICIENCY	LUMENS
		EFF 2700K: 62 lm/w	2700K lm: 1670 lm
		EFF 3000K: 63 lm/w	3000K lm: 1680 lm
		EFF 4000K: 80 lm/w	4000K lm: 1812 lm

ENERGY LABEL

BPM Lighting LED MODULES SLIM

The luminaire contains built-in LED lamps.

A⁺ } LED
A }
C }
D }
F }

The LED-lamps cannot be changed in the luminaire.

874/2012