



## SLIM LENSES

FOR ALARIK SLIM



Let's get brighter



Let's get brighter



## SLIM LENSES

FOR ALARIK SLIM

### GENERAL DETAILS

REFERENCE:	11548.06   11548.12
INSTALLATION:	ALARIK SLIM MODULE
EXTERNAL FINISH:	.BK Black   .W White
MATERIAL:	Aluminium
IP DEGREE:	IP20
IK:	IK06
BEAM ANGLE:	15°   38°
LIGHT DIRECTION:	Fixed


### GENERAL DIMENSIONS

DIMENSIONS:	* CROQUIS
MINIMUM DISTANCE TO ILLUMINATED OBJECT:	0.5 m

### ELECTRICAL DETAILS

LAMP:	LED
LED TYPE:	OSRAM
PROTECTION CLASS:	⏏
ENERGETIC EFFICIENCY:	A+
CONSTANT VOLTAGE:	48 V
VOLTAGE:	230 V
LIFE TIME:	35.000 h
LUMEN MAINTENANCE:	L80_B10: 35000
CRI:	≥ 90
MACADAM:	<3

### ENERGY LABEL

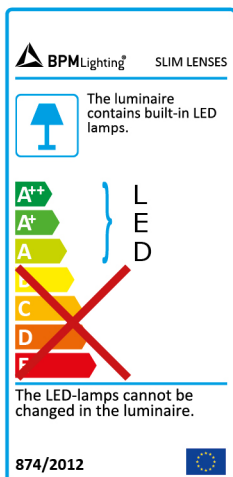




Let's get brighter

# SLIM LENSES

FOR ALARIK SLIM




11548.12

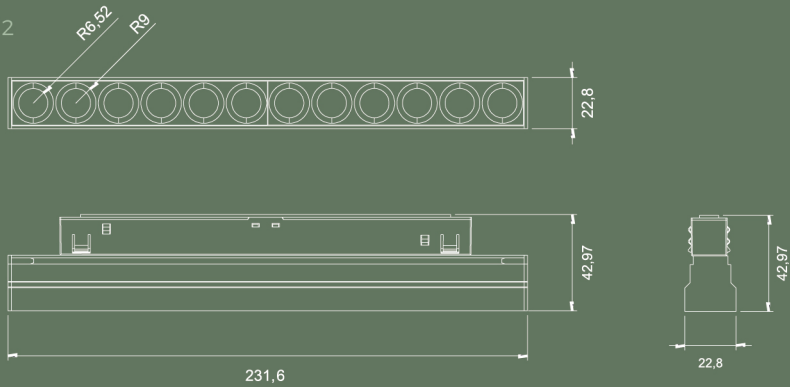

		EFFICIENCY	LUMENS
POWER	18 W	EFF 2700K: 74 lm/w	2700K lm: 1320 lm
		EFF 3000K: 83 lm/w	3000K lm: 1511 lm
		EFF 4000K: 93 lm/w	4000K lm: 1654 lm

11548.06

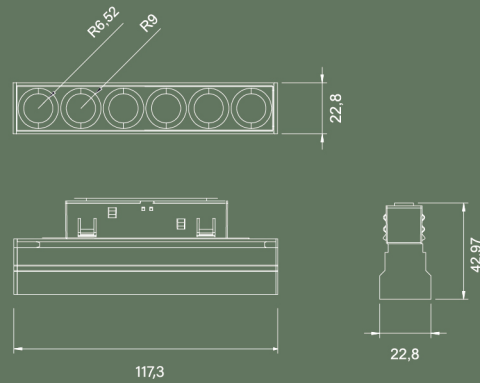

		EFFICIENCY	LUMENS
POWER	9 W	EFF 2700K: 74 lm/w	2700K lm: 660 lm
		EFF 3000K: 83 lm/w	3000K lm: 750 lm
		EFF 4000K: 93 lm/w	4000K lm: 827 lm

## ENERGY LABEL

**BPM Lighting®** SLIM LENSES

The luminaire contains built-in LED lamps.

**A<sup>+</sup>** } **LED**  
**A** }  
**B** }  
**C** }  
**D** }  
**F** }

The LED-lamps cannot be changed in the luminaire.

874/2012