



SLIM MOTION LENSES

FOR ALARIK SLIM

 **BPM**Lighting®

Let's get brighter



Let's get brighter



SLIM MOTION LENSES

FOR ALARIK SLIM

GENERAL DETAILS


REFERENCE: 11547
 INSTALLATION: ALARIK SLIM MODULE
 EXTERNAL FINISH: .BK Black | .W White
 MATERIAL: Aluminium
 IP DEGREE: IP20
 IK: IK06
 BEAM ANGLE: 15° | 38°
 LIGHT DIRECTION: Oscillation

GENERAL DIMENSIONS


DIMENSIONS: * CROQUIS
 MINIMUM DISTANCE TO ILLUMINATED OBJECT: 0.5 m

ELECTRICAL DETAILS

LAMP: LED
 LED TYPE: OSRAM
 PROTECTION CLASS: III
 ENERGETIC EFFICIENCY: A+
 CONSTANT VOLTAGE: 48 V
 VOLTAGE: 230 V
 LIFE TIME: 35.000 h
 LUMEN MAINTENANCE: L80_B10: 35000
 CRI: ≥ 90
 MACADAM: <3

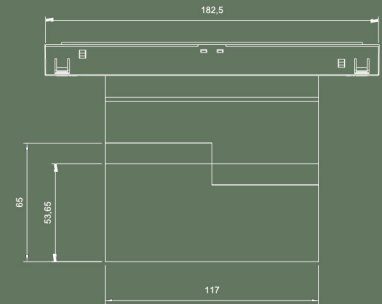

ENERGY LABEL

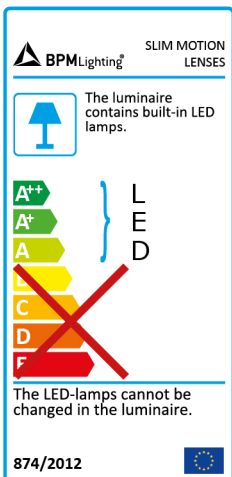

POWER	9,18 W	EFFICIENCY		LUMENS	
		EFF 2700K:	74 lm/w	2700K lm:	660 lm
		EFF 3000K:	82,86 lm/w	3000K lm:	750 lm
		EFF 4000K:	93 lm/w	4000K lm:	827 lm