



SLIM PATRICIA
L

FOR ALARIK SLIM

 **BPM**Lighting®

Let's get brighter

CE 



Let's get brighter



SLIM PATRICIA L

FOR ALARIK SLIM


GENERAL DETAILS

REFERENCE:	11546 L
INSTALLATION:	ALARIK SLIM MODULE
EXTERNAL FINISH:	.BK Black .W White
MATERIAL:	Aluminium
IP DEGREE:	IP20
IK:	IK06
REFLECTOR:	Round
LIGHT DIRECTION:	Oscillation
BEAM ANGLE:	15° - 36° 36° - 60°


GENERAL DIMENSIONS

DIMENSIONS:	CROQUIS
MINIMUM DISTANCE TO ILLUMINATED OBJECT:	0.5 m

ELECTRICAL DETAILS

LAMP:	LED
LED TYPE:	BRIDGELUX
PROTECTION CLASS:	
ENERGETIC EFFICIENCY:	A+
CONSTANT VOLTAGE:	48 V
VOLTAGE:	230 V
LIFE TIME:	50.000 h
LUMEN MAINTENANCE:	L80_B10: 50000
CRI:	≥ 90
MACADAM:	< 3

ENERGY LABEL

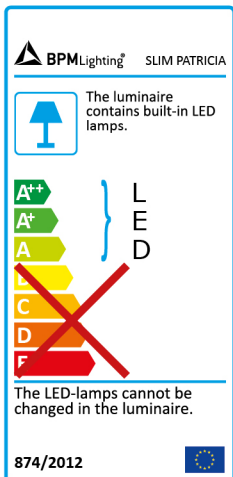

CE 

 **BPM**Lighting®



Let's get brighter

SLIM PATRICIA L


FOR ALARIK SLIM




SLIM PATRICIA L 11546

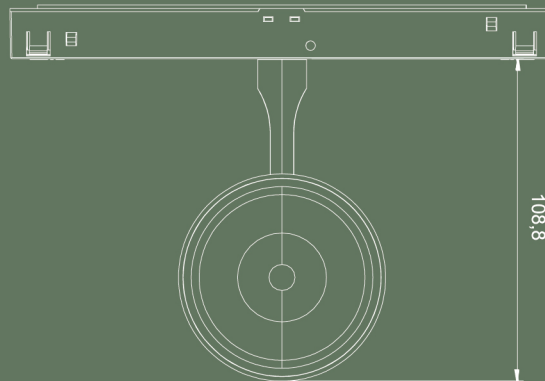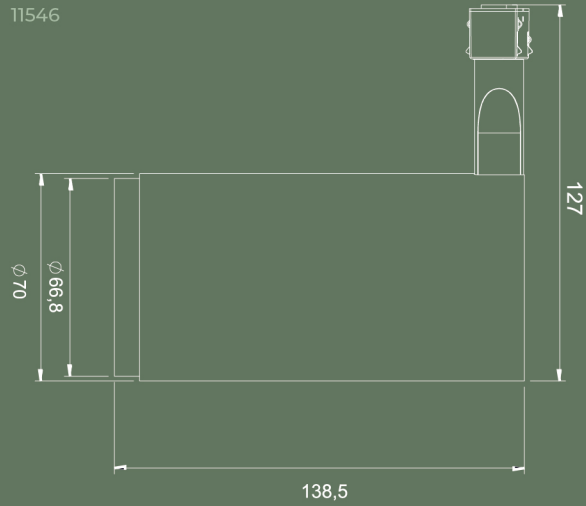

ENERGY LABEL


 **BPM**Lighting® SLIM PATRICIA

 The luminaire contains built-in LED lamps.

A⁺⁺
A⁺
A
B
C
D
F

LED

The LED-lamps cannot be changed in the luminaire.

874/2012 

POWER	22W	EFFICIENCY		LUMENS	
		EFF	lm/w	lm	lm
		EFF 2700K:	92 lm/w	2700K lm:	2038 lm
		EFF 3000K:	104 lm/w	3000K lm:	2254 lm
		EFF 4000K:	105 lm/w	4000K lm:	2320 lm