



SLIM PATRICIA
S | M

FOR ALARIK SLIM



Let's get brighter



Let's get brighter

SLIM PATRICIA S | M

FOR ALARIK SLIM



GENERAL DETAILS

REFERENCE:	11544 S 11545 M
INSTALLATION:	ALARIK SLIM MODULE
EXTERNAL FINISH:	.BK Black .W White
MATERIAL:	Aluminium
IP DEGREE:	IP20
IK:	IK06
REFLECTOR:	Round
LIGHT DIRECTION:	Oscillation
BEAM ANGLE:	15° 38° 60°


GENERAL DIMENSIONS

DIMENSIONS:	CROQUIS
MINIMUM DISTANCE TO ILLUMINATED OBJECT:	0.5 m

ELECTRICAL DETAILS

LAMP:	LED
LED TYPE:	BRIDGELUX
PROTECTION CLASS:	⏏
ENERGETIC EFFICIENCY:	A+
CONSTANT VOLTAGE:	48 V
VOLTAGE:	230 V
LIFE TIME:	50.000 h
LUMEN MAINTENANCE:	L80_B10: 50000
CRI:	≥90
MACADAM:	<3

ENERGY LABEL

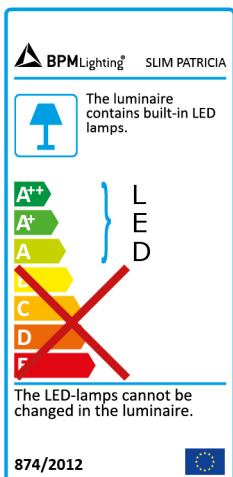




Let's get brighter

SLIM PATRICIA S | M


FOR ALARIK SLIM



SLIM PATRICIA S 11544

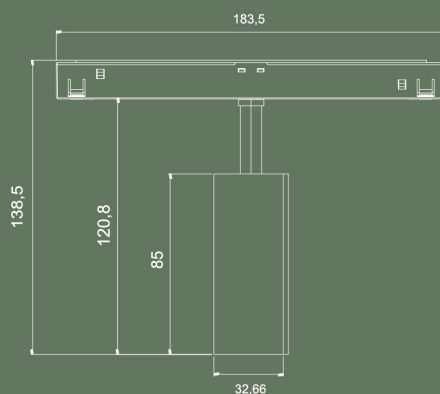

SLIM PATRICIA M 11545

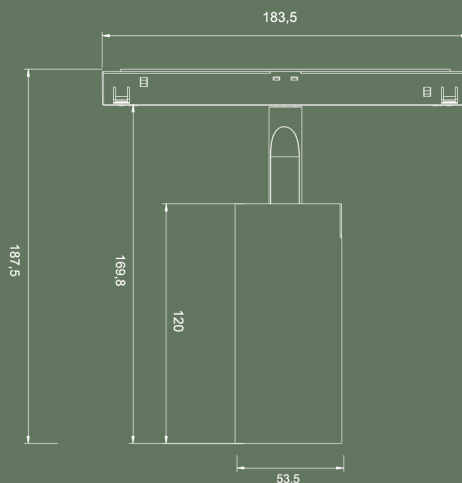

POWER	8W	EFFICIENCY		LUMENS	
		EFF 2700K:	75 lm/w	2700K lm:	579 lm
		EFF 3000K:	79 lm/w	3000K lm:	607 lm
		EFF 4000K:	90 lm/w	4000K lm:	695 lm

POWER	13W	EFFICIENCY		LUMENS	
		EFF 2700K:	90 lm/w	2700K lm:	1173 lm
		EFF 3000K:	90 lm/w	3000K lm:	1181 lm
		EFF 4000K:	93 lm/w	4000K lm:	1207 lm

ENERGY LABEL

BPM Lighting SLIM PATRICIA

The luminaire contains built-in LED lamps.

A++
A+
A
B
C
D
E
F

LED

The LED-lamps cannot be changed in the luminaire.

874/2012