



# NORLYS

# AULIX

WE LIVE FOR LIGHTING

---

## SVĚTELNÉ STUDIO

Náměstí Na Sádkách 705  
252 41 Dolní Břežany (Praha západ)

Telefon: +420 246 083 152

Mobil.: +420 702 061 783

E-mail: [studio@aulix.cz](mailto:studio@aulix.cz)

Web: [www.aulix.cz](http://www.aulix.cz)

Sledujte nás také na sociálních sítích:



# Brightening your life with our passion for light

Inspired by the simplicity and timeless aesthetics of Scandinavian design, we draw from nature to craft lighting fixtures that exude elegance and sophistication. NORLYS products embody the core values of Scandinavian design, embracing minimalism, functionality and enduring beauty. With NORLYS, you can trust that our lighting solutions will effortlessly integrate into any space, elevating its ambiance and leaving a lasting impression.



**30 +** \_\_\_\_\_ years on the market

**300 +** \_\_\_\_\_ team members

**24** \_\_\_\_\_ countries

**5 mln** \_\_\_\_\_ unit sold

# We're focused on our core values

At NORLYS, our values are at the core of everything we do. They shape our culture, inspire our actions, and drive our passion for delivering the best lighting solutions. We believe that by upholding these values, we can make a positive impact on the world of lighting.



## For people

We're field experts who enjoy sharing knowledge and cherish long lasting customer relationships.

Commitment to our Clients has been our path for years, and we tread it with confidence. We support with pre-sales advice and information, and we follow up after the purchase. They can count on our openness and professionalism. They can rely on us. We put the Clients at the center of everything we do. We strive to deeply understand their varied needs, to allay fears, and surpass expectations with a wide range of diverse and unique products and services tailored to individual needs.



## Responsibility

We shape the world with gentle passion, showcasing its beauty in the finest light, because it deserves nothing less.

We can't operate any other way. We want to leave the world as we found it, with all its beauty and diversity. We responsibly use renewable resources, continuously improve energy-efficient production methods, and create top-quality luminaries with a minimal impact on the environment. Building a responsible and ethical company is a continuous, long-term effort on processes without compromises or half measures.



## Passion for light

We focus on the future, emphasizing sustainability and our impact on future generations.

We strive to create extraordinary places, providing unique lighting experiences. By combining cutting-edge innovations, professionalism, enthusiasm, and the experience of our team, we obtain a powerful tool. A tool for extracting the best qualities and meanings from spaces. Our commitment to designing unique and practical lighting solutions enriches and invigorates space.



# Over 30 years of experience

NORLYS is the embodiment of the Scandinavian spirit. It was born in the frosty North in Norway, reflecting its simplicity, resilience, and naturalness. NORLYS is the answer to the long polar nights, the harshness of nature, and the need for safety. That is why we have been lighting spaces for 30 years. It is our passion and mission.

Today our main production plant and stock facilities are established in Poland and Sweden. We have our own aluminium foundry, a press department for the production of steel luminaires, and a hot-dip galvanising department. Apart from that, we have a machining department which includes CNC machining, a powder-coating department, and assembly departments. Our pride is our own Testing Laboratory equipped with specialised equipment of the highest class for the testing of luminaires. This lab performs measurements according to the requirements specific to ENEC and in accordance with the ISO 17025 standard.

We are an international company. Our subsidiaries located in Norway, Sweden, France, Italy and Poland are accompanied by an extensive worldwide sales network of professional distributors. This year, we are proud to announce that we have achieved the EcoVadis Bronze certification, reaffirming our commitment to sustainable development and corporate social responsibility.



Brand new production hall (1998)



Swedish warehouse (2011)




Die casting and tool shop (2011)



New warehouse and assembly (2015)

# How to read the catalogue?

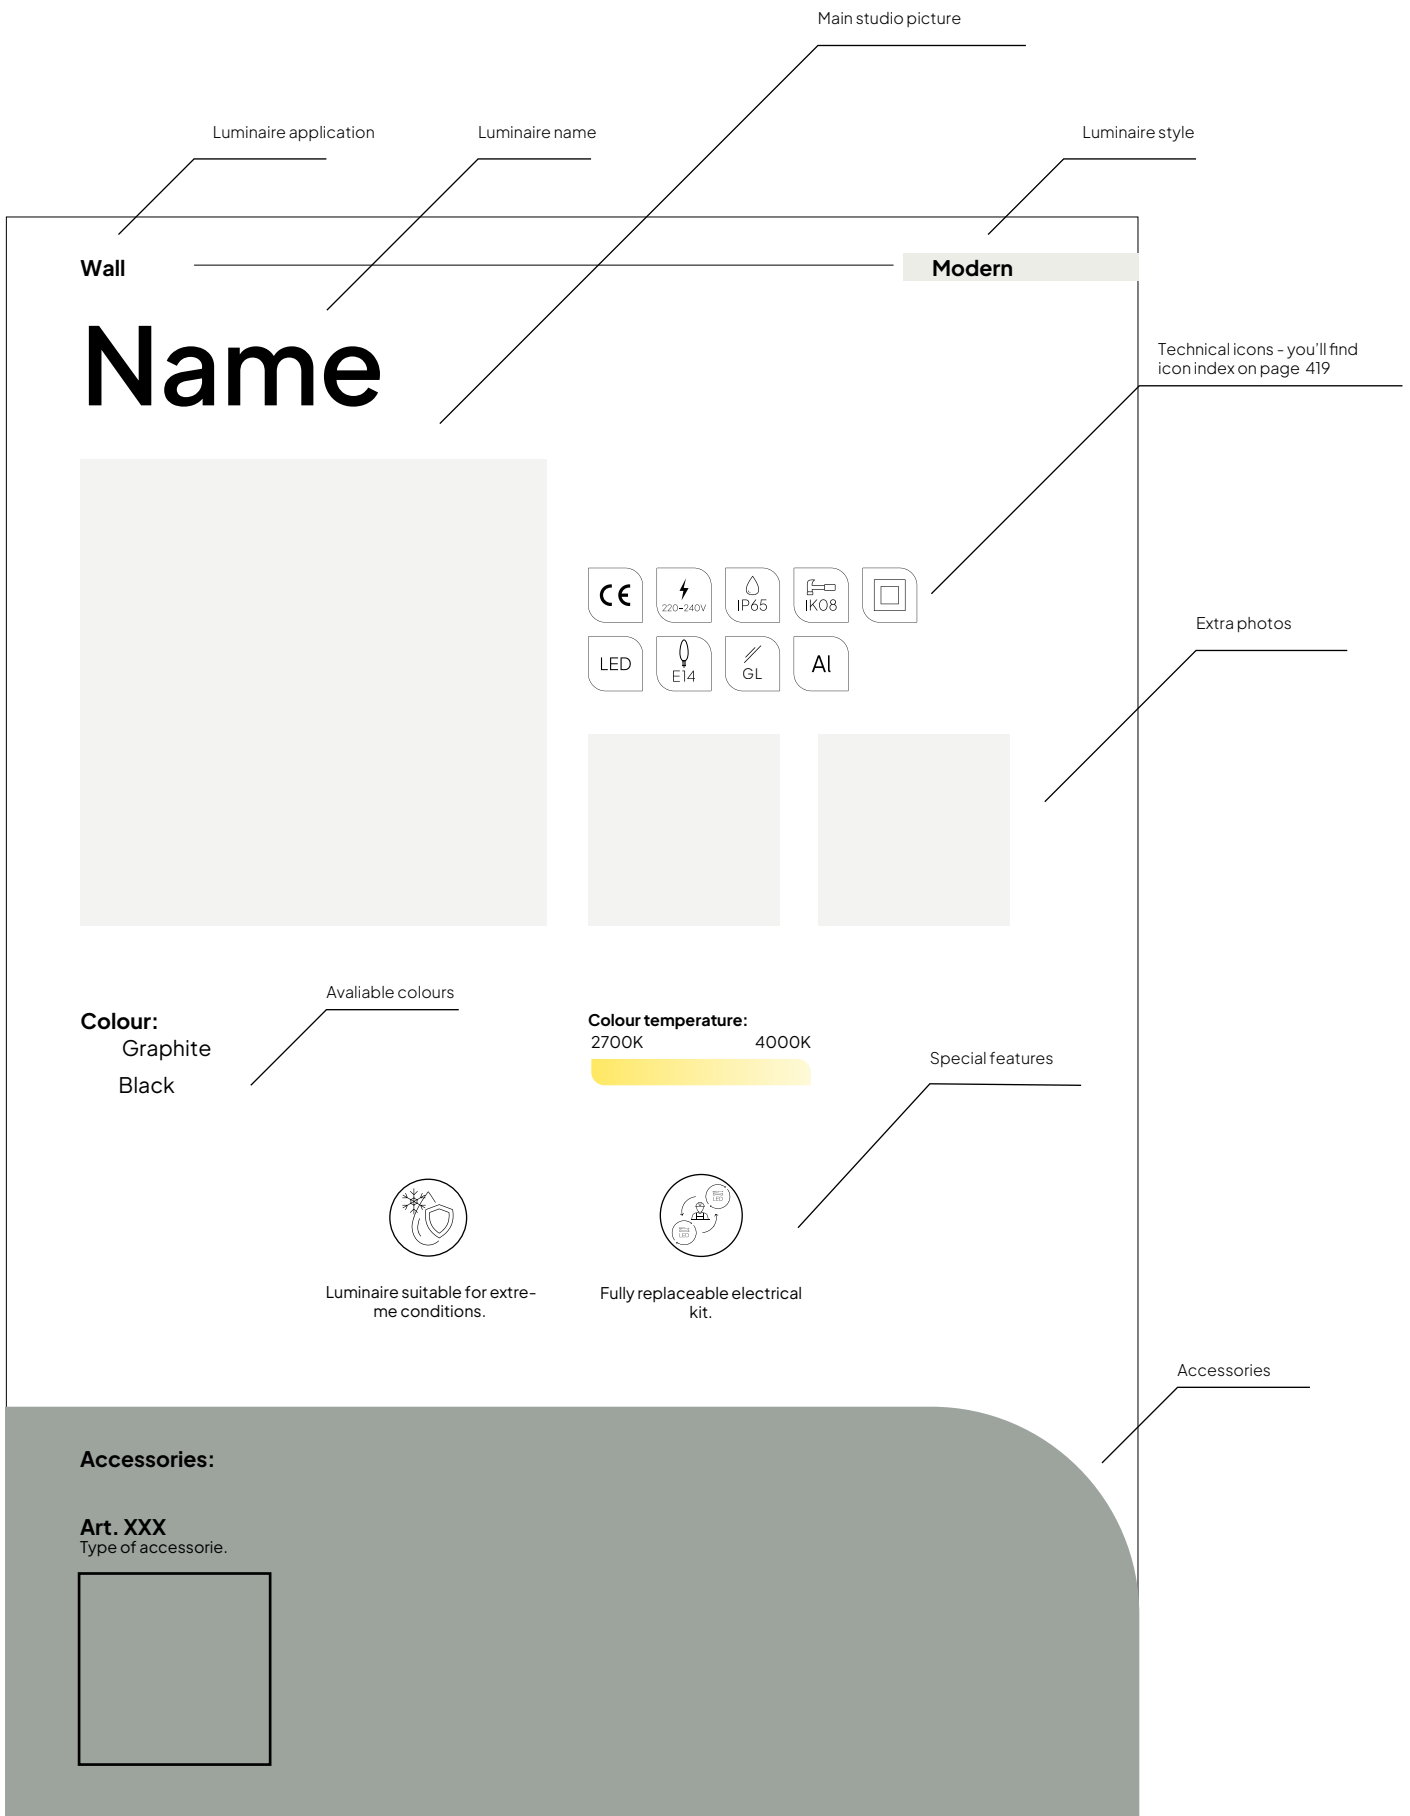

# Families

**A** p.43 Alta  
 p.19 Arendal  
 p.13 Arendal Mini  
 p.295 Arvika  
 p.23 Asker  
**B** p.299 Basel  
 p.241 Bergen  
 p.244 Berlin  
 p.303 Bern  
 p.307 Boden  
 p.348 Bologna  
 p.51 Borg  
 p.59 Bornholm  
 p.246 Bremen  
**C** p.335 Chelsea  
 p.358 Como  
**E** p.73 Egersund  
 p.63 Egersund Mini  
 p.75 Egersund Park  
**F** p.365 Florence  
**G** p.81 Geneva  
 p.373 Genoa  
 p.375 Glasgow  
 p.87 Glode  
 p.85 Grimstad  
**H** p.99 Halden  
 p.89 Halmstad  
 p.109 Hammerfest  
 p.101 Hellvik  
 p.107 Hitra  
**K** p.311 Karlstad  
 p.113 Kisa  
 p.119 Koster  
**L** p.262 Larvik  
 p.395 Latina  
 p.129 Lillehammer  
 p.133 Lillesand  
 p.249 Lofoten  
 p.377 London  
 p.316 Lund  
 p.137 Lysfjord  
**M** p.321 Mandal  
 p.415 Milano  
 p.397 Modena  
 p.142 Molde  
 p.147 Mora  
 p.149 Moss  
**N** p.169 Namsos  
 p.165 Narvik

p.181 Nice  
 p.163 Nidaros  
 p.159 Nordland  
 p.183 Oppland  
 p.264 Oslo  
 p.325 Paris  
 p.417 Poles  
**R** p.189 Rena  
 p.411 Rimini  
 p.197 Rondane  
**S** p.205 Sande  
 p.199 Sandvik  
 p.330 Ski  
 p.202 Skara  
 p.207 Sol  
 p.211 Stavanger  
 p.272 Stockholm  
**T** p.227 Torp  
 p.229 Trysil  
 p.333 Vansbro  
 p.219 Vasa  
 p.409 Venice  
 p.225 Varberg  
 p.221 Visby  
 p.215 Voss

Modern

Classic

Industrial

Loft

# Wall

Arendal



p.15

Asker



p.25

Asker Big



p.29

Basel



p.299

Bergen



p.241

Berlin



p.245

Bern



p.303

Boden



p.307

Bologna



p.349

Bologna



p.349

Borholm



p.59

Bremen



p.247

Chelsea



p.337

Chelsea



p.337

Chelsea



p.339

Chelsea Big



p.339

Como



p.359

Florence



p.365

Geneva



p.81

Genoa



p.373

Genoa Mini



p.373

Glasgow



p.375

Halden



p.99

Hitra



p.105

Karlstad



p.311

Koster



p.121

Larvik



p.263

Latina



p.395

Lillehammer



p.129

Lofoten



p.249

Lofoten



p.254

London



p.377

London



p.383

London Big



p.379

Lund



p.317

Lysfjord



p.137

Mandal



p.323

Mandal



p.323

Modena



p.397

Modena Big



p.397

Modena Big



p.397

Molde



p.142

Namsos



p.171

Nordland



p.159

Oslo



p.265

Paris




p.327

Paris Big



p.329

Rimini



p.413



Rondane



p.197

Sandvik



p.199

Sandvik



p.199

Ski



p.331

Stockholm



p.273

Stockholm



p.275

Stockholm Big



p.275

Torp



p.227

Vansbro



p.333

Vasa



p.219

Venice



p.409

Voss



p.215


# Bollard

Alta



p.45

Alta




p.45

Alta



p.49

Alta



p.49

Arendal



p.19

Arendal



p.19

Arendal



p.19

Arendal Mini



p.17

Arendal Mini



p.17

Arvika



p.295

Arvika



p.295

Asker



p.33

Asker



p.33

Bologna



p.351

Bologna



p.351

Borg



p.53

Borg



p.53

Borg



p.53

Borg



p.53

Chelsea



p.343

Chelsea




p.343

Chelsea Big



p.343

Chelsea Big



p.343

Como



p.361

Egersund



p.73

Egersund



p.73

Egersund Mini



p.65

Egersund Mini



p.65

Egersund Mini



p.69

Egersund Mini



p.69

Egersund Park



p.77

Egersund Park



p.77

Florence



p.369

Glode



p.87

Glode



p.87

Halmstad



p.89

<b>Halmstad</b>  p.89	<b>Halmstad</b>  p.89	<b>Halmstad</b>  p.95	<b>Halmstad</b>  p.95	<b>Hellvik</b>  p.101	<b>Hellvik</b>  p.101
<b>Kisa</b>  p.115	<b>Lillesand</b>  p.133	<b>Lillesand</b>  p.133	<b>Lillesand</b>  p.135	<b>Lillesand</b>  p.135	<b>Lofoten</b>  p.257
<b>Lofoten</b>  p.259	<b>London</b>  p.387	<b>London</b>  p.387	<b>London Big</b>  p.387	<b>Modena</b>  p.401	<b>Modena</b>  p.401
<b>Modena Big</b>  p.401	<b>Molde</b>  p.145	<b>Molde</b>  p.145	<b>Namsos</b>  p.173	<b>Namsos</b>  p.173	<b>Narvik</b>  p.165
<b>Oppland</b>  p.185	<b>Oppland</b>  p.187	<b>Oslo</b>  p.267	<b>Rimini</b>  p.411	<b>Rimini</b>  p.411	<b>Skara</b>  p.203
<b>Stavanger</b>  p.211	<b>Stavanger</b>  p.211	<b>Stavanger</b>  p.211	<b>Stockholm</b>  p.279	<b>Stockholm</b>  p.279	<b>Stockholm</b>  p.279
<b>Stockholm</b>  p.283	<b>Stockholm</b>  p.283	<b>Stockholm</b>  p.287	<b>Stockholm</b>  p.287	<b>Stockholm Big</b>  p.287	<b>Trysil</b>  p.231

# Pole

Asker



Asker




Bologna



Borg



Chelsea



Como



Egersund Park



Florence



Hammerfest



Karlstad



Kisa



Koster



Lofoten



London



London Big




Lund



Milano



Modena



Modena Big



Mora




Nice



Oslo



Poles



Rimini



Stockholm



Visby



Trysil



# Ceiling

<b>Bornholm</b>  p.59	<b>Nordland</b>  p.159	<b>Nidaros</b>  p.163	<b>Nidaros</b>  p.163	<b>Nidaros</b>  p.163	<b>Sandvik</b>  p.201
<b>Sol</b>  p.207	<b>Bergen</b>  p.243	<b>Lofoten</b>  p.254	<b>Lofoten</b>  p.254	<b>Lofoten</b>  p.255	<b>Oslo</b>  p.271
<b>Karlstad</b>  p.313	<b>Chelsea</b>  p.345	<b>Florence</b>  p.367	<b>London</b>  p.385	<b>London Big</b>  p.385	<b>Latina</b>  p.395
<b>Modena</b>  p.399	<b>Modena Big</b>  p.399				

# Recessed & Spot

<b>Grimstad</b>  p.85	<b>Grimstad</b>  p.85	<b>Moss</b>  p.151	<b>Moss</b>  p.151	<b>Moss</b>  p.153	<b>Moss</b>  p.153
<b>Moss</b>  p.155	<b>Moss</b>  p.155	<b>Moss</b>  p.155	<b>Moss</b>  p.157	<b>Moss</b>  p.157	<b>Namsos</b>  p.177
<b>Namsos</b>  p.177	<b>Namsos Mini</b>  p.179	<b>Rena</b>  p.189	<b>Rena</b>  p.193	<b>Sande</b>  p.205	<b>Varberg</b>  p.225

# Arendal Mini

Luminaires that set the mood and highlight the qualities of their surroundings through beautiful light diffusion. In a modern design combining crystal with steel, the Arendal Mini will work well in a wide variety of space settings. The soft, harmonious light filtered through the satin-finished glass will introduce a pleasant atmosphere wherever it is used. The wall version of the lamp, made of aluminium, will be perfect as entrance lighting.





# Arendal Mini



**Colour:**

- Graphite
- Black

**Colour temperature:**


2700K\* 3000K 4000K



\*2700K on request only, contact your supplier.



Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).



Fully replaceable electrical kit.



Product Eco-friendly.




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light Control
1251BL	LED	4W	330lm	3000K	> 50 000h	Dimmable
1251GR				4000K		
1252BL						
1252GR						
1250BL	E14	-	-	-	-	-
1250GR						





# Arendal Mini

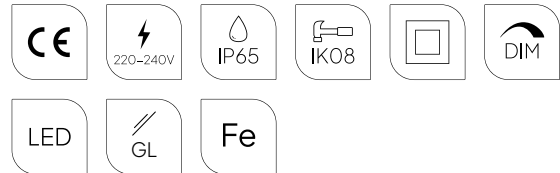

**Colour:**

- Graphite
- Galvanized
- Black

**Colour temperature:**


2700K\* 3000K 4000K



\*2700K on request only, contact your supplier.



Luminaire suitable for extreme conditions.



Double corrosion protection (galvanising+powder coating).




Product Eco-friendly.

**Accessories:**


**Art. 204**


Ground anchor.




**Art. 203**

Concreting anchor.



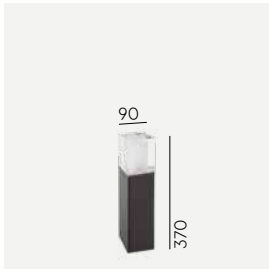

Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1566BL	LED	4W	330 lm	3000K	>50 000h	Dimmable
1566GA						
1566GR						
1567BL			345 lm	4000K		
1567GA						
1567GR						

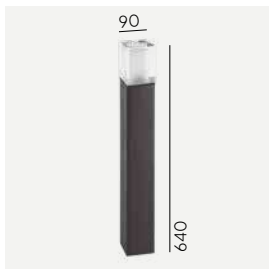

Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1561BL	LED	4W	330 lm	3000K	>50 000h	Dimmable
1561GA						
1561GR						
1562BL			345 lm	4000K		
1562GA						
1562GR						



# Arendal

Luminaires that set the mood and highlight the qualities of their surroundings through beautiful light diffusion. Three different heights make it easier to choose the right lamp for the garden path, driveway, terrace or house access. The effect will be even more intriguing when used together in the arrangement. The crystal shade used in the luminaire, additionally satin-finished on the inside, provides a gentle beam of light. Arendal is modern elegance and this design never gets old.





# Arendal



**Colour:**

- Graphite
- Galvanized
- Black

**Colour temperature:**

2700K\* 3000K 4000K




\*2700K on request only, contact your supplier.



Luminaire suitable for extreme conditions.



Double corrosion protection (galvanising+powder coating).




Fully replaceable electrical kit.

**Accessories:**


**Art. 205**


Concreting anchor




**Art. 206**

Anchoring support





Art	Type of light source
1560BL	E27
1560GA	
1560GR	



Art	Type of light source
1565BL	E27
1565GA	
1565GR	



Art	Type of light source
1569BL	E27
1569GA	
1569GR	



# Asker


Modern buildings need new solutions. The modern Asker luminaire family is ideally suited to this. Unconventional, minimalist lamps work well on a concrete or brick façade. But of course not only. The minimalist design makes it possible to match them to many variants of wall finishes, and the durable and proven materials used in the lamps guarantee many years of trouble-free use in difficult weather conditions. The lamps are also available in bollard and pole versions. The bold yet simple shapes have always been and will continue to be attractive to professional designers and individual investors alike.







# Asker

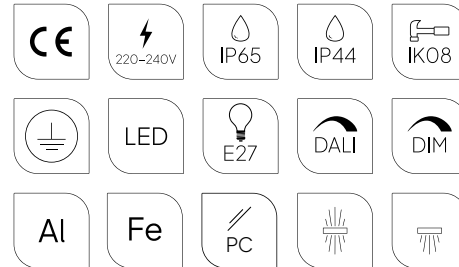

**Colour:**

- Graphite
- Aluminium
- Galvanized
- Black
- White

**Colour temperature:**


2700K\* 3000K 4000K




\*2700K on request only, contact your supplier.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Multiple light variants.




Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).






Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1510AL	LED	8,8W	312lm	3000K	50 000h	Dimmable
1510BL						
1510GR						
1510WH						
5102AL						
5102BL						
5102GR		8,4W	798lm	3000K	>70 000h	
5102WH						
1720AL						
1720BL						
1720GR						
1720WH						
5150AL		8,3W	901lm	4000K	>70 000h	
5150BL						
5150GR						
5150WH						
5160AL						
5160BL						
5160GR	9,9W	852lm	3000K	>70 000h		
5160WH						
1721AL						
1721BL						
1721GR						
1721WH						
1513AL	E27	-	-	-	-	
1513BL						
1513GR						
1513WH						

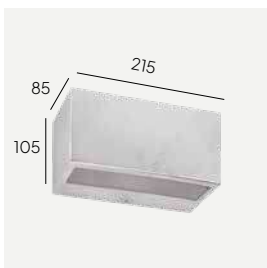

Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1700GA	LED	8,4W	360lm	3000K	50 000h	Dimmable
5100GA			367lm	4000K		
1702GA	E27	-	-	-	-	-



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1511AL	LED	8,8W	156lm	3000K	50 000h	Dimmable
1511BL						
1511GR						
1511WH						
5103AL						
5103BL		5,4W	164lm	4000K		
5103GR						
5103WH						
1726AL						
1726BL						
1726GR	5,5W	429lm	3000K	70 000h		
1726WH						
5151AL						
5151BL						
5151GR						
5151WH						
5157AL						
5157BL						
5157GR						
5157WH						
1727AL	E27	-	-	-	-	
1727BL						
1727GR						
1727WH						
1514AL						
1514BL						
1514GR						
1514WH						

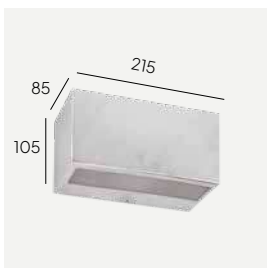

Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1705GA	LED	8W	165lm	3000K	50 000h	Dimmable
5101GA			183lm	4000K		
1707GA	E27	-	-	-	-	-



# Asker Big



CE	220-240V	IP65	IK08	Grounding symbol
LED	E27	DALI	DIM	PC
Al	Fe	Light bulb icon	Light bulb icon	



**Colour:**

- Graphite
- Aluminium
- Galvanized
- Black
- White


**Colour temperature:**

2700K\* 3000K 4000K


\*2700K on request only, contact your supplier.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.





Multiple light variants.



Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).




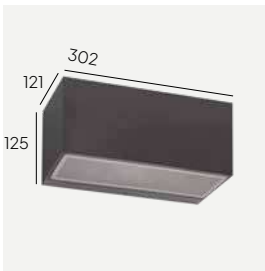

Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1300AL	LED	8,3W	547lm	3000K	>72 000h	Dimmable
1300BL						
1300GR						
1300WH						
5080AL		19,4W	1669lm	3000K	>72 000h	DALI2
5080BL						
5080GR						
5080WH						
5086AL		19,3W	1942lm	4000K	>70 000h	DALI2
5086BL						
5086GR						
5086WH						
5018AL		8,5W	550lm	4000K	>70 000h	DALI2
5018BL						
5018GR						
5018WH						
1306AL	E27	13,7W	1280lm	3000K	>70 000h	Dimmable
1306BL						
1306GR						
1306WH						
5105AL		13,7W	1313lm	4000K	>70 000h	Dimmable
5105BL						
5105GR						
5105WH						
1303AL	E27	-	-	-	-	-
1303BL						
1303GR						
1303WH						




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1710GA	LED	7,1W	649lm	3000K	70 000h	Dimmable
1712GA	E27	-	-	-	-	-

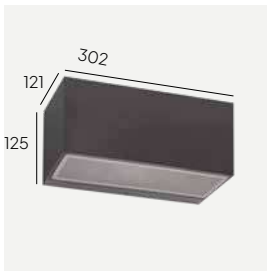

Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1302AL	LED	5,2W	306lm	3000K	>70 000h	Dimmable
1302BL						
1302GR						
1302WH						
5104AL						
5104BL						
5104GR		13,6W	656lm	4000K	>70 000h	Dimmable
5104WH						
5106AL						
5106BL						
5106GR						
5106WH						
1308AL		10,2W	843lm	3000K	>72 000h	DALI2
1308BL						
1308GR						
1308WH						
5085AL						
5085BL						
5085GR						
5085WH						
5087AL	960lm	4000K	4000K	>70 000h	DALI2	
5087BL						
5087GR						
5087WH						
1305AL	E27	-	-	-	-	
1305BL						
1305GR						
1305WH						




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1717GA	E27	-	-	-	-	-
1715GA	LED	5,3W	347lm	3000K	70 000h	Dimmable

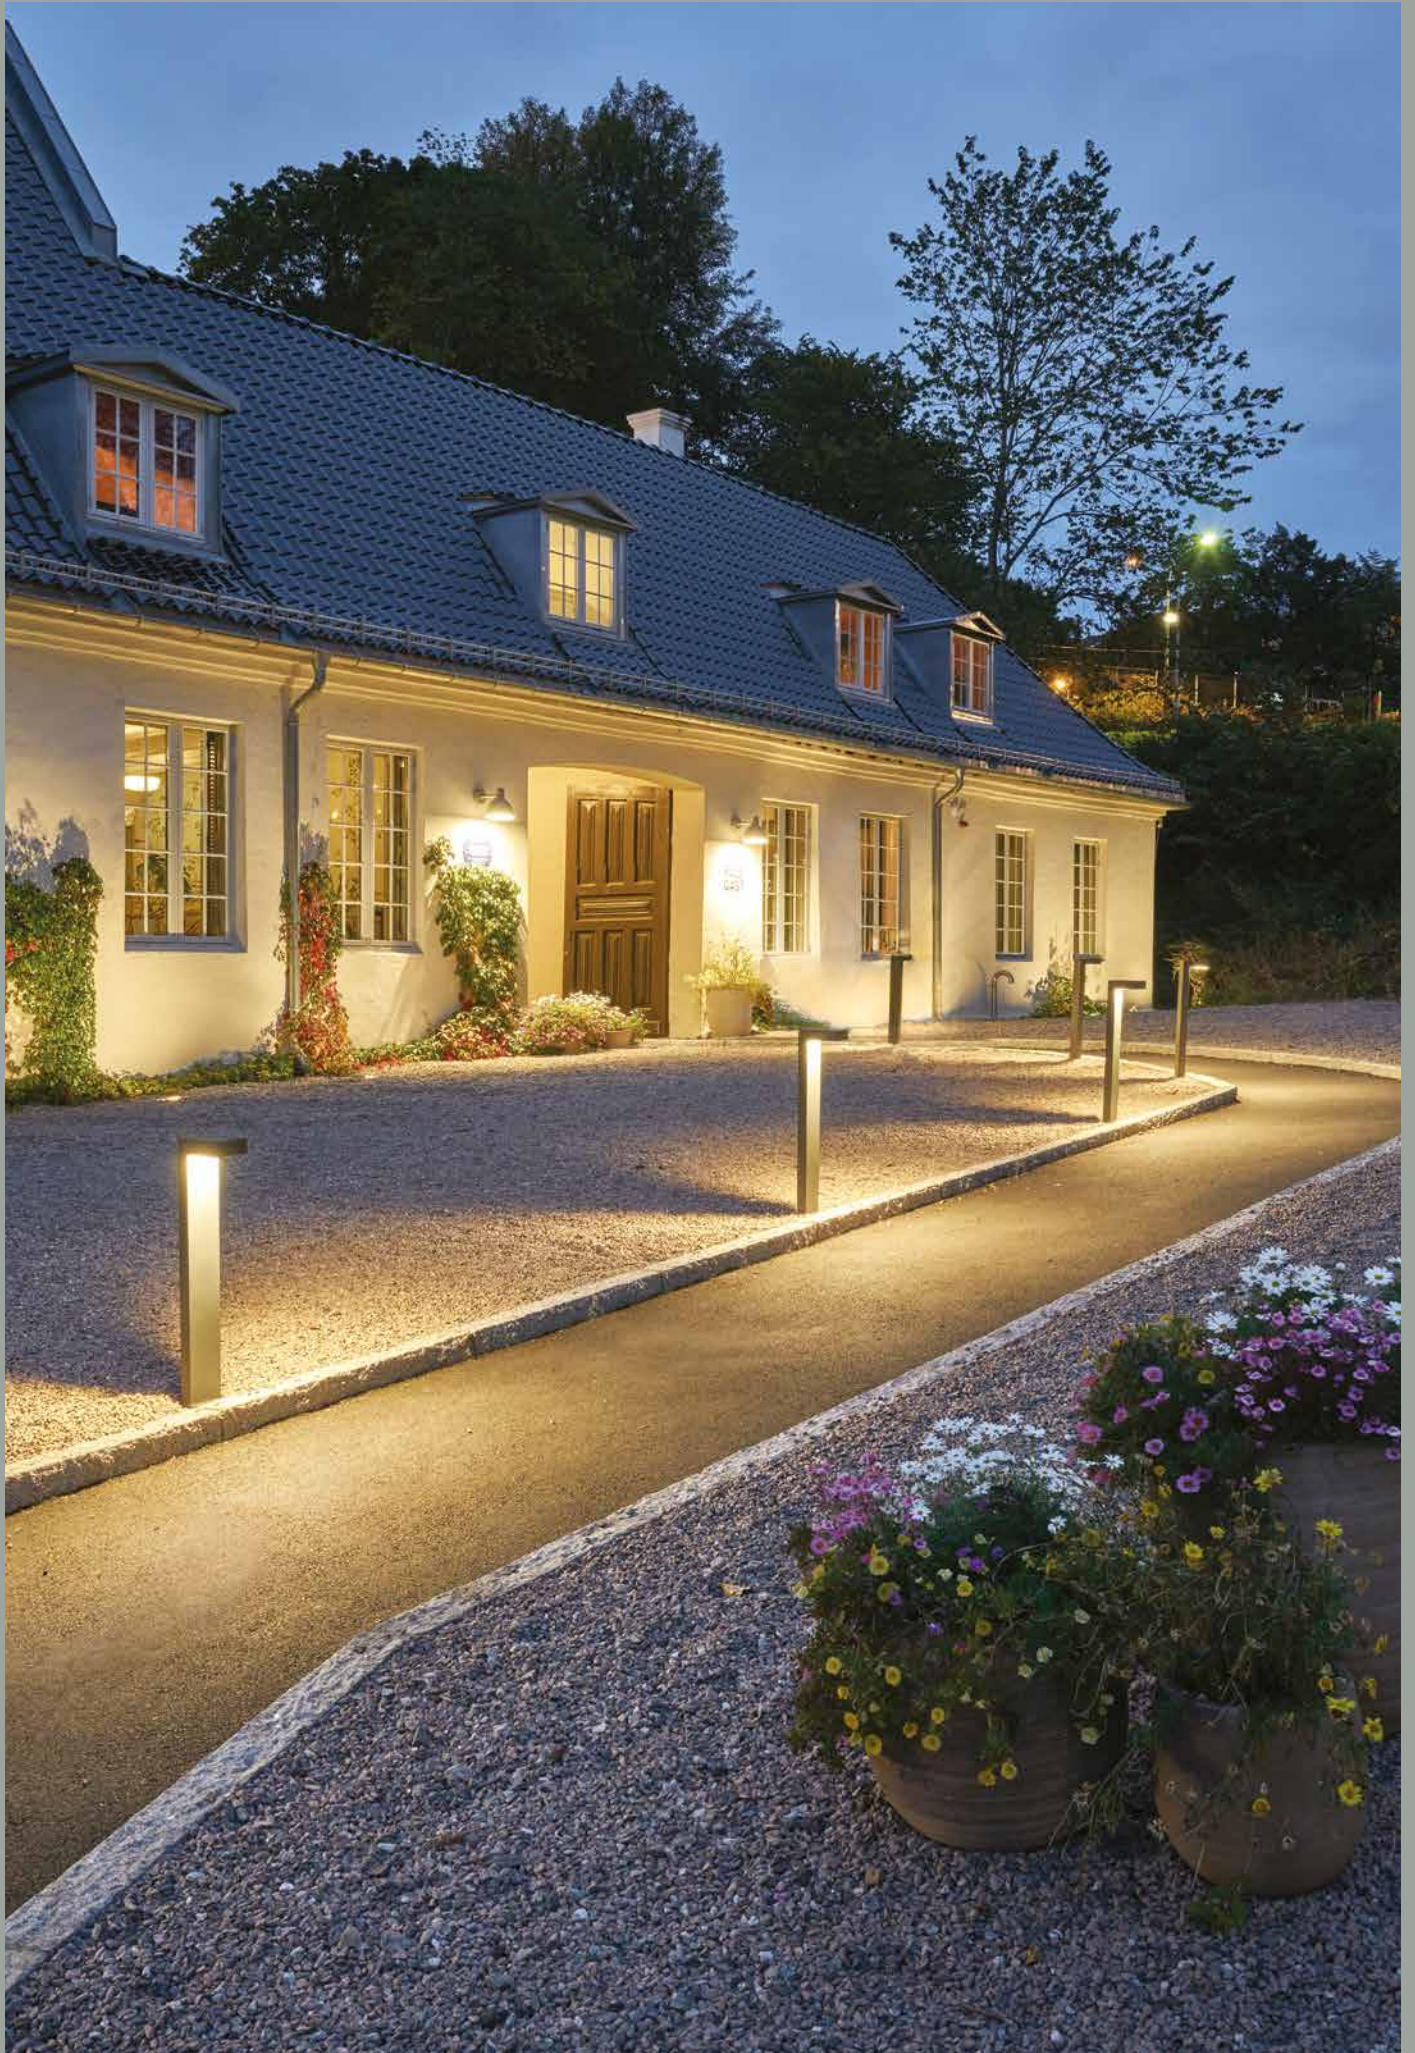



# Asker Bollard

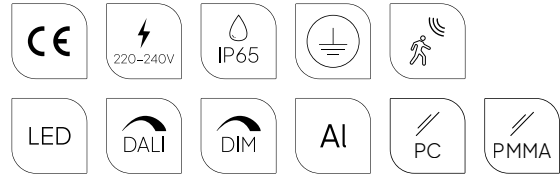


**Colour:**

- Graphite
- Aluminium
- Black

**Colour temperature:**

2700K\* 3000K 4000K

\*2700K on request only, contact your supplier.



Fully replaceable electrical kit.




Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).

**Accessories:**


**Art. 1907**


Concreting anchor



**Art. 1908**

Ground anchor





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens	IK	
1311AL	LED	9,5W	585lm	3000K	50 000h	-	-	IK10	
1311BL									
1311GR									
1314AL		7,7W	697lm		3000K	> 109 000h	Dimmable	IESNA type II/III	IK08
1314BL									
1314GR									
1315AL									
1315BL									
1315GR									
1316AL		7,7W	604lm		3000K	> 109 000h	Dimmable	IESNA type V	
1316BL									
1316GR									
1317AL									
1317BL									
1317GR									
1318AL		7,7W	724lm		4000K	> 109 000h	Dimmable	IESNA type II/III	
1318BL									
1318GR									
1319AL									
1319BL									
1319GR									
1320AL	7,7W	617lm	4000K	> 109 000h	Dimmable	IESNA type V			
1320BL									
1320GR									
1322AL									
1322BL									
1322GR									
5210AL	10W	394lm	3000K	> 55 000h	Dimmable	-	IK10		
5210BL									
5210GR									
5211AL		457lm	4000K						
5211BL									
5211GR									




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Motion Detector
1338AL	LED	9,7W	585lm	3000K	50 000h	PIR
1338BL						
1338GR						
1339AL			640lm	4000K		
1339BL						
1339GR						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens	IK
1310AL	LED	9,5W	585lm	3000K	50 000h	On/Off		IK10
1310BL								
1310GR								
5120AL								
5120BL								
5120GR								
5212AL		10W	394lm	3000K	> 55 000h			IK10
5212BL								
5212GR								
5213AL								
5213BL								
5213GR								
5214AL		7,7W	682lm	3000K	>109 000h	Dimmable	IESNA type II/III	IK08
5214BL								
5214GR								
5215AL								
5215BL			654lm	4000K				
5215GR								
5216AL	604lm		3000K					
5216BL								
5216GR								
5217AL		654lm			4000K	IESNA type V		
5217BL								
5217GR								



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Motion Detector
1336AL	LED	9,7W	585lm	3000K	50 000h	PIR
1336BL						
1336GR						
1337AL			636lm	4000K		
1337BL						
1337GR						

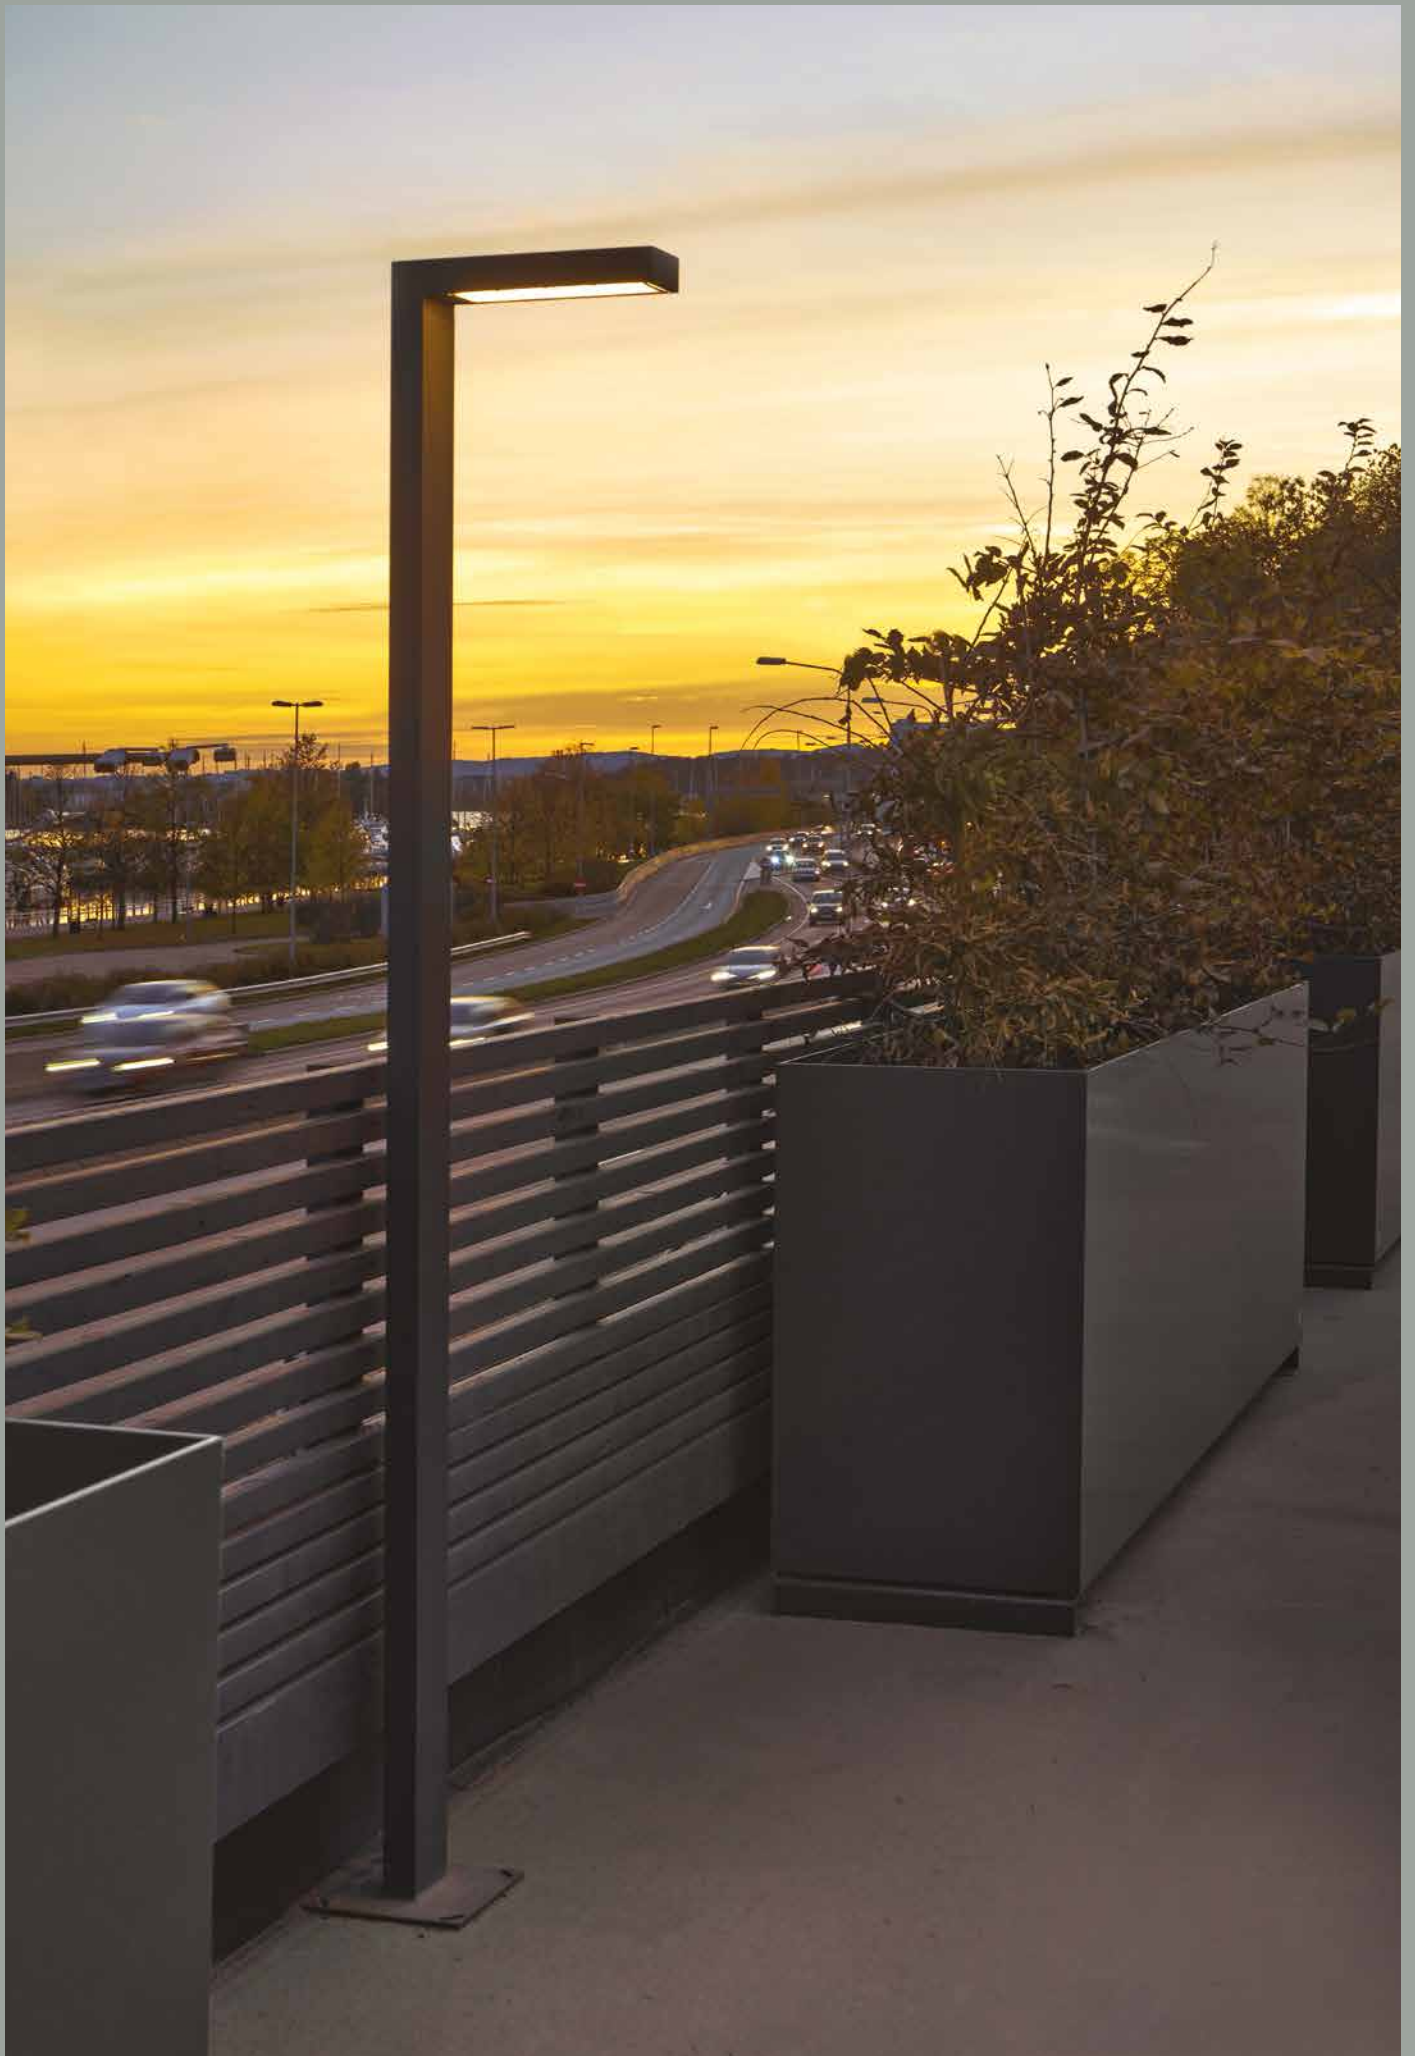

# Asker Pole




**Colour:**

- Aluminium
- Black
- Graphite

**Colour temperature:**

- 2700K\* 3000K 4000K
- 
- \*2700K on request only, contact your supplier.



Fully replaceable electrical kit.



Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).




Product Eco-friendly.

**Accessories:**


**Art. 116**

Concreting anchor  
For 2160 & 2360 height




**Art. 117**


Anchoring support  
For 2160 & 2360 height.



**Art. 3091**


Concreting anchor



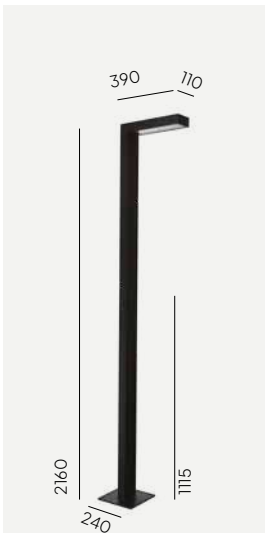



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens
1360AL	LED	12 W	1128lm	3000K	>72 000h	Dimmable	-
1360BL							
1360GR							
1361AL		8,4W	1081lm		>100 000h	DALI2 / NightDim	IESNA type V
1361BL							
1361GR							
1362AL		8,5W	1081lm		>120 000h	DALI2 / NightDim	IESNA type III
1362BL							
1362GR							
1366AL		8,4W	1018lm		>120 000h	-	IESNA type III
1366BL							
1366GR							
1368AL	8,7W	1018lm	>120 000h	DALI2 / NightDim	IESNA type III		
1368BL							
1368GR							

\*All indexes also available in 4000K and 2700K versions.

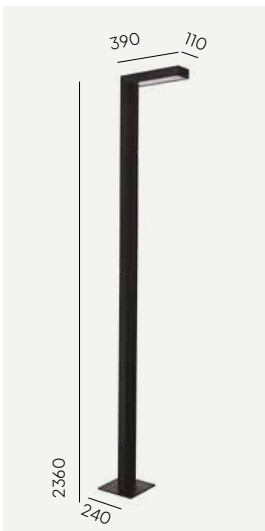


Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens
1364AL	LED	8,4W	1033lm	3000K	>100 000h	-	IESNA type V
1364BL							
1364GR							
1365AL		8,5W	1085lm		>120 000h	DALI2 / NightDim	IESNA type III
1365BL							
1365GR							
1367AL		8,4W	1018lm		>120 000h	-	IESNA type III
1367BL							
1367GR							
1369AL		8,7W	1081lm		>120 000h	DALI2 / NightDim	IESNA type III
1369BL							
1369GR							

\*All indexes also available in 4000K and 2700K versions.

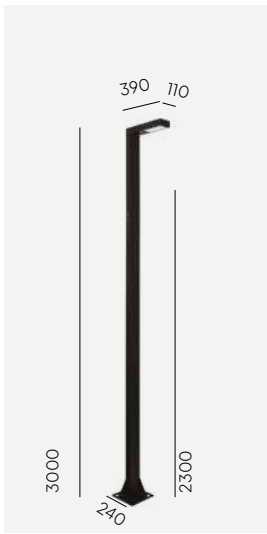

Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens
5222AL	LED	19,5W	2667lm	3000K	> 120 000h	DALI2 / NightDim	IESNA type V
5222BL							
5222GR							
5224AL			2660lm			Dimmable	
5224BL							
5224GR							
5226AL		2646lm	DALI2 / NightDim		IESNA type III		
5226BL							
5226GR							
5228AL		19,6W	2666lm			Dimmable	
5228BL							
5228GR							

\*All indexes also available in 4000K and 2700K versions.

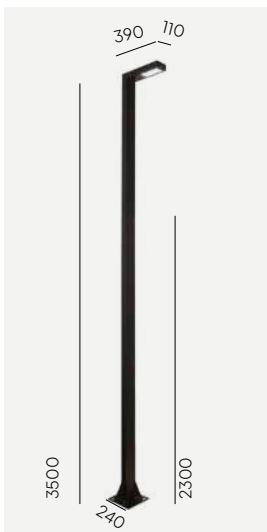

Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens	IP	
5200AL	LED	19,9W	2620lm	3000K	> 120 000h	DALI2 / NightDim	IESNA type V	IP55/65	
5200BL									
5200GR									
5202AL		19,5W	2660lm		Dimmable	> 100 000h		Dimmable	IP65
5202BL									
5202GR									
5204AL		19,9W	2620lm		DALI2 / NightDim	IESNA type III	IP55/65		
5204BL									
5204GR									
5206AL		19,6W	2666lm		Dimmable		> 100 000h	Dimmable	IP65
5206BL									
5206GR									

\*All indexes also available in 4000K and 2700K versions.



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens
4322AL	LED	19,5W	2624lm	3000K	>100 000h	DALI2 / NightDim	IESNA type II/III
4322BL							
4322GR							
4323AL							
4323BL			2742lm	4000K			IESNA type V
4323GR							
4362AL							
4362BL							
4362GR			2711lm	3000K			IESNA type V
4363AL							
4363BL							
4363GR							
4363BL	2832lm	4000K	IESNA type V				
4363GR							

\*Other two mounting options Ø76mm and Ø50mm available on request



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens
4332AL	LED	39,8W	5457lm	3000K	>100 000h	DALI2 / NightDim	IESNA type II/III
4332BL							
4332GR							
4333AL							
4333BL			5723lm	4000K			IESNA type V
4333GR							
4372AL							
4372BL							
4372GR			5723lm	3000K			IESNA type V
4373AL							
4373BL							
4373GR							
4373BL	6015lm	4000K	IESNA type V				
4373GR							

\*Other two mounting options Ø76mm and Ø50mm available on request




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens
4342AL	LED	19,5W	2624lm	3000K	>100 000h	DALI2 / NightDim	IESNA type II/III
4342BL							
4342GR							
4343AL							
4343BL			2742lm	4000K			IESNA type V
4343GR							
4382AL							
4382BL							
4382GR			2711lm	3000K			IESNA type V
4383AL							
4383BL							
4383GR							
4383BL	2832lm	4000K	IESNA type V				
4383GR							

\*Other two mounting options Ø76mm and Ø50mm available on request



# Asker Head

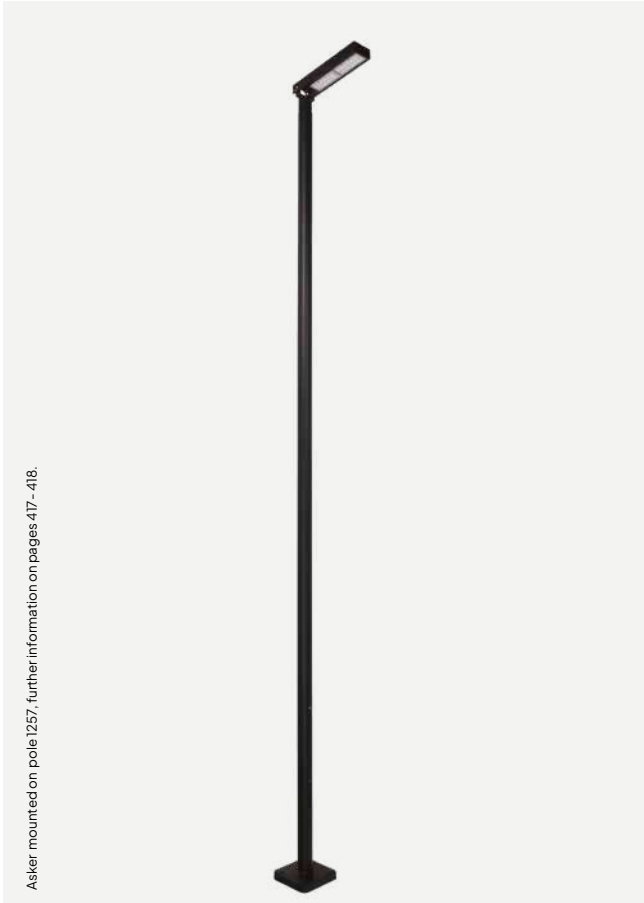

Asker mounted on pole 1257, further information on pages 417 - 418.

CE	220-240V	IP65	IK10	LED	DALI
Al	PC	6m			




**Colour:**

- Aluminium
- Black
- Graphite


**Colour temperature:**

2700K\* 3000K 4000K

\*2700K on request only, contact your supplier.



Fully replaceable electrical kit.



Wide range of light direction adjustment.



Product Eco-friendly.

**Accessories:**

Luminaires sold separately, recommended poles ø60, further information on pages 417- 418.



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens
4352AL	LED	39,8W	5457lm	3000K	>100 000h	DALI2 / NightDim	IESNA type II/III
4352BL							
4352GR							
4353AL				4000K			
4353BL							
4353GR							
4392AL			5723lm	3000K			IESNA type V
4392BL							
4392GR							
4393AL				4000K			
4393BL							
4393GR							

\*Other two mounting options Ø76mm and Ø50mm available on request




# Alta

Gardens and terraces are often extension of domestic spaces which require illumination. Oases of greenery and places of respite after daily chores require the right setting. This is where we spend time with family and friends, indulge in garden hobbies or celebrate moments of peace and quiet in solitude. It is worth emphasizing the qualities of our favourite places with gentle light. The Alta lamps, a subtle combination of wood and steel, are perfect for the garden and terrace. The interesting solution of light diffusion gives the desired effect of a sense of calm and harmony. A garden subtly illuminated by Alta luminaires is a tested way to truly relax.





# Alta

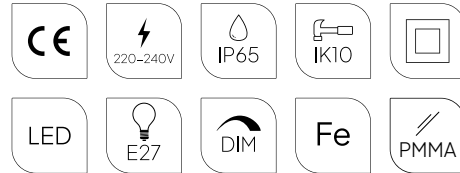

**Colour:**


- Black
- Galvanized

**Colour temperature:**

2700K\* 3000K 4000K



\*2700K on request only, contact your supplier.



Fully replaceable electrical kit.



Product Eco-friendly.



Luminaire suitable for extreme conditions.




Double corrosion protection (galvanising+powder coating).

**Accessories:**


**Art. 205**

Concreting anchor



**Art. 206**

Anchoring support






Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
291BL	E27	-	-	-	-	-
291GA						
1475BL	LED E27	5,9W	100lm	2700K	25 000h	Dimmable
1475GA						
1479BL	LED	8,5W	146lm	3000K	> 50 000h	
1479GA			151lm	4000K		
5021BL						
5021GA						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light Control
293BL	E27	-	-	-	-	-
293GA						
1477BL	LED E27	5,9W	100lm	2700K	25 000h	Dimmable
1477GA						
1476BL	LED	8,5 W	146lm	3000K	>50 000h	
1476GA			151lm	4000K		
1468BL						
1468GA						

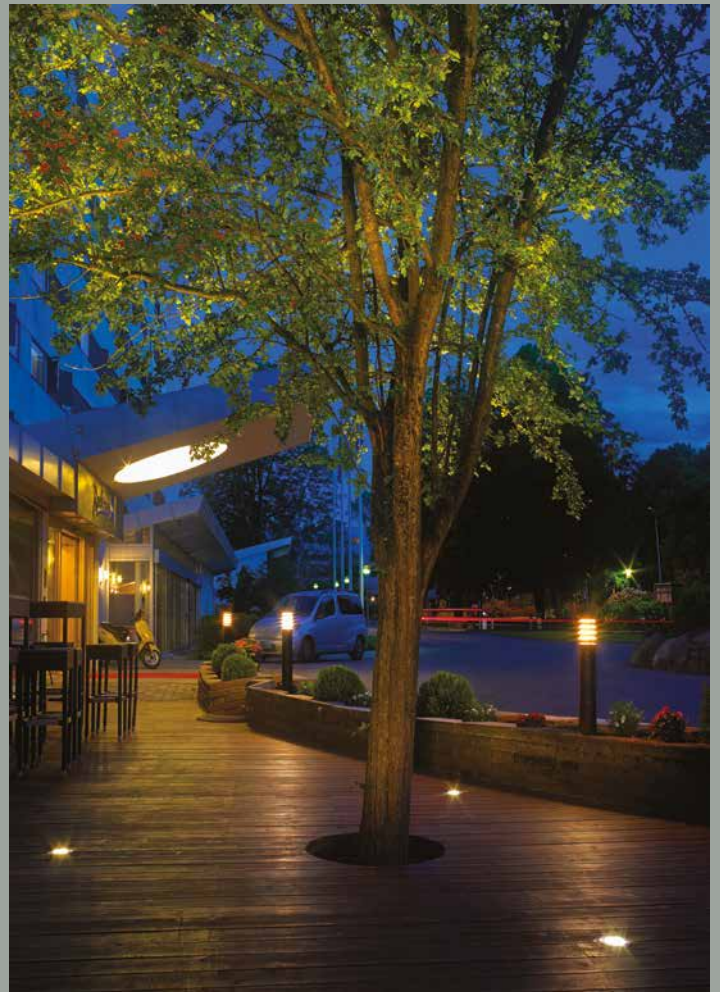





# Alta

scandinavian wood



- CE
- 220-240V
- IP65
- IK10
- DIM
- E27
- LED
- Fe
- PMMA



**Colour:**

- Black
- Galvanized

**Wood:**

- Impregnated
- Painted

**Colour temperature:**

2700K\* 3000K 4000K

\*2700K on request only, contact your supplier.



Luminaire housing made of natural wood.




Product Eco-friendly.

**Accessories:**


**Art. 205**

Concreting anchor



**Art. 206**

Anchoring support





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1440BL	E27	-	-	-	-	-
1440GA						
1665BL	LED	8,5W	146lm	3000K	>50 000h	Dimmable
1665GA			151lm	4000K		
1666BL						
1666GA						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1450BL	E27	-	-	-	-	-
1450GA						
1669BL	LED	8,5W	146lm	3000K	>50 000h	Dimmable
1669GA			151lm	4000K		
1670BL						
1670GA						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1443BL	E27	-	-	-	-	-
1443GA						
1673BL	LED	8,5W	146lm	3000K	>50 000h	Dimmable
1673GA			151lm	4000K		
1674BL						
1674GA						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1453BL	E27	-	-	-	-	-
1453GA						
1677BL	LED	8,5W	146lm	3000K	>50 000h	Dimmable
1677GA			151lm	4000K		
1678BL						
1678GA						

# Borg

The Borg luminaires family is a prime example of top quality and modern design. Borg will prove ideal for designing modern solutions to enhance urban living comfort. The Borg will be a great complement to leisurely, plant-filled squares with benches, but it will also fit in well with the landscape of an ordinary street and completely change its look. For many people, the city is a place to work and live. Therefore, designing comfortable urban landscapes requires the right eye-catching lighting. The minimalist and functional Borg will bring a modern style to any urban space.



Photo: panoramahyttene.no



# Borg




**Colour:**

- Aluminium
- Graphite

**Colour temperature:**

2700K\* 3000K 4000K

\*2700K on request only, contact your supplier.



Fully replaceable electrical kit.



Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).




Product Eco-friendly.

**Accessories:**


**Art. 202**


Anchoring support




**Art. 203**

Concreting anchor





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
6190AL	LED	16W	1358lm	3000K	> 72 000h	Dimmable
6190GR			1396lm	4000K		
6191AL		17,6W	1358lm	3000K		DALI2/ NightDim
6191GR			1396lm	4000K		
6192AL	LED	17,6W	1358lm	3000K	> 72 000h	DALI2/ NightDim
6192GR			1396lm	4000K		
6193AL			1358lm	3000K		
6193GR	1396lm	4000K				



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
6180AL	LED	16W	1358lm	3000K	> 72 000h	Dimmable
6180GR			1396lm	4000K		
6181AL		15,9W	1358lm	3000K		DALI2/ NightDim
6181GR			1396lm	4000K		
6183AL	LED	17,6W	1358lm	3000K	> 72 000h	DALI2/ NightDim
6183GR			1396lm	4000K		
6182AL			1358lm	3000K		
6182GR	1396lm	4000K				



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
6170AL	LED	16W	1358lm	3000K	> 72 000h	Dimmable
6170GR				4000K		
6171AL			1396lm	4000K		
6171GR						
6173AL		17,6W	1396lm	4000K		DALI2 / NightDim
6173GR						
6172AL			1358lm	3000K		
6172GR						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
6120AL	LED	16,1W	1358lm	3000K	> 72 000h	Dimmable
6120GR				4000K		
6121AL		16W	1396lm	4000K		
6121GR						
6123AL		17,2W	1396lm	4000K		DALI2
6123GR						
6122AL			1358lm	3000K		
6122GR						





# Borg



Borg mounted on pole 3004, details on pages 417-418.

CE	220-240V	IP65	IK08	⏚	6m
LED	DALI	Al	PC	60	




- Colour:**
- Aluminium
  - Graphite


**Colour temperature:**

2700K\* 3000K 4000K

\*2700K on request only, contact your supplier.



Fully replaceable electrical kit.



Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).




Product Eco-friendly.

**Accessories:**

Luminaires sold separately, recommended poles ø60, further information on pages 417- 418.


**Art. 7660**

Adapter Ø60 for install on pole Ø76



**Art. 154**

Arm for use on wall





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
6150AL	LED	32W	3735lm	3000K	> 72 000h	-
6150GR						
5140AL			3928lm	4000K		
5140GR						
5141AL		3735lm	3000K	DALI2/ NightDim		
5141GR						
5142AL		32,6W	3970lm			4000K
5142GR						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Lens Control
6151AL	LED	32W	2996lm	3000K	> 72 000h	-
6151GR						
5145AL			3069lm	4000K		
5145GR						
5146AL		2953lm	3000K	DALI2/ NightDim		
5146GR						
5147AL		32,6	3194lm			4000K
5147GR						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control			
6153AL	LED	53W	6900lm	3000K	> 72 000h	DALI2/Night-Dim			
6153GR									
6154AL						7200lm	4000K	> 100 000h	DALI2/Night-Dim
6154GR									
6155AL		7200lm	4000K	> 100 000h	DALI2/Night-Dim				
6155GR									
6156AL		7200lm	4000K	> 72 000h	D4i				
6156GR									

# Bornholm

Minimalist design, classic shape. In a word, the captivating simplicity and versatility of this lamp, which offers the possibility of many applications. The Bornholm luminaire is durable and long-lasting, and although it is dedicated to external walls, it is just as suitable for a variety of uses indoors. It can be used as a ceiling or wall light. The milky shade minimizes glare, gives evenly spread light and provides comfort to the eye. The Bornholm will be the perfect piece to bring a warm accent to this type of modern interior. It looks great on raw concrete, but will actually be a good complement to any façade or wall.





# Bornholm




**Colour:**

- Aluminium
- White
- Graphite

**Colour temperature:**

- 2700K\* 3000K 4000K
- 
- \*2700K on request only, contact your supplier.



Fully replaceable electrical kit.



Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).



Product Eco-friendly.



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control			
541AL	LED	7,8W	428lm	3000K	>50 000h	Dimmable			
541GR									
541WH									
5121AL			443lm	4000K					
5121GR									
5121WH									
544AL	LED	10W	417lm	3000K	50 000h	Motion Detector			
544GR									
544WH									
545AL									
545GR	10,5W	464lm	4000K	-	-	-			
545WH									
542AL							17,5W	794lm	3000K
542GR									
542WH									
5122AL								836lm	4000K
5122GR									
5122WH									

Bornholm can be mounted as a ceiling fixture!



# Egersund Mini

Energy efficiency, functionality and aesthetics. This rare combination has been achieved in this particular lamp. Innovation happens when it brings economic benefit.

Undoubtedly innovative product providing efficiency, durability and low energy consumption thanks to the state-of-the-art LED technology fitted to these luminaires.

Durable materials enclosed in a minimalist form and an original reflector in the shape of a metallized cone have given the lamp a completely unique appearance. It will be perfect for gardens, driveways and paths and will be a decoration for both traditional and modern homes.









# Egersund Mini




**Colour:**


-  Aluminium
-  Graphite

**Colour temperature:**

2700K\* 3000K 4000K



\*2700K on request only, contact your supplier.



Fully replaceable electrical kit.



Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).




Product Eco-friendly.

**Accessories:**


**Art. 205**


Concreting anchor




**Art. 206**

Anchoring support





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1290AL	LED	9,1W	864lm	3000K	> 72 000h	Dimmable
1290GR						
5117AL			917lm	4000K		
5117GR						
2302AL		864lm	3000K	DALI		
2302GR						
2303AL		9,6W	934lm			4000K
2303GR						




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1291AL	LED	9,1W	864lm	3000K	> 72 000h	Dimmable
1291GR						
5118AL			917lm	4000K		
5118GR						
2314AL			864lm	3000K		DALI
2314GR						
2315AL			915lm	4000K		
2315GR						





# Egersund Mini

scandinavian wood

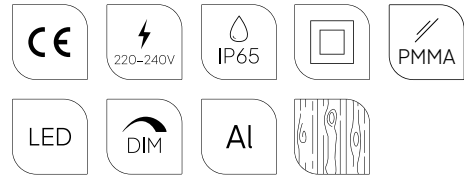

**Colour:**

- Aluminium
- Graphite

**Wood:**

- Impregnated
- Painted

**Colour temperature:**

2700K\* 3000K 4000K


\*2700K on request only, contact your supplier.



Luminaire housing made of natural wood.



Product Eco-friendly.




Fully replaceable electrical kit.

**Accessories:**


**Art. 205**

Concreting anchor



**Art. 206**

Anchoring support





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
2304AL	LED	9,1W	864lm	3000K	72 000h	Dimmable
2304GR						
2305AL			873lm	4000K		
2305GR						




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
2308AL	LED	9,1W	864lm	3000K	72 000h	Dimmable
2308GR						
2309AL			873lm	4000K		
2309GR						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
2316AL	LED	9,1W	864lm	3000K	72 000h	Dimmable
2316GR						
2317AL			873lm	4000K		
2317GR						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
2320AL	LED	9,1W	864lm	3000K	72 000h	Dimmable
2320GR						
2321AL			873lm	4000K		
2321GR						

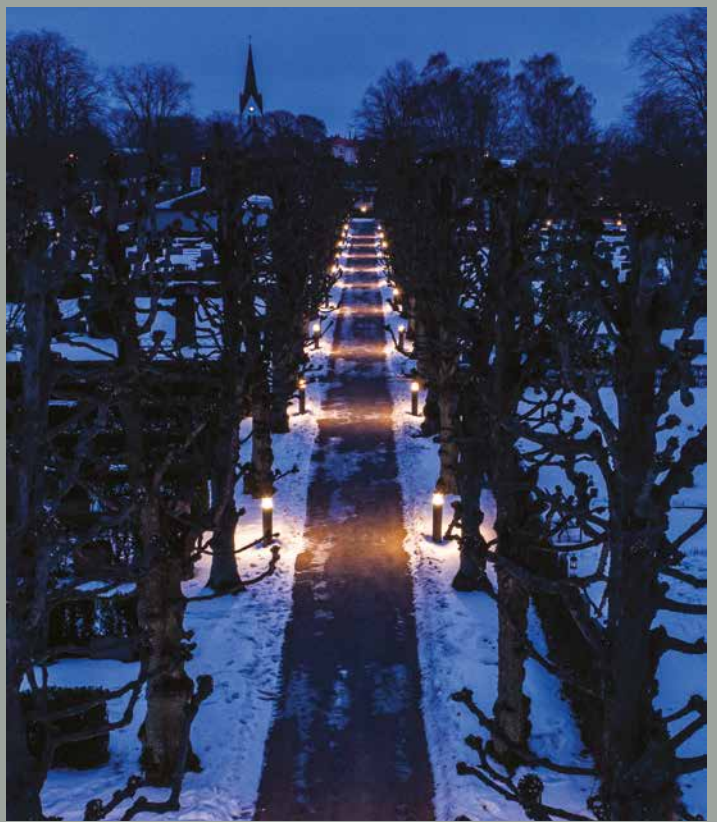





# Egersund




**Colour:**

- Aluminium
- Graphite

**Colour temperature:**

2700K\* 3000K 4000K

\*2700K on request only, contact your supplier.



Fully replaceable electrical kit.




Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).




Product Eco-friendly.

**Accessories:**

**Art. 1230**  
Concreting anchor



**Art. 1231**  
Anchoring support





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Class
1280AL	LED	20,3W	1681lm	3000K	> 162 000h	Dimmable	II
1280GR							
5068AL		21,9W	1681lm	3000K		DALI2 / NightDim	I
5068GR							
5014AL		20,3W	1782lm	4000K		Dimmable	II
5014GR							
5066AL		22W	1782lm	4000K		DALI2 / NightDim	I
5066GR							



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Class
1285AL	LED	22W	1586lm	3000K	> 162 000h	Dimmable	II
1285GR							
5069AL		21,9W	1681lm	3000K		DALI2 / NightDim	I
5069GR							
5067AL		1782lm	4000K	DALI2 / NightDim		I	
5067GR							
5015AL		22W	1782lm	4000K		Dimmable	II
5015GR							

# Egersund Park

The world takes on different and better colours in the right light. And if, in addition, the light source is stylish, durable and energy-efficient, then we have a complete success. The luminaires from the Egersund Park family are not only intended for park settings and urban greenery. The versatility of the lamps and the possibility of a variety of applications has already been appreciated by many designers. The lightweight construction, simple shape and warm light, radically changes the perception of the space.





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Class
6080AL	LED	9,1W	907lm	3000K	> 72 000h	Dimmable	II
6080GR							
6081AL			935lm	4000K			
6081GR							
6082AL		23,9W	2258lm	3000K	> 102 000h	DALI2 / NightDim	I
6082GR							
6083AL			2319lm	4000K			
6083GR							



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Class
6090AL	LED	9,1W	907lm	3000K	> 102 000h	Dimmable	II
6090GR							
6091AL			935lm	4000K			
6091GR							
6092AL		23,9W	2258lm	3000K	> 102 000h	DALI2 / NightDim	I
6092GR							
6093AL			2319lm	4000K			
6093GR							

# Egersund Park




**Colour:**

- Aluminium
- Graphite

**Colour temperature:**

2700K\* 3000K 4000K

\*2700K on request only, contact your supplier.



Fully replaceable electrical kit.



Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).




Product Eco-friendly.

**Accessories:**


**Art. 205**

Concreting anchor



**Art. 206**

Anchoring support





# Egersund Park




**Colour:**

- Aluminium
- Graphite

**Colour temperature:**

2700K\* 3000K 4000K

\*2700K on request only, contact your supplier.



Fully replaceable electrical kit.



Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).




Product Eco-friendly.

**Accessories:**


**Art. 6130**

Concreting anchor




**Art. 6132**

Anchoring support 490mm



**Art. 6135**

Electric box



for Art. 6105, 6107, 6113, 6115



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Class	
6105AL	LED	9,1W	907lm	3000K	> 72 000h	Dimmable	II	
6105GR				4000K				
6107AL			23,7W	2239lm				3000K
6107GR								4000K
6113AL		23,9W	2314lm	3000K		DALI2	I	
6113GR				4000K				
6115AL		10W	959lm	3000K	>50 000h	Dimmable	II	
6115GR				4000K				
6117AL			1064lm	3000K				
6117GR				4000K				
6118AL								
6118GR								






# Geneva

Geneva is a fashionable type of lamp, and is popular with designers and individual investors alike. The hallmark of the Geneva wall lamp is the light emitted in two directions.


Using an innovative plane lighting system, the glare effect has been eliminated.

The Geneva lamp is a luminaire with a wide range of applications. It is ideal for illuminating pillars and large wall areas, especially on public buildings. Geneva can also certainly transform the shape of a single-family house, not only with a modern character.

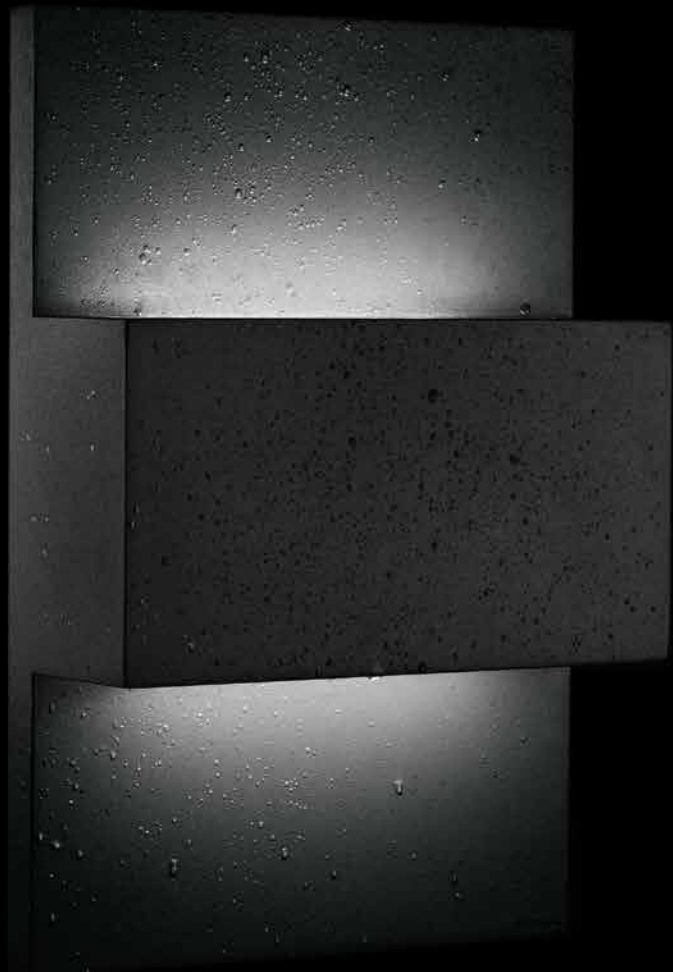



# Geneva

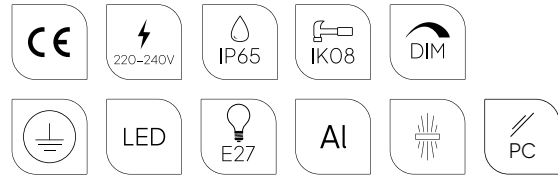


**Colour:**

- Aluminium
- White
- Graphite

**Colour temperature:**

2700K\* 3000K 4000K

\*2700K on request only, contact your supplier.




Fully replaceable electrical kit.



Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).




Product Eco-friendly.

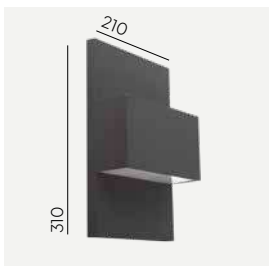



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1874AL	E27	-	-	-	-	-
1874GR		-	-	-	-	-
1874WH		-	-	-	-	-
1879AL	LED	8,3W	609lm	3000K	> 72 000h	Dimmable
1879GR						
1879WH						
1880AL		8,4W	656lm	4000K		
1880GR						
1880WH						

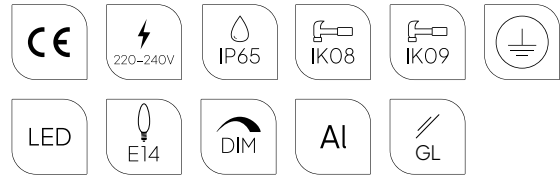

# Grimstad




**Colour:**


-  Aluminium
-  Graphite

**Colour temperature:**

2700K\* 3000K 4000K



\*2700K on request only, contact your supplier.



Fully replaceable electrical kit.




Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).



Product Eco-friendly.






Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1545AL	LED	8,3W	67lm	3000K	> 100 000h	Dimmable
1545GR						
5025AL		7,4W	72lm	4000K		
5025GR						
1547AL	E14	-	-	-	-	-
1547GR						






Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1544AL	LED	5,3W	214lm	3000K	70 000h	Dimmable
1544GR						
1546AL	E14	-	-	-	-	-
1546GR						

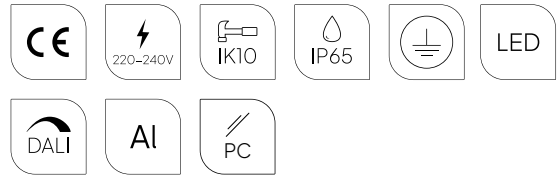

# Glode



**Colour:**


-  Aluminium
-  Graphite
-  Black

**Colour temperature:**

- 2700K\*
  - 3000K
  - 4000K
- 
- \*2700K on request only, contact your supplier.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Product Eco-friendly.

**Accessories:**


**Art. 112**

Concreting anchor




**Art. 113**

Anchoring support





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens
1262AL	LED	53W	7746lm	4000K	> 70 000h	DALI2	IESNA type IV
1262BL							
1262GR							
1261AL							
1261BL							
1261GR							
1281AL		54W	7320lm	3000K		-	
1281BL							
1281GR							
1282AL							
1282BL							
1282GR							

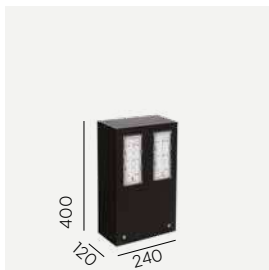

Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens
1264AL	LED	53W	7746lm	4000K	> 70 000h	DALI2	IESNA type IV
1264BL							
1264GR							
1263AL							
1263BL							
1263GR							
1283AL		54W	7320lm	3000K		-	
1283BL							
1283GR							
1284AL							
1284BL							
1284GR							




# Halmstad

Thanks to Halmstad luminaires, garden spaces will acquire a unique charm. The bollard made of natural wood and steel works well with shrubs, perennials, stones and, above all, with the wooden architecture of the garden such as arbours, benches, trellises for climbing plants. Lamps in the garden are exposed to snow, sun, frost and moisture. They will serve for as long as possible heavily exposed to the test of time and weather. The elegant design with modern LED technology and the different sizes make it simply worth applying in the garden. The trees will grow larger, the plants will create a life-giving retreat and the reliable Halmstad luminaires will continue to enhance the beauty of the garden.





# Halmstad

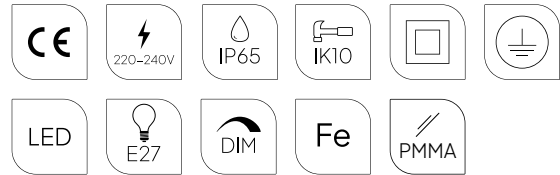

**Colour:**


- Black
- Graphite
- Galvanized

**Colour temperature:**

2700K\* 3000K 4000K



\*2700K on request only, contact your supplier.




Fully replaceable electrical kit.



Product Eco-friendly.



Luminaire suitable for extreme conditions.




Double corrosion protection (galvanising+powder coating).

**Accessories:**


**Art. 205**

Concreting anchor




**Art. 206**

Anchoring support






Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
296BL	E27	-	-	-	-	-
296GA						
296GR						
1483BL	LED E27	5,9W	252lm	2700K	25 000h	Dimmable
1483GA						
1483GR						
1482BL	LED	8,5W	292lm	3000K	> 50 000h	
1482GA						
1482GR						
5022BL			310lm	4000K		
5022GA						
5022GR						

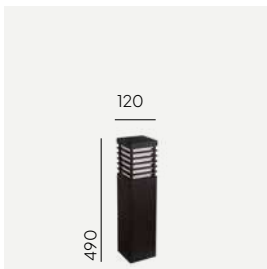

Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
295BL	E27	-	-	-	-	-
295GA						
295GR						
1488BL	LED E27	5,9W	252lm	2700K	25 000h	Dimmable
1488GA						
1488GR						
1489BL	LED	8,5W	292lm	3000K	> 50 000h	
1489GA						
1489GR						
1346BL			310lm	4000K		
1346GA						
1346GR						




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Class
210BL	E27	-	-	-	-	-	II
210GA							
210GR							
212BL	LED E27	5,9W	-	2700K	25 000h	Dimmable	
212GA							
212GR							
211BL	LED	10,5W	295lm	3000K	> 50 000h	-	I
211GA							
211GR							





# Halmstad

scandinavian wood

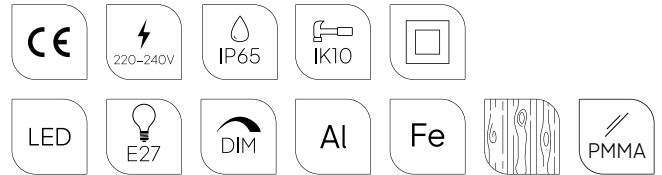

**Colour:**

- Black
- Galvanized
- Graphite

**Wood:**

- Impregnated
- Painted

**Colour temperature:**

2700K\* 3000K 4000K




\*2700K on request only, contact your supplier.



Luminaire housing made of natural wood.



Product Eco-friendly.




Fully replaceable electrical kit.

**Accessories:**


**Art. 205**

Concreting anchor



**Art. 206**

Anchoring support





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1410BL	E27	-	-	-	-	-
1410GA						
1410GR						
1356BL	LED	8,5W	310lm	4000K	> 50 000h	Dimmable
1356GA						
1356GR						
1419BL			292lm	3000K		
1419GA						
1419GR						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1400BL	E27	-	-	-	-	-
1400GA						
1400GR						
1353BL	LED	8,5W	310lm	4000K	> 50 000h	Dimmable
1353GA						
1353GR						
1409BL			292lm	3000K		
1409GA						
1409GR						




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1413BL	E27	-	-	-	-	-
1413GA						
1413GR						
1350BL	LED	8,5W	310lm	4000K	> 50 000h	Dimmable
1350GA						
1350GR						
1417BL			292lm	3000K		
1417GA						
1417GR						



Bollard

Modern

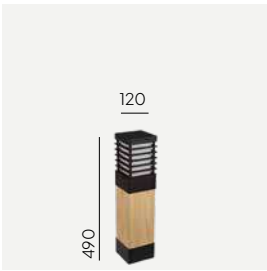


Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1403BL	E27	-	-	-	-	-
1403GA						
1403GR						
1347BL	LED	8,5W	310lm	4000K	> 50 000h	Dimmable
1347GA						
1347GR						
1407BL			292lm	3000K		
1407GA						
1407GR						





# Halden

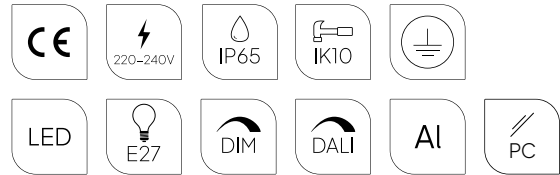

**Colour:**

- Aluminium
- White
- Graphite

**Colour temperature:**


2700K\* 3000K 4000K



\*2700K on request only, contact your supplier.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.



Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
510AL	E27	-	-	-	-	-
510GR		-	-	-	-	-
510WH		-	-	-	-	-
515AL	LED E27	5,9W	175lm	2700K	25000h	Dimmable
515GR						
515WH						
5096AL	LED	8,4W	662lm	3000K	> 110 000h	DALI2
5096GR						
5096WH						
517AL		8,5W	682lm	4000K	> 110 000h	Dimmable
517GR						
517WH						
5020AL	8,8W	690lm	4000K	> 110 000h	DALI2	
5020GR						
5020WH						
5097AL	8,8W	696lm	4000K	> 110 000h	DALI2	
5097GR						
5097WH						



# Hellvik

The original bollard luminaire in a fashionable geometric shape will bring an aura of modernity to any private or public space. The Hellvik lamp is hard to pass by indifferently. Available in several sizes, this bollard offers a range of state-of-the-art light sources and controls to suit the most demanding users. Hellvik is the perfect choice for those who want to combine modernity with reliability and exceptional style. This lamp is a frequent choice of designers. The unusual design will work well in a wide variety of settings. Hellvik likes to play a leading role in the space. It likes to attract attention.

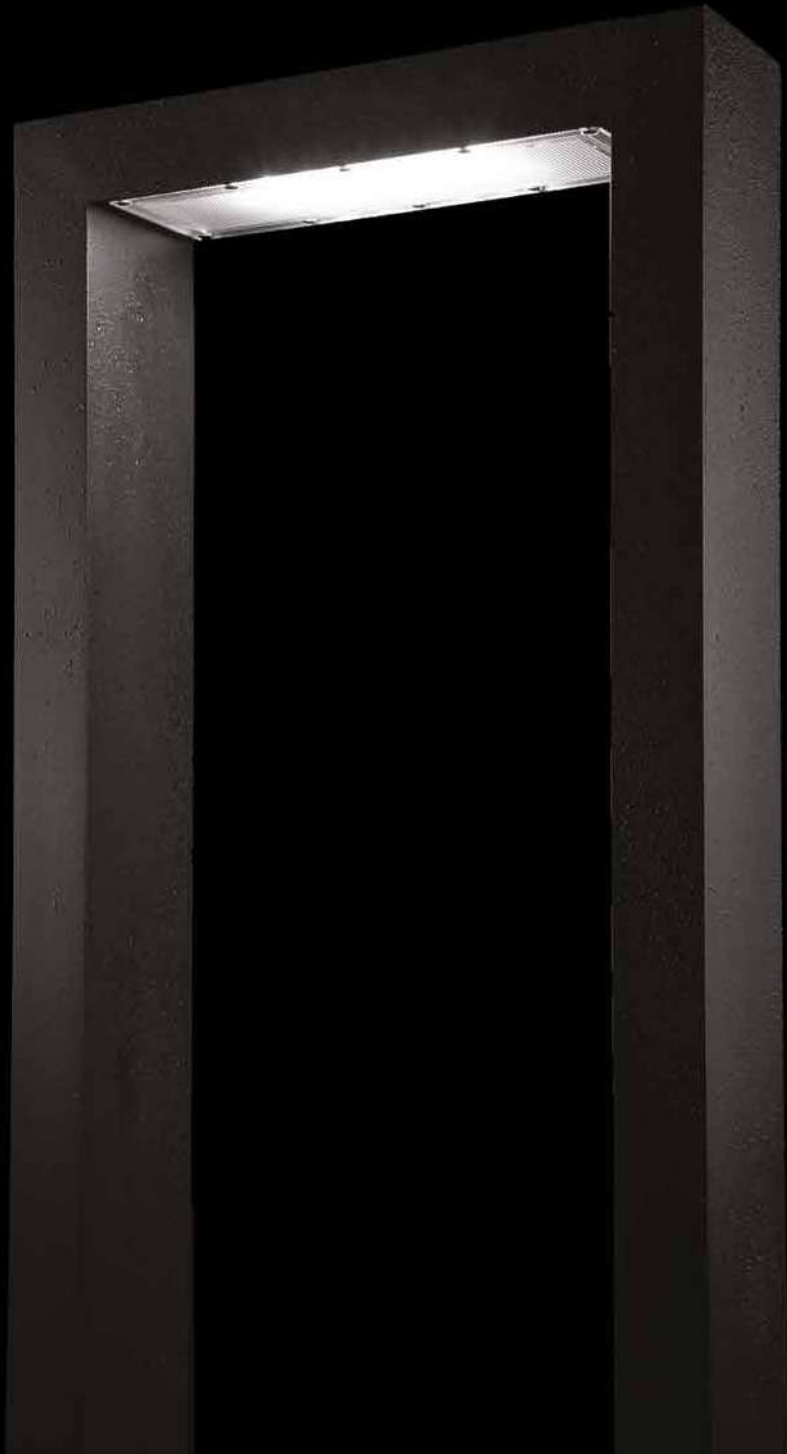

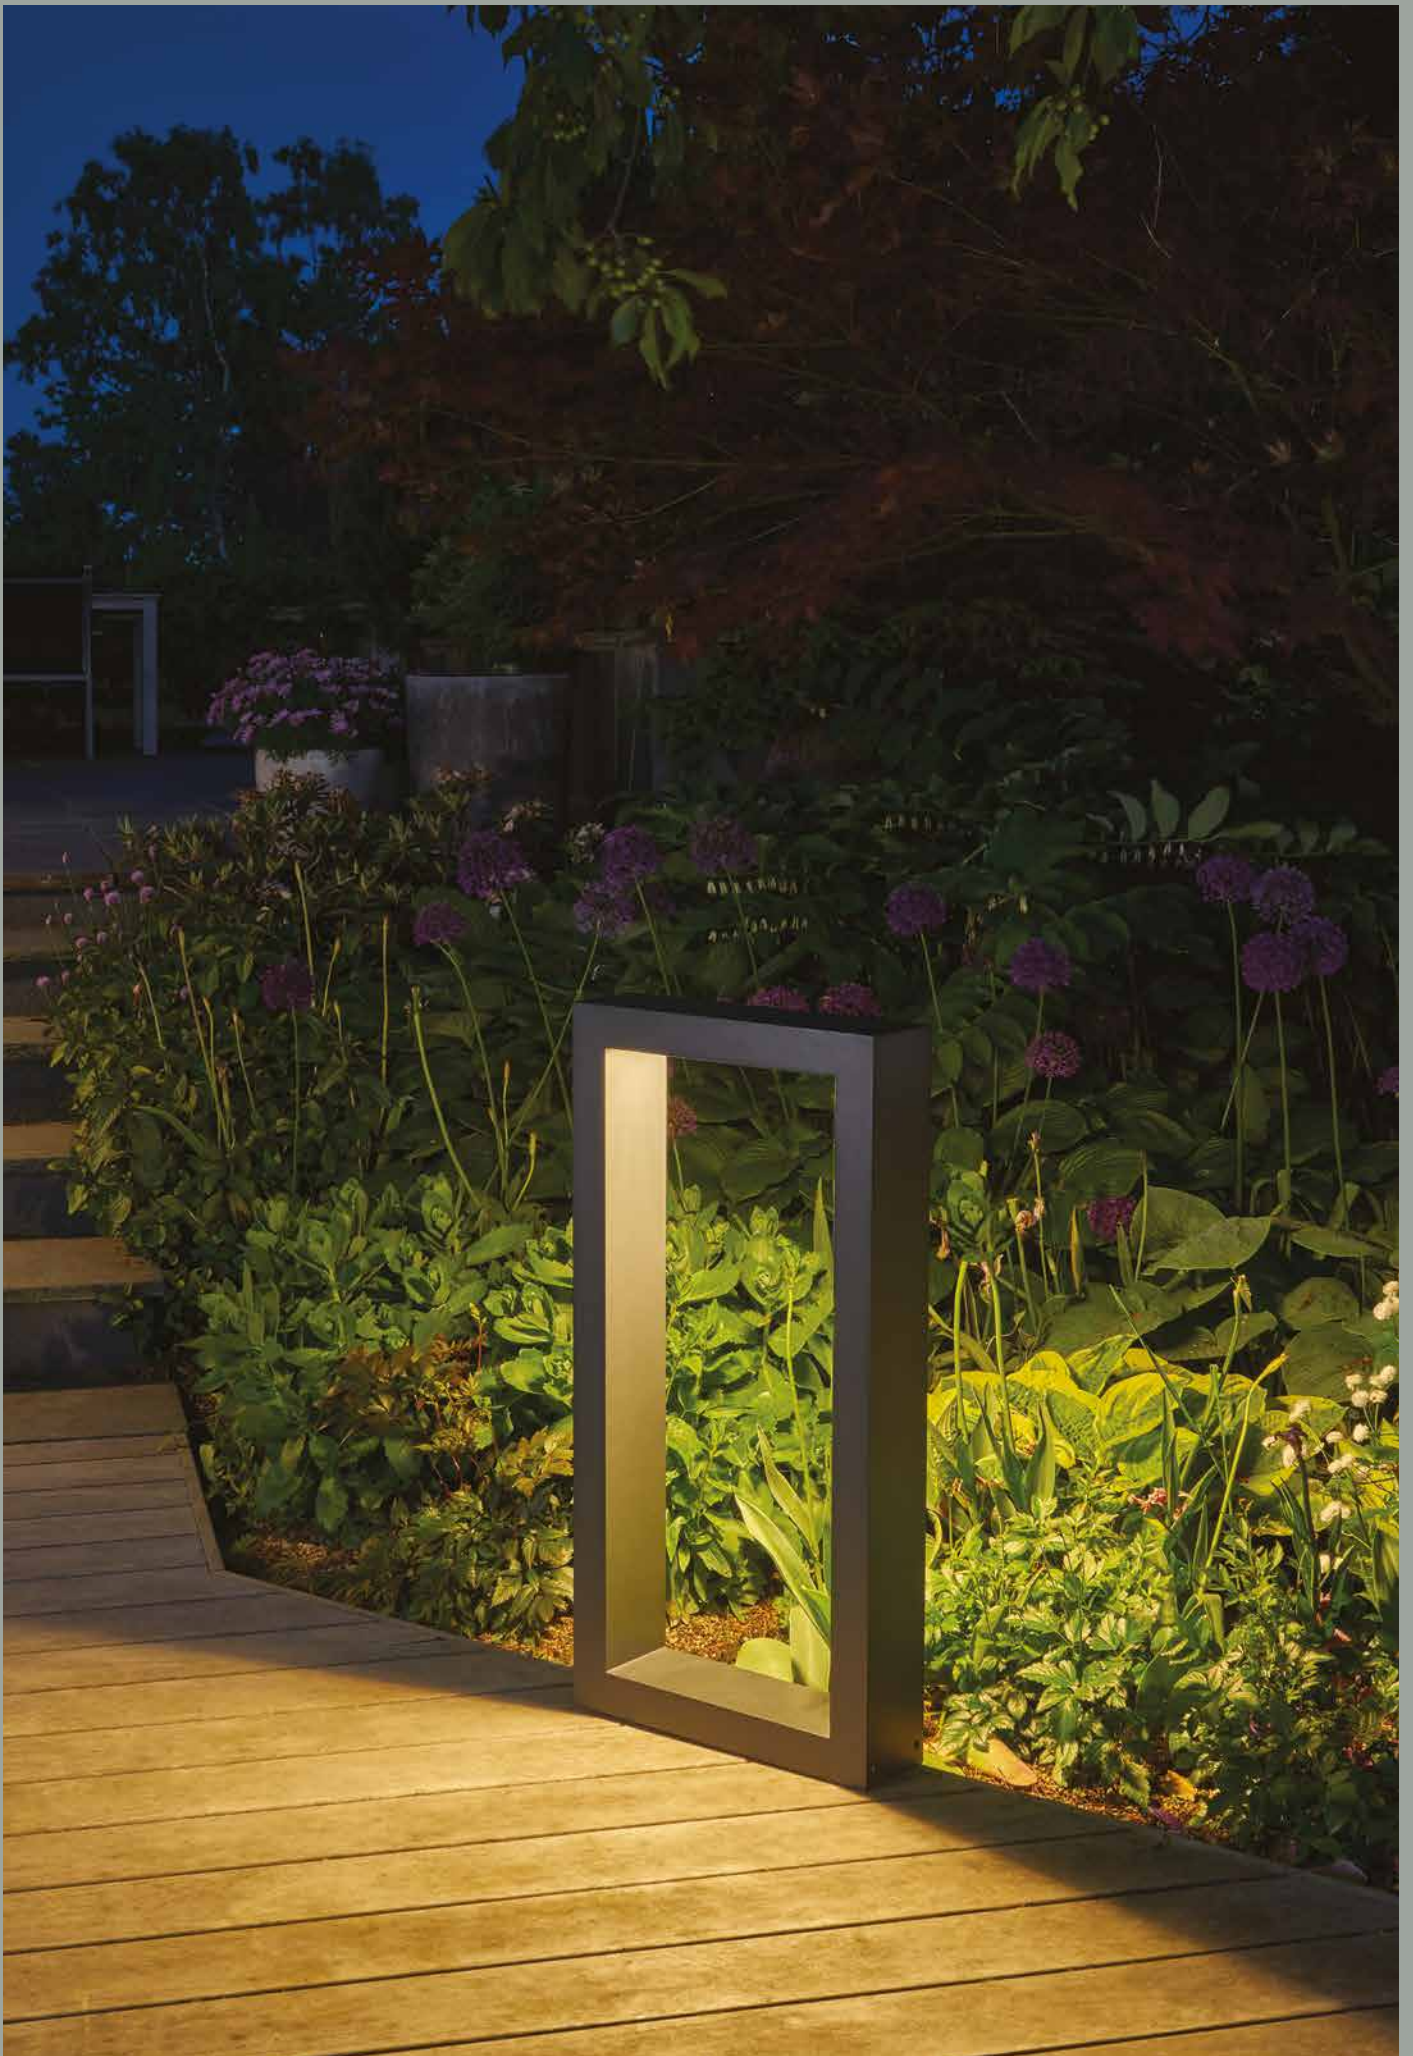

# Hellvik



**Colour:**

- Aluminium
- Graphite
- Black

**Colour temperature:**


2700K\* 3000K 4000K




\*2700K on request only, contact your supplier.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).

**Accessories:**


**Art. 209**

Concreting anchor



**Art. 2409**


Anchoring support  
(2 pcs needed)






Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Class				
2410AL	LED	11,8W	1014lm	3000K	> 72 000h	Dimmable	II				
2410BL											
2410GR											
2411AL											
2411BL											
2411GR											
2412AL		20,2W	1747lm	3000K	> 72 000h	DALI2	I				
2412BL											
2412GR											
2413AL											
2413BL											
2413GR											
2414AL		8W	1038lm	3000K	> 100 000h	Dimmable	II				
2414BL											
2414GR											
2415AL			8,1W	1007lm				4000K	> 100 000h	DALI2	I
2415BL											
2415GR											
2416AL		11,9W		1537lm	3000K	> 100 000h	DALI2	I			
2416BL											
2416GR											
2417AL											
2417BL											
2417GR											



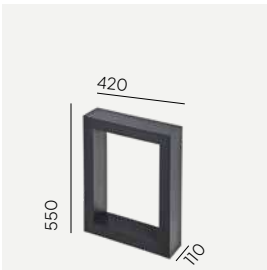

Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Class
2400AL	LED	6,9W	531lm	3000K	> 72.000h	Dimmable	II
2400BL				4000K			
2400GR			575lm	3000K			
2401AL				4000K			
2401BL			670lm	3000K			
2401GR				4000K			
2402AL		10,1W	808lm	3000K	> 72.000h	DALI2	I
2402BL				4000K			
2402GR				4000K			
2403AL		8W	1038lm	3000K	> 100.000h	Dimmable	II
2403BL				4000K			
2403GR				4000K			
2404AL		8,1W	1007lm	3000K	> 100.000h	DALI2	I
2404BL				4000K			
2404GR				4000K			
2405AL		11,9W	1537lm	3000K	> 100.000h	DALI2	I
2405BL				4000K			
2405GR				4000K			
2406AL		11,9W	1549lm	3000K	> 100.000h	DALI2	I
2406BL				4000K			
2406GR				4000K			
2407AL		11,9W	1549lm	3000K	> 100.000h	DALI2	I
2407BL				4000K			
2407GR				4000K			

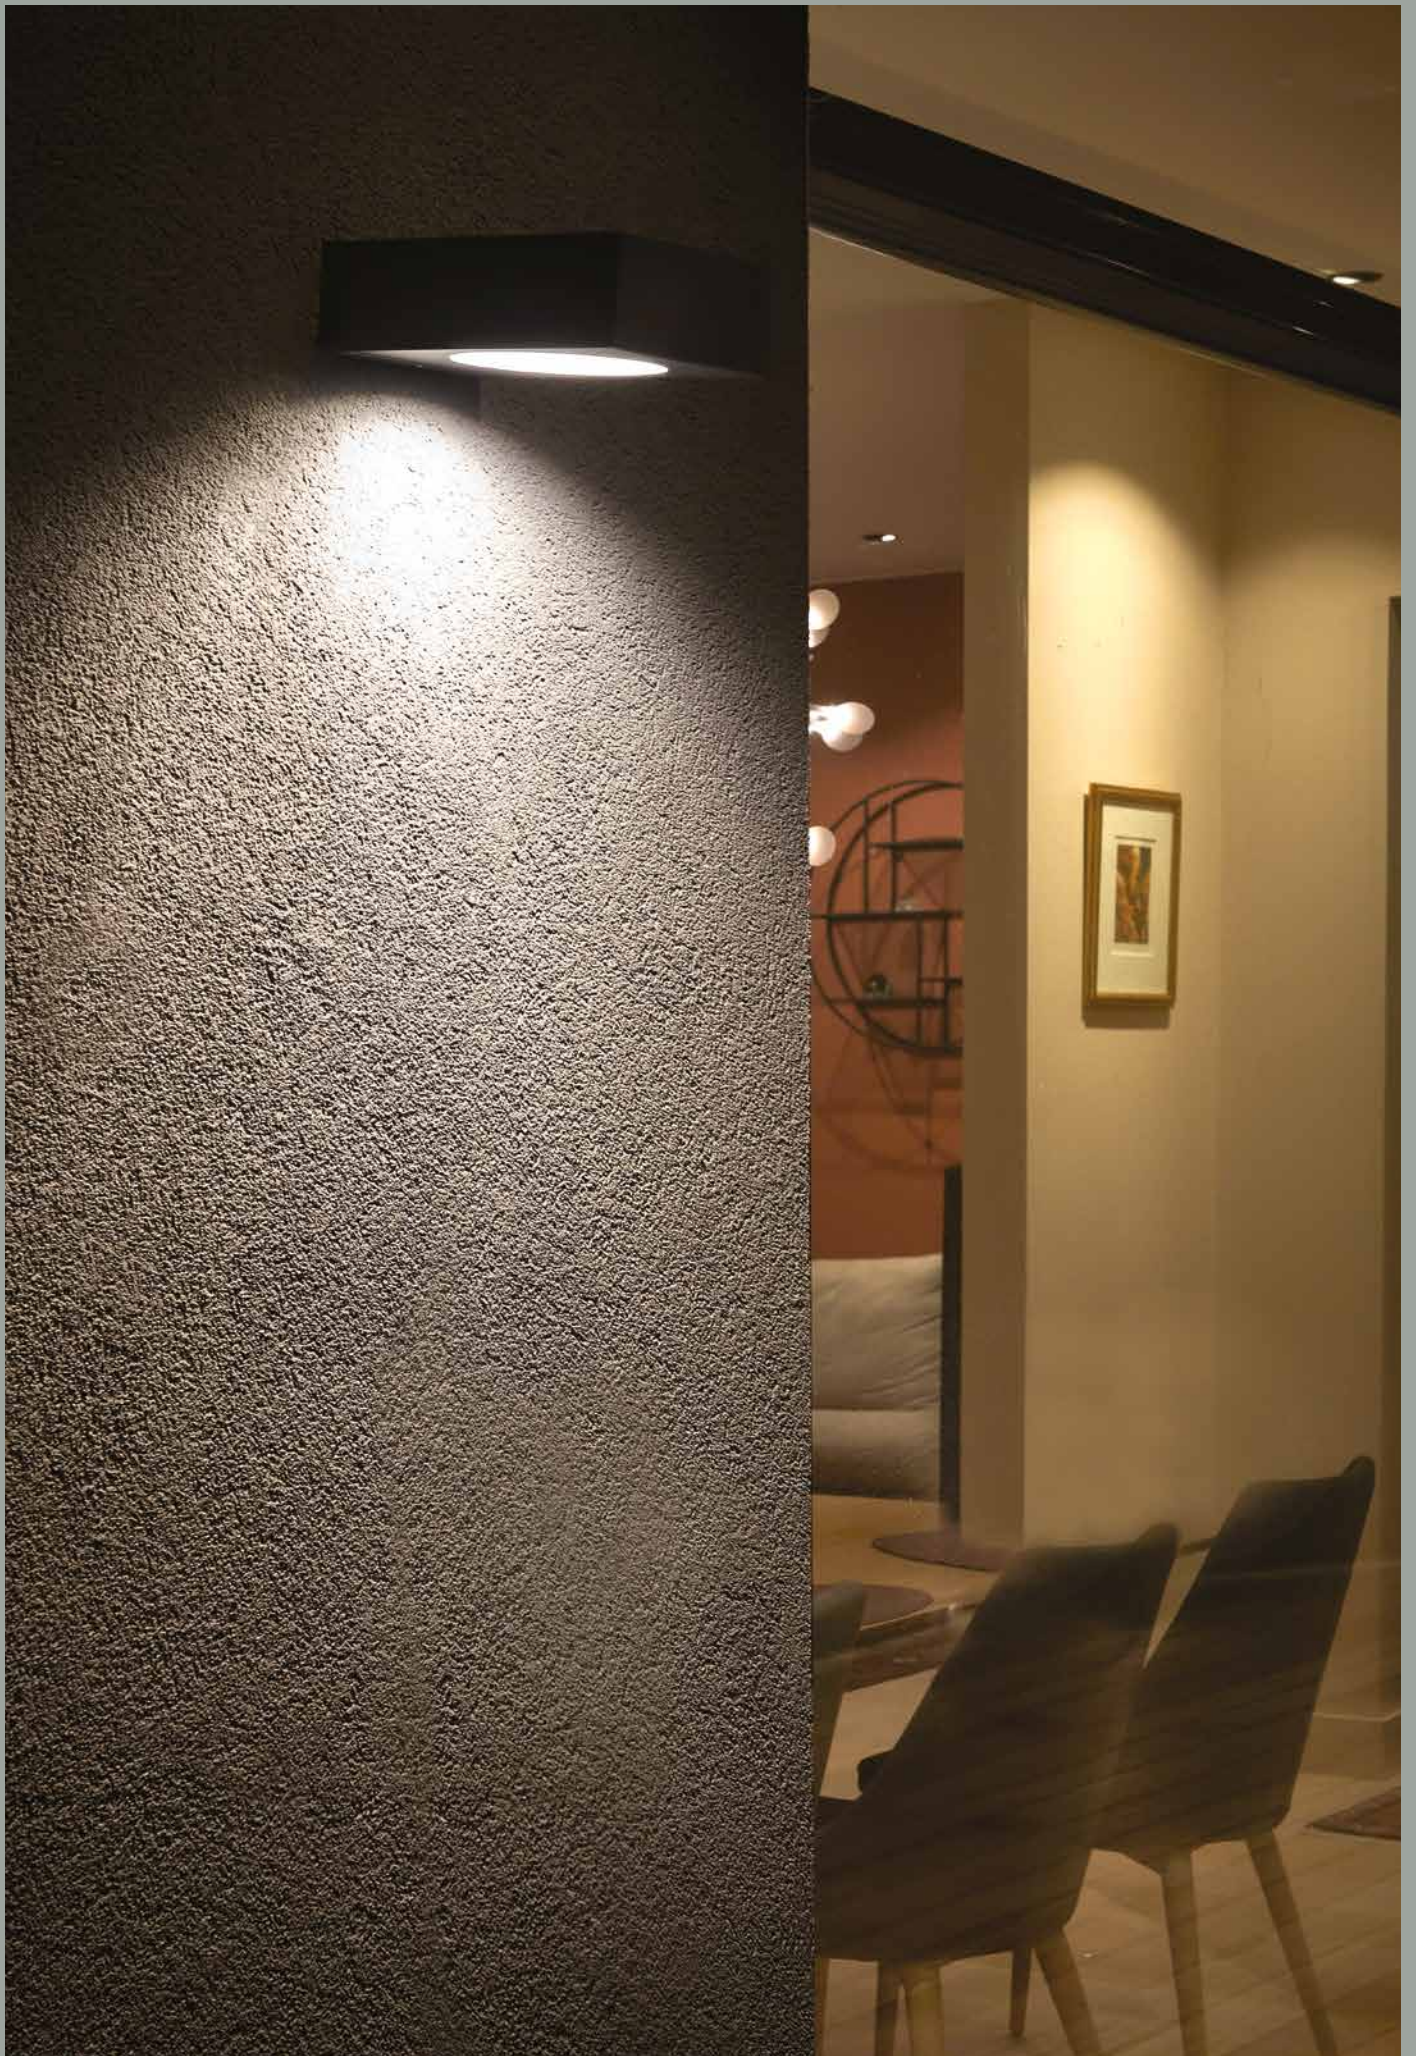

# Hitra



**Colour:**

- Aluminium
- White
- Graphite


**Colour temperature:**

2700K\* 3000K 4000K

\*2700K on request only, contact your supplier.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.





Product Eco-friendly.

**Accessories:**

**Art. 151**

Corner bracket tilt 15//30/45 °



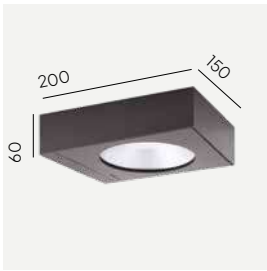


Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50
1330AL	LED	9,5W	920lm	3000K	50 000
1330GR					
1330WH					
5114AL			979lm	4000K	
5114GR					
5114WH					
1331AL		17,5W	1599lm	3000K	
1331GR					
1331WH					
5115AL			1717lm	4000K	
5115GR					
5115WH					



# Hammerfest

A city vibrant with life, yet safe and comfortable is the perfect place for the Hammerfest pole. It refers in style to the classics, but is ultimately thoroughly modern after all. Hammerfest is a modern pole elegant by its minimalism. Thanks to its specially designed luminaire, the lamp has the advantage of illuminating a large area with a harmonious beam of light. Designers of urban spaces have the choice of a satin or milk glass diffuser, with which the urban evening space of streets, parks, promenades and squares can be balanced perfectly. Good lighting does not compete with architecture in the city. The task of successful illumination is to highlight its most significant qualities.



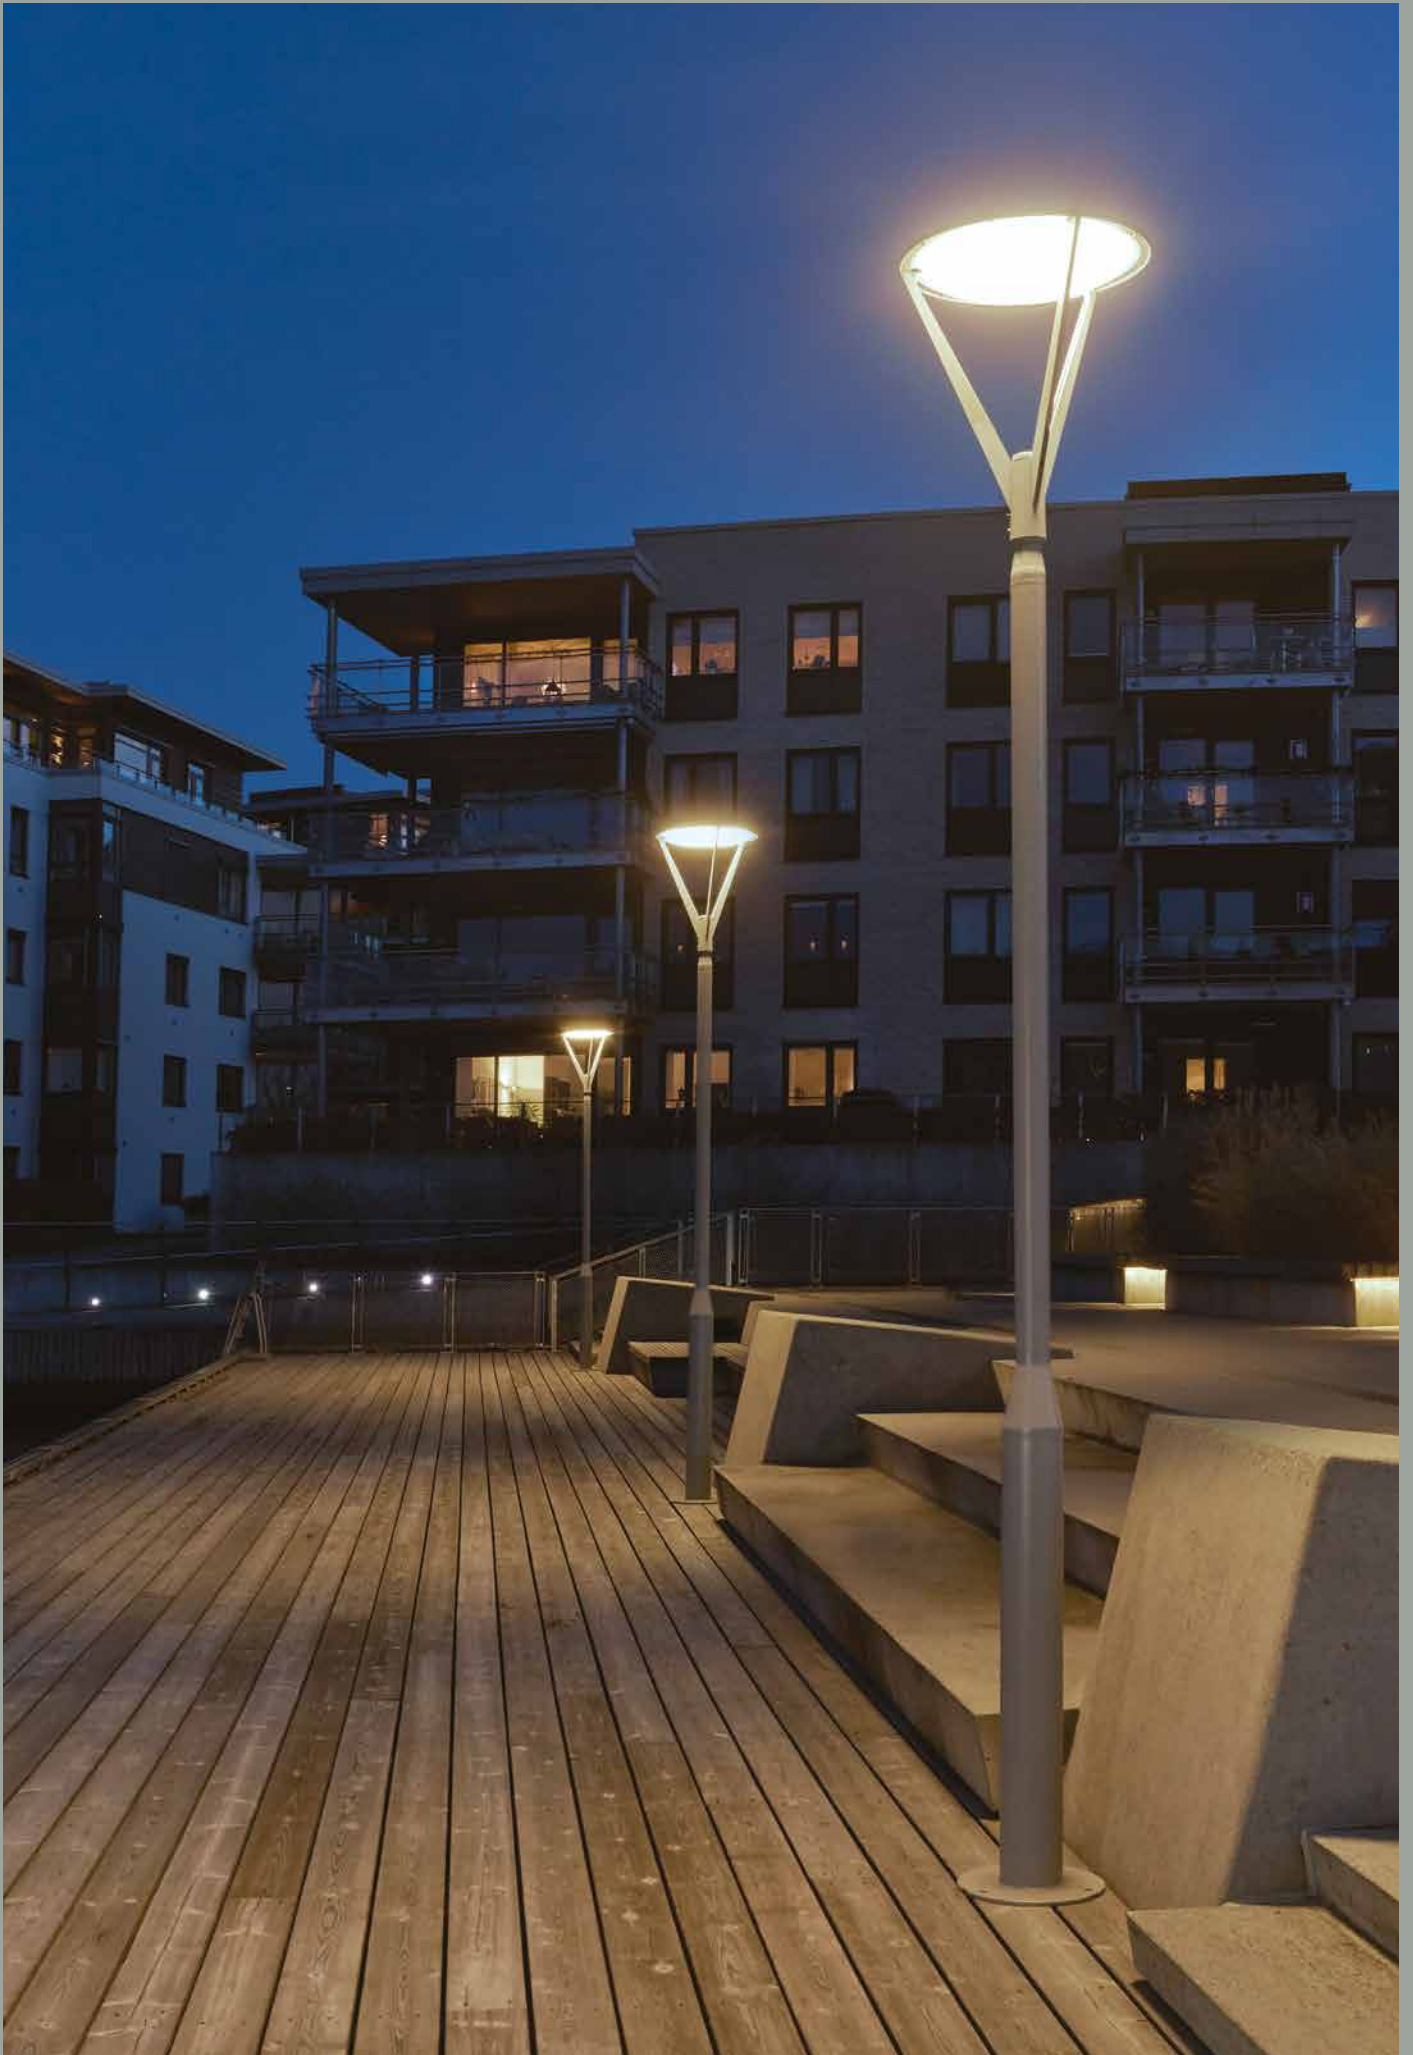

# Hammerfest



Hammerfest mounted on pole 3004, further information on pages 417-418.

CE	220-240V	IP65	Grounding symbol	DIM	DALI
LED	Al	PMMA	6m	D4I	60



**Colour:**

- Aluminium
- Graphite

**Colour temperature:**


2700K\* 3000K 4000K




\*2700K on request only, contact your supplier.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).

**Accessories:**

Luminaires sold separately, recommended poles ø60, further information on pages 417-418.


**Art. 7665**

Adapter Ø60 for install on pole Ø76



**Art. 154**

Arm for use on wall





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	
5135AL	LED	32,3W	3320lm	4000K	> 72 000h	-	
5135GR				3000K		DALI2/ NightDim	
5136AL		32,5W	3117lm	4000K			
5136GR			3310lm	3000K			
5137AL		32,7W	3227lm	3000K			> 50 000h
5137GR				4000K			
6141AL							
6141GR							



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	
5130AL	LED	32W	3933lm	4000K	> 72 000h	-	
5130GR				3000K		DALI2/ NightDim	
5131AL		32,5W	3974lm	4000K			
5131GR			3721lm	3000K			
5132AL		26,4W	3321lm	3000K			> 54 000h
5132GR				4000K			
6140AL							
6140GR							




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens			
6146AL	LED	53W	6519lm	3000K	> 100 000h	DALI2/ NightDim	IESNA type V			
6146GR				4000K						
6148AL				6802lm				4000K		
6148GR				6545lm				3000K		
6147AL			7375lm	4000K		-		-	-	-
6147GR										
6149AL										
6149GR										



# Kisa

Proven, robust, practical and at the same time suitable for illuminating the driveway is the Kisa luminaire equipped with the latest LED technology. The Kisa lamp in both bollard and pole versions utilizes a huge range of LED applications, offering several control versions and light directions. Light sources must be glare-free as this is a priority for safety and convenience. In Kisa this is ensured by the milky diffuser, giving an intense but non-glare beam of light. The luminaire is also ideal for energy-saving illumination in garden settings and walkway lighting.



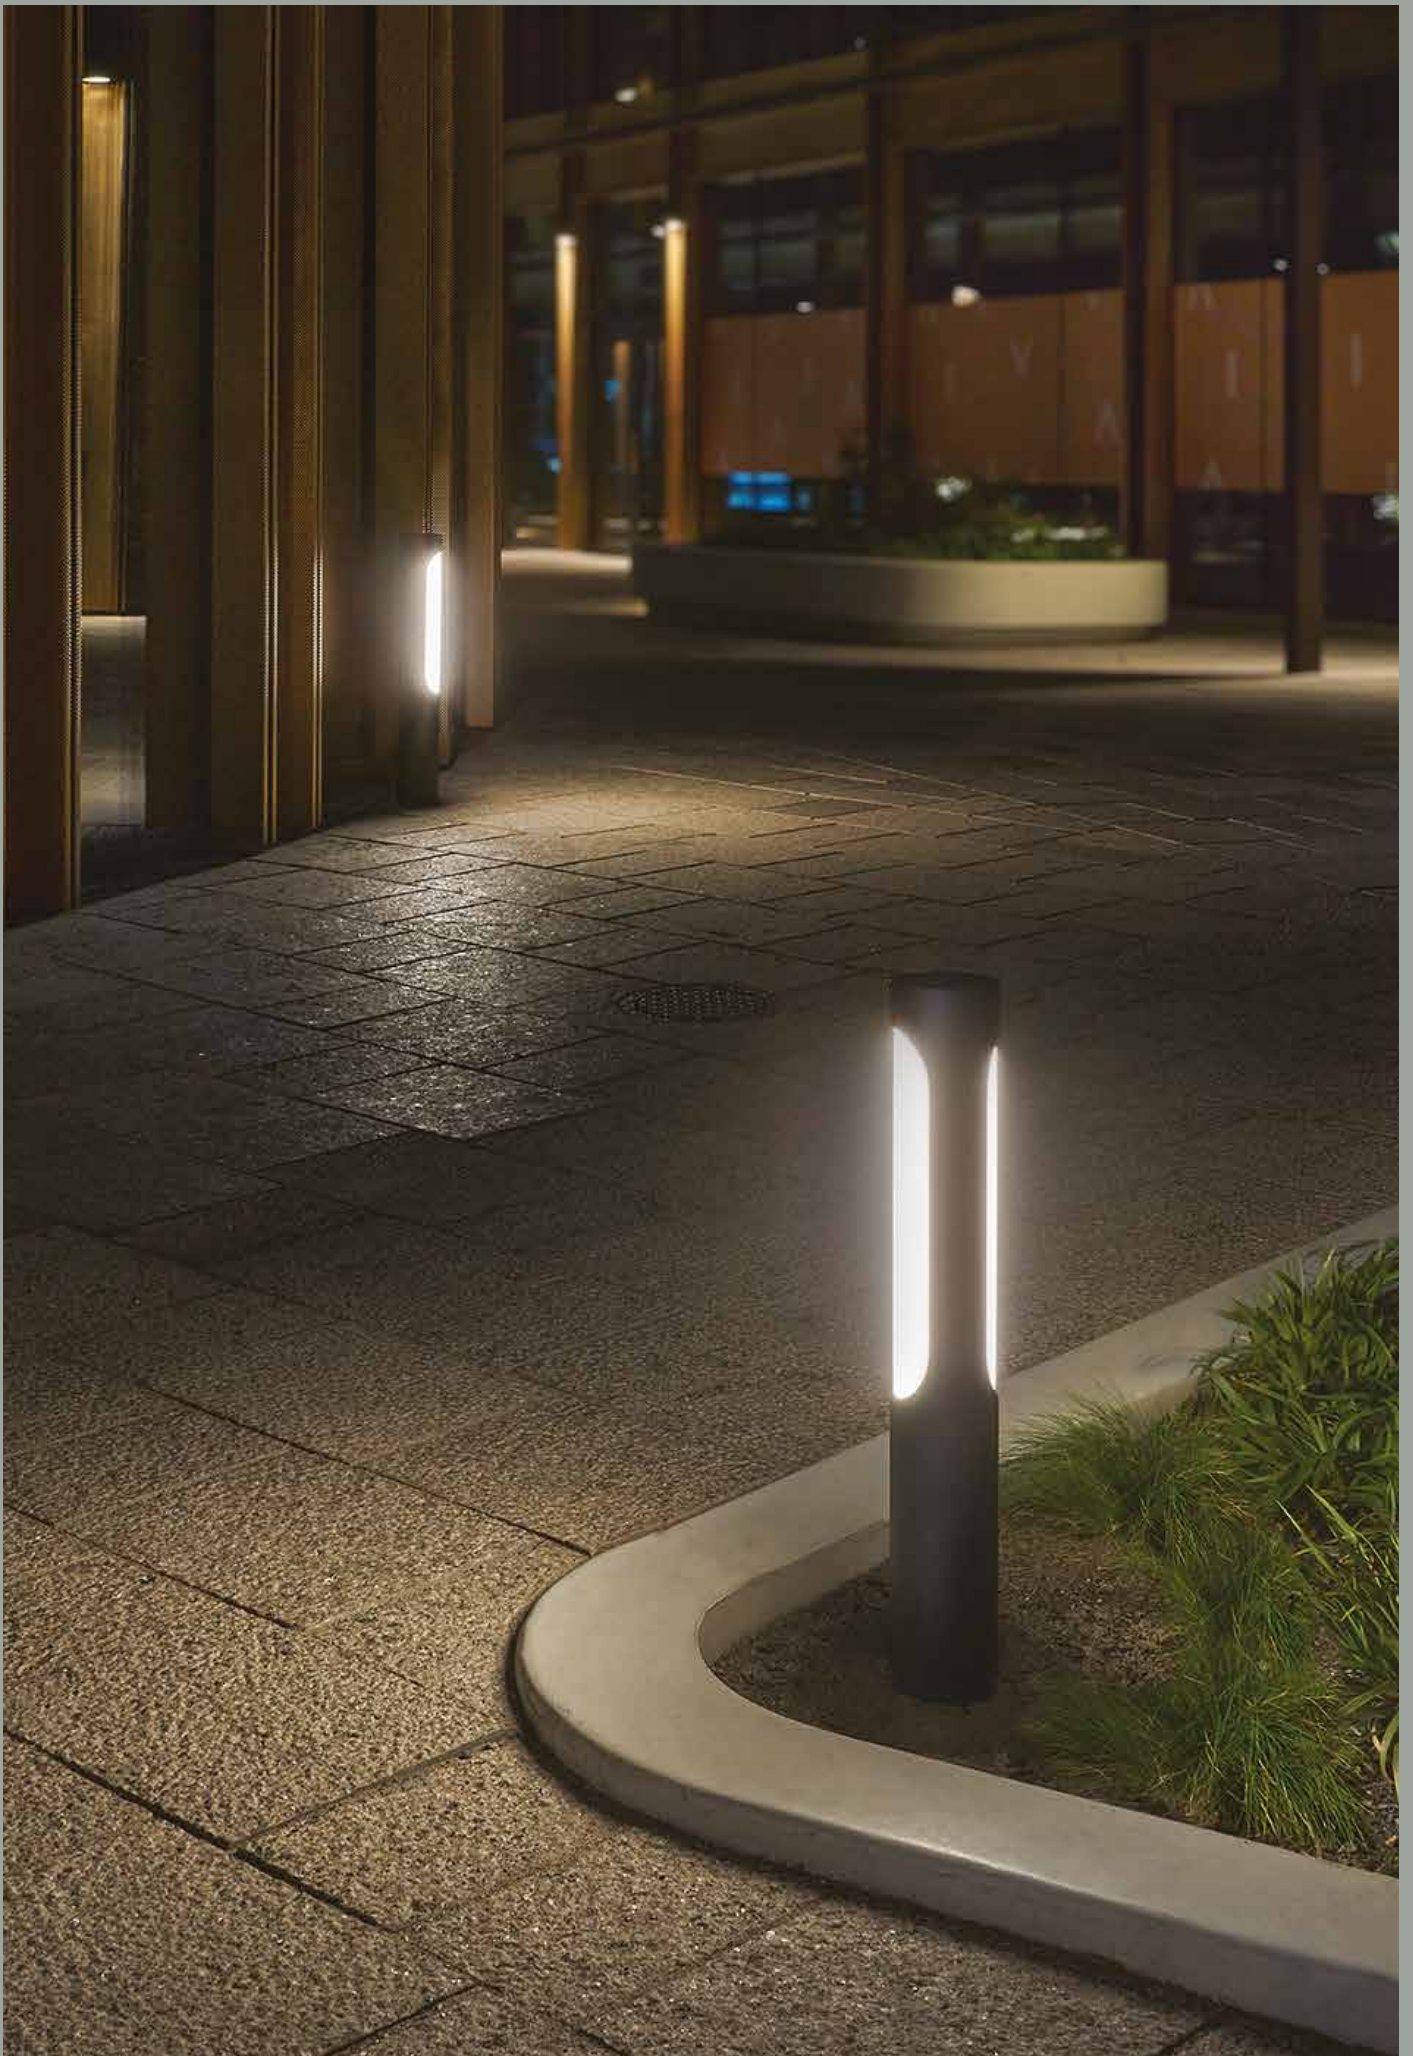

# Kisa



**Colour:**

- Aluminium
- Graphite


**Colour temperature:**

2700K\* 3000K 4000K

\*2700K on request only, contact your supplier.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).

**Accessories:**


**Art. 205**

Concreting anchor



**Art. 206**

Anchoring support





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	
5180AL	LED	8,8W	706lm	3000K	> 70 000h	Dimmable	
5180GR							
5182AL		14,1W	1185lm			4000K	DALI2/ NighDim
5182GR							
5181AL		8,8W	766lm	4000K		Dimmable	
5181GR							
5183GR		14,1W	1222lm			DALI2/ NighDim	
5183GR							



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	
5184AL	LED	13,4W	1274lm	3000K	> 70 000h	Dimmable	
5184GR							
5186AL		27W	2432lm			4000K	DALI2/ NighDim
5186GR							
5187AL		13,4W	1357lm			Dimmable	
5187GR							
5185AL		13,4W	1357lm			Dimmable	
5185GR							

# Kisa Pole



**Colour:**


- Aluminium
- Graphite

**Colour temperature:**

- 2700K\* 3000K 4000K
- 
- \*2700K on request only, contact your supplier.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).

**Accessories:**


**Art. 6130**

Concreting anchor




**Art. 6132**

Anchoring support 490mm



**Art. 6135**

Electric box





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	
5190AL	LED	8,8W	706lm	3000K	> 70 000h	Dimmable	
5190GR				4000K			
5191AL			766lm	3000K			
5191GR				4000K			
5192AL		14,1W	1185lm	3000K		> 70 000h	DALI2/ NightDim
5192GR				4000K			
5193AL			1222lm	3000K			
5193GR				4000K			



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	
5194AL	LED	13,4W	1274lm	3000K	> 70 000h	Dimmable	
5194GR				4000K			
5195AL			1357lm	3000K			
5195GR				4000K			
5196AL		27W	2432lm	3000K		> 70 000h	DALI2/ NightDim
5196GR				4000K			
5197AL			2637lm	3000K			
5197GR				4000K			

# Koster

The classics have always had, have and will always have their followers. The Koster lamp family is a proposal for universal lighting. Koster is a group of luminaires with a universal design characterised by a symmetrical light distribution. This design seems to tame the space, introducing calmness and predictability. The Koster luminaire can be used on the outside façade of a building, in the garden, next to a pavement. There are indeed many possibilities. It is available in a wall and two column variants - single and double.








# Koster




**Colour:**

- Aluminium
- Graphite

**Colour temperature:**



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).

**Accessories:**

**Art. 158**

Corner bracket






Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	IP	Lens		
724AL	E27	-	-	-	-	-	IP54	-		
724GR										
725AL	LED	9,5W	872lm	3000K	50 000h	-	IP54	-		
725GR										
1912AL		17,5W	1568lm							
1912GR										
5004AL		16,9W	1625lm	4000K	>100 000h	Dimmable	IP45			
5004GR										
1834AL		2090lm	3000K							
1834GR										
1814AL		2007lm	4000K	>120 000h					DALI2/ NightDim	IP45
1814GR										
1822AL	2747lm	4000K								
1822GR										
1842AL	2718lm	4000K								
1842GR										





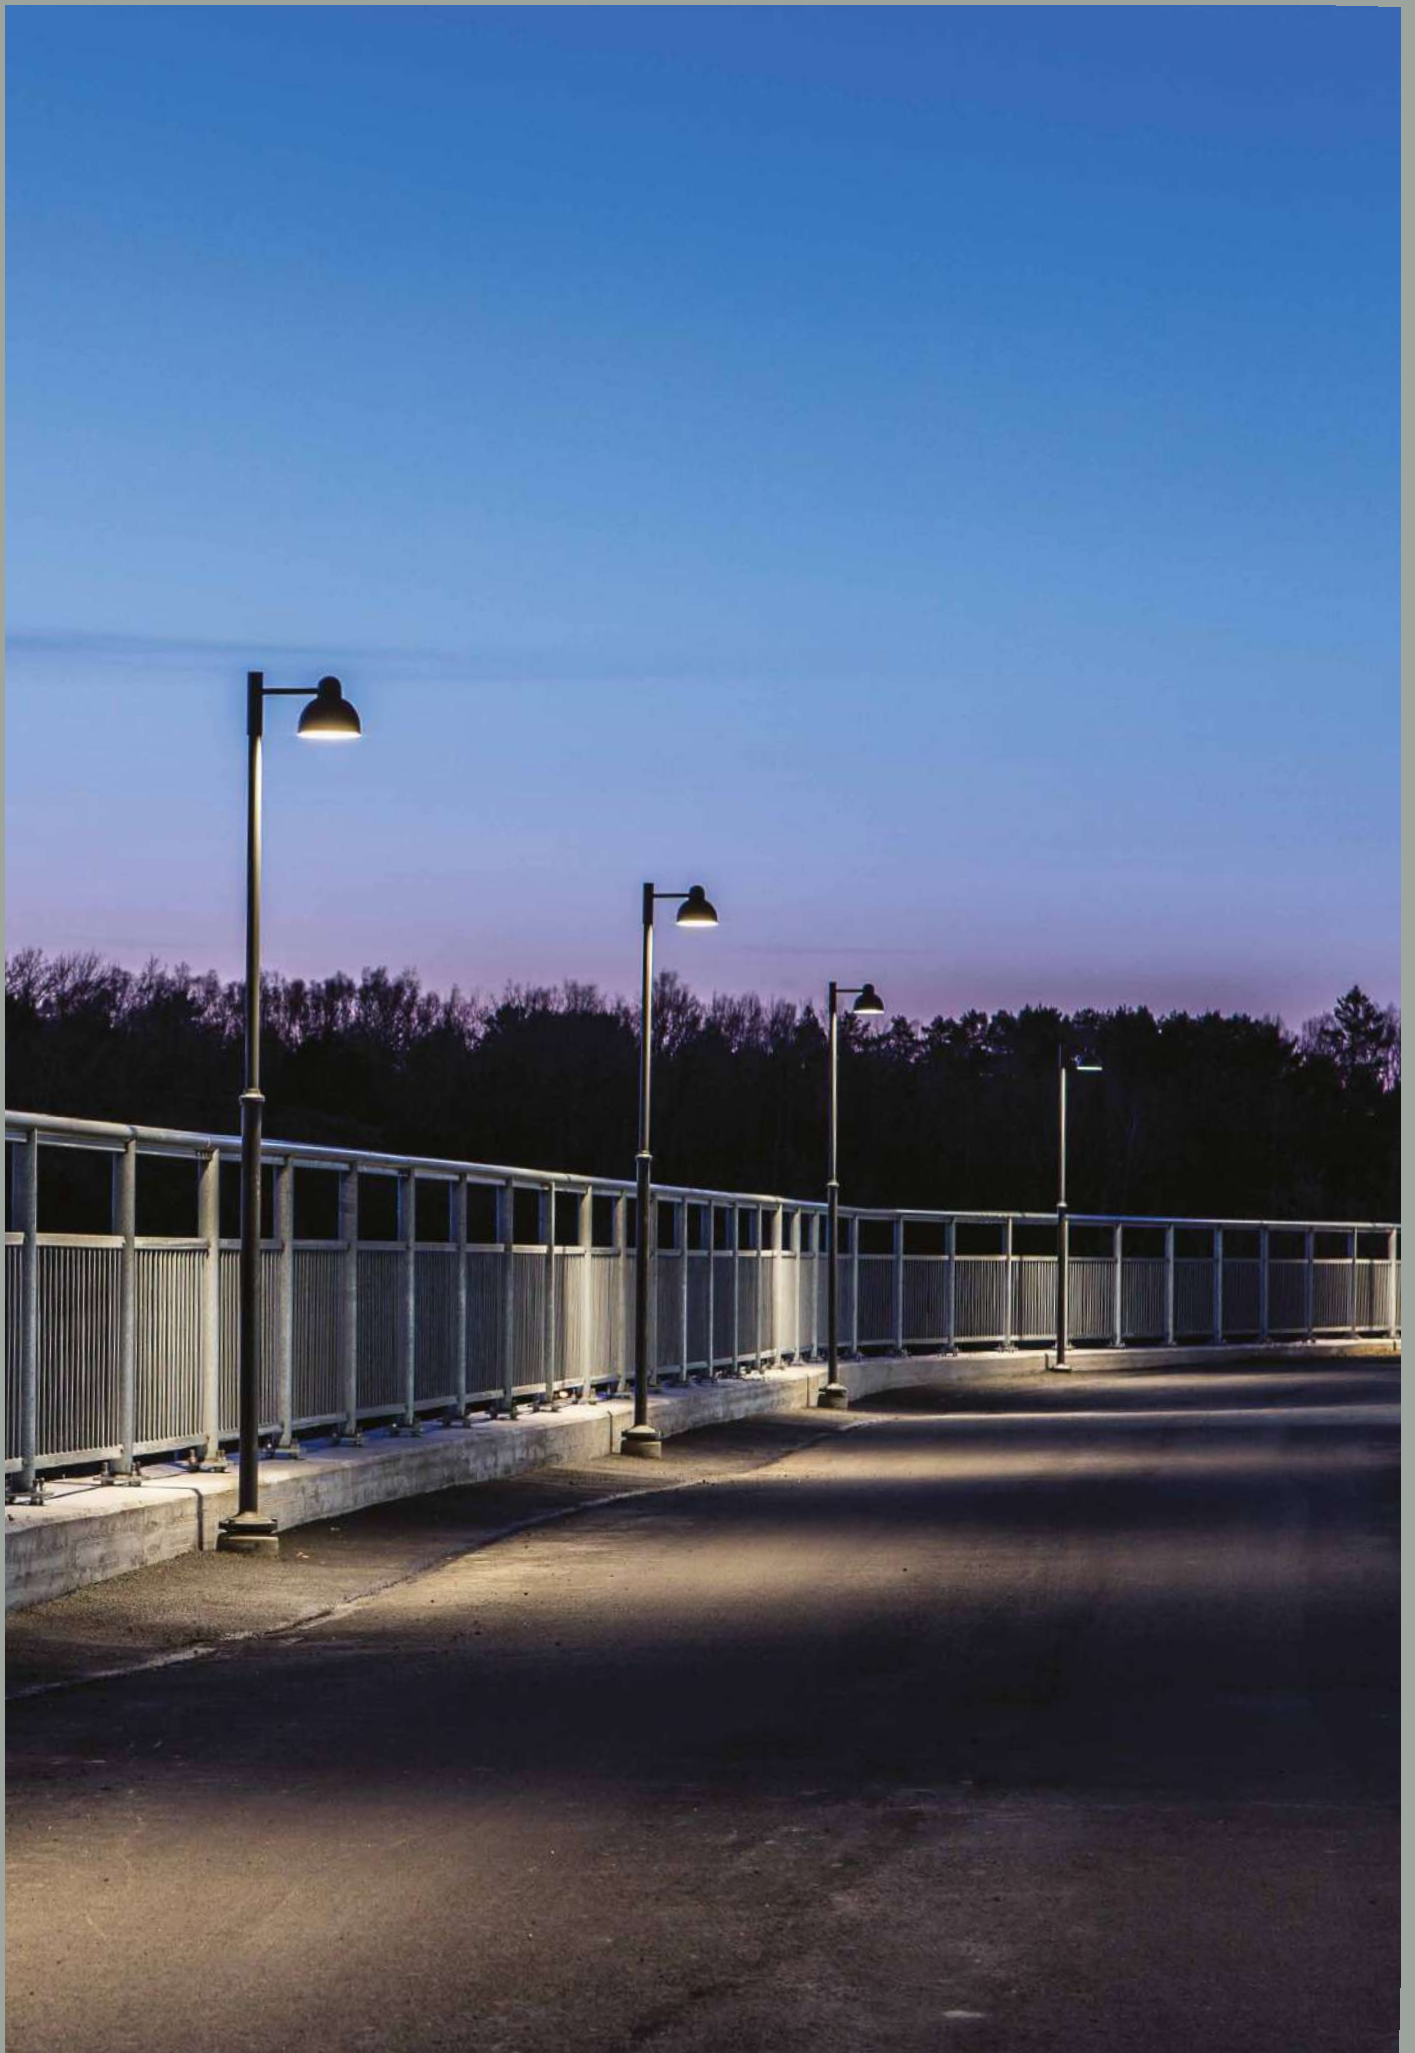


# Koster Pole



Koster mounted on pole 1273, further information on pages 417 - 418.

CE	220-240V	IK10	IP65	⏚	DIM	DALI
LED	E27	Al	PC	50	60	

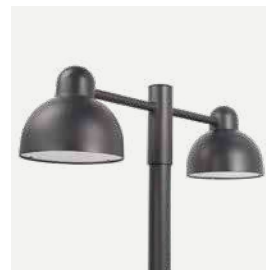

**Colour:**

- Aluminium
- Graphite

**Colour temperature:**


2700K\* 3000K 4000K



\*2700K on request only, contact your supplier.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).

**Accessories:**

Luminaires sold separately, recommended poles  $\varnothing 50$  and  $\varnothing 60$ , further information on pages 417 - 418.


**Art. 7660**

Adapter  $\varnothing 60$  for mounting on pole  $\varnothing 76$




**Art. 405**

Concreting anchor



**Art. 406**

Anchoring support





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens						
1815AL	LED	14,4W	1991lm	3000K	> 120 000h	DALI2/ NightDim	IESNA type V						
1815GR													
1823AL													
1823GR													
1843AL													
1843GR													
1835AL		14,4W	2031lm	4000K	50 000h	-	-						
1835GR													
5070AL		17,5W	1625lm	-				50 000h	-	-			
5070GR													
1915AL			1568lm	3000K							-	-	-
1915GR													



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens						
1817AL	LED	14,4W	1991lm	3000K	> 120 000h	DALI2/ NightDim	IESNA type V						
1817GR													
1825AL													
1825GR													
1845AL													
1845GR													
1837AL		14,4W	2031lm	4000K	50 000h	-	-						
1837GR													
5006AL		17,5W	1625lm	-				50 000h	-	-			
5006GR													
1913AL			1568lm	3000K							-	-	-
1913GR													



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens						
1816AL	LED	14,4W	1991lm	3000K	> 120 000h	DALI2/ NightDim	IESNA type V						
1816GR													
1824AL													
1824GR													
1844AL													
1844GR													
1836AL		14,4W	2031lm	4000K	50 000h	-	-						
1836GR													
5007AL		17,5W	1625lm	-				50 000h	-	-			
5007GR													
1914AL			1568lm	3000K							-	-	-
1914GR													



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Class	Lens			
1155AL	E27	-	-	-	-	-					
1155GR											
1157AL	LED	35W	3136lm	3000K	> 50 000h	-	I	-			
1157GR			3250lm	4000K							
1159AL		34W	3422lm	3000K	> 120 000h	Dimmable	II				
1159GR			3624lm	4000K							
1165AL	LED	37W	3654lm	3000K				> 120 000h	DALI2/ NightDim	I	IESNA type V
1165GR			3825lm	4000K							
1167AL											
1167GR											
1173AL											
1173GR											
1175AL											
1175GR											




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Class	Lens			
1177AL	E27	-	-	-	-	-					
1177GR											
1179AL	LED	35W	3136lm	3000K	> 50 000h	-	I	-			
1179GR			3250lm	4000K							
1181AL		34W	3422lm	3000K	> 120 000h	Dimmable	II				
1181GR			3624lm	4000K							
1187AL	LED	37W	3654lm	3000K				> 120 000h	DALI2/ NightDim	I	IESNA type V
1187GR			3825lm	4000K							
1189AL											
1189GR											
1195AL											
1195GR											
1197AL											
1197GR											





# Lillehammer

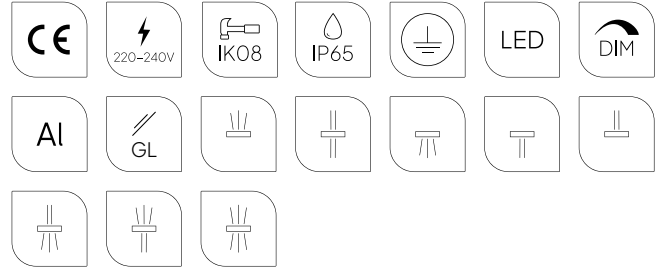

**Colour:**

- Aluminium
- Graphite
- Black
- White

**Colour temperature:**


2700K\* 3000K 4000K




\*2700K on request only, contact your supplier.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Multiple light variants.




Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).








Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1580AL	LED	7,3W	126lm	3000K	> 102 000h	Dimmable
1580BL						
1580GR						
1580WH						
5027AL			130lm	4000K		
5027BL						
5027GR						
5027WH						

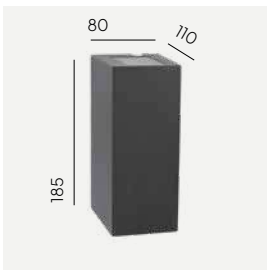

Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1581AL	LED	7,3W	216lm	3000K	> 102 000h	Dimmable
1581BL						
1581GR						
1581WH						
5028AL			231lm	4000K		
5028BL						
5028GR						
5028WH						




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1582AL	LED	4W	107lm	3000K	> 102 000h	Dimmable
1582BL						
1582GR						
1582WH						
5029AL			112lm	4000K		
5029BL						
5029GR						
5029WH						

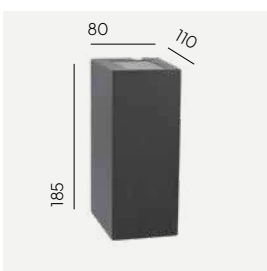


Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1583AL	LED	7,3W	34lm	3000K	> 102 000h	Dimmable
1583BL						
1583GR						
1583WH						
5030AL			38lm	4000K		
5030BL						
5030GR						
5030WH						




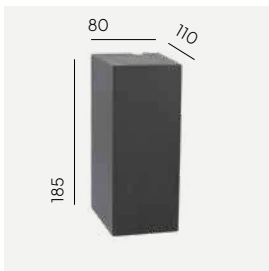

Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1584AL	LED	4W	17lm	3000K	> 102 000h	Dimmable
1584BL						
1584GR						
1584WH						
5031AL			18lm	4000K		
5031BL						
5031GR						
5031WH						

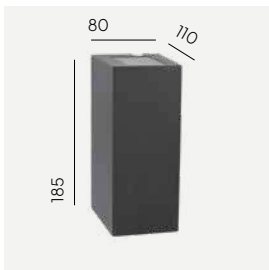

Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1585AL	LED	4W	17lm	3000K	> 102 000h	Dimmable
1585BL						
1585GR						
1585WH						
1586AL			18lm	4000K		
1586BL						
1586GR						
1586WH						

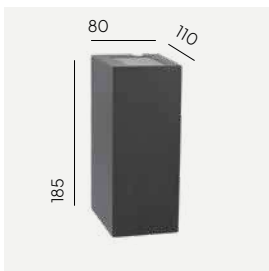


Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1587AL	LED	4W	108lm	3000K	> 102 000h	Dimmable
1587BL						
1587GR						
1587WH						
1588AL			135lm	4000K		
1588BL						
1588GR						
1588WH						





# Lillesand

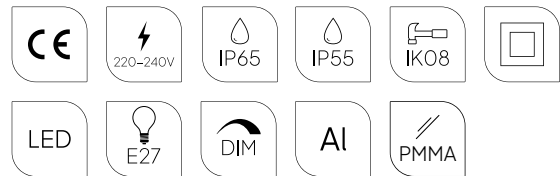

**Colour:**



Aluminium



Graphite

**Colour temperature:**

2700K\* 3000K


4000K



\*2700K on request only, contact your supplier.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Product Eco-friendly.

**Accessories:**


**Art. 205**

Concreting anchor



**Art. 206**

Anchoring support






Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	IP
1380AL	E27	-	-	-	-	-	IP55
1380GR							
1382AL	LEDE27	5,9W	495lm	2700K	25 000	Dimmable	
1382GR							
2330AL	LED	9,2W	897lm	3000K	> 72 000h	Dimmable	IP65
2330GR							
2331AL			956lm	4000K			
2331GR							



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	IP
1383AL	E27	-	-	-	-	-	IP55
1383GR							
1384AL	LEDE27	5,9W	495lm	2700K	25 000	Dimmable	
1384GR							
2342AL	LED	9,2W	897lm	3000K	> 72 000h	Dimmable	IP65
2342GR							
2343AL			956lm	4000K			
2343GR							

# Lillesand

scandinavian wood

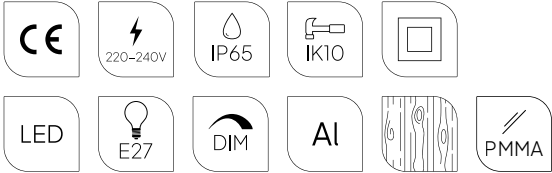

**Colour:**

- Aluminium
- Graphite

**Wood:**

- Impregnated
- Painted

**Colour temperature:**

2700K\* 3000K 4000K


\*2700K on request only, contact your supplier.



Luminaire housing is made of natural wood.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.

**Accessories:**


**Art. 205**

Concreting anchor



**Art. 206**

Anchoring support





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
2334AL	LED	9,2W	897lm	3000K	72 000h	Dimmable
2334GR				4000K		
2335AL			956lm	4000K		
2335GR						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
2338AL	LED	9,2W	897lm	3000K	72 000h	Dimmable
2338GR				4000K		
2339AL			956lm	4000K		
2339GR						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
2346AL	LED	9,2W	897lm	3000K	72 000h	Dimmable
2346GR				4000K		
2347AL			956lm	4000K		
2347GR						




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
2350AL	LED	9,2W	897lm	3000K	72 000h	Dimmable
2350GR				4000K		
2351AL			956lm	4000K		
2351GR						




# Lysfjord

This wall fixture can be a real discovery for designers of urban spaces and individual investors. We have used innovative configurable lens systems that allows for original lighting effects. The Lysfjord luminaire, although simple in shape can conjure up an extraordinary atmosphere. The various options for setting the angle of incidence of wide or focused light rays, give a very wide range of possibilities for shaping the space with light. Outstanding quality from NORLYS including aluminium, safety glass, reliable and long-lasting LED.

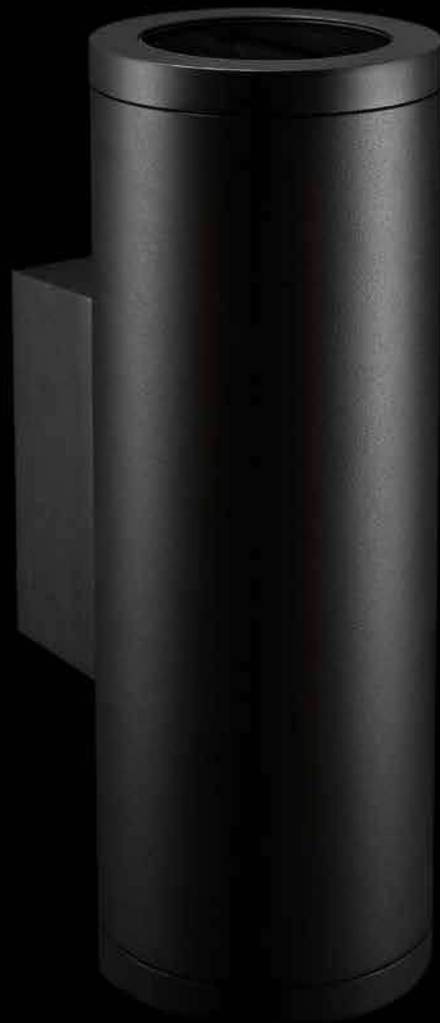



# Lysfjord

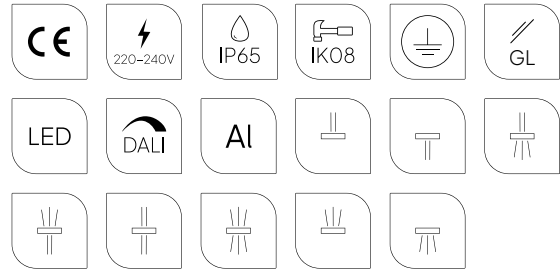

**Colour:**


- Aluminium
- Graphite
- Black
- White

**Colour temperature:**


- 2700K\* 3000K 4000K
- 
- \*2700K on request only, contact your supplier.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.



Multiple light variants.



Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
6401AL	LED	14,6W	39lm	3000K	> 70 000h	DALI2/ NightDim
6401BL						
6401GR						
6401WH						
6421AL			37lm	4000K		
6421BL						
6421GR						
6421WH						




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
6402AL	LED	26,5W	946lm	3000K	> 70 000h	DALI2/ NightDim
6402BL						
6402GR						
6402WH						
6422AL				4000K		
6422BL						
6422GR						
6422WH						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
6403AL	LED	26,5W	1814lm	3000K	> 70 000h	DALI2/ NightDim
6403BL						
6403GR						
6403WH						
6423AL				4000K		
6423BL						
6423GR						
6423WH						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
6404AL	LED	26,5W	78lm	3000K	> 70 000h	DALI2/ NightDim
6404BL						
6404GR						
6404WH						
6424AL				4000K		
6424BL						
6424GR						
6424WH						

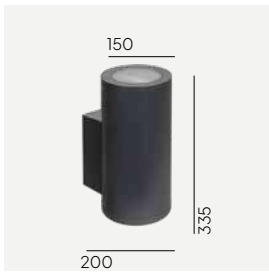

Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
6405AL	LED	26,5W	946lm	3000K	> 70 000h	DALI2/ NightDim
6405BL						
6405GR						
6405WH						
6425AL						
6425BL						
6425GR						
6425WH						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
6406AL	LED	14,6W	39lm	3000K	> 70 000h	DALI2/ NightDim
6406BL						
6406GR						
6406WH						
6426AL						
6426BL						
6426GR						
6426WH						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
6407AL	LED	14,6W	998lm	3000K	> 70 000h	DALI2/ NightDim
6407BL						
6407GR						
6407WH						
6427AL						
6427BL						
6427GR						
6427WH						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
6408AL	LED	14,6W	998lm	3000K	> 70 000h	DALI2/ NightDim
6408BL						
6408GR						
6408WH						
6428AL						
6428BL						
6428GR						
6428WH						




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
2026AL	LED	8W	386lm	3000K	50 000	Dimmable
2026GR						
2027AL			438lm	4000K		
2027GR						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Motion Detector
2028AL	LED	8W	386lm	3000K	50 000	PIR
2028GR						
2029AL			438lm	4000K		
2029GR						



# Molde

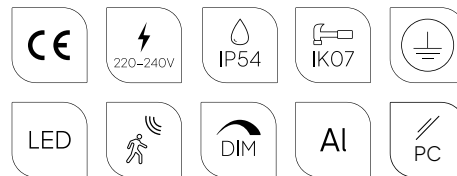

**Colour:**

- Aluminium
- Graphite

**Colour temperature:**


2700K\* 3000K 4000K



\*2700K on request only, contact your supplier.




Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).

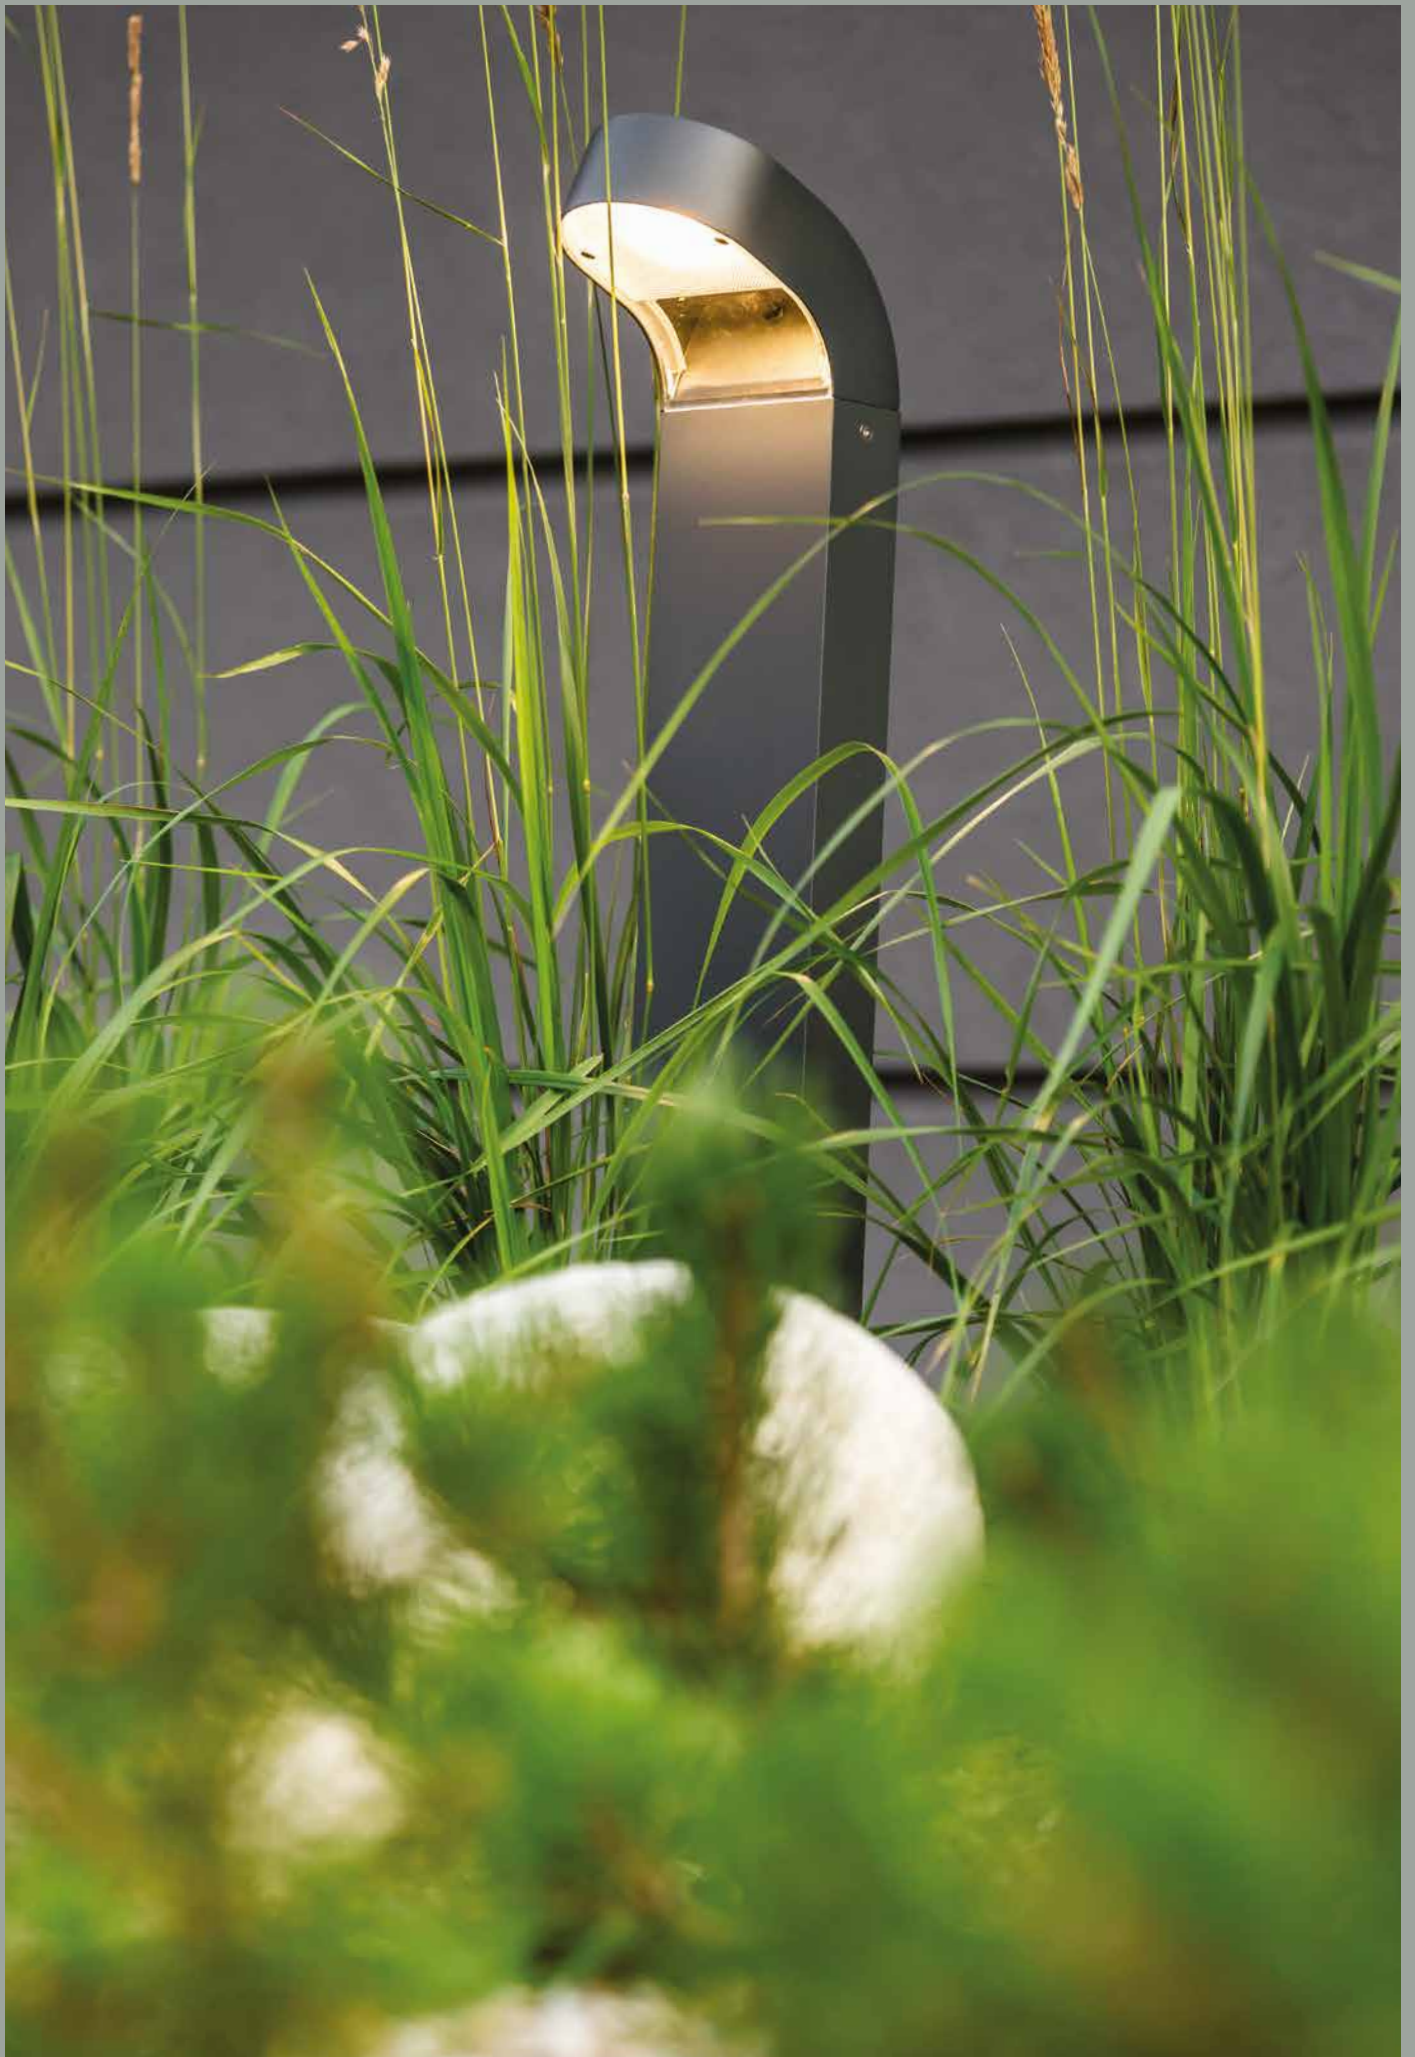



# Molde

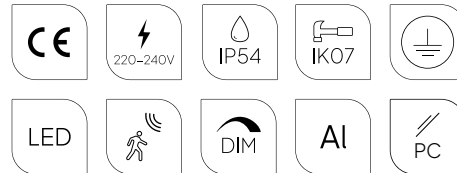

**Colour:**



Aluminium



Graphite

**Colour temperature:**

2700K\* 3000K


4000K



\*2700K on request only, contact your supplier.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).

**Accessories:**


**Art. 1907**


Concreting anchor



**Art. 1908**

Anchoring support



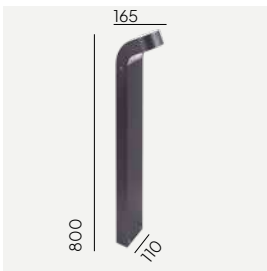

Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1901AL	LED	8W	386lm	3000K	50 000	Dimmable
1901GR				4000K		
5107AL			438lm	4000K		
5107GR						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Motion Detector
1970AL	LED	8,2W	386lm	3000K	> 55 000h	PIR
1970GR				4000K		
1972AL			438lm	4000K		
1972GR						




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1903AL	LED	8W	386lm	3000K	50 000	Dimmable
1903GR				4000K		
1904AL			438lm	4000K		
1904GR						




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Motion Detector
1971AL	LED	8,2W	386lm	3000K	> 55 000h	PIR
1971GR				4000K		
1973AL			438lm	4000K		
1973GR						

# Mora

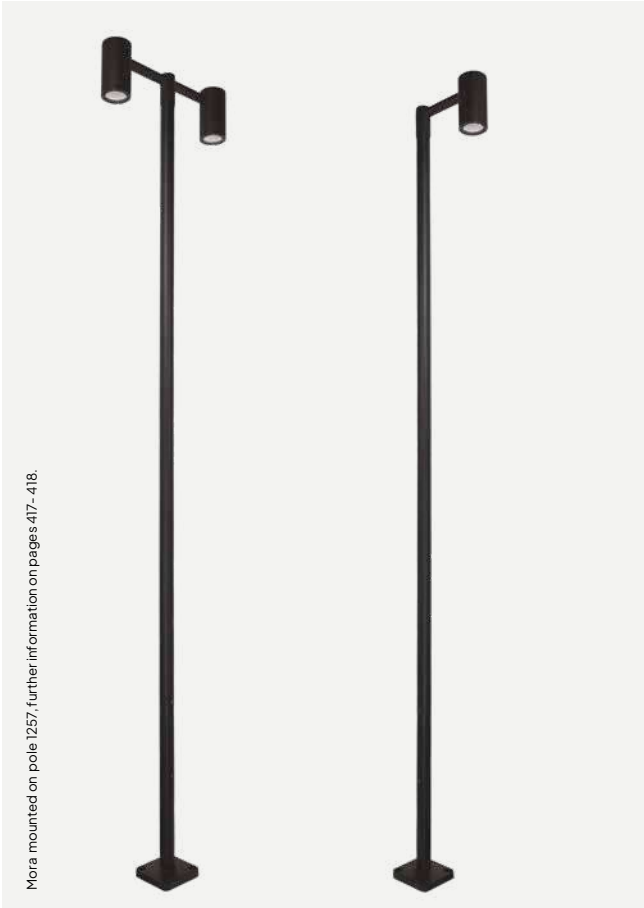

Mora mounted on pole 1257, further information on pages 417- 418.

CE	220-240V	IP65	IK08	⏚
LED	DALI	Al	GL	60

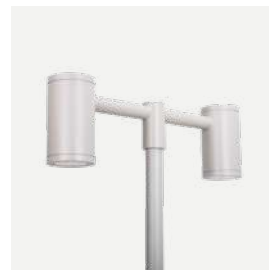

**Colour:**

- Aluminium
- Graphite
- Black


**Colour temperature:**

2700K\* 3000K 4000K

\*2700K on request only, contact your supplier.



Product Eco-friendly.





Fully replaceable electrical kit.



Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).

**Accessories:**

Luminaires sold separately, recommended poles ø60, further information on pages 417- 418.

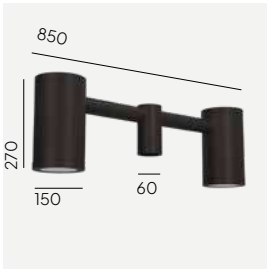

Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
6466AL	LED	33,9W	3229lm	3000K	> 110 000h	DALI2/ NigthDim
6466BL						
6466GR		33,5W	3437lm	4000K		
6467AL						
6467BL						
6467GR						




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
6460AL	LED	17,6W	1626lm	3000K	> 110 000h	DALI2/ NigthDim
6460BL						
6460GR			1735lm	4000K		
6461AL						
6461BL						
6461GR						

# Moss

Moss spotlights combine a simple form with small dimensions. They are ideal for illuminating small architecture, individual trees or other elements of the garden layout important to the owner. Thanks to their small size, Moss can be hidden and the light will be the main feature. The undoubted strengths of this family of luminaires, thanks to the innovative use of a phase dimming system, are the ability to select the power, colour and brightness adjustment of the light source. The luminaires in the Moss family offer angle adjustment and versatility through a variety of mounting options. These include ceiling-mounted, pole-mounted, portable, driven into the ground and free-standing bollards variants.



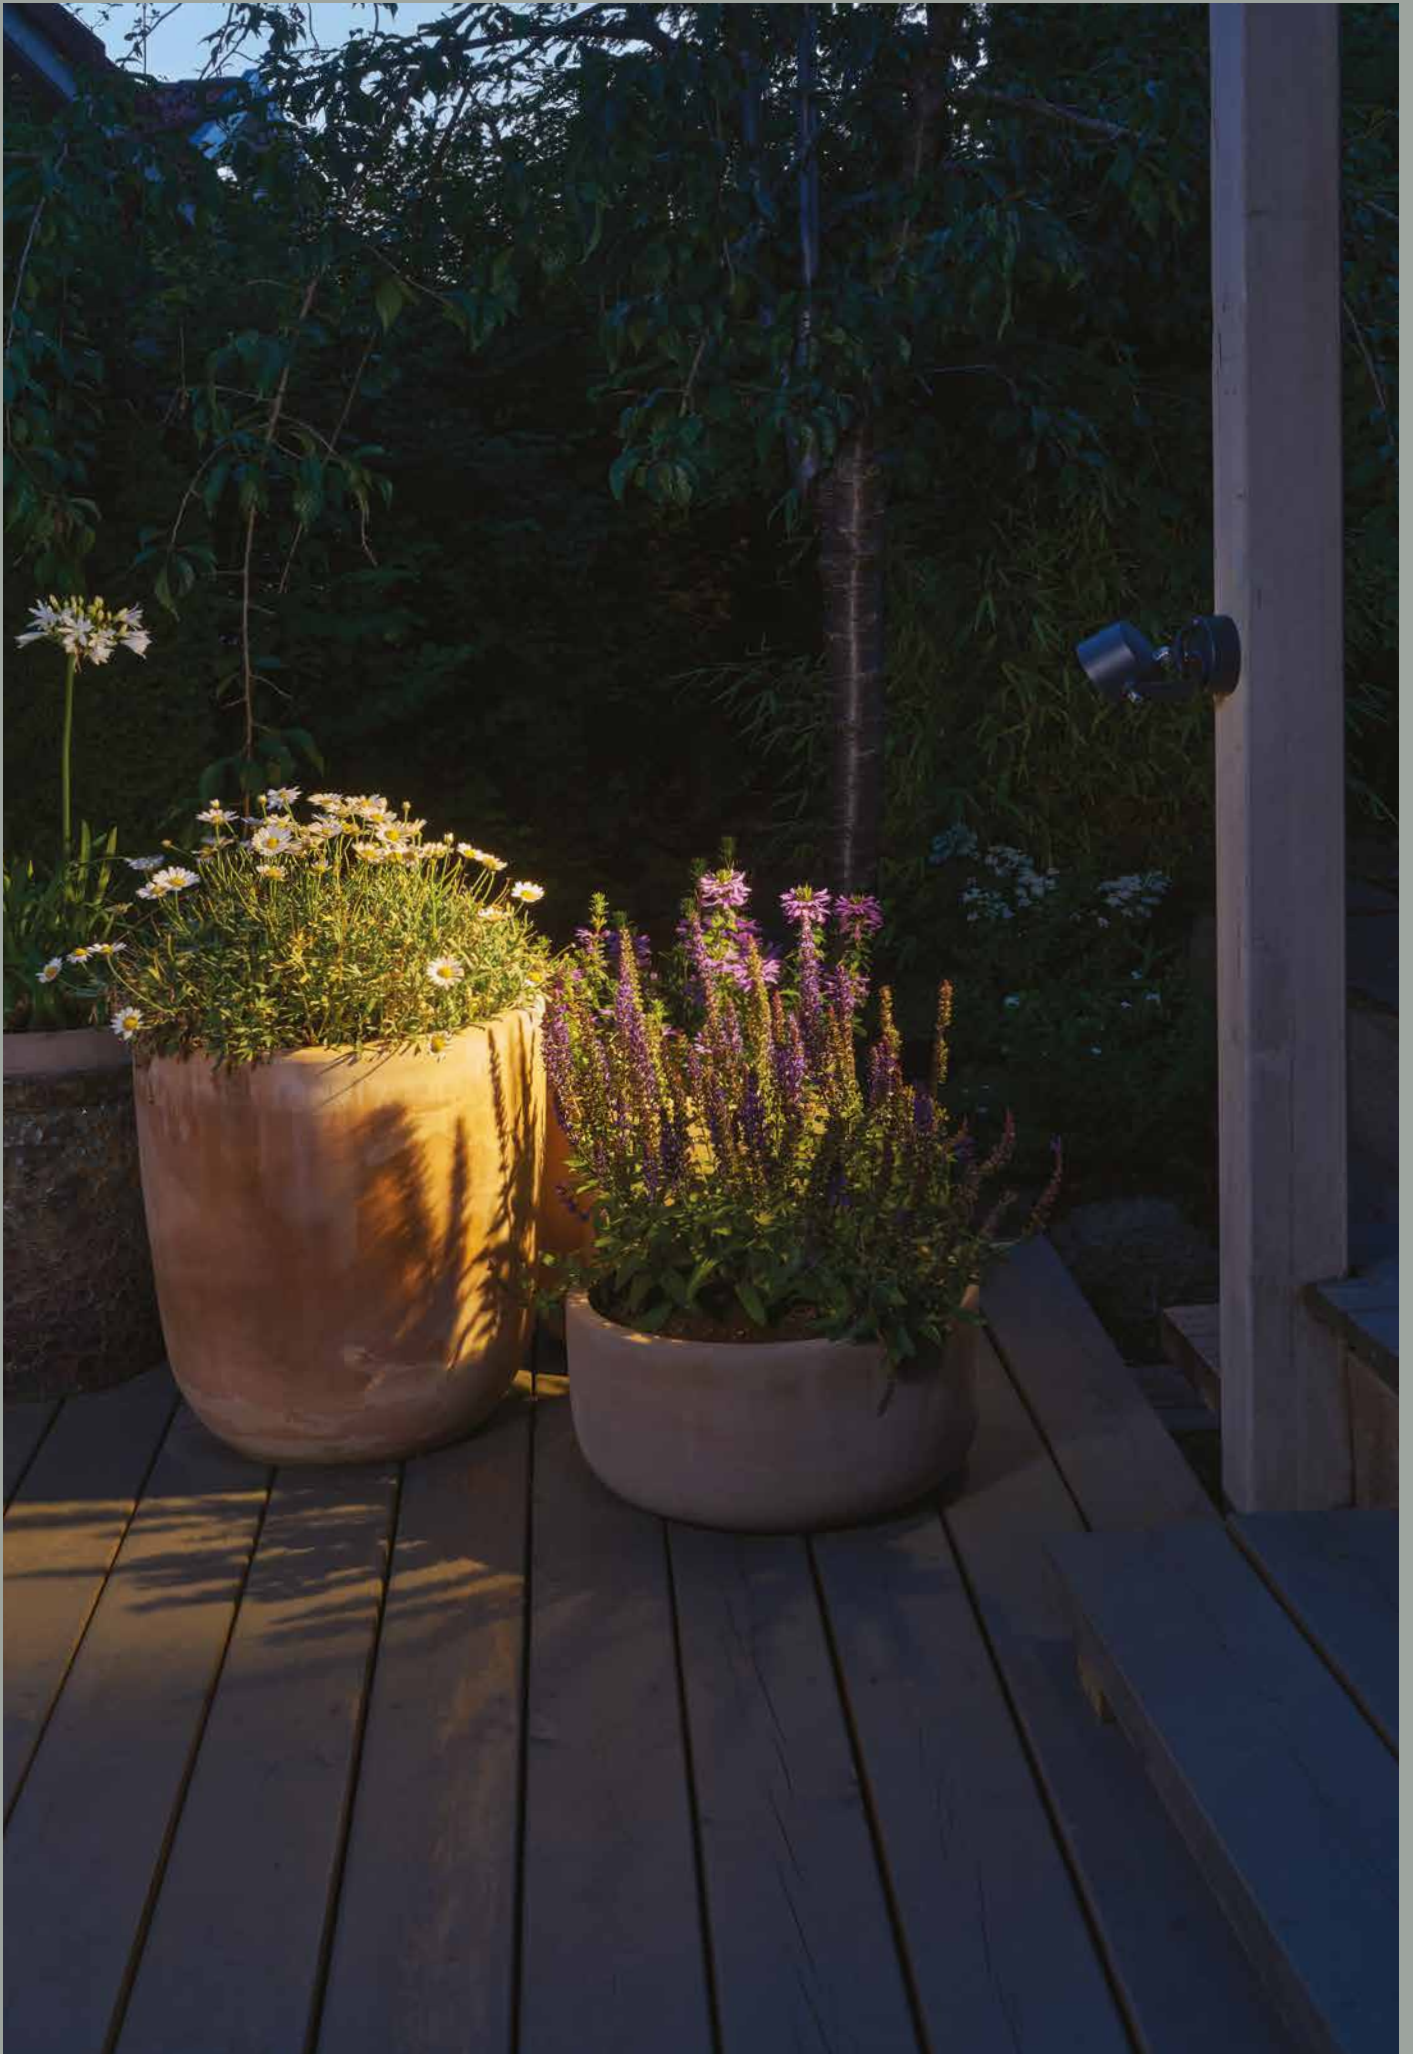

# Moss



**Colour:**

- Black
- Graphite

**Colour temperature:**

2700K\* 3000K 4000K




\*2700K on request only, contact your supplier.




Product Eco-friendly.



Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).




Wide range of light direction adjustment.

**Accessories:**

**Art. 6437**

Plate





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	
6161BL	LED	4W	389lm	3000K	> 50 000h	Dimmable	
6161GR							
6162BL			414lm				
6162GR							
6163BL		8W	686lm				3000K
6163GR							
6164BL			749lm				4000K
6164GR							

\*All indexes also available with 15° or 24° light angle, contact your supplier.



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
6772BL	LED	8W	686lm	3000K	> 50 000h	Dimmable
6772GR						
6778BL		4W	389lm			
6778GR						

\*All indexes also available in 4000K and 2700K versions, and with 15° or 24° light angle, contact your supplier.



60  
205

Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Clamp
6732BL	LED	4W	389lm	3000K	> 50 000h	Dimmable	Ø50
6732GR							
6750BL		8W	686lm				
6750GR							
6735BL		4W	389lm				Ø60
6735GR							
6753BL		8W	686lm				
6753GR							
6738BL		4W	389lm				Ø76
6738GR							
6756BL		8W	686lm				
6756GR							

\*All indexes also available in 4000K and 2700K versions, and with 15° or 24° light angle, contact your supplier.



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
6702BL	LED	8W	686lm	3000K	> 50 000h	Dimmable
6702GR						
6706BL		4W	389lm			
6706GR						

\*All indexes also available in 4000K and 2700K versions, and with 15° or 24° light angle, contact your supplier.



# Moss




**Colour:**

- Black
- Graphite

**Colour temperature:**

2700K\* 3000K 4000K




\*2700K on request only, contact your supplier.



Product Eco-friendly.



Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).




Wide range of light direction adjustment.

**Accessories:**


**Art. 145**

Hermetic IP68 box with 3 lines




**Art. 6729**

Head mount




**Art. 6439**

Special clams.



**Art. 6434 (ø50), 6435 (ø60), 6436 (ø76)**


Clams.





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	
6165BL	LED	4W	389lm	3000K	> 50 000h	Dimmable	
6165GR			414lm	4000K			
6166BL							8W
6166GR			749lm	4000K			
6167BL		686lm					
6167GR			749lm	4000K			
6168BL		686lm					3000K
6168GR			749lm	4000K			

\*All indexes also available with 15° or 24° light angle, contact your supplier.

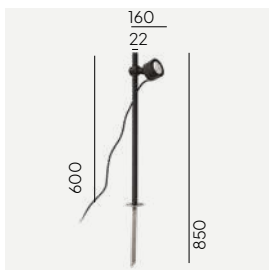

Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	
6602BL	LED	4W	389lm	3000K	> 50 000h	Dimmable	
6602GR			414lm	4000K			
6603BL							8W
6603GR			749lm	4000K			
6600BL		686lm					
6600GR			749lm	4000K			
6601BL		686lm					3000K
6601GR			749lm	4000K			

\*All indexes also available with 15° or 24° light angle, contact your supplier.



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
6473BL	LED	4W	389lm	3000K	> 50 000h	Dimmable
6473GR						
6471BL		8W	686lm			
6471GR						


\*All indexes also available in 4000K and 2700K versions, and with 15° or 24° light angle, contact your supplier.



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
6485BL	LED	4W	389lm	3000K	> 50 000h	Dimmable
6485GR						
6483BL		8W	686lm			
6483GR						

\*All indexes also available in 4000K and 2700K versions, and with 15° or 24° light angle, contact your supplier.

# Moss

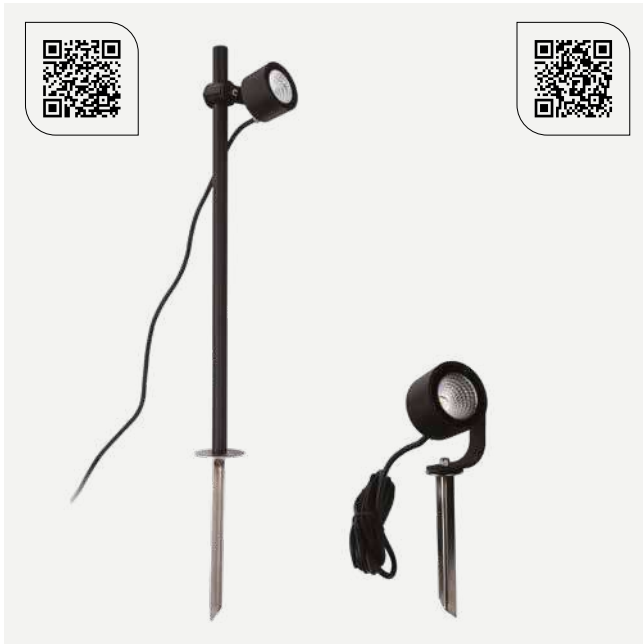

**Colour:**

- Black
- Graphite
- Stainless Steel

**Colour temperature:**

2700K\* 3000K 4000K



\*2700K on request only, contact your supplier.


CE	220-240V	IP65	Grounding symbol	Recycling symbol	36° beam angle
LED	DIM	Al	GL	INOX	



Product Eco-friendly.



Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).




Wide range of light direction adjustment.

**Accessories:**


**Art. 145**


Hermetic IP68 box with 3 lines



**Art. 146**


8-way connection box IP68





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
6346BL	LED	4W	389lm	3000K	> 50 000h	Dimmable
6346GR						
6346ST						
6352BL						
6352GR						
6352ST						
6376BL		8W	749lm	4000K		
6376GR						
6376ST						
6370BL			686lm	3000K'		
6370GR						
6370ST						

\*All indexes also available with 15° or 24° light angle, contact your supplier.



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
6355BL	LED	4W	389lm	3000K	> 50 000h	Dimmable
6355GR						
6355ST						
6361BL						
6361GR						
6361ST						
6385BL		8W	749lm	4000K		
6385GR						
6385ST						
6379BL			686lm	3000K		
6379GR						
6379ST						

\*All indexes also available with 15° or 24° light angle, contact your supplier.

# Moss



**Colour:**

- Black
- Graphite
- Stainless Steel

**Colour temperature:**

2700K\* 3000K 4000K



\*2700K on request only, contact your supplier.


CE	220-240V	IP65	Grounding symbol	GL	Adjustable beam
LED	DIM	Al	Fe	INOX	36° beam angle



Product Eco-friendly.



Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).




Wide range of light direction adjustment.

**Accessories:**


**Art. 145**

Hermetic IP68 box with 3 lines





# Nordland

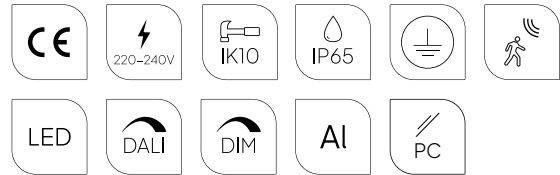

**Colour:**

- Aluminium
- White
- Graphite

**Colour temperature:**

2700K\* 3000K 4000K



\*2700K on request only, contact your supplier.



Product Eco-friendly.




Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).







Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control									
718AL	LED	10W	574lm	3000K	50 000h	Dimmable									
718GR															
718WH															
5041AL		17,5W	1249lm	4000K		50 000h	-								
5041GR															
5041WH															
5017AL		9,6W	594lm	4000K			50 000h	Dimmable							
5017GR															
5017WH															
5016AL		18,5W	716lm	3000K				50 000h	Motion Detector						
5016GR															
5016WH															
5043AL		17,5W	763lm	4000K					50 000h	-					
5043GR															
5043WH															
5045AL		15,4W	933lm	4000K						50 000h	-				
5045GR															
5045WH															
5047AL		16W	934lm	3000K							50 000h	Dimmable			
5047GR															
5047WH															
5046AL		28,9W	2183lm	3000K								> 80 000h	-		
5046GR															
5046WH															
5253AL		28,9W	2308lm	4000K									> 80 000h	DALI2	
5253GR															
5253WH															
5255AL		-	-	-										-	-
5255GR															
5255WH															
7120AL	2xE27	-	-	-	-										
7120GR															
7120WH															



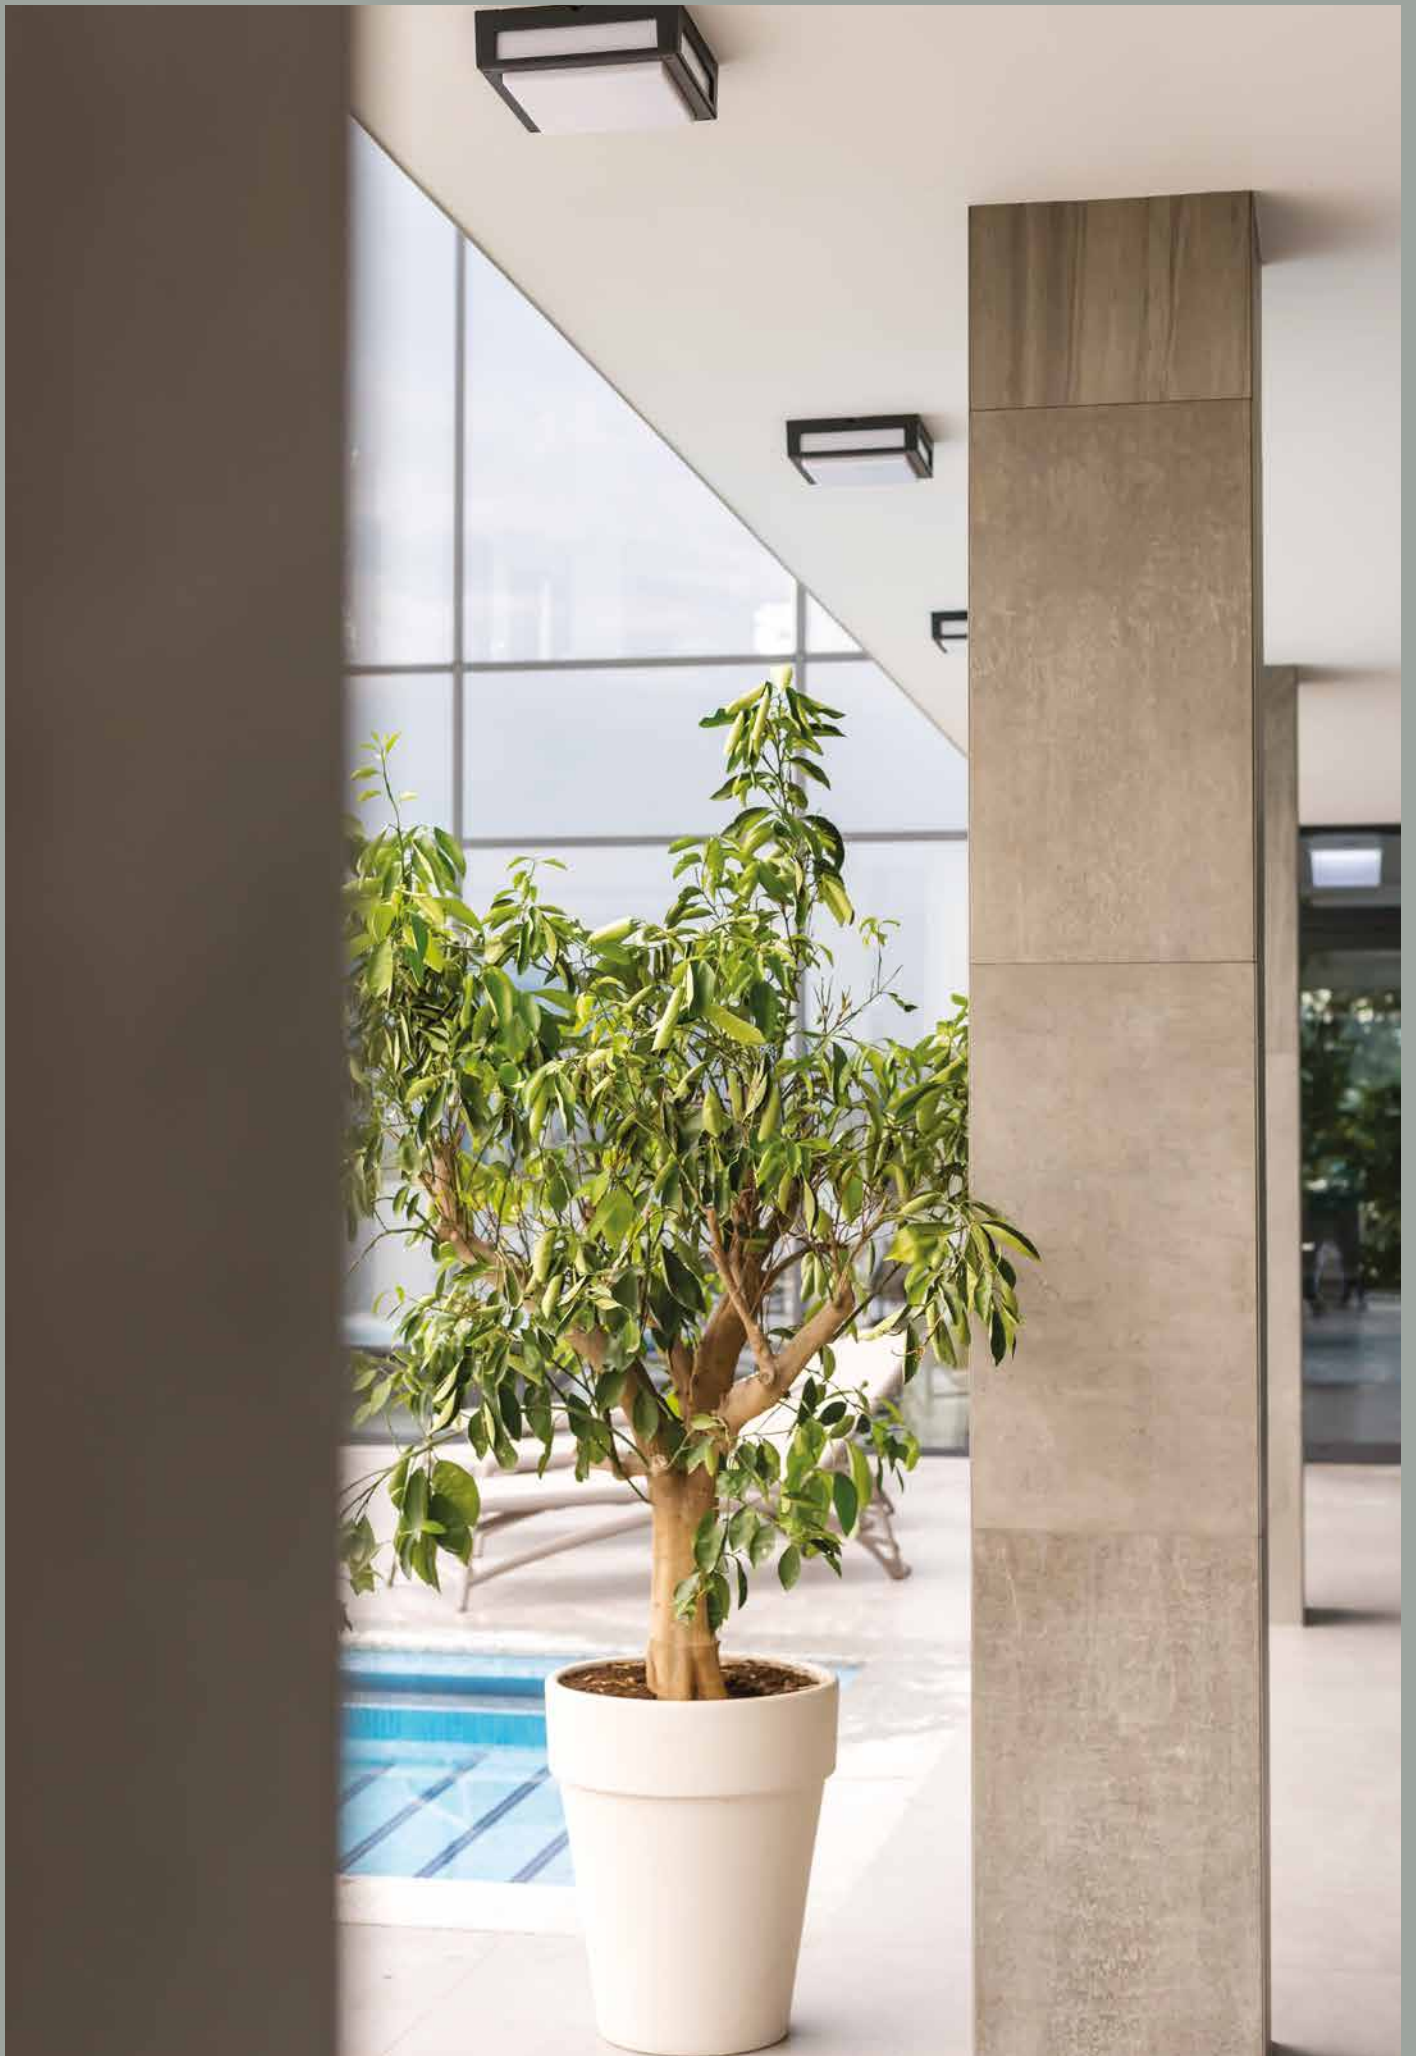

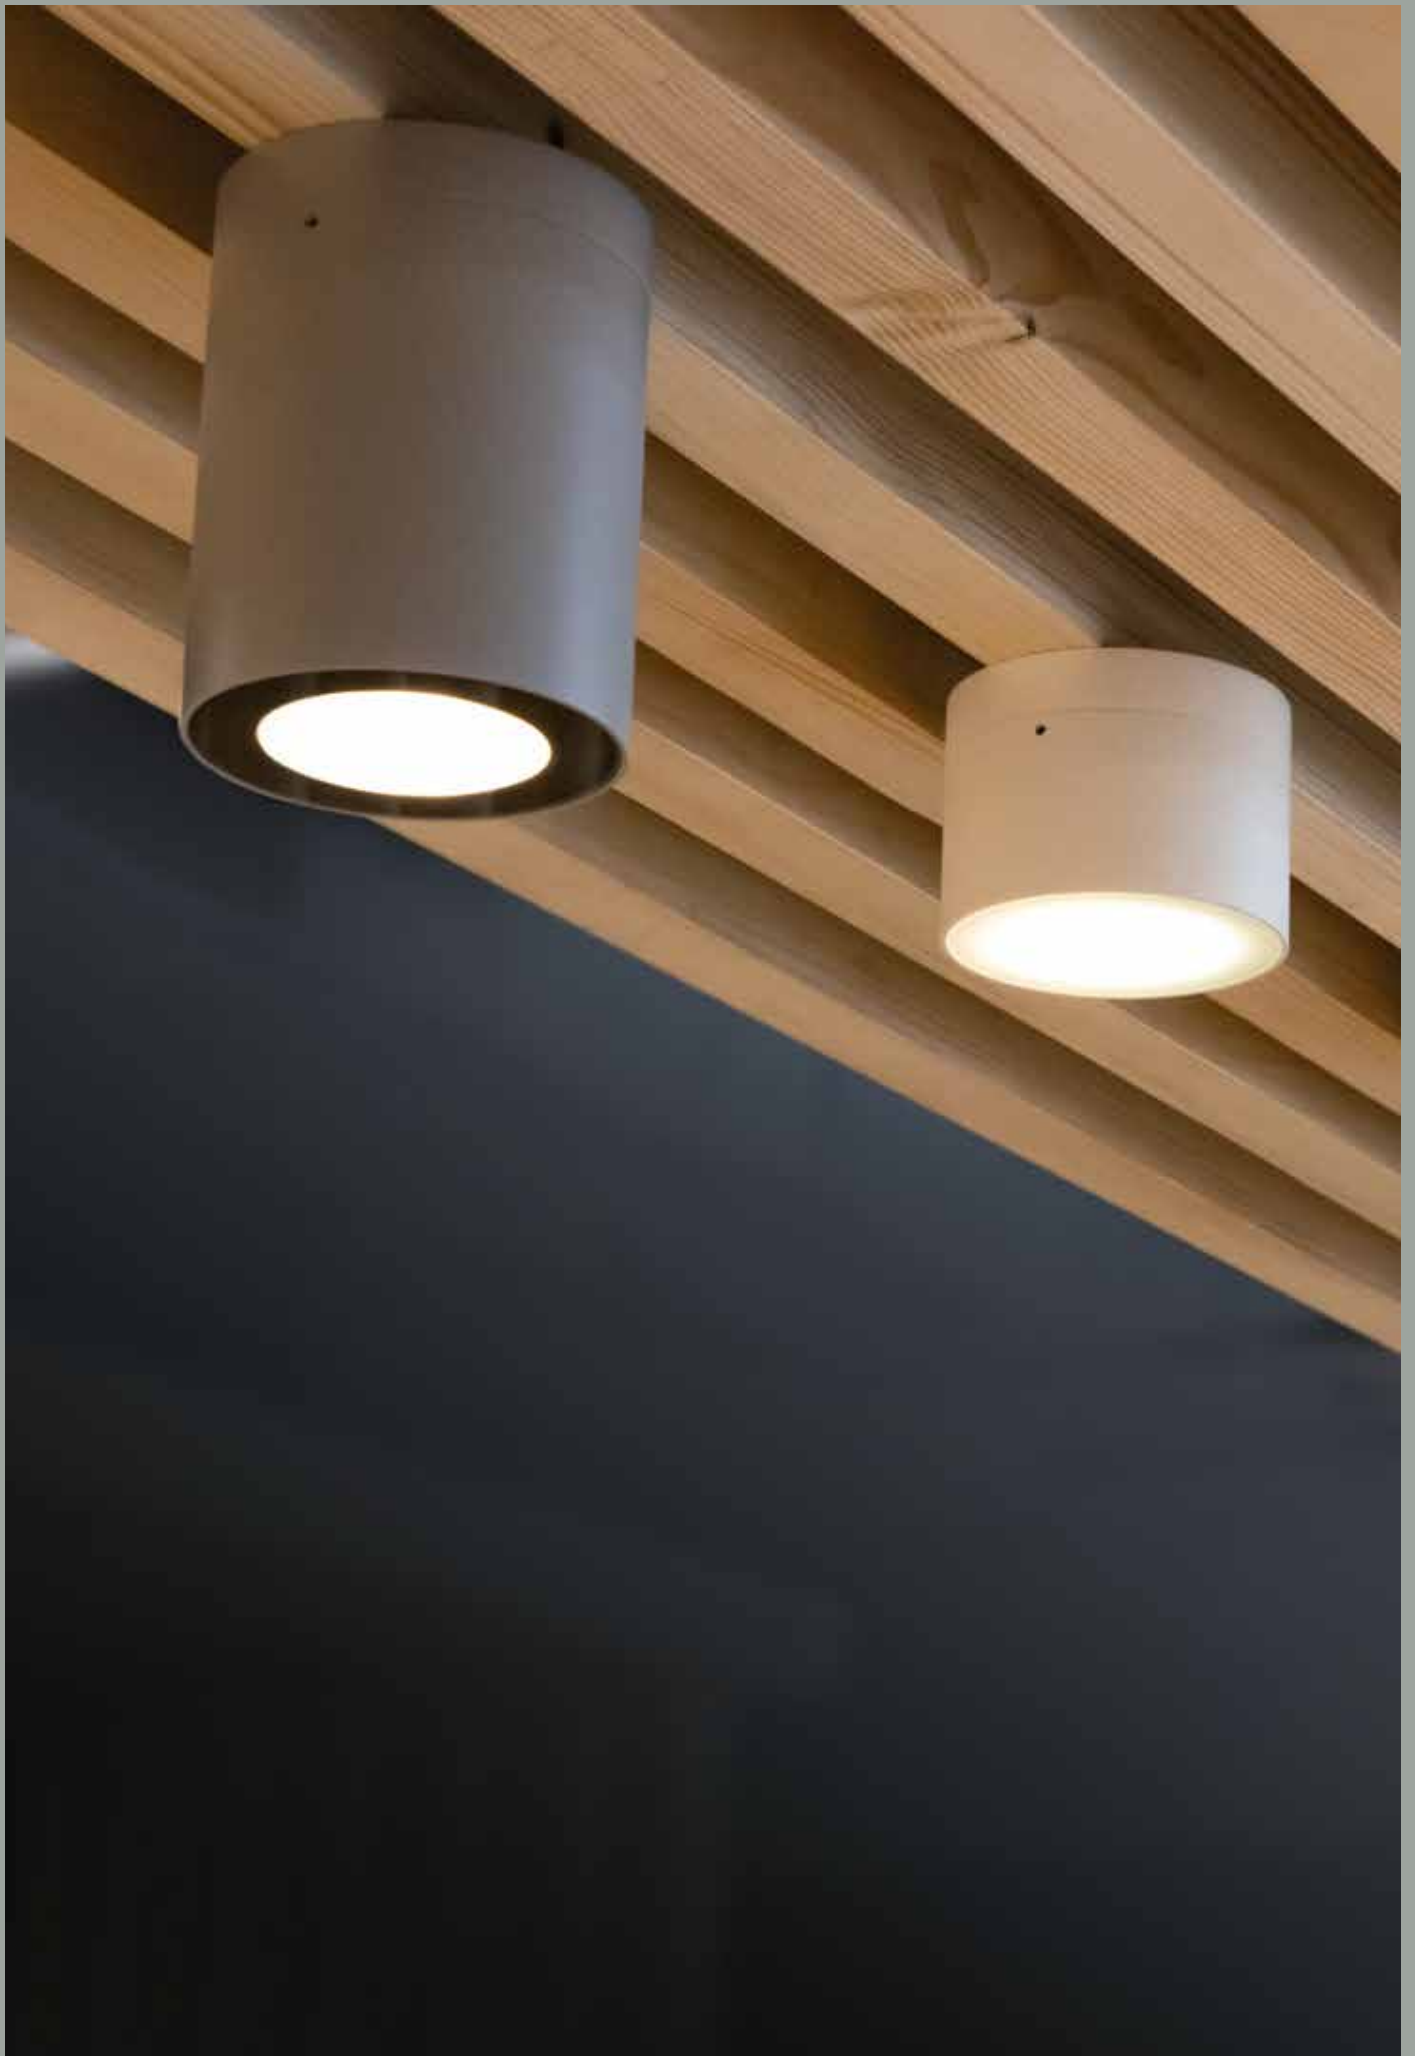

# Nidaros

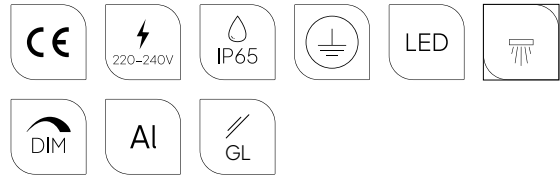

**Colour:**

-  Aluminium
-  Graphite
-  Black
-  White

**Colour temperature:**


2700K\* 3000K 4000K



\*2700K on request only, contact your supplier.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).

**Accessories:**

**Art. 3084**

Distance.





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
2122AL	LED	8,3W	765lm	3000K	> 50 000h	Dimmable
2122BL						
2122GR						
2122WH						
2125AL		8,5W		4000K	50 000h	
2125BL						
2125GR						
2125WH						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
2121AL	LED	7,8W	765lm	3000K	>110 000h	Dimmable
2121BL						
2121GR						
2121WH						
2124AL		8,5W		4000K	50 000h	
2124BL						
2124GR						
2124WH						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
2120AL	LED	10,7W	631lm	3000K	50 000h	Dimmable
2120BL						
2120GR						
2120WH						
2123AL				4000K		
2123BL						
2123GR						
2123WH						


# Narvik

It looks robust and it really is. This bollard is a luminaire with a legendary durability that will cope perfectly with any weather conditions. The path leading to the gate, the terrace where we spend long summer evenings, the driveway - the Narvik bollard will work everywhere. The ingeniously designed diffuser emits a rotationally symmetrical stream of light, and thanks to the use of the latest technology, the luminaire provides a maximum field of illumination in relation to its size. Narvik is the ideal solution for modern architecture. It is also available in a PRO version, which, with half the power of the luminaire compared to the basic model, provides 30% more light output.





# Narvik

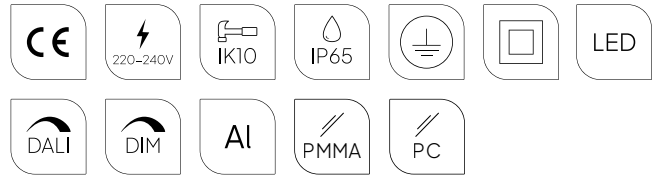

**Colour:**

- Aluminium
- Graphite

**Colour temperature:**


- 2700K\*
- 3000K
- 4000K



\*2700K on request only, contact your supplier.




Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.



Vandal-resistant luminaire.




Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).

**Accessories:**


**Art. 505**

Concreting anchor




**Art. 110**

Ground anchor



**Art. 115**

Ground anchor





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	
557AL	LED	21,8W	556lm	3000K	> 110 000h	-	
557GR						-	
5091AL		22,5W	597lm	3000K		DALI2/ NightDim	
5091GR						-	
5024AL		21,8W	564lm	4000K	> 50 000h	-	
5024GR						-	
5090AL			582lm		4000K	> 50 000h	DALI2/ NightDim
5090GR							-



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control			
1735AL	LED	22,2W	1122lm	3000K	> 72 000h	DALI2/ NightDim			
1735GR						-			
1850AL						13,4W	666lm	3000K	-
1850GR									-
559AL		757lm	4000K	> 72 000h		DIM			
559GR						-			
1733AL		22,2W	1162lm	4000K	> 72 000h	DALI2/ NightDim			
1733GR						-			
1737AL						-			
1737GR						-			
1851AL		-							
1851GR		-							




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control			
1736AL	LED	22,2W	1416lm	3000K	> 72 000h	DALI2/ NightDim			
1736GR						-			
1852GR						13,6W	853lm	3000K	-
1852GR									-
553AL		959lm	4000K	> 72 000h		DIM			
553GR						-			
1734AL		22,2W	1475lm	4000K	> 72 000h	DALI2/ NightDim			
1734GR						-			
1738AL						-			
1738GR						-			
1853AL		-							
1853GR		-							



# Namosos

Lighting should give us a feeling of safety and comfort when moving around. Namosos will be perfect for lighting stairs, steps, staircases and passageways. We recommend Namosos where you need to illuminate the most important points of your property, especially if there is a difference in level. This unusual luminaire will work perfectly as a modern lighting solution for wall surfaces and guarantees even illumination of the area under the lams. It looks equally good built into the wall as well as the bollard version.



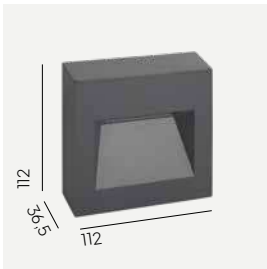

Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1341AL	LED	4W	123lm	3000K	> 50 000	Dimmable
1341GR						
5156AL		4,2W	162lm	4000K		
5156GR						



# Namsos



**Colour:**

- Aluminium
- Graphite

**Colour temperature:**


- 2700K\*
- 3000K
- 4000K




\*2700K on request only, contact your supplier.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).

**Accessories:**


**Art. 157**

Mounting distance





# Namsos

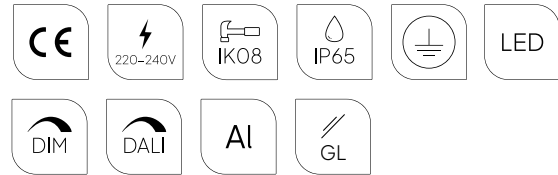

**Colour:**

- Aluminium
- Graphite

**Colour temperature:**


- 2700K\*
- 3000K
- 4000K



\*2700K on request only, contact your supplier.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).

**Accessories:**


**Art. 112**

Concreting anchor



**Art. 113**

Ground anchor





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1931AL	LED	8,4W	566lm	3000K	> 102 000h	Dimmable
1931GR			612lm	4000K		
5012AL		8,6W				877lm
5012GR			13,8W	904lm		
6035AL		13,6W				843lm
6035GR			14W	907lm		
6033AL		13,6W				843lm
6033GR			13,6W	843lm		
1921AL		13,6W				843lm
1921GR			14W	907lm		
1922AL		14W				907lm
1922GR						




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1932AL	LED	8,6W	566lm	3000K	> 102 000h	Dimmable
1932GR			612lm	4000K		
5013AL		13,8W				877lm
5013GR			13,8W	904lm		
6036AL		13,6W				843lm
6036GR			14W	907lm		
6034AL		13,6W				843lm
6034GR			13,6W	843lm		
1923AL		13,6W				843lm
1923GR			14W	907lm		
1924AL		14W				907lm
1924GR						










# Namsos



**Colour:**

-  Aluminium
-  Graphite
-  Galvanized

**Colour temperature:**


2700K\* 3000K 4000K



\*2700K on request only, contact your supplier.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1929AL	LED	13,6W	843lm	3000K	> 102 000h	Dimmable
1929GR						
1930AL		8,4W	566lm			
1930GR						
6032AL		13,8W	904lm			
6032GR						
1934AL		14W	907lm	4000K		Dimmable
1934GR						
5011AL		8,6W	612lm			
5011GR						
6031AL		13,8W	877lm	DALI2		
6031GR						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1933GA	LED	5,2W	295lm	3000K	> 70 000	Dimmable
5116GA			689lm	4000K		

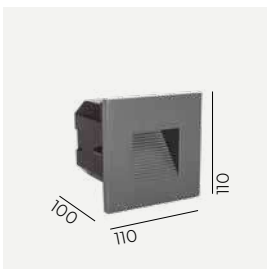

Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1340AL	LED	4W	47lm	3000K	> 50 000h	Dimmable
1340GR						

# Namsos Mini



**Colour:**

- Aluminium
- Graphite


**Colour temperature:**

- 2700K\*
- 3000K
- 4000K

\*2700K on request only, contact your supplier.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.



Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).





# Nice



Nice mounted on pole 3004, further information on pages 417- 418.

CE	220-240V	IP65	IK07	LED
DALI	Al	GL	4,5m	60



**Colour:**

- Aluminium
- Graphite


**Colour temperature:**

2700K\* 3000K 4000K

\*2700K on request only, contact your supplier.




Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.



Product Eco-friendly.




Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).

**Accessories:**

Luminaires sold separately, recommended poles  $\varnothing 60$ , further information on pages 417- 418.


**Art. 154**

Wall mounting arm



**Art. 7665**

Reduction for fittings  $\varnothing 60$  for mounting on a pole  $\varnothing 76$





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
777AL	LED	38W	3029lm	3000K	> 110 000h	-
777GR						
5089GR		36.3W	2964lm	4000K	> 50 000h	DALI2/ NightDim
5089AL						
5088AL						
5088GR		38W	3092lm	4000K	> 110 000h	-
5001AL						
5001GR						




# Oppland

The Oppland bollards will work fantastically between a garden path and a flower bed. They will illuminate a passage, add mystery to the plants and give depth to the garden.

The Oppland luminaires family stands for energy-saving LED technology, minimalist yet elegant design, durability of materials and reliability. Choice between a modern-style aluminium body or a wooden body, in two colours, in arrangements closer to nature. Oppland bollards will not only provide exceptionally effective lighting. They will bring an elegant and modern accent to any environment that is sure to attract attention. Oppland simply illuminates beautifully.



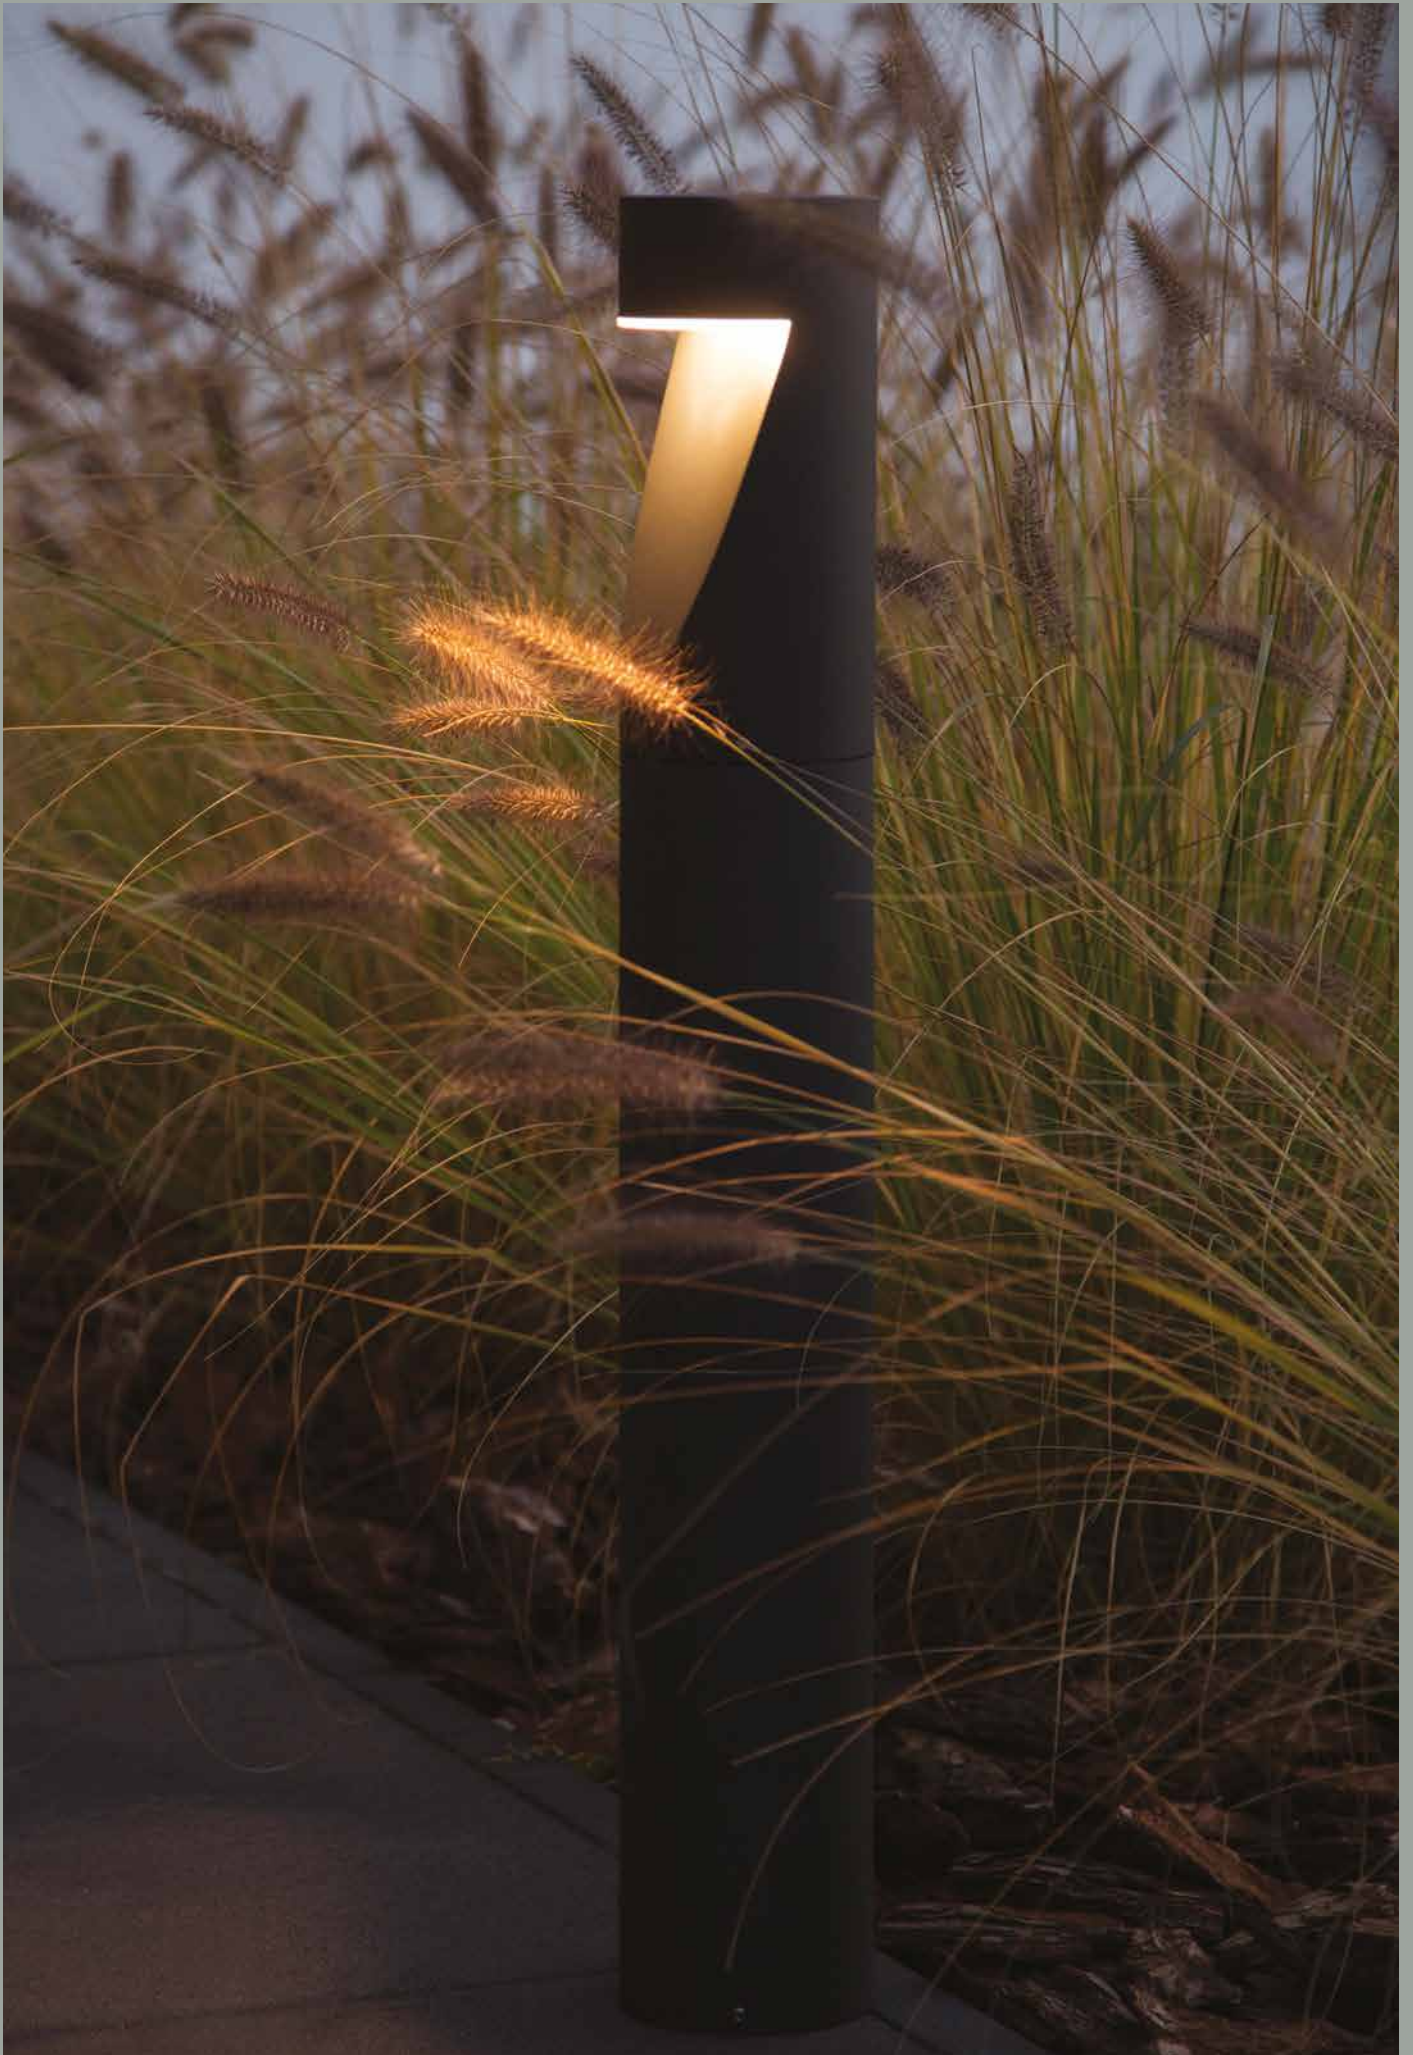



# Oppland



**Colour:**

- Aluminium
- Graphite

**Colour temperature:**


2700K\* 3000K 4000K



\*2700K on request only, contact your supplier.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).

**Accessories:**


**Art. 205**

Concreting anchor



**Art. 206**

Anchoring support





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1324AL	LED	8,2W	304lm	3000K	> 171 460h	DALI2
1324GR						
1321AL						
1321GR						
5123AL	LED	9,3W	313lm	4000K	> 50 000h	Dimmable
5123GR						




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
2360AL	LED	10W	301lm	3000K	> 50 000h	Dimmable
2360GR						
2361AL						
2361GR						





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
2364AL	LED	10W	301lm	3000K	> 50 000h	Dimmable
2364GR						
2365AL						
2365GR						

# Oppland

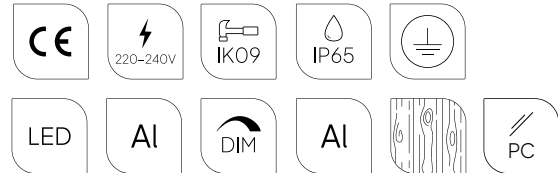

scandinavian wood



**Colour:**


-  Aluminium
-  Graphite

**Wood:**

-  Impregnated
-  Painted

**Colour temperature:**

2700K\* 3000K 4000K




\*2700K on request only, contact your supplier.




Luminaire housing made of natural wood.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).

**Accessories:**


**Art. 205**


Concreting anchor



**Art. 206**

Anchoring support



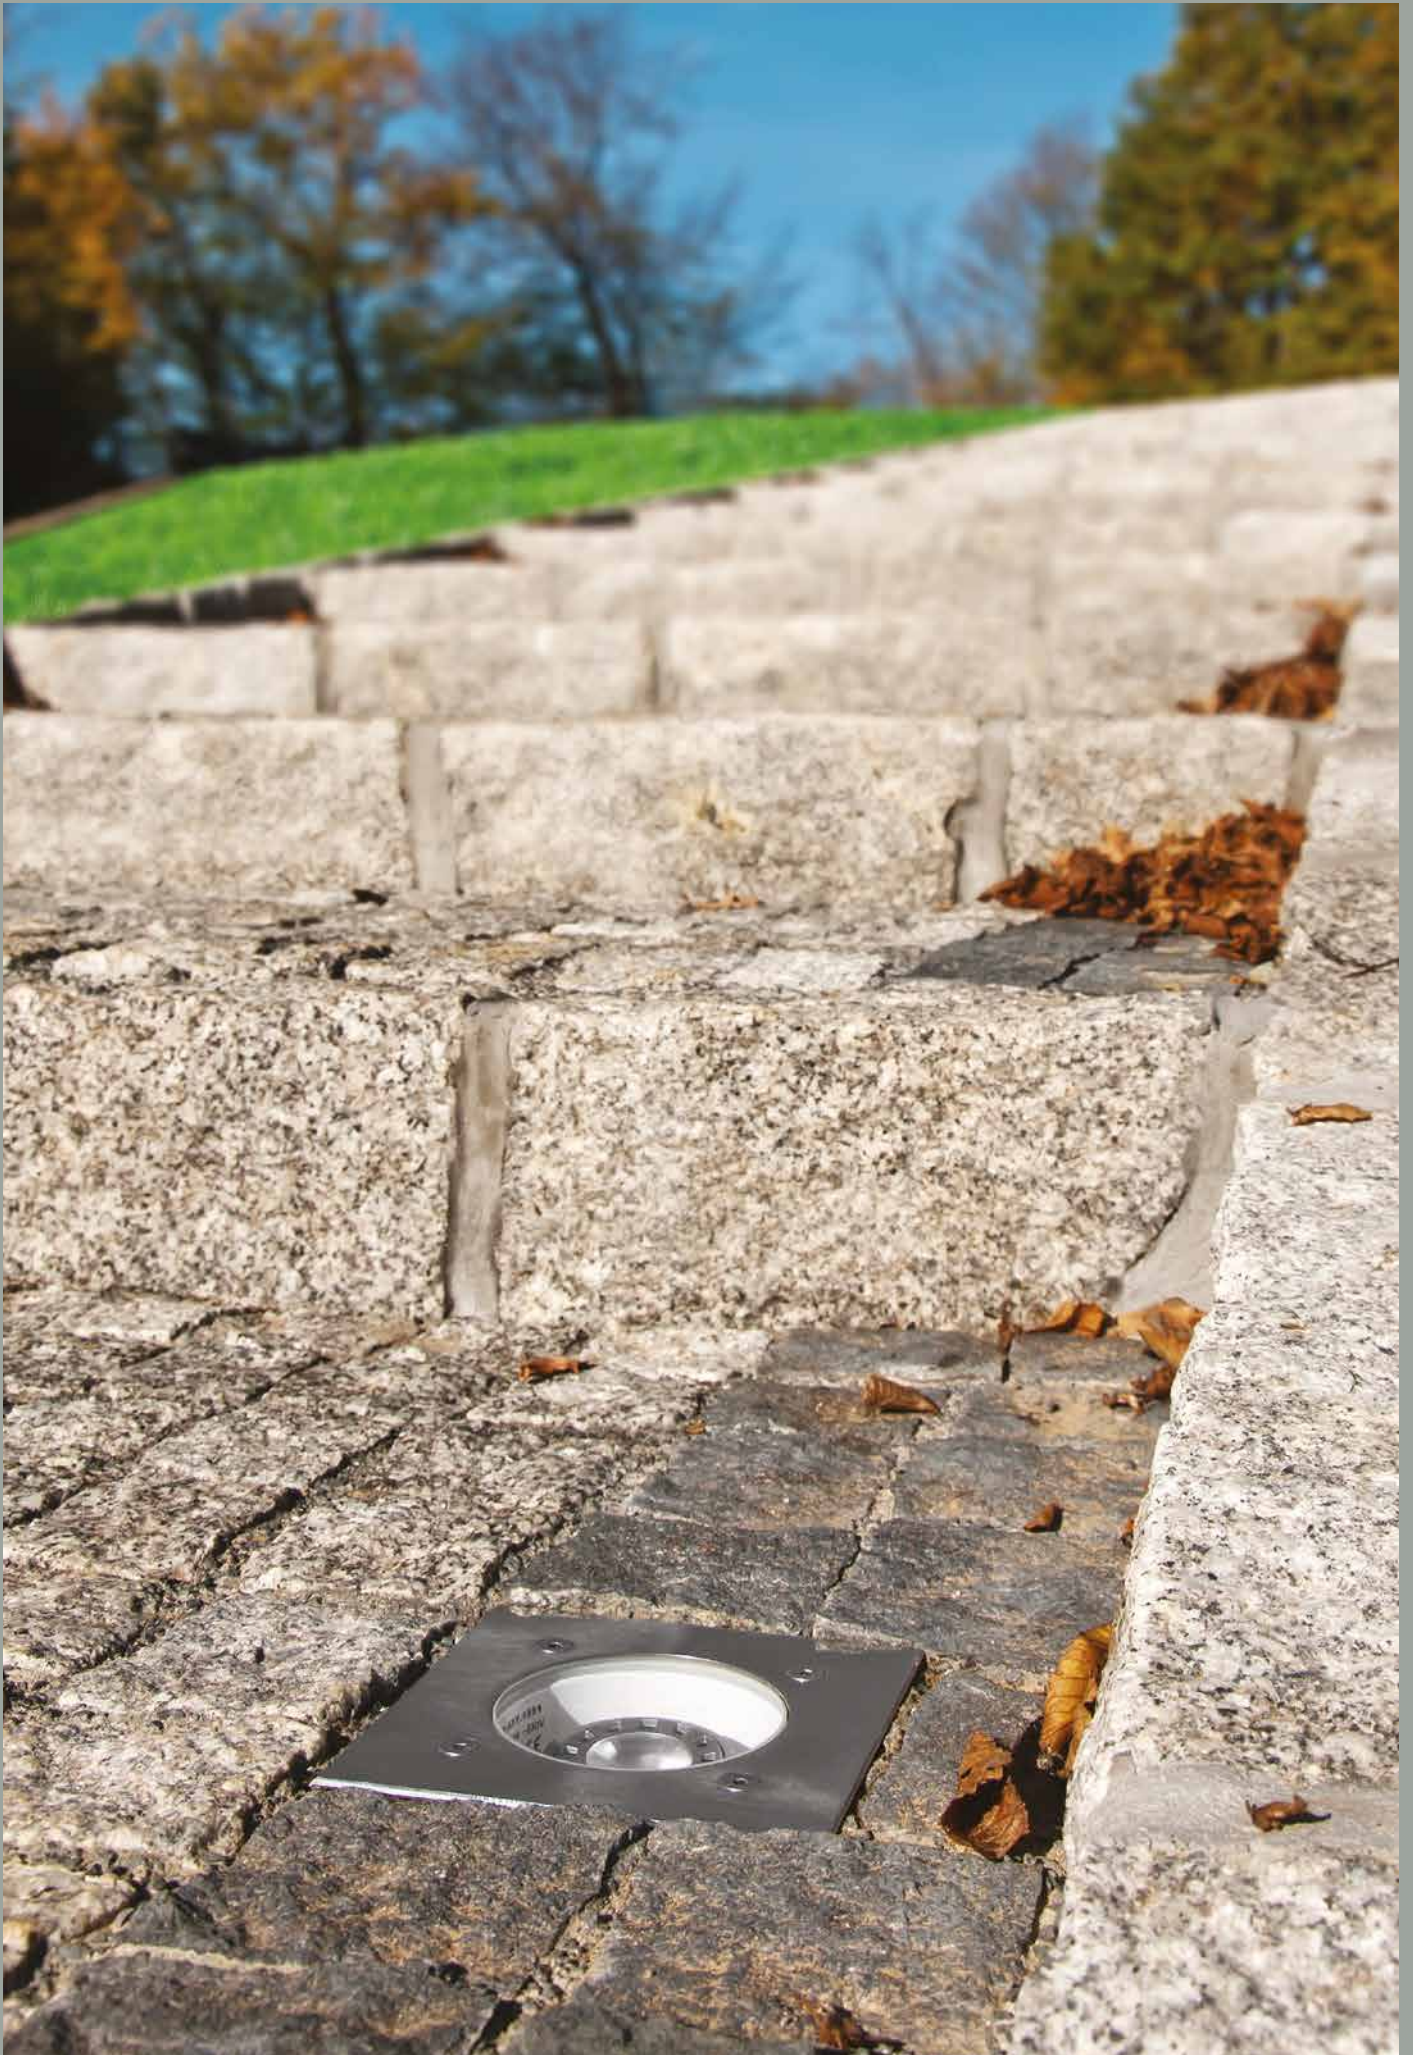

# Rena



**Colour:**


● Stainless Steel

**Colour temperature:**

2700K\* 3000K 4000K




\*2700K on request only, contact your supplier.




Multiple light variants.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Wide range of light direction adjustment.

**Accessories:**


**Art. 142**

Ground assembly module




**Art. 145**

Hermetic 3-track box



**Art. 146**

Hermetic 3-track box





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1551ST	LED GU10	5,5W	367lm	3000K	40 000	Dimmable
1553ST		-	-	-	-	-
1762ST	LED	4W	318lm	3000K	50 000h	Dimmable
1763ST			369lm	4000K		
1766ST		8W	672lm	3000K		
1767ST			731lm	4000K		

\*All indexes with LED module also available with 15° or 24° light angle, contact your supplier. For indexes with LED GU 10 is possible to adjust the angle of the socket by 10°.



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1641ST	LED GU10	5,5W	367lm	3000K	40 000	Dimmable
1643ST		-	-	-	-	-

\*For indexes with LED GU 10 is possible to adjust the angle of the socket by 10°.



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1555ST	LED GU10	5,5W	237lm	3000K	40 000	Dimmable
1557ST		-	-	-	-	-
1752ST	LED	4W	178lm	3000K	50 000h	Dimmable
1753ST			180lm	4000K		
1756ST		8,8W	314lm	3000K		
1757ST			330lm	4000K		

\*All indexes with LED module also available with 15° or 24° light angle, contact your supplier. For indexes with LED GU 10 is possible to adjust the angle of the socket by 10°.



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1645ST	LED GU10	5,5W	237lm	3000K	40 000	Dimmable
1647ST		-	-	-	-	-

\*For indexes with LED GU 10 is possible to adjust the angle of the socket by 10°.



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1550ST	LED GU10	5,5W	367lm	3000K	40 000	Dimmable
1552ST		-	-	-		
1760ST	LED	4W	318lm	3000K	50 000h	Dimmable
1761ST			369lm	4000K		
1764ST		8W	672lm	3000K		
1765ST			731lm	4000K		

\*All indexes with LED module also available with 15° or 24° light angle, contact your supplier. For indexes with LED GU10 is possible to adjust the angle of the socket by 10°.



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1640ST	LED GU10	5,5W	367lm	3000K	40 000	Dimmable
1642ST		-	-	-		

\*For indexes with LED GU10 is possible to adjust the angle of the socket by 10°.



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1554ST	LED GU10	5,5W	237lm	3000K	40 000	Dimmable
1556ST		-	-	-		
1750ST	LED	4,2W	178lm	3000K	> 50 000h	Dimmable
1751ST		4W	180lm	4000K		
1754ST		8W	314lm	3000K		
1755ST			330lm	4000K		

\*All indexes with LED module also available with 15° or 24° light angle, contact your supplier. For indexes with LED GU10 is possible to adjust the angle of the socket by 10°.



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1644ST	LED GU10	5,5W	237lm	3000K	40 000	Dimmable
1646ST		-	-	-		

For indexes with LED GU10 is possible to adjust the angle of the socket by 10°.





# Rena Cover




**Colour:**


- Black
- Graphite

**Colour temperature:**

2700K\* 3000K 4000K




CE	220-240V	IK10	IP68	Grounding symbol	3m
LED	GU10	Al	DIM	Adjustable beam symbol	PC




Multiple light variants.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.




Wide range of light direction adjustment.

**Accessories:**


**Art. 142**  
Power cord cover



**Art. 145**  
Hermetic 3-track box



**Art. 146**  
Hermetic 3-track box





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1632BL	LED GU10	-	-	-	-	-
1632GR		-	-	-	-	-
1633BL		5,5W	13lm	3000K	40 000	Dimmable
1633GR						
1770BL	LED	4W	24lm	3000K	50 000h	Dimmable
1770GR			25lm	4000K		
1771BL						
1771GR						
1774BL		8,7W	48lm	3000K		
1774GR						
1775BL		8W	48lm	4000K		
1775GR						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1630BL	LED GU10	-	-	-	-	-
1630GR		-	-	-	-	-
1631BL		5,5W	13lm	3000K	40 000	Dimmable
1631GR						
1768BL	LED	4W	24lm	3000K	50 000h	Dimmable
1768GR			28lm	4000K		
1769BL						
1769GR						
1772BL		8W	48lm	3000K		
1772GR						
1773BL		56lm	4000K			
1773GR						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1650BL	LED GU10	-	-	-	-	-
1650GR		-	-	-	-	-
1651BL		5,5W	13lm	3000K	40 000	Dimmable
1651GR		5,5W	13lm	3000K	40 000	Dimmable



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1652BL	LED GU10	-	-	-	-	-
1652GR		-	-	-	-	-
1653BL		5,5W	13lm	3000K	40 000	Dimmable
1653GR		5,5W	13lm	3000K	40 000	Dimmable



# Rondane



**Colour:**

- Aluminium
- Graphite

**Colour temperature:**


2700K\* 3000K 4000K




\*2700K on request only, contact your supplier.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.



Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
538AL	E27	-	-	-	-	-
538GR						
537AL	LED	8,5W	305lm	3000K	> 110 000h	Dimmable
537GR						
539AL		17,5W	732lm		50 000h	-
539GR						
548AL	9,5W	345lm			Motion Detector	
548GR						

\*All indexes also available in 4000K and 2700K versions.



# Sandvik



**Colour:**

- Aluminium
- Graphite
- Black
- White

**Colour temperature:**


2700K\* 3000K 4000K



\*2700K on request only, contact your supplier.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).

**Accessories:**


**Art. 148**


Corner bracket for art. 1730, 1731, 1732, 5152




**Art. 131**

Corner bracket for art 1740, 1741, 1742, 5153



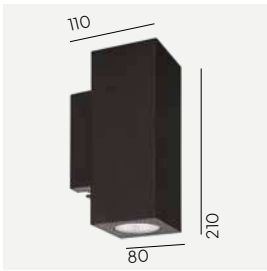

Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1730AL	LED GU10	-	-	-	-	-
1730BL						
1730GR						
1730WH						
1731AL	LED	7,8W	420lm	2700K	40 000h	Dimmable
1731BL						
1731GR						
1731WH						
1732AL						
1732BL						
1732GR						
1732WH						
5152AL	LED	16W	1126lm	3000K	> 50 000	Dimmable
5152BL						
5152GR						
5152WH						
5152WH						

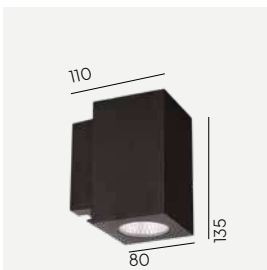

Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1740AL	LED GU10	-	-	-	-	-
1740BL						
1740GR						
1740WH						
1741AL	LED	3,9W	210lm	2700K	40 000h	Dimmable
1741BL						
1741GR						
1741WH						
1742AL						
1742BL						
1742GR						
1742WH						
5153AL	LED	8W	563lm	3000K	> 50 000h	Dimmable
5153BL						
5153GR						
5153WH						
5153WH						



# Sandvik



**Colour:**

- Aluminium
- Graphite
- Black
- White

**Colour temperature:**


2700K\* 3000K 4000K



\*2700K on request only, contact your supplier.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.



Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
795AL	LED GU10	3,9W	210lm	2700K	40 000h	Dimmable
795BL						
795GR						
795WH						
796AL						
796BL						
796GR						
796WH						




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens
2937AL	LED	7,7W	730lm	4000K	>268 210h	Dimmable	IESNA Type II/III
2937BL							
2937GR							
2935AL							
2935BL							
2935GR							
2939AL			604lm	3000K			IESNA Type V
2939BL							
2939GR							
2941AL							
2941BL							
2941GR							



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens	Energy distributor ~230V
2945AL	LED	7,7W	730lm	4000K	>268 210h	Dimmable	IESNA Type II/III	E(Uni)
2945BL								
2945GR								
2943AL								
2943BL								
2943GR								
2947AL			604lm	3000K			IESNA Type V	
2947BL								
2947GR								
2949AL								
2949BL								
2949GR								

# Skara

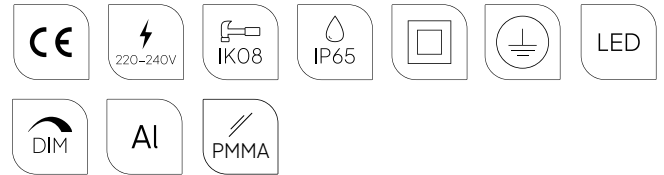

**Colour:**

- Aluminium
- Black
- Graphite

**Colour temperature:**

2700K\* 3000K 4000K




\*2700K on request only, contact your supplier.



Luminaires with energy distributor option.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.



Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).



# Sande



**Colour:**

- Graphite
- Black

**Colour temperature:**


2700K\* 3000K 4000K




\*2700K on request only, contact your supplier.




Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Wide range of light direction adjustment.

**Accessories:**


**Art. 1233**

Cap



**Art. 1233**

Ground anchor.






Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Light angle
1592BL	LED GU10	5,5W	276lm	3000K	40 000	Dimmable	36°
1592GR							40°
1593BL	LED	8,6W	566lm		> 145 000h		
1593GR							



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Light angle
1598BL	LED GU10	5,5W	276lm	3000K	40 000	Dimmable	36°
1598GR							40°
1594BL	LED	8,6W	738lm		> 145 000h		
1594GR							



# Sol

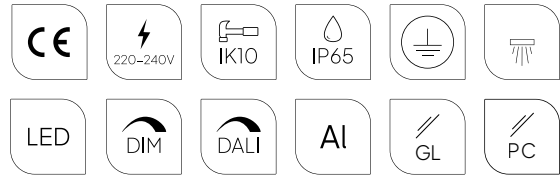

**Colour:**

- Aluminium
- Graphite
- Black
- White

**Colour temperature:**

2700K\* 3000K 4000K




\*2700K on request only, contact your supplier.



Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Product Eco-friendly.

**Accessories:**

**Art. 3095**

Distance





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
4051AL	LED	19,1W	2101lm	3000K	> 100 000h	Dimmable
4051BL						
4051GR						
4051WH						
4052AL						
4052BL						
4052GR						
4052WH						
4055AL						
4055BL						
4055GR						
4055WH						
4056AL						
4056BL						
4056GR						
4056WH						
						DALI2



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
4053AL	LED	19,3W	1655lm	3000K	> 100 000h	Dimmable
4053BL						
4053GR						
4053WH						
4054AL						
4054BL						
4054GR						
4054WH						
4057AL						
4057BL						
4057GR						
4057WH						
4058AL						
4058BL						
4058GR						
4058WH						
						DALI2






Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
4043AL	LED	19,3W	1938lm	3000K	> 100 000h	Dimmable
4043BL						
4043GR						
4043WH						
4044AL						
4044BL						
4044GR		2221lm	4000K			
4044WH						
4047AL		19,1W	1924lm	3000K	> 100 000h	DALI2
4047BL						
4047GR						
4047WH						
4048AL						
4048BL						
4048GR		2227lm	4000K			
4048WH						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control		
4045AL	LED	19,3W	1633lm	3000K	> 100 000h	Dimmable		
4045BL								
4045GR								
4045WH								
4046AL		19,1W	1890lm	4000K			> 100 000h	DALI2
4046BL								
4046GR								
4046WH								
4049AL		19,3W	1618lm	3000K	> 100 000h	DALI2		
4049BL								
4049GR								
4049WH								
4050AL		19,1W	1866lm	4000K			> 100 000h	DALI2
4050BL								
4050GR								
4050WH								

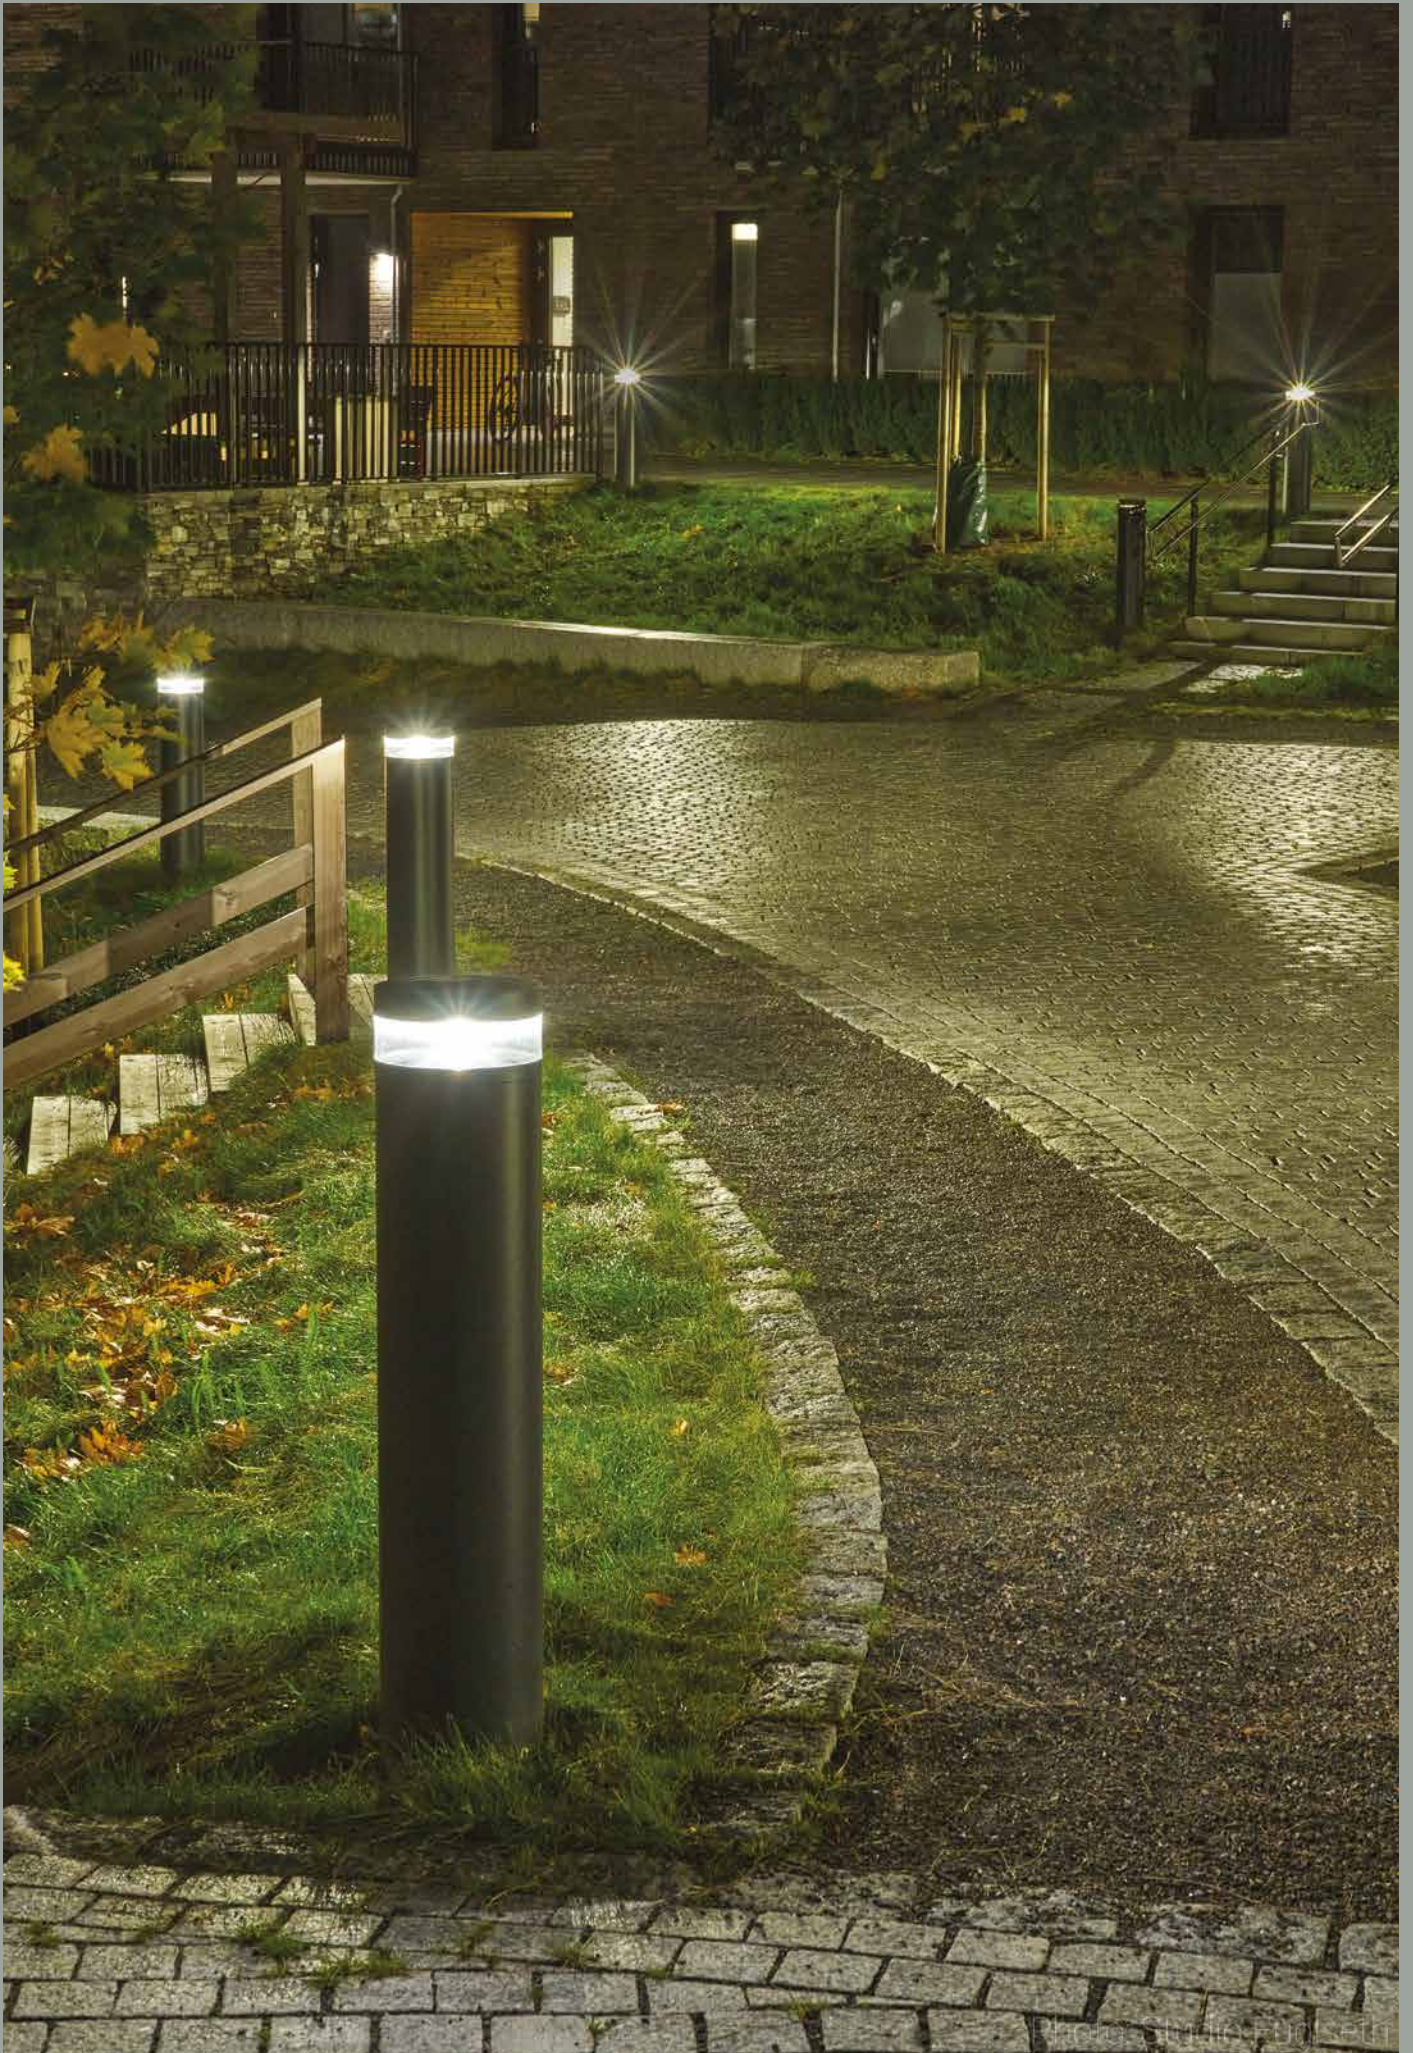

# Stavanger



**Colour:**



Aluminium



Graphite

**Colour temperature:**

2700K\* 3000K


4000K



\*2700K on request only, contact your supplier.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).

**Accessories:**


**Art. 1230**

Concreting anchor




**Art. 1231**

Ground anchor





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	
1240AL	LED	12,2W	428lm	3000K	> 145 000h	Dimmable	
1240GR							
5008AL			493lm	4000k	50 000h		DALI2/ NightDim
5008GR							
5060AL			428lm	3000K	> 145 000h		
5060GR							
5063AL							
5063GR							

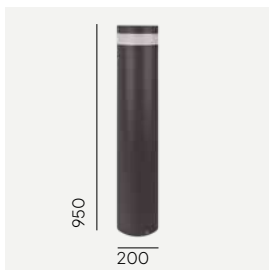

Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Class
1243AL	E27	-	-	-	-	-	I
1243GR							
2240AL	LED	13,6W	483lm	3000K	> 72 000h	Dimmable	II
2240GR							
2241AL			565lm	4000K			
2241GR							





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	
1244AL	LED	12,2W	428lm	3000K	> 145 000h	Dimmable	
1244GR							
5009AL		11,9W	530lm	4000k	50 000h		DALI2/ NightDim
5009GR							
5061AL		12,2W	493lm	3000K	> 145 000h		
5061GR							
5064AL							
5064GR							




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Class
1246AL	E27	-	-	-	-	-	I
1246GR							
2244AL	LED	13,6W	483lm	3000K	> 72 000h	Dimmable	II
2244GR							
2245AL			565lm	4000K			
2245GR							

Bollard

Modern



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1247AL	LED	8,4W	312lm	3000K	> 145 000h	Dimmable
1247GR						
5010AL						
5010GR						
5062AL		8,5W	351lm	4000k	50 000h	DALI
5062GR						
5065AL		8,4W	400lm	3000K	> 145 000h	
5065GR						




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Class
1248AL	E27	-	-	-	-	-	I
1248GR							
2248AL	LED	8,9W	337lm	3000K	> 72 000h	Dimmable	II
2248GR							
2249AL							
2249GR							





# Voss

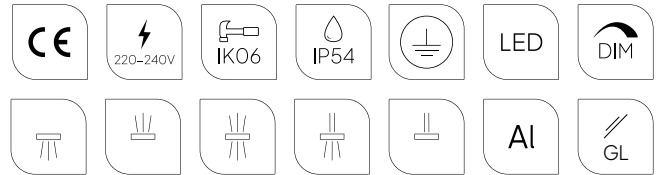

**Colour:**



Aluminium



Graphite

**Colour temperature:**

2700K\* 3000K


4000K




\*2700K on request only, contact your supplier.




Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.





Multiple light variants.

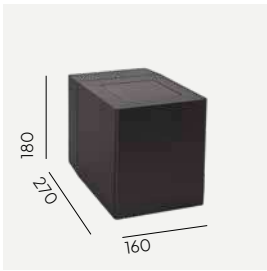



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1951AL	LED	10,8W	557lm	3000K	> 171 460	Dimmable
1951GR						
5034AL		16,8W	610lm	4000K	50 000	
5034GR						

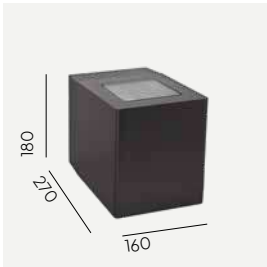

Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1955AL	LED	10,5W	557lm	3000K	> 102 000h	Dimmable
1955GR						
5036AL		10,5W	557lm	4000K	50 000	
5036GR						

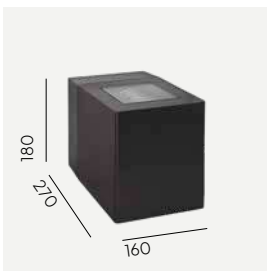


Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1950AL	LED	15,4W	614lm	3000K	50 000h	-
1950GR						
5032AL		16,9W	655lm	4000K	> 102 000h	
5032GR						

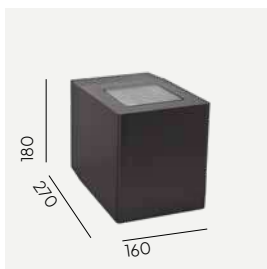

Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1952AL	LED	21W	1115lm	3000K	> 102 000h	-
1952GR			1077lm	4000K		
5033AL						
5033GR						



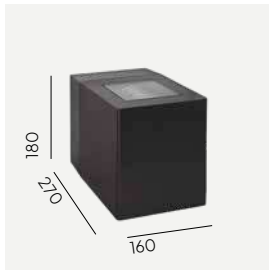

Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1953AL	LED	6,4W	55,7lm	3000K	> 102.000h	-
1953GR						
5128AL			55lm	4000K		Dimmable
5128GR						





# Vasa



**Colour:**

- Aluminium
- Graphite
- Black
- White

**Colour temperature:**


2700K\* 3000K 4000K




\*2700K on request only, contact your supplier.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.



Multiple light variants.



Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
120AL	E27	-	-	-	-	-
120BL						
120GR						
120WH						
127AL	LEDE27	8W	384lm	2700K	25 000h	-
127BL						
127GR						
127WH						
128AL	LED	8,5W	631lm	3000K	> 72 000h	Dimmable
128BL						
128GR						
128WH						
5019AL	LED	8,3W	668lm	4000K	> 70 000h	-
5019BL						
5019GR						
5019WH						
5093AL	LED	9,7W	670lm	3000K	> 70 000h	DALI2
5093BL						
5093GR						
5093WH						
5092AL	LED	14,1W	1039lm	4000K	> 70 000h	-
5092BL						
5092GR						
5092WH						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
450AL	LED	6W	440lm	3000K	> 102 000h	Dimmable
450BL						
450GR						
450WH						
451AL	LED	6W	457lm	4000K	> 102 000h	Dimmable
451BL						
451GR						
451WH						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
454AL	LED	6W	440lm	3000K	> 102 000h	Dimmable
454BL						
454GR						
454WH						
455AL	LED	6W	457lm	4000K	> 102 000h	Dimmable
455BL						
455GR						
455WH						


# Visby

The city needs light of the right quality and in the right quantity. It needs balance.

The Visby model can be an excellent choice here.

Visby is a modernist pole lamp, economical thanks to the LED modules, but also with an excellent ratio of energy consumption to lighting capacity. It is ideal for illuminating streets, built-up areas, parks and squares, where it creates practical yet beautiful lighting. This is complemented by an innovative ring bracket system at the height of the light source and a plane reflection system, which optimally reduces glare and creates a harmonious light beam.



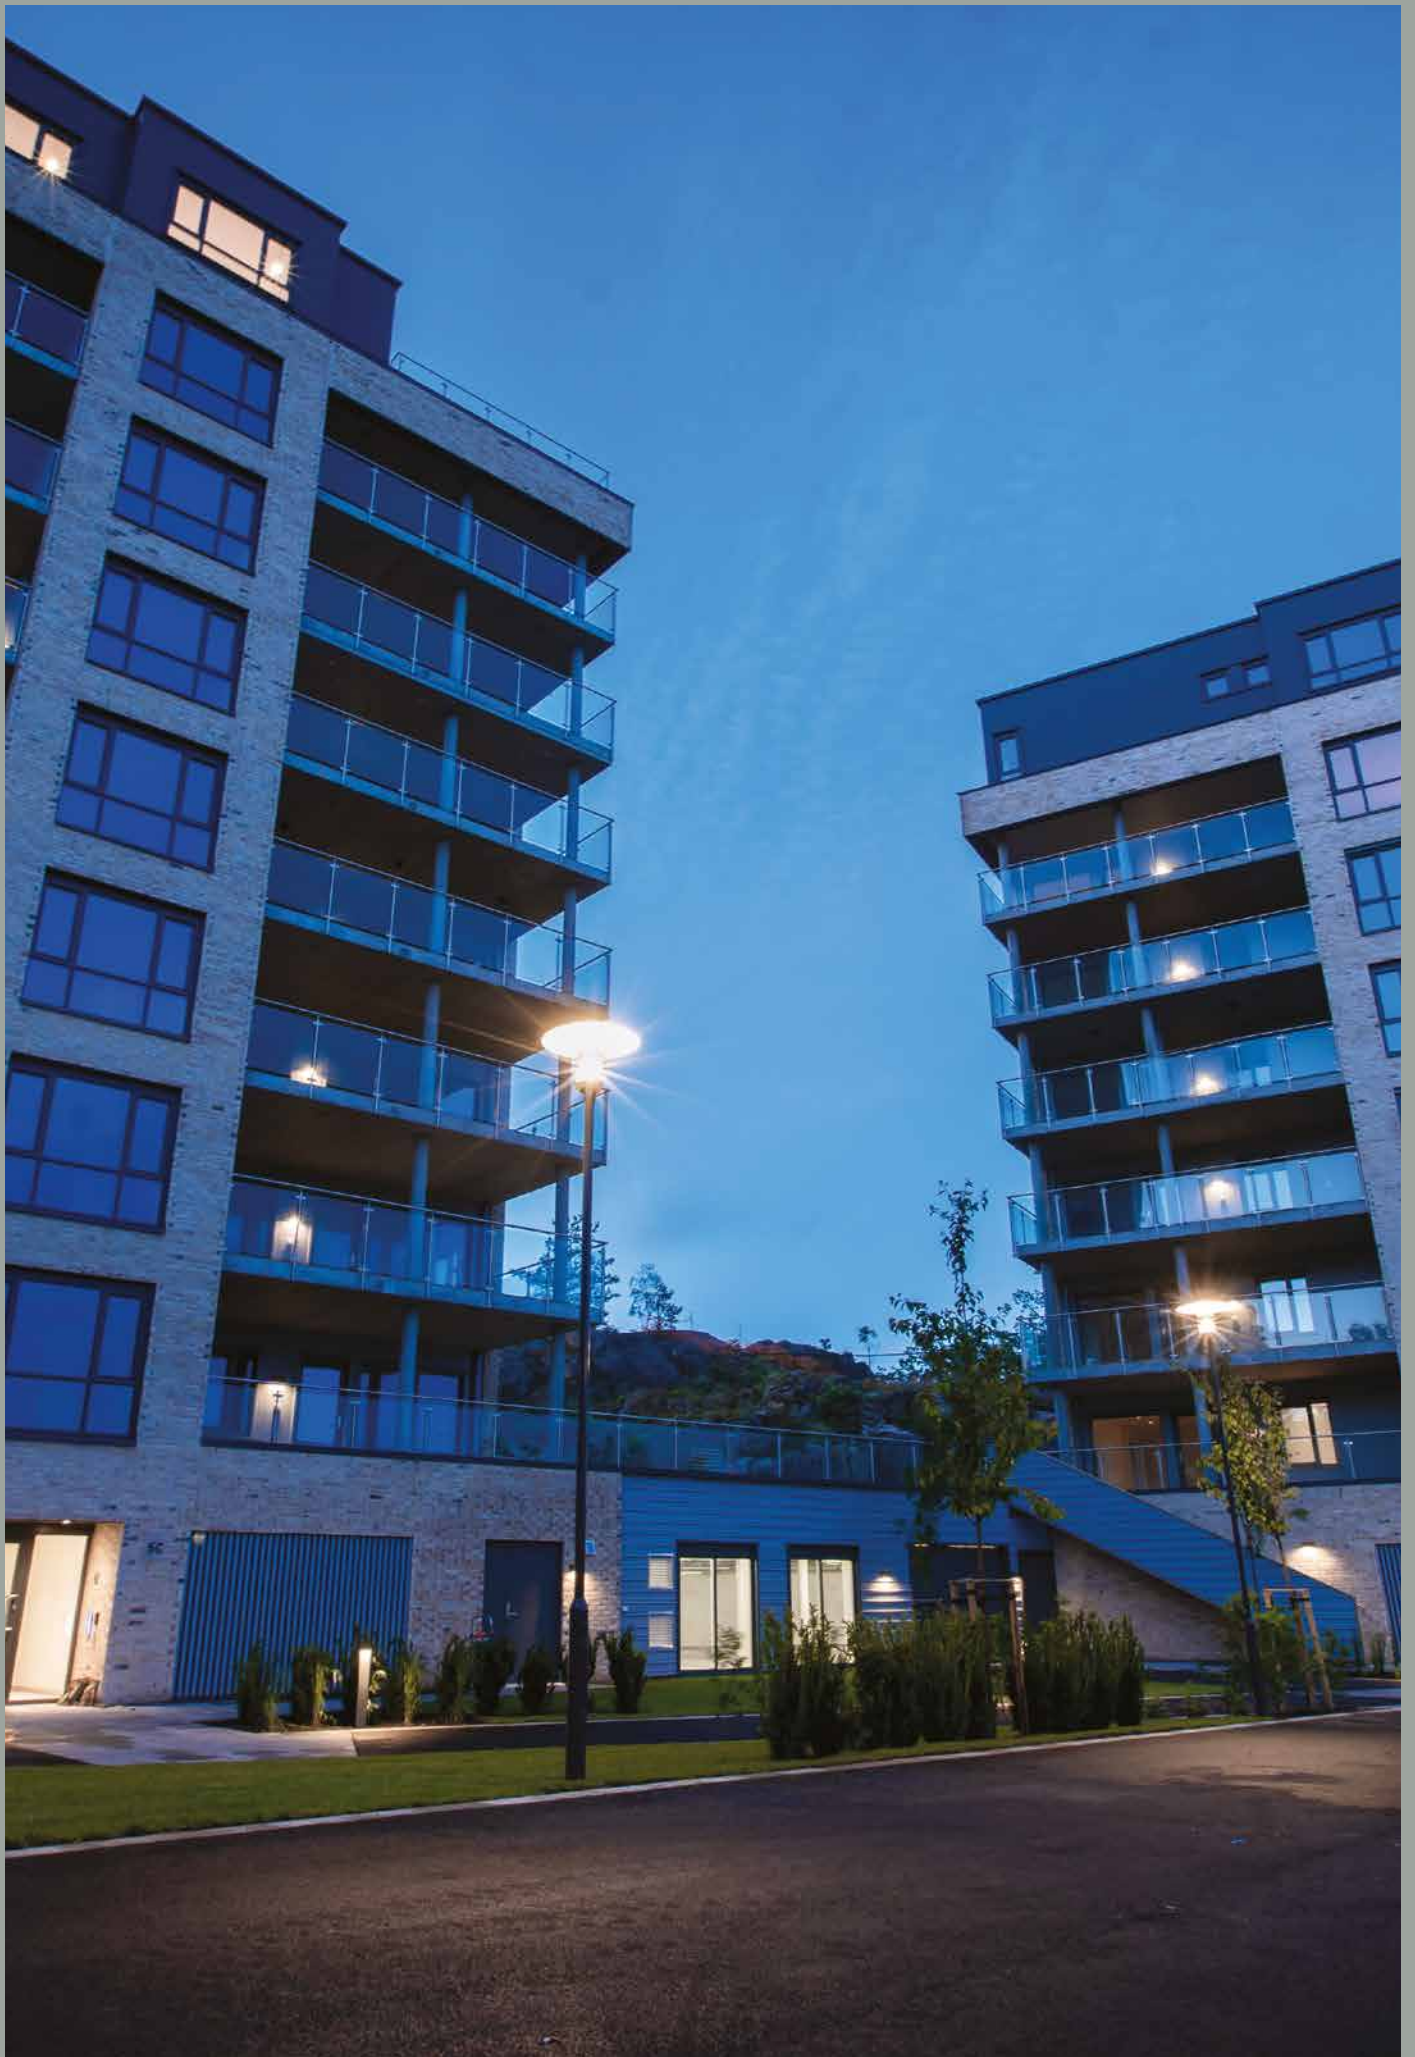

# Visby



Visby mounted on pole 3004, further information on pages 417-418.



**Colour:**

- Aluminium
- Graphite

**Colour temperature:**

2700K\* 3000K 4000K


\*2700K on request only, contact your supplier.



Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Product Eco-friendly.

**Accessories:**

Luminaires sold separately, recommended poles ø60, further information on pages 417- 418.

**Art. 7660**

Reduction for ø60 luminaires for mounting on the ø76 pole.






Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50
577AL	LED	27W	1388lm	3000K	50 000h
577GR					
576AL		44,5W	2465lm		
576GR					
5003AL		26,5W	1553lm	4000K	
5003GR					
5002AL		43,6W	2624lm		
5002GR					





# Varberg

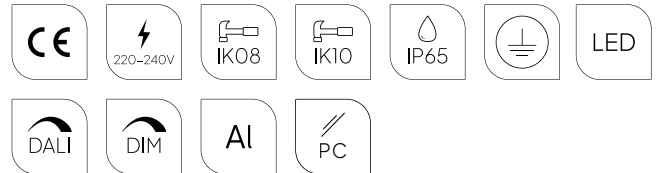

**Colour:**


- Aluminium
- Graphite
- Black

**Colour temperature:**


2700K\* 3000K 4000K




\*2700K on request only, contact your supplier.



Multiple light variants.



Fully replaceable electrical kit.



Product Eco-friendly.



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens
7150AL	LED	30W	3621lm	4000K	>100 000h	DALI2/ NightDim	IESNA type IV
7150BL							
7150GR			3843lm	3000K			
7151AL							
7151BL							
7151GR							



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens
7152AL	LED	7,7W	741lm	4000K	>109 000h	Dimmable	IESNA type IV
7152BL							
7152GR							
7153AL		7,8W	742lm	4000K		DALI2	
7153BL							
7153GR							
7154AL		7,7W	759lm	3000K		Dimmable	
7154BL							
7154GR							
7155AL		7,8W	760lm	3000K		DALI2	
7155BL							
7155GR							

# Torp



Colour:


- Black



Luminaire suitable for extreme conditions.



Product Eco-friendly.

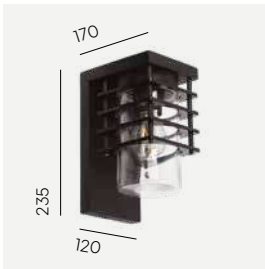

Art	Type of light source
1396BL	E27



# Trysil


Thoroughly futuristic, ahead of its time but elegant. Whatever your needs, Trysil is the perfect choice for those who wish to combine modernity with reliability and exceptional style. Trysil is available in bollard and pole versions. It offers a range of state-of-the-art light sources and controls, adapted to the needs of the most demanding users.

Trysil family means quality, design and functionality.





# Trysil

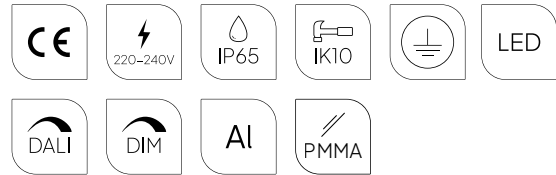

**Colour:**


- Aluminium
- Graphite
- Black

**Colour temperature:**


- 2700K\* 3000K 4000K
- 
- \*2700K on request only, contact your supplier.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).

**Accessories:**


**Art. 1907**

Concreting anchor




**Art. 1908**

Anchoring support




**Art. 1909**



**Art. 3081**

Special foot






Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	
1097AL	LED	7,3W	647lm	4000K	> 171 460h	Dimmable	
1097BL							
1097GR							
1096AL							
1096BL							
1096GR							
1108AL		9,5W	660lm	3000K	> 102 000h		-
1108BL							
1108GR							
1109AL							
1109BL							
1109GR							



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens				
1101AL	LED	7,4W	694lm	4000K	> 109 000h	Dimmable	IESNA type V				
1101BL											
1101GR											
1100AL											
1100BL											
1100GR											
1102AL		8W	689lm	3000K		> 109 000h		DALI2	IESNA type II/III		
1102BL											
1102GR											
1103AL											
1103BL											
1103GR											
1105AL	7,4W	706lm	4000K	> 109 000h	Dimmable	IESNA type II/III					
1105BL											
1105GR											
1104AL		7,5W	738lm				3000K	> 109 000h		DALI2	IESNA type II/III
1104BL											
1104GR											
1106AL											
1106BL											
1106GR											
1107AL	8W	707lm	3000K	> 109 000h	DALI2		IESNA type II/III				
1107BL											
1107GR											
1107AL	8W	693lm	4000K			> 109 000h		DALI2	IESNA type II/III		
1107BL											
1107GR											



# Trysil

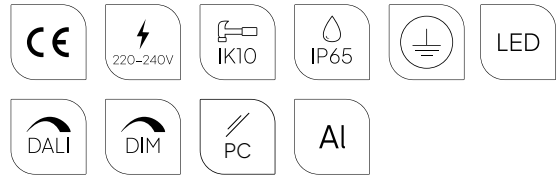

**Colour:**

- Aluminium
- Black
- Graphite


**Colour temperature:**

2700K\* 3000K 4000K

\*2700K on request only, contact your supplier.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.



Product Eco-friendly.

**Accessories:**

**Art. 3091**





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1048AL	LED	12,5W	1260lm	3000K	> 72 000h	Dimmable
1048BL						
1048GR						
1049AL						
1049BL						
1049GR						
1050AL		20W	1973lm	3000K	>102 000h	DALI2/ NightDim
1050BL						
1050GR						
1051AL						
1051BL						
1051GR						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens		
1055AL	LED	8,7W	1141lm	4000K	> 100 000h	DALI2/ NightDim	IESNA type V		
1055BL									
1055GR									
1054AL		8,4W	1081lm	3000K					
1054BL									
1054GR									
1058AL		8,6W	1111lm	3000K			> 100 000h	DALI2/ NightDim	IESNA type II/III
1058BL									
1058GR									
1059AL		8,7W	1161lm	4000K					
1059BL									
1059GR									



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1001AL	LED	25W	2476lm	4000K	> 102 000h	Dimmable
1001BL						
1001GR						
1000AL						
1000BL						
1000GR						
1002AL		40W	3901lm	3000K	> 102 000h	DALI2
1002BL						
1002GR						
1003AL						
1003BL						
1003GR						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens
1007AL	LED	16,3W	2377lm	4000K	> 100 000h	DALI2/ NightDim	IESNA type V
1007BL							
1007GR							
1006AL							
1006BL							
1006GR							
1010AL		2282lm	3000K	> 100 000h	DALI2/ NightDim	IESNA type II/III	
1010BL							
1010GR							
1011AL		2216lm	3000K	> 100 000h	DALI2/ NightDim	IESNA type II/III	
1011BL							
1011GR							
1011BL	2293lm	4000K	> 100 000h	DALI2/ NightDim	IESNA type II/III		
1011GR							



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1060AL	LED	17W	1667lm	3000K	> 102 000h	Dimmable
1060BL						
1060GR						
1061AL						
1061BL						
1061GR						
1062AL		1719lm	4000K	> 102 000h	DALI2/ NightDim	DALI2/ NightDim
1062BL						
1062GR						
1063AL		20W	1973lm	3000k	> 102 000h	DALI2/ NightDim
1063BL						
1063GR						
1063GR	2054lm	4000K	> 102 000h	DALI2/ NightDim	DALI2/ NightDim	
1063GR						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control		
1012AL	LED	34W	3347lm	3000K	> 102 000h	Dimmable		
1012BL								
1012GR								
1013AL		33W	3448lm	4000K			> 102 000h	DALI2/ NightDim
1013BL								
1013GR								
1014AL		3901lm	3000K	> 102 000h	DALI2/ NightDim	DALI2/ NightDim		
1014BL								
1014GR		40W	3901lm	3000K	> 102 000h	DALI2/ NightDim		
1015AL								
1015BL								
1015GR		4145lm	4000K	> 102 000h	DALI2/ NightDim	DALI2/ NightDim		
1015GR								



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens
1067AL	LED	12,2W	1705lm	4000K	> 100 000h	DALI2/ NightDim	IESNA type V
1067BL							
1067GR							
1066AL							
1066BL							
1066GR							
1070AL			1594lm	3000K			IESNA type II/III
1070BL							
1070GR							
1071AL			1667lm	4000K			
1071BL							
1071GR							



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens	
1019AL	LED	23,3W	3425lm	4000K	> 100 000h	DALI2/ NightDim	IESNA type V	
1019BL								
1019GR								
1018AL			3277lm	3000K				IESNA type II/III
1018BL								
1018GR								
1022AL			3194lm	3000K				
1022BL								
1022GR								
1023AL			3308lm	4000K				
1023BL								
1023GR								



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1072AL	LED	17W	1667lm	3000K	> 102 000h	Dimmable
1072BL						
1072GR						
1073AL			1719lm	4000K		
1073BL						
1073GR						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1024AL	LED	34W	3347lm	3000K	> 102 000h	Dimmable
1024BL						
1024GR						
1025AL						
1025BL						
1025GR						
1026AL		40W	3901lm	3000K		DALI2/ NightDim
1026BL						
1026GR						
1027AL						
1027BL						
1027GR						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens	
1079AL	LED	12,2W	1705lm	4000K	> 100 000h	DALI2/ NightDim	IESNA type V	
1079BL								
1079GR								
1078AL								
1078BL								
1078GR								
1082AL			1594lm	3000K			DALI2/ NightDim	IESNA type II/III
1082BL								
1082GR								
1083AL								
1083BL								
1083GR								



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens	
1031AL	LED	23,3W	3425lm	4000K	> 100 000h	DALI2/ NightDim	IESNA type V	
1031BL								
1031GR								
1030AL								
1030BL								
1030GR								
1034AL			3194lm	3000K			DALI2/ NightDim	IESNA type II/III
1034BL								
1034GR								
1035AL								
1035BL								
1035GR								



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	
1084AL	LED	17W	1667lm	3000K	> 102 000h	Dimmable	
1084BL							
1084GR							
1085AL			1719lm	4000K			
1085BL							
1085GR							
1086AL		20W	1973lm	3000K			DALI2/ NightDim
1086BL							
1086GR							
1087AL			1973lm	4000K			
1087BL							
1087GR							



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens			
1091AL	LED	12,2W	1705lm	4000K	> 100 000h	DALI2/ NightDim	IESNA type V			
1091BL										
1091GR										
1090AL			1638lm	3000K					IESNA type II/III	
1090BL										
1090GR										
1094AL			1594lm	3000K						IESNA type II/III
1094BL										
1094GR										
1095AL			1667lm	4000K					IESNA type II/III	
1095BL										
1095GR										



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	
1037AL	LED	34W	3448lm	4000K	> 102 000h	Dimmable	
1037BL							
1037GR							
1036AL			3347lm				
1036BL							
1036GR							
1038AL		40W	3901lm	3000K		> 102 000h	DALI2
1038BL							
1038GR							
1039AL			4145lm	4000K			
1039BL							
1039GR							



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens		
1043AL	LED	23,3W	3425lm	4000K	> 100 000h	DALI2/ NightDim	IESNA type V		
1043BL									
1043GR									
1042AL			3277lm						
1042BL									
1042GR									
1046AL			3194lm	3000K			> 100 000h	DALI2/ NightDim	IESNA type II/III
1046BL									
1046GR									
1047AL			3308lm	4000K					
1047BL									
1047GR									





# Bergen



**Colour:**




Black



Galvanized



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Double corrosion protection (galvanising+powder coating).

**Accessories:**


**Art. 153**

Corner bracket



**Art. 159**

Spacer





Art	Type of light source
270BL	E27
270GA	E27



Art	Type of light source
271BL	E27
271GA	E27



# Bergen



Colour:




Black




Galvanized



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.

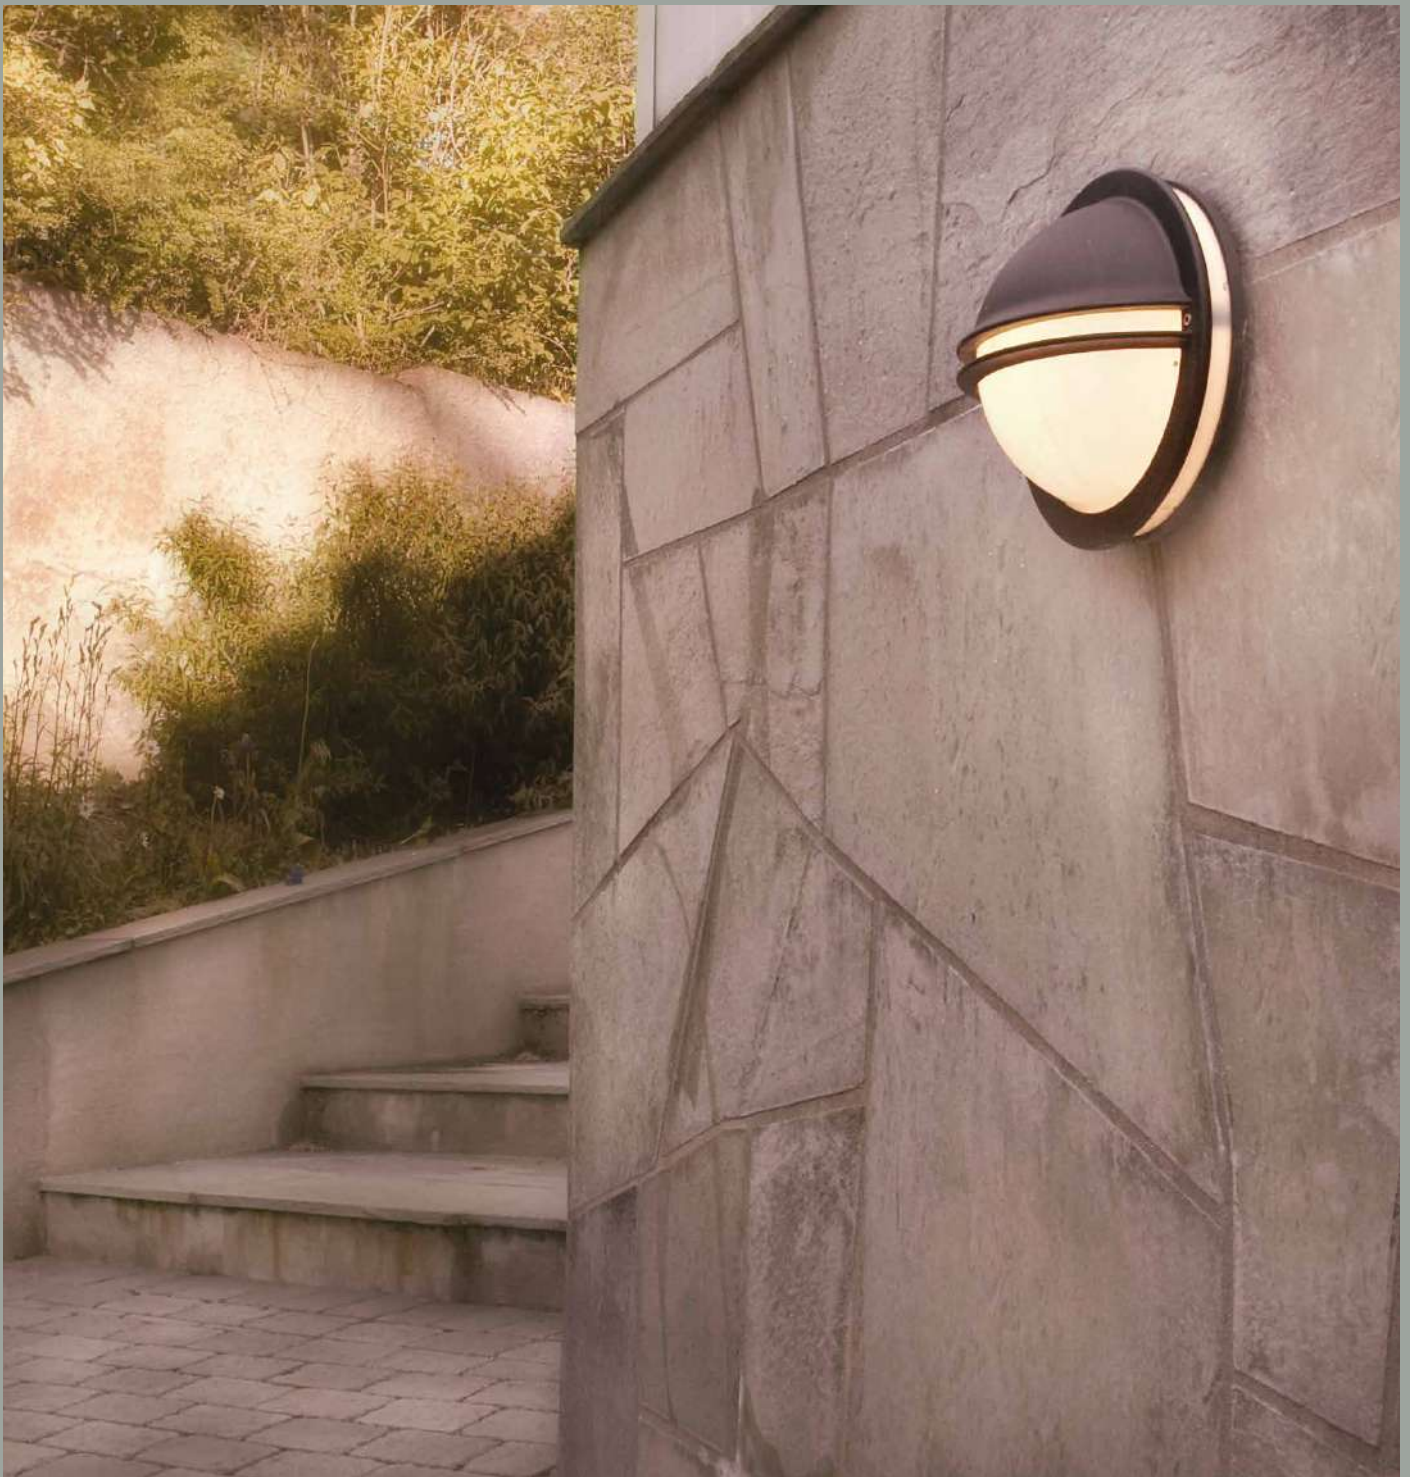

Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
611BL	E27	-	-	-	-	-
611WH		-	-	-	-	-
615BL	LED E27	LED max 9W	240lm	2700K	25 000h	Dimmable
615WH						
617BL	LED	8W	185lm	3000K	50 000h	
617WH						
618BL		10W	-			-
618WH						

# Berlin

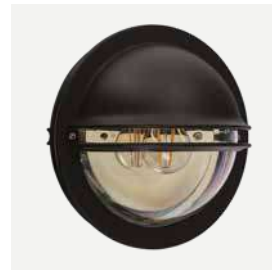

**Colour:**

Black

White

**Colour temperature:**


2700K\* 3000K 4000K



\*2700K on request only, contact your supplier.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.



Product Eco-friendly.





Art	Type of light source
610BL	E27
610WH	



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
631BL	E27	-	-	-	-	-
631GA		-	-	-	-	-
637BL	LED	8W	364lm	3000K	50 000h	Dimmable
637GA			532lm			
638BL		10W	532lm			
638GA						

# Bremen

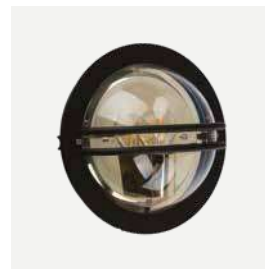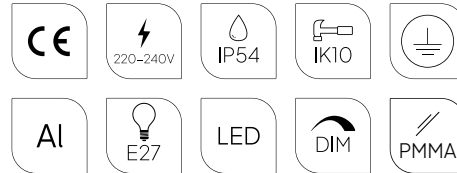

**Colour:**

Black

Galvanized

**Colour temperature:**

2700K\* 3000K 4000K




\*2700K on request only, contact your supplier.



Product Eco-friendly.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.



270


Art	Type of light source
630BL	E27
630GA	



Photo: Studio Fulgseth



# Lofoten

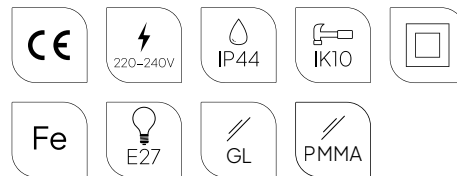

**Colour:**

● Black



Luminaire suitable for extreme conditions.



Product Eco-friendly.



Double corrosion protection (galvanising+powder coating).




Art	Type of light source
1940BL	E27



Art	Type of light source
1960BL	E27



# Lofoten

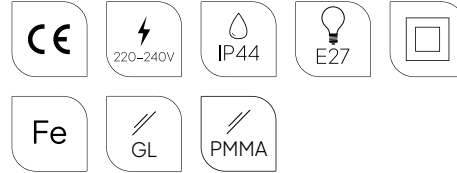

Colour:



Black



Luminaire suitable for extreme conditions.



Product Eco-friendly.





Double corrosion protection (galvanising+powder coating).

Accessories:


Art. 155

Corner bracket





Art	Type of light source
1939BL	E27



Art	Type of light source
1949BL	E27



Art	Type of light source
1963BL	E27



Art	Type of light source
1969BL	E27



# Lofoten




Colour:  
● Black



Luminaire suitable for extreme conditions.



Product Eco-friendly.



Double corrosion protection (galvanising+powder coating).




Art	Type of light source
1944BL	E27



Art	Type of light source
1945BL	E27

# Lofoten

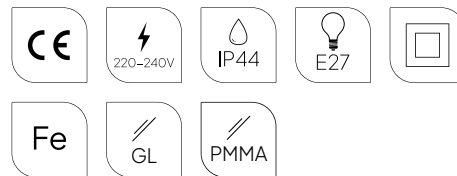

Colour:

● Black



Luminaire suitable for extreme conditions.



Product Eco-friendly.



Double corrosion protection (galvanising+powder coating).



Art	Type of light source
1942BL	E27



Art	Type of light source
1962BL	E27





# Lofoten



Colour:


● Black



Luminaire suitable for extreme conditions.



Product Eco-friendly.



Double corrosion protection (galvanising+powder coating).




Art	Type of light source
1941BL	E27



Art	Type of light source
1961BL	E27



# Lofoten

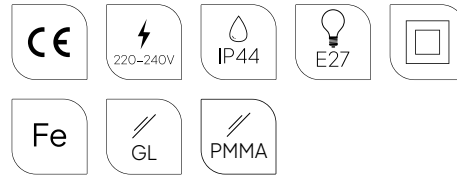

Colour:


● Black



Luminaire suitable for extreme conditions.



Product Eco-friendly.



Double corrosion protection (galvanising+powder coating).



Art	Type of light source
1946BL	E27



Art	Type of light source
1966BL	E27



Art	Type of light source
1948BL	E27




Art	Type of light source
1947BL	E27



Art	Type of light source
1968BL	E27

# Lofoten

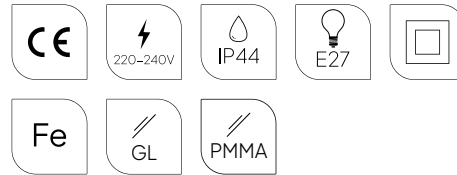

Colour:  
● Black



Luminaire suitable for extreme conditions.



Product Eco-friendly.




Double corrosion protection (galvanising+powder coating).

### Accessories:


#### Art. 405

Concreting anchor



#### Art. 406

Ground anchor






Art	Type of light source
690BL	E27
690GA	



# Larvik

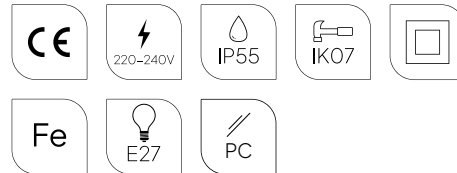

**Colour:**



Black



Galvanized



Luminaire suitable for extreme conditions.



Product Eco-friendly.




Double corrosion protection (galvanising+powder coating).

**Accessories:**


**Art. 153**

Mounting corner



**Art. 159**

Luminaire mounting distance






Art	Type of light source
240BL	E27
240GA	E27



# Oslo

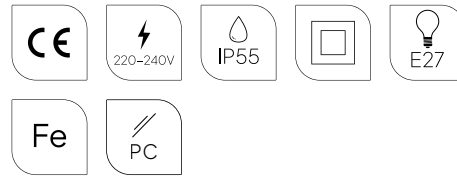

**Colour:**



Black



Galvanized



Luminaire suitable for extreme conditions.



Product Eco-friendly.




Double corrosion protection (galvanising+powder coating).

**Accessories:**


**Art. 153**

Mounting corner




**Art. 159**

Luminaire mounting distance





# Oslo

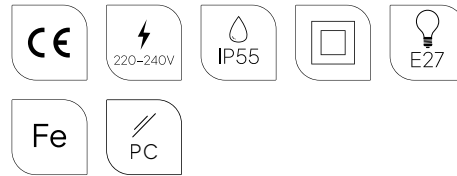

Colour:



Black



Galvanized



Luminaire suitable for extreme conditions.



Product Eco-friendly.





Double corrosion protection (galvanising+powder coating).



Art	Type of light source
245BL	E27
245GA	



# Oslo

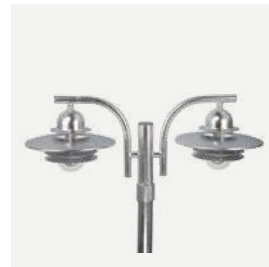

**Colour:**

- Black
- Galvanized



Luminaire suitable for extreme conditions.



Product Eco-friendly.




Double corrosion protection (galvanising+powder coating).

**Accessories:**


**Art. 405**


Concreting anchor.



**Art. 406**

Ground anchor.




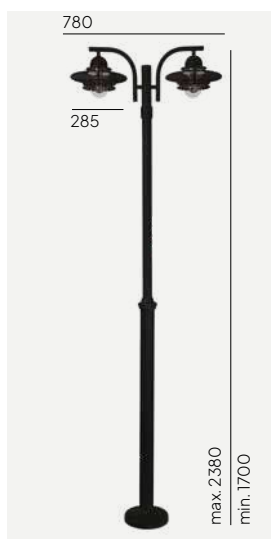

Art	Type of light source
242BL	E27
242GA	



# Oslo

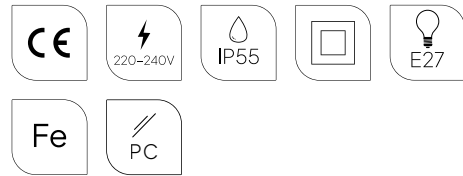

**Colour:**



Black



Galvanized



Luminaire suitable for extreme conditions.



Product Eco-friendly.



Double corrosion protection (galvanising+powder coating).





Art	Type of light source
240A/BL	E27
240A/GA	



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
220BL	E27	-	-	-	-	-
220GA		-	-	-	-	-
1600BL	LED	8W	240lm	3000K	50 000h	Dimmable
1600GA						
5110BL		8W	250lm	4000K		
5110GA						



# Stockholm

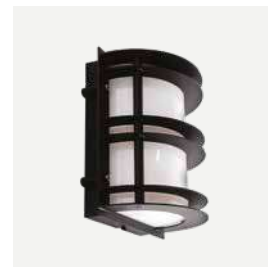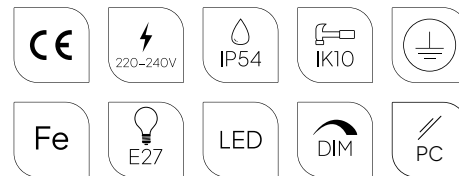

**Colour:**

- Black
- Galvanized

**Colour temperature:**

2700K\* 3000K 4000K



\*2700K on request only, contact your supplier.



Luminaire suitable for extreme conditions.



Product Eco-friendly.



Double corrosion protection (galvanising+powder coating).



Art	Type of light source
226BL	E27
226GA	E27




# Stockholm & Stockholm Big



**Colour:**

- Black
- Galvanized



Luminaire suitable for extreme conditions.



Product Eco-friendly.




Double corrosion protection (galvanising+powder coating).

**Accessories:**


**Art. 153**

Corner bracket



**Art. 159**

Spacer






Art	Type of light source
286BL	E27
286GA	



Art	Type of light source
280BL	E27
280GA	



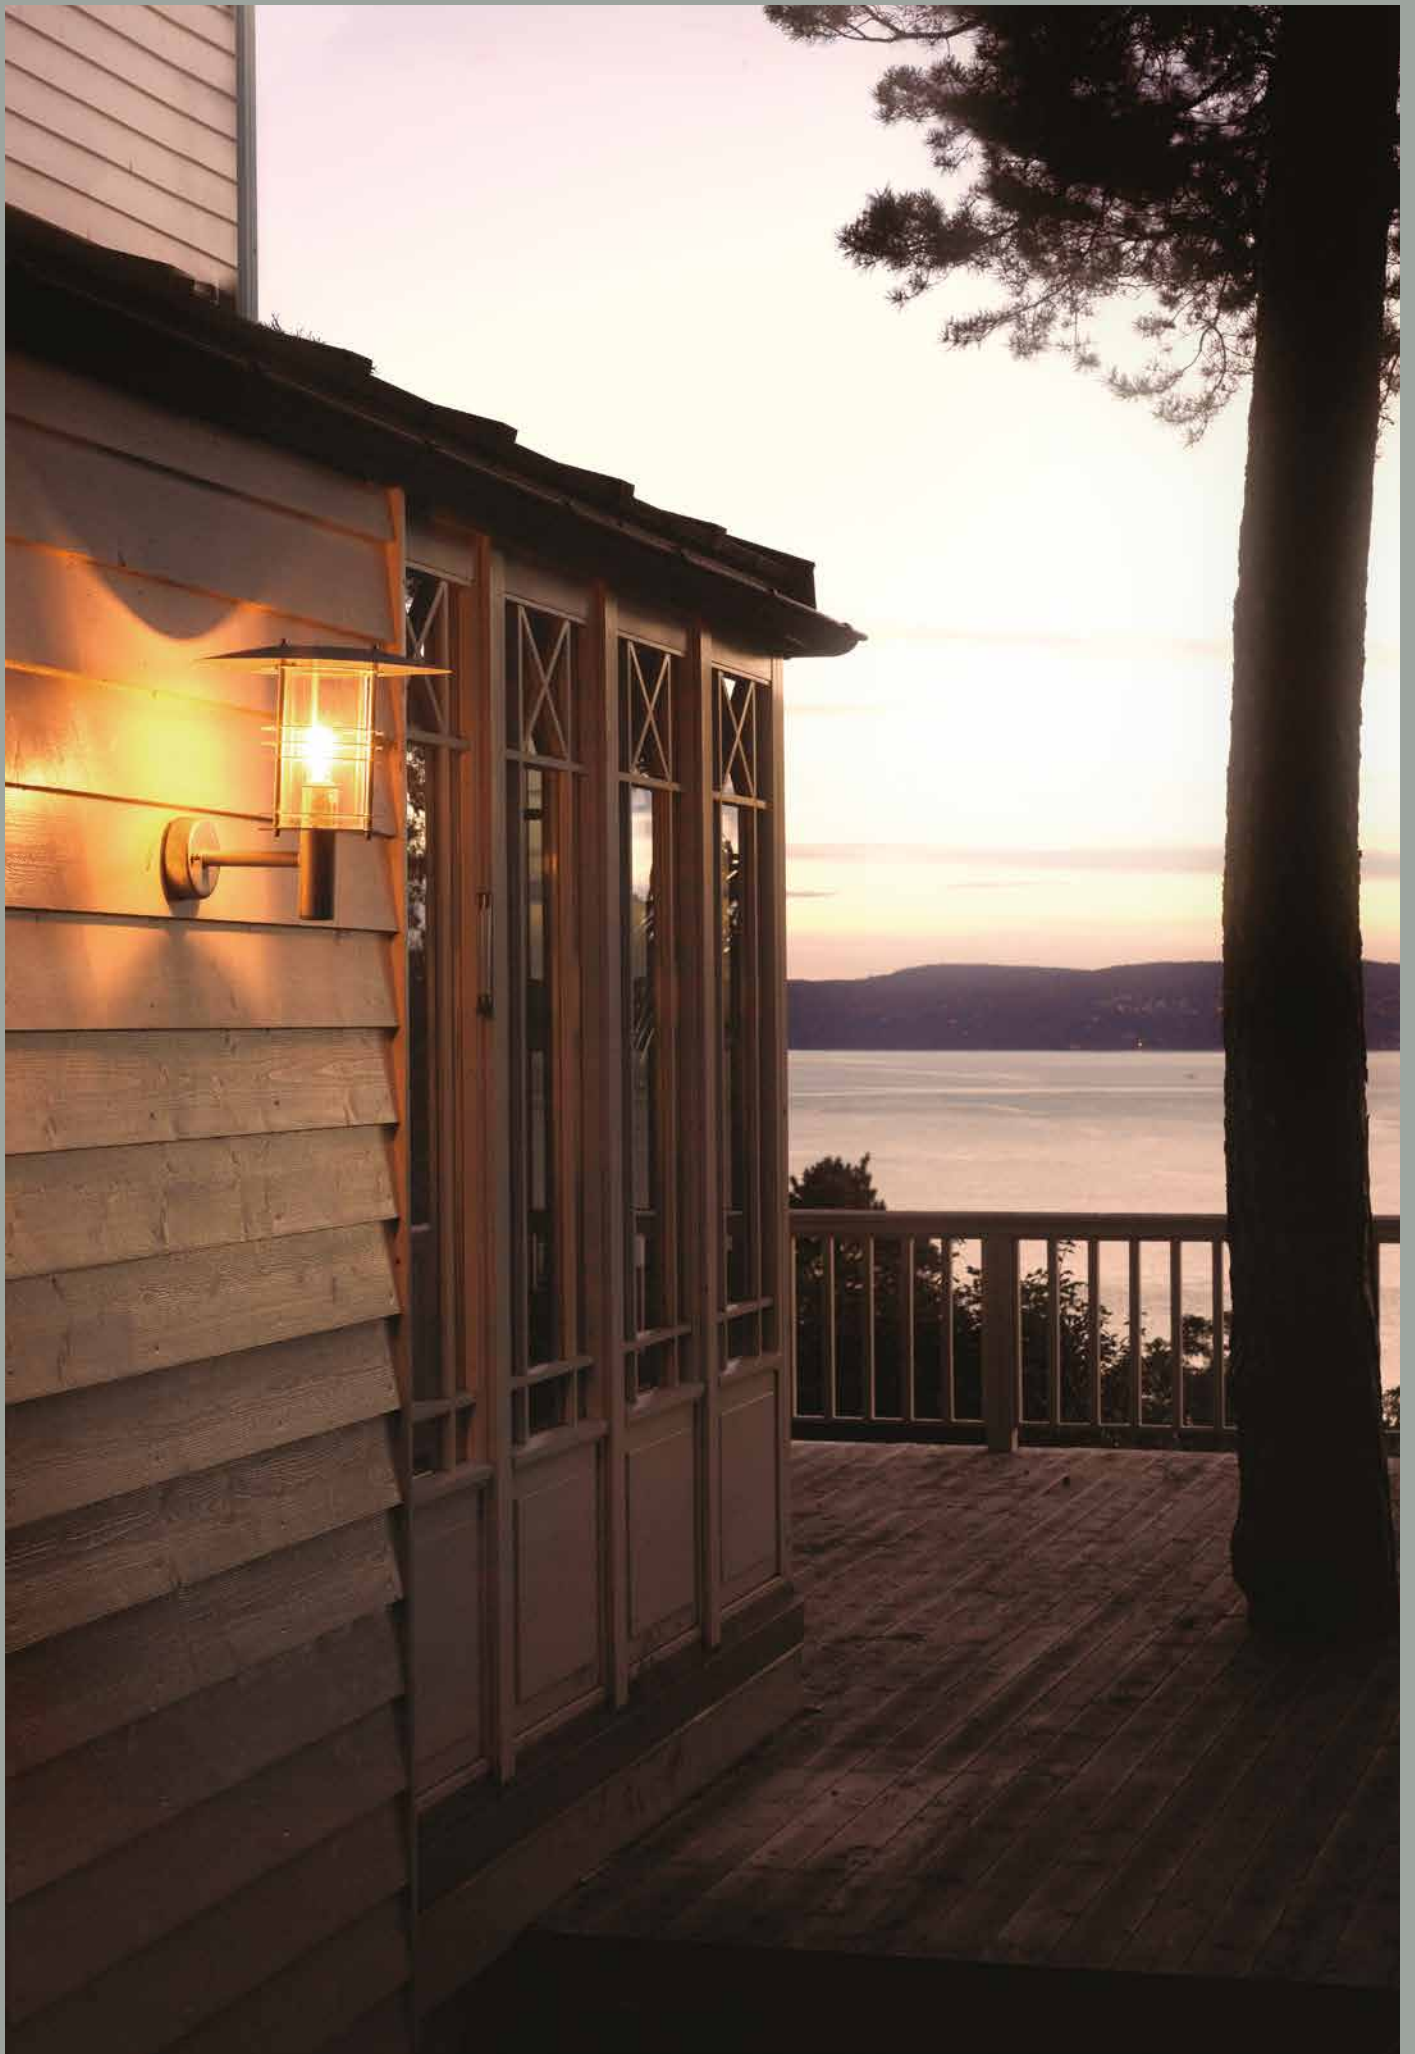



# Stockholm



**Colour:**



Black



Galvanized

**Colour temperature:**

2700K\* 3000K


4000K



\*2700K on request only, contact your supplier.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Double corrosion protection (galvanising+powder coating).

**Accessories:**


**Art. 205**

Concreting anchor.



**Art. 206**

Anchoring support





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
288BL	E27	-	-	-	-	-
288GA						
1464BL	LEDE27	5,9W	100lm	2700K	25 000h	Dimmable
1464GA						
1265BL	LED	8,5W	342lm	3000K	50 000h	
1265GA						
1604BL						
1604GA	10,5W	432lm	4000K	>50 000h	DALI	
1605BL						
1605GA						



Art	Type of light source
297BL	E27
297GA	



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
289BL	E27	-	-	-	-	-
289GA						
1469BL	LEDE27	5,9W	100lm	2700K	25 000h	Dimmable
1469GA						
1260BL	LED	8,5W	342lm	3000K	> 50 000h	
1260GA						
1606BL						
1606GA	10,5W	362lm	4000K	> 50 000h	DALI	
1603BL						
1603GA						
1602BL	432lm	3000K	3000K	> 50 000h	DALI	
1602GA						



Art	Type of light source
298BL	E27
298GA	





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Class
299BL	E27	-	-	-	-	-	II
299GA							
1269BL	LEDE27	5,9W	100lm	2700K	25 000h	Dimmable	
1269GA							
1268BL	LED	10W	333lm	3000K	50 000h	I	
1268GA							





# Stockholm

scandinavian wood



- 
- 
- 
- 
- 
- 
- LED**
- Fe**
- 
- 
- 



**Colour:**

- Black
- Galvanized

**Wood:**

- Impregnated
- Painted

**Colour temperature:**

2700K\* 3000K 4000K




\*2700K on request only, contact your supplier.



Luminaire housing made of natural wood.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Double corrosion protection (galvanising+powder coating).

**Accessories:**


**Art. 205**

Concreting anchor.



**Art. 206**

Anchoring support.





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1423BL	E27	-	-	-	-	-
1423GA						
1426BL	LED	8,5W	342lm	3000K	50 000h	Dimmable
1426GA						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1433BL	E27	-	-	-	-	-
1433GA						
1436BL	LED	8,5W	342lm	3000K	50 000h	Dimmable
1436GA						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1420BL	E27	-	-	-	-	-
1420GA						
1429BL	LED	8,5W	342lm	3000K	50 000h	Dimmable
1429GA						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1430BL	E27	-	-	-	-	-
1430GA						
1439BL	LED	8,5W	342lm	3000K	50 000h	Dimmable
1439GA						





# Stockholm & Stockholm Big



Colour:

● Black

● Galvanized




Luminaire suitable for extreme conditions.



Product Eco-friendly.




Double corrosion protection (galvanising+powder coating).

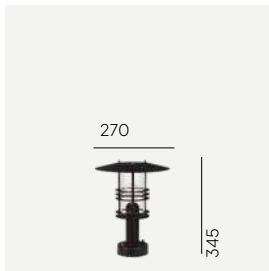

Art	Type of light source
284BL	E27
284GA	




Art	Type of light source
285BL	E27
285GA	

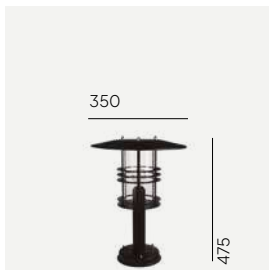


Art	Type of light source
287BL	E27
287GA	





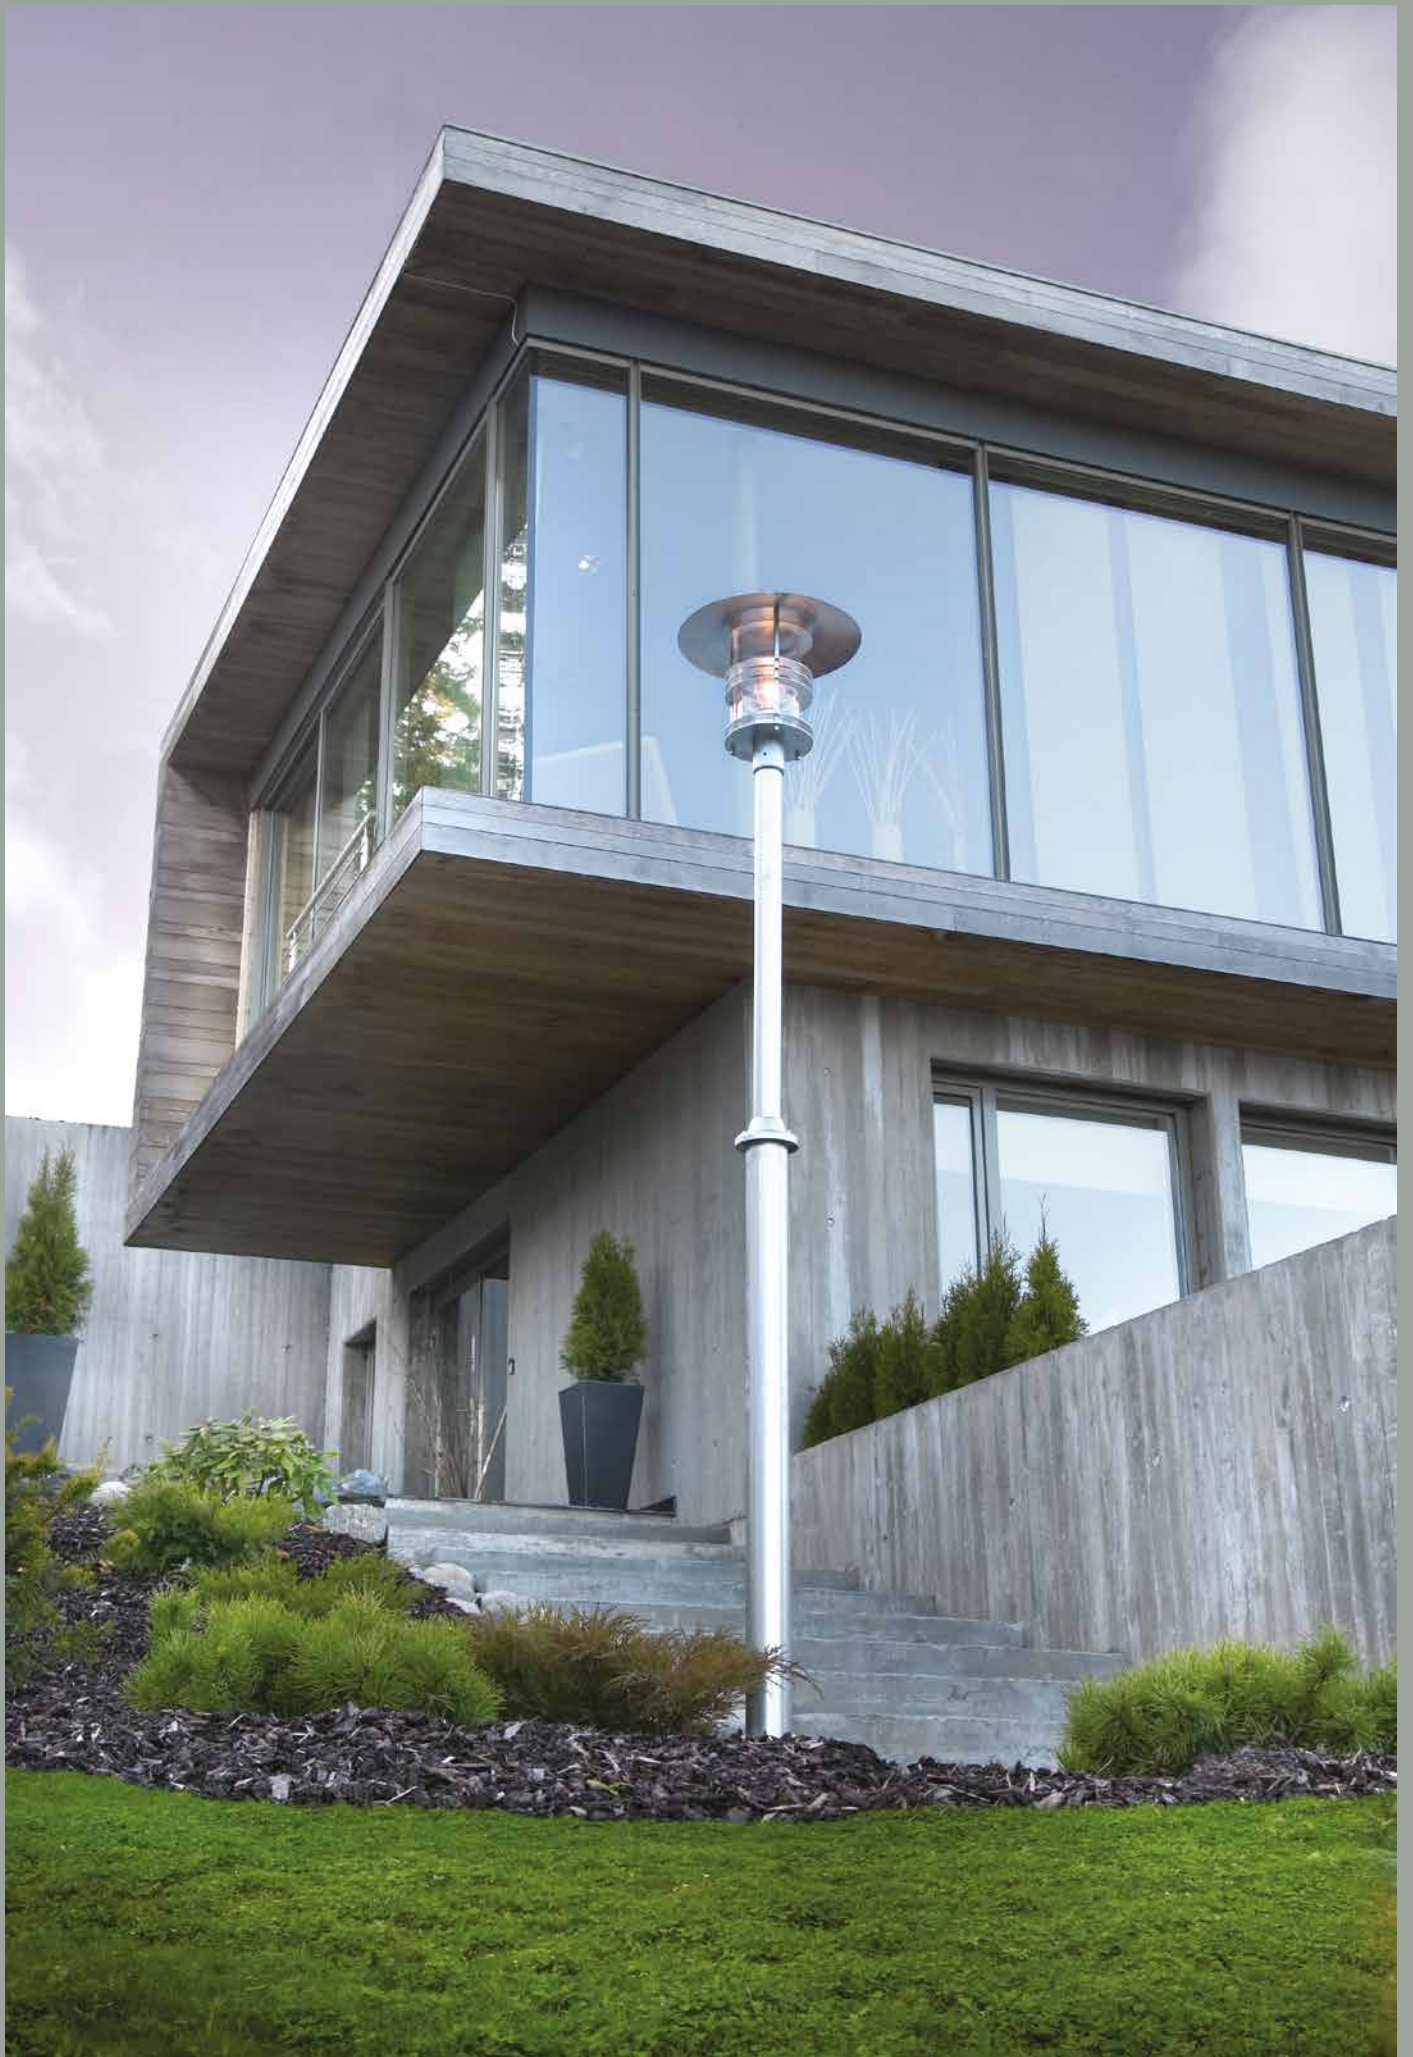

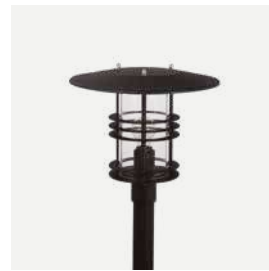

# Stockholm Big



**Colour:**

-  Black
-  Galvanized



Luminaire suitable for extreme conditions.



Product Eco-friendly.




Double corrosion protection (galvanising+powder coating).

**Accessories:**


**Art. 405**


Concreting anchor.



**Art. 406**

Ground anchor.




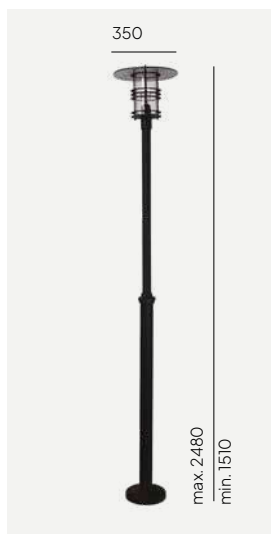

Art	Type of light source
281BL	E27
281GA	




Art	Type of light source
283BL	E27
283GA	

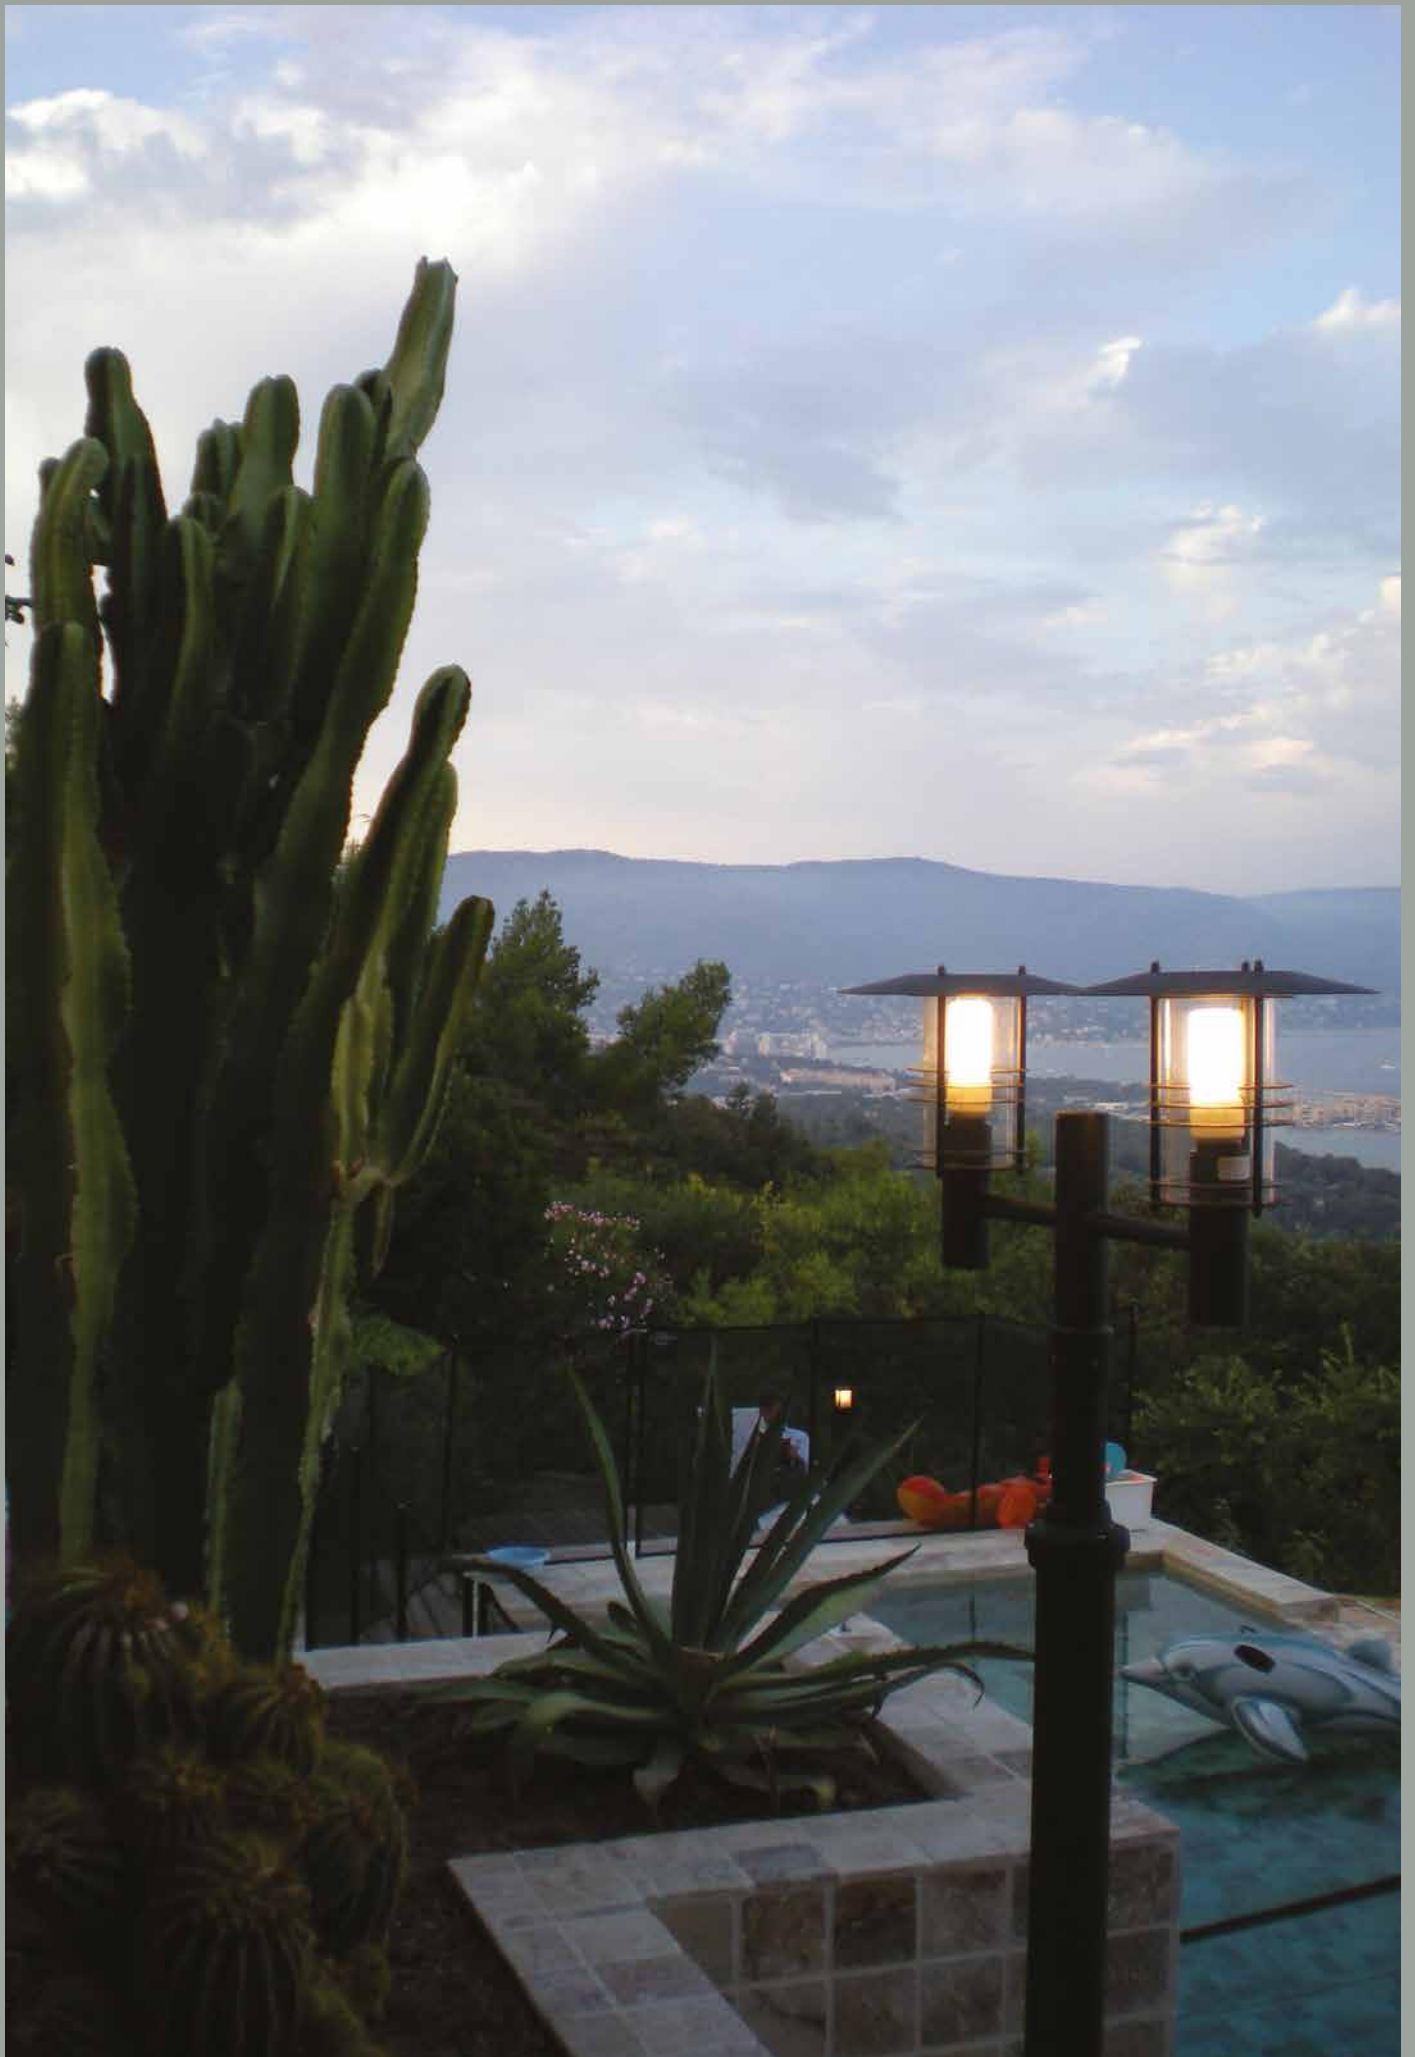



# Arvika

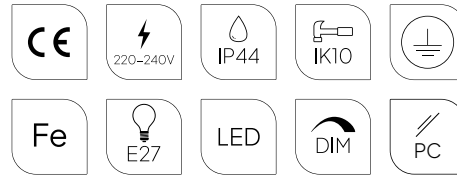

**Colour:**



Black



Galvanized

**Colour temperature:**

2700K\* 3000K

4000K




\*2700K on request only, contact your supplier.



Luminaires with energy distributor option.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Double corrosion protection (galvanising+powder coating).


**Accessories:**


**Art. 208**

Concreting anchor.



**Art. 207**



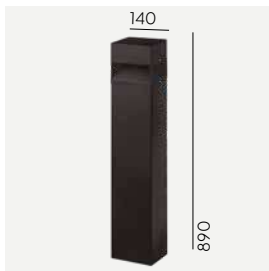

Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50
898BL	E27	-	-	-	-
898GA					
891BL	LED	8,8W	543lm	3000K	> 102 000h
891GA					



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Energy distributor ~230V
899BL	E27	-	-	-	-	F(SHUKO)
899GA						
893BL	LED	8,8W	543lm	3000K	> 102 000h	
893GA						
901BL		12,7W	568lm	4000K	> 72 000h	E(UNI)
901GA						
902BL						
902GA						







# Basel



**Colour:**

- Black
- Galvanized
- Aluminium
- Stainless Steel

**Colour temperature:**

2700K\* 3000K 4000K




\*2700K on request only, contact your supplier.



Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).




Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.



Art	Type of light source
660AL	E27
660BL	
660GA	
660ST	

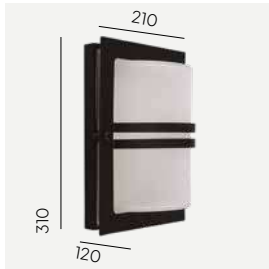


Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
661AL	E27	-	-	-	-	-
661BL						
661GA						
661ST						
MD661AL	E27	-	-	-	-	Motion Detector
MD661BL						
MD661GA						
MD661ST						
668AL	E27	5,2W	483lm	3000K	> 70 000	Dimmable
668BL						
668GA						
668ST						
671AL	LED	9,5W	-	-	50 000h	Motion Detector
671BL						
671GA						
671ST						
672AL						
672BL						
672GA						
672ST						

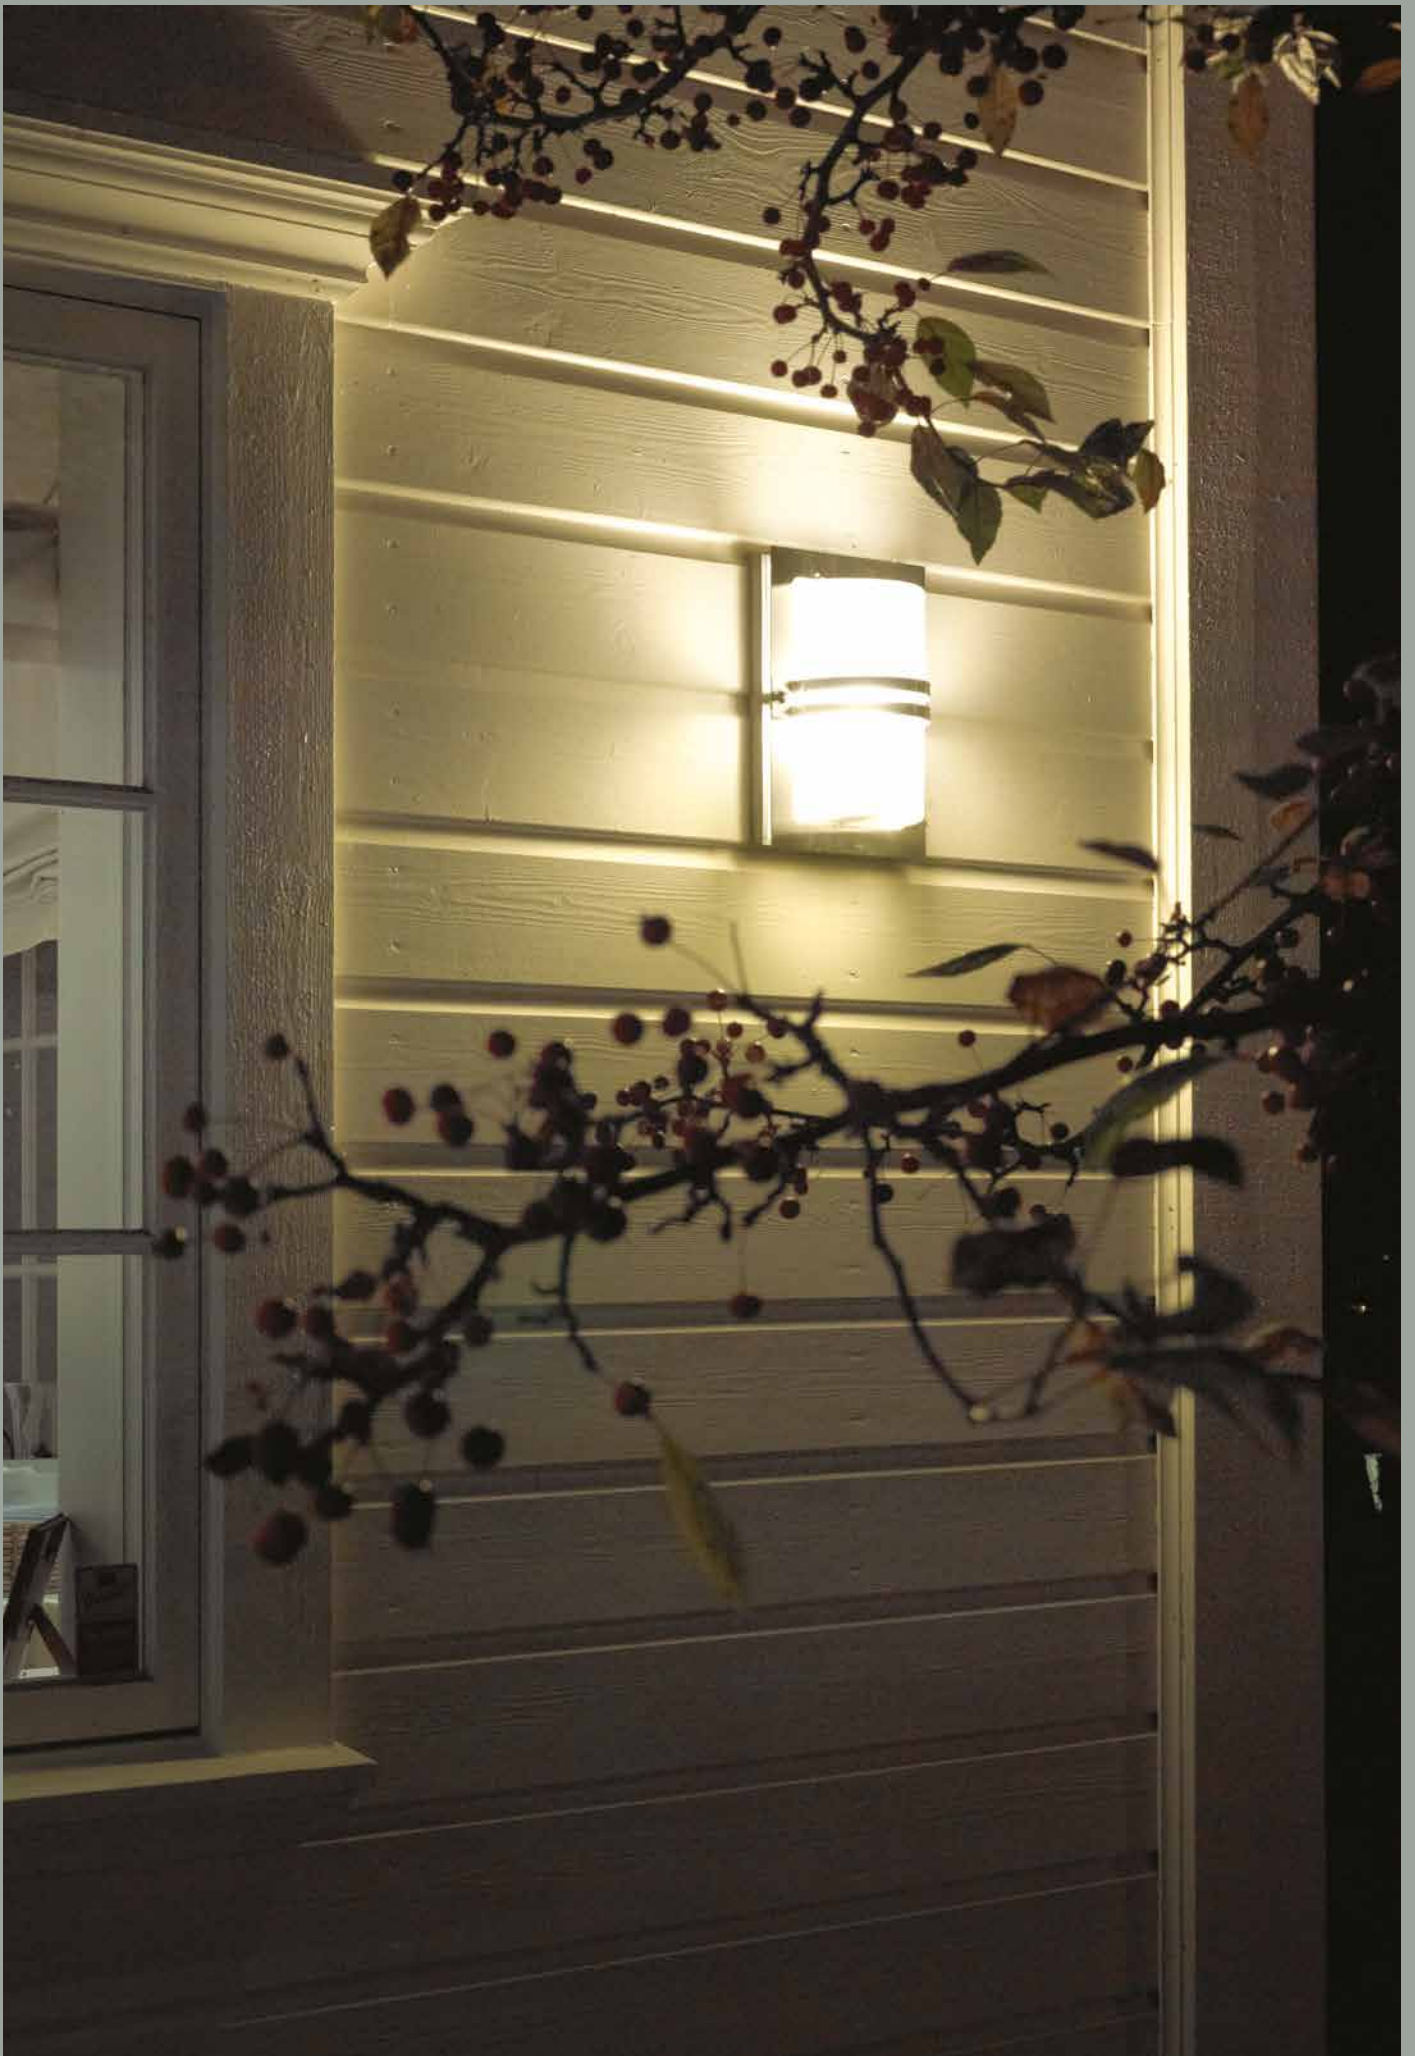



# Bern

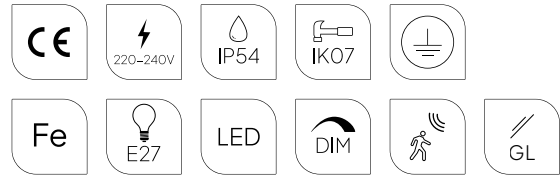

**Colour:**

- Black
- Galvanized
- Aluminium
- Stainless Steel

**Colour temperature:**

2700K\* 3000K 4000K




\*2700K on request only, contact your supplier.



Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.



Art	Type of light source
650AL	E27
650BL	
650GA	
650ST	



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
651AL	E27	-	-	-	-	-
651BL						
651GA						
651ST						
655AL	LED	5,2W	477lm	3000K	> 72 000	Dimmable
655BL						
655GA						
655ST						
675AL	LED	11,2W	819lm	4000K	50 000h	Motion Detector
675BL						
675GA						
675ST						
676AL						
676BL						
676GA						
676ST						







# Boden



**Colour:**

Black

Galvanized

**Colour temperature:**

2700K\* 3000K 4000K




\*2700K on request only, contact your supplier.




Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.

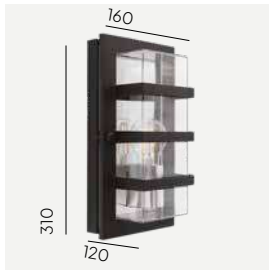

Art	Type of light source
862BL	E27
862GA	



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
860BL	E27	-	-	-	-	-
860GA						
866BL	LED	8W	307lm	3000K	50 000h	Dimmable
866GA				4000K		
5109BL			-			
5109GA						







# Karlstad




**Colour:**

- Black
- Copper
- Galvanized
- White



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Product Eco-friendly.

**Accessories:**


**Art. 153**

Mounting corner



**Art. 159**

Luminaire mounting distance





Art	Type of light source
230BL	E27
230CO	
230GA	
230WH	




Art	Type of light source
230A/BL	E27
230A/GA	
230A/WH	





# Karlstad

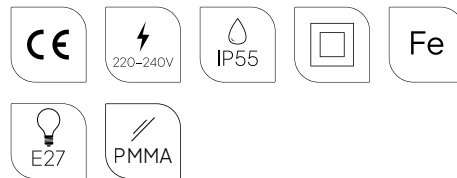

Colour:

● Black

● Galvanized


○ White



Product Eco-friendly.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Art	Type of light source
2033BL	E27
2033GA	



Art	Type of light source
2032BL	E27
2032GA	

# Karlstad



**Colour:**


- Black
- Galvanized



Product Eco-friendly.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.

**Accessories:**


**Art. 405**


Concreting anchor.



**Art. 406**

Ground anchor.



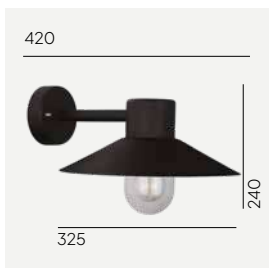

Art	Type of light source
290BL	E27
290GA	

# Lund



**Colour:**



Black




Galvanized



Product Eco-friendly.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.

**Accessories:**


**Art. 153**


Mounting corner



**Art. 159**

Luminaire mounting distance



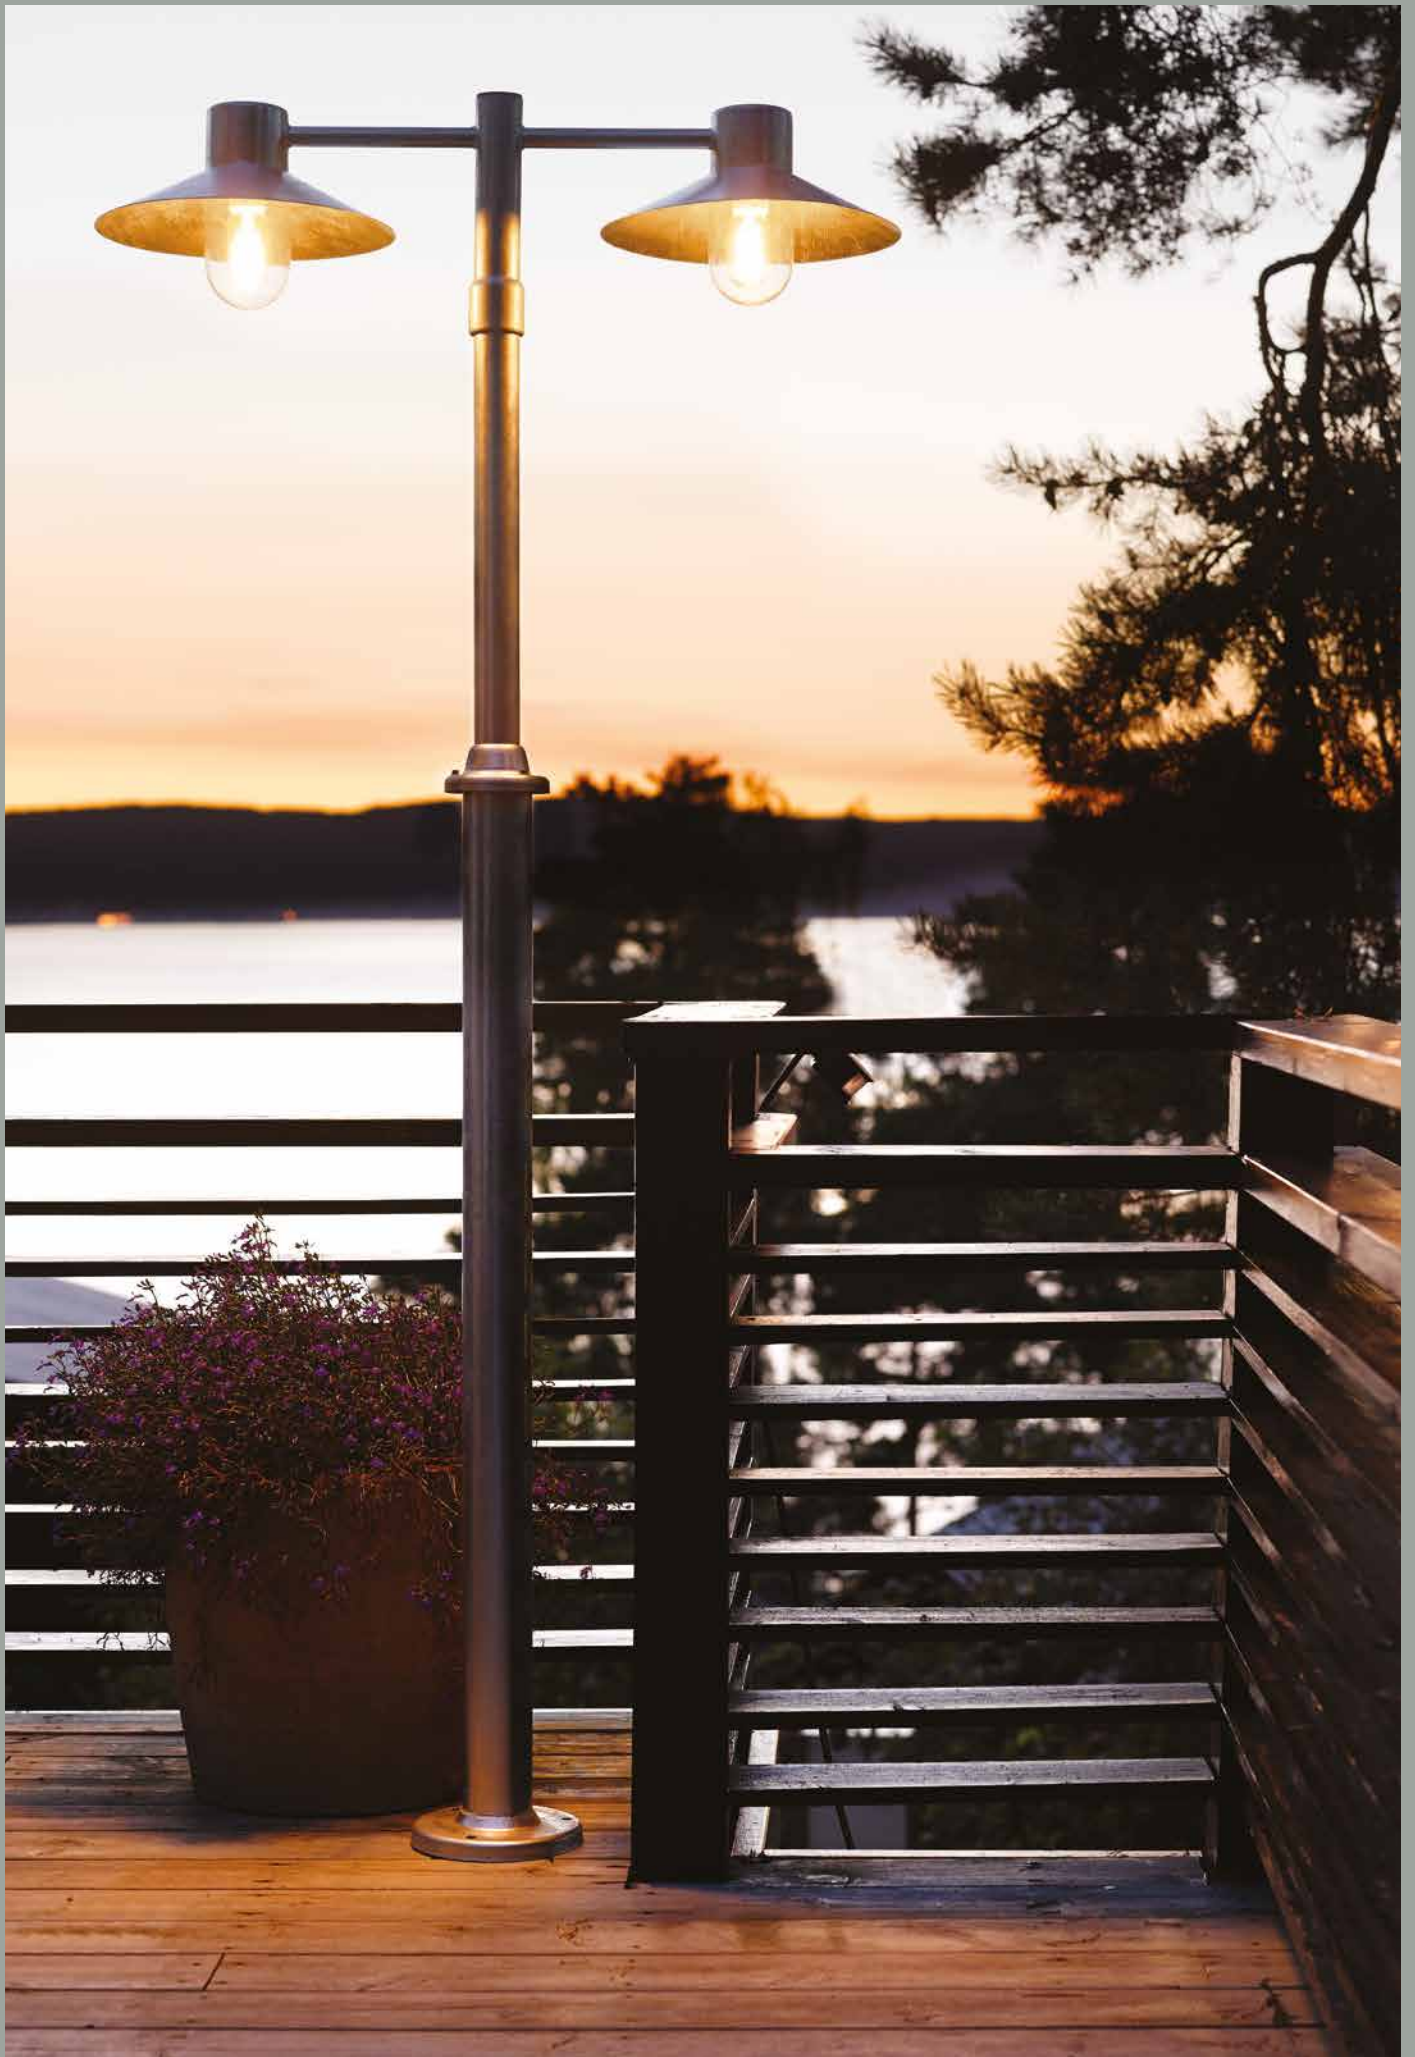

# Lund



**Colour:**


- Black
- Galvanized



Product Eco-friendly.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.

**Accessories:**


**Art. 405**

Concreting anchor.



**Art. 406**

Ground anchor.





Art	Type of light source
274BL	E27
274GA	



Art	Type of light source
275BL	E27
275GA	



# Mandal

An intriguing as well as functional and durable wall fixture. Scandinavian style is not only about design, but also about usability. Materials used to construct Mandal are robust and easy to maintain. Harmonious beam of light through the glass panes. It is a truly versatile luminaire that meets lighting requirements of contemporary architecture. Minimalism can be the perfect solution for any space, adding sophistication and unique character. Mandal harmonises perfectly with any type of building, but particularly in the galvanised version matches perfectly modern or industrial style.





# Mandal



**Colour:**



Black



Galvanized

**Colour temperature:**

2700K\* 3000K


4000K



\*2700K on request only, contact your supplier.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Product Eco-friendly.

**Accessories:**


**Art. 130**

Corner bracket  
Art.1373, 1374



**Art. 149**

Corner bracket  
Art.1370, 1371





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1370BL	LED GU10	7,8W	500lm	2700K	40 000h	Dimmable
1370GA						
1371BL	LED GU10	-	-	-	-	-
1371GA						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1373BL	LED GU10	3,9W	250lm	2700K	40 000h	Dimmable
1373GA						
1374BL	LED GU10	-	-	-	-	-
1374GA						




# Paris

Fashionable and elegant as a Parisian - a wall fixture that combines minimalist, industrial design and excellent functionality. Ideal for illuminating buildings and fence posts. Paris is also perfect for illuminating a house number plate. Four colour options allow for perfect match with any surroundings, both copper and galvanised versions will add exceptional character to any façade.





# Paris

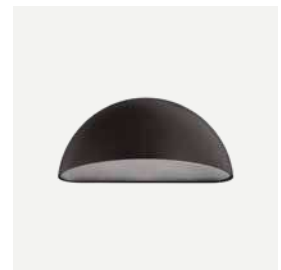

**Colour:**

- Black
- Copper
- Galvanized
- White


**Colour temperature:**




Product Eco-friendly.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
160BL	E27	-	-	-	-	-
160CO						
160GA						
160WH						
1495BL	LED	5,2W	508lm	3000K	> 70 000h	Dimmable
1495GA						
1495WH						
5038BL		5,4W	476lm	4000K		
5038GA						
5038WH						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
163BL	E27	-	-	-	-	-
163GA						
163WH						
1496BL	LED	5,2W	471lm	3000K	> 70 000h	Dimmable
1496GA						
1496WH						
5039BL		5,4W	438lm	4000K		
5039GA						
5039WH						





# Paris Big



CE	⚡ 220-240V	💧 IP43	⏚
Fe	LED	💡 E27	DIM
			PC



**Colour:**

- Black
- White
- Galvanized

**Colour temperature:**

2700K\* 3000K 4000K




\*2700K on request only, contact your supplier.



Product Eco-friendly.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1392BL	LED	5,2W	346lm	3000K	> 70 000h	Dimmable
1392GA						
5113BL		5,4W	432lm	4000K		
5113GA						

# Ski

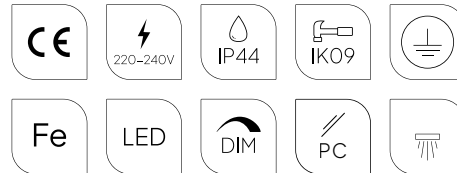

**Colour:**

- Black
- Galvanized

**Colour temperature:**

2700K\* 3000K 4000K




\*2700K on request only, contact your supplier.



Luminaires with energy distributor option.adjustmen



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Energy distributor ~230V
1390BL	LED	5,2W	37lm	3000K	> 70 000h	Dimmable	F(SCHUKO)
1390GA							



# Vansbro



**Colour:**


- Black
- Copper
- Galvanized



Product Eco-friendly.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.

**Accessories:**


**Art. 153**

Mounting corner.



**Art. 159**

Luminaire mounting distance.





Art	Type of light source
1920BL	
1920CO	E27
1920GA	



# Chelsea

Chelsea is craftsmanship, perfect workmanship and hand-blended polished copper, the result is a distinguished lighting charm. The exclusive Chelsea family offers traditional design and exceptional aesthetics. All the luminaires in the wide range are ideal for lighting entrances, terraces, walkways, driveways, gardens, fence posts. The unique style of these lamps will satisfy even the most demanding customers. An important feature of Chelsea to bear in mind that in natural weather conditions the bodies are covered with a noble patina.








# Chelsea



Colour:


 Copper



Product Eco-friendly.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.



Handmade product (artisanal method).



Art	Type of light source
950CO	E27



Art	Type of light source
962CO	E27



Art	Type of light source
963CO	E27




# Chelsea & Chelsea Big



**Colour:**


 Copper



Product Eco-friendly.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Handmade product (artisanal method).

**Accessories:**

**Art. 152**

Mounting corner.  
For Art. 954, Art. 960





Art	Type of light source
955CO	E27



Art	Type of light source
964CO	E27




Art	Type of light source
954CO	E27





Art	Type of light source
960CO	E27



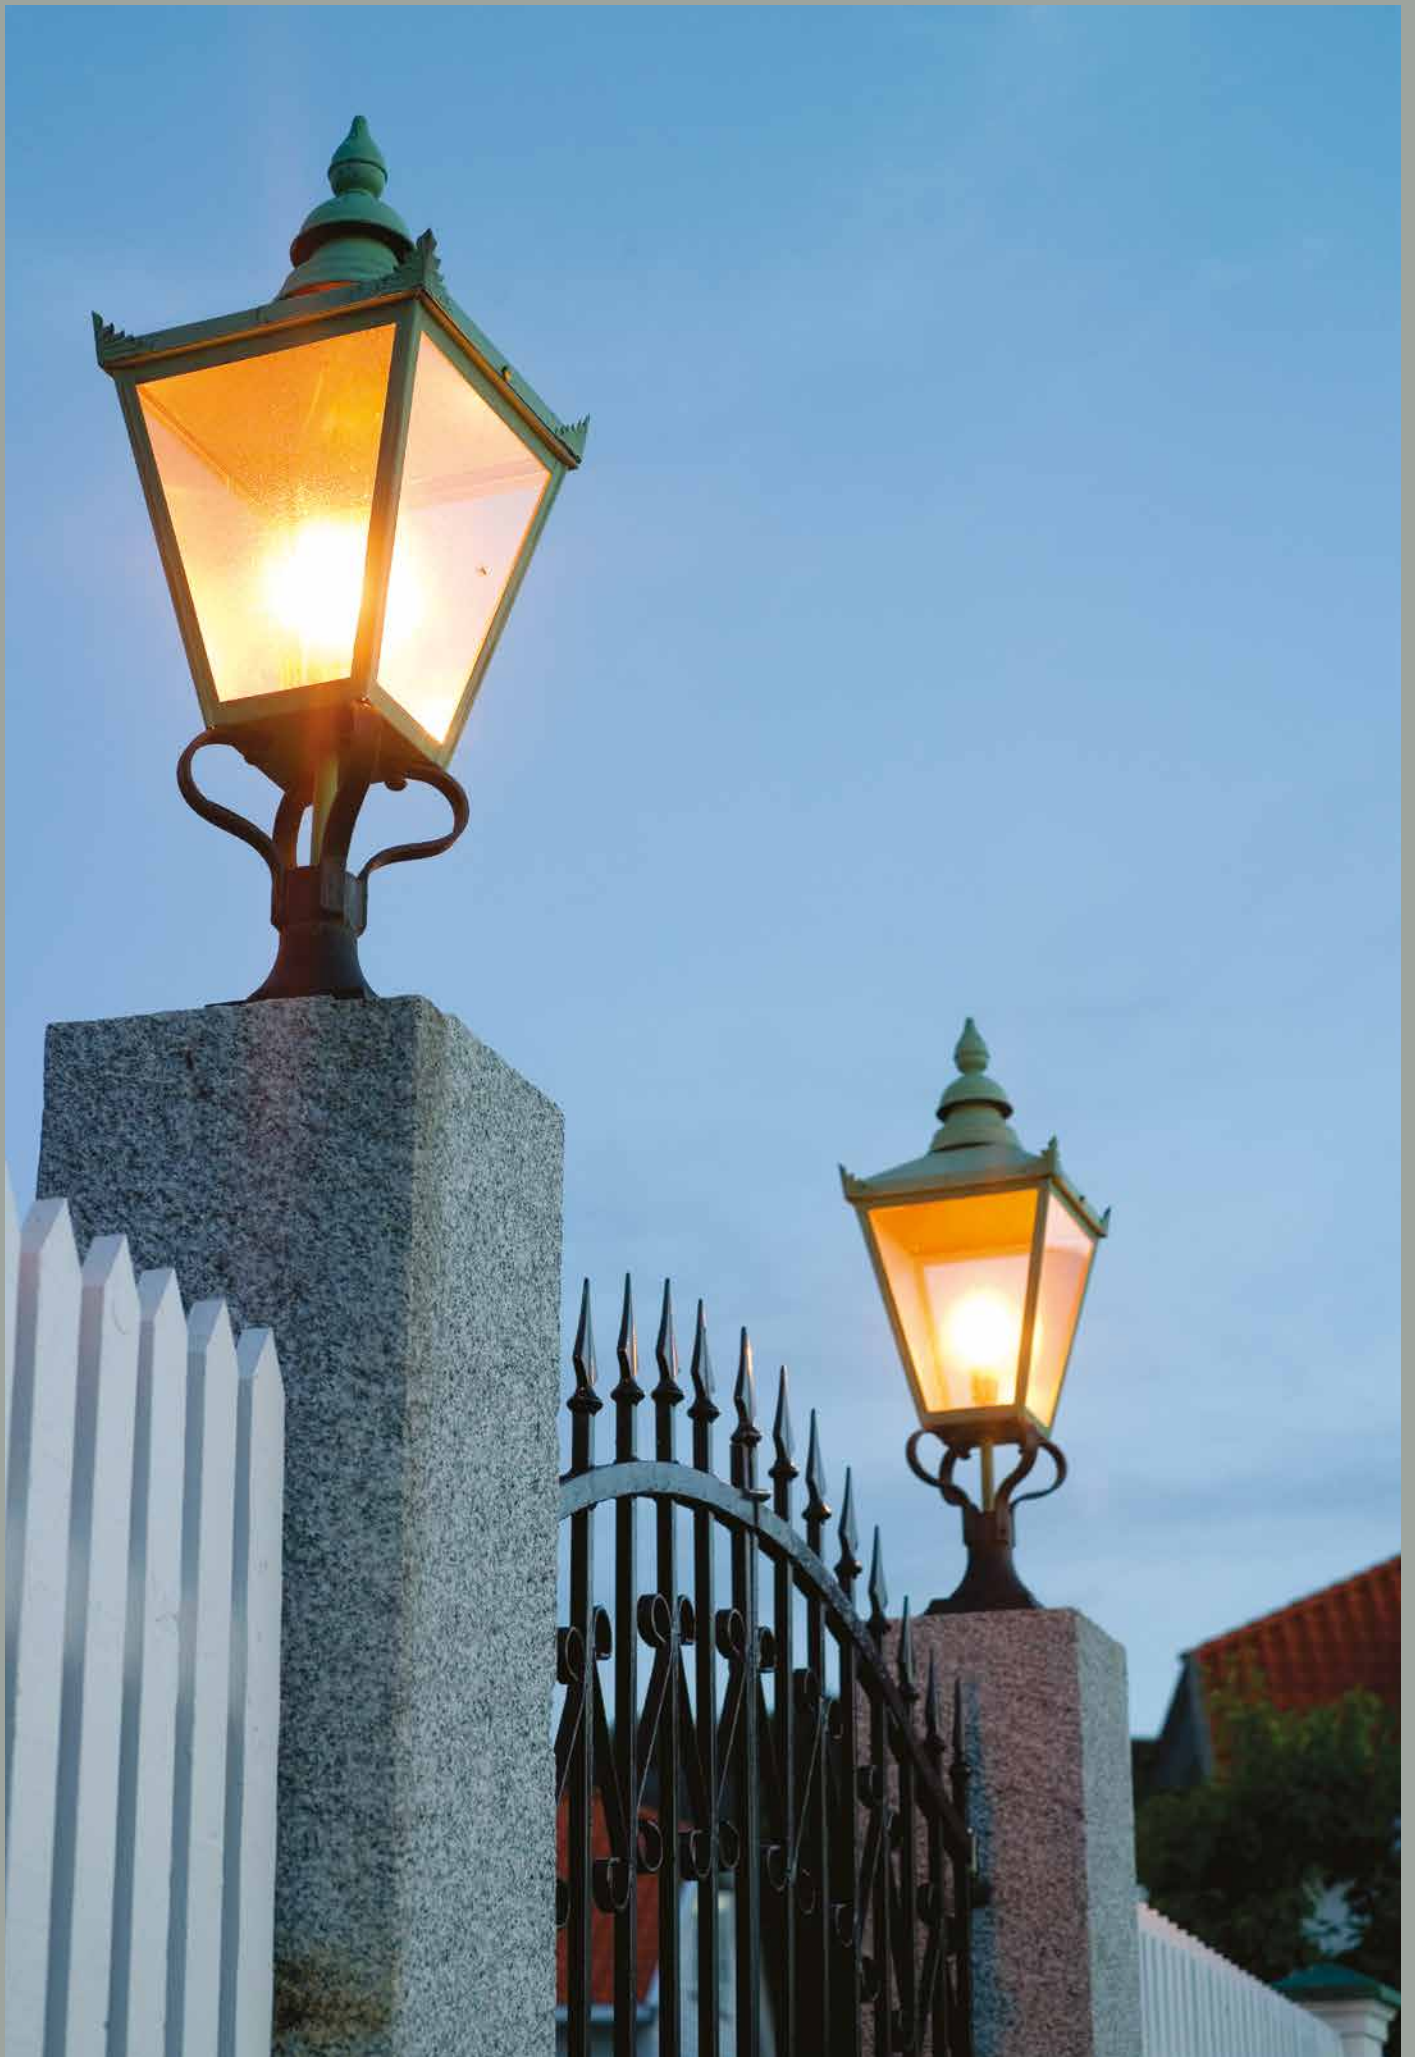


# Chelsea & Chelsea Big

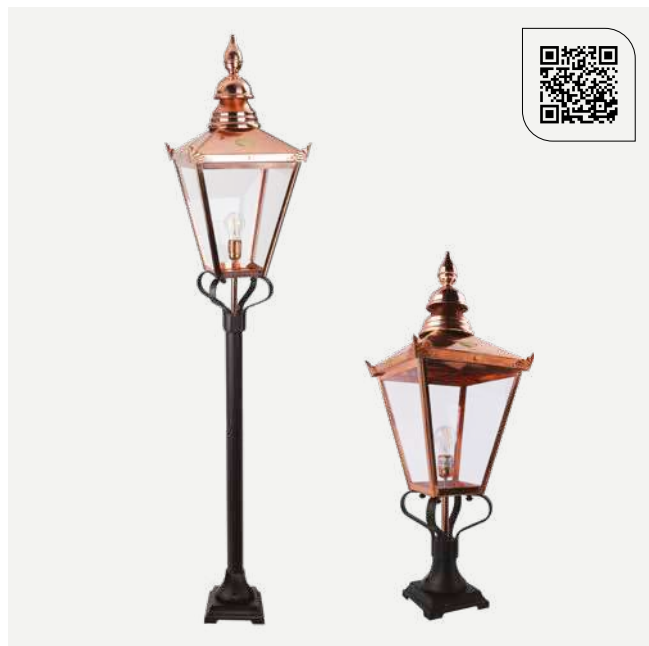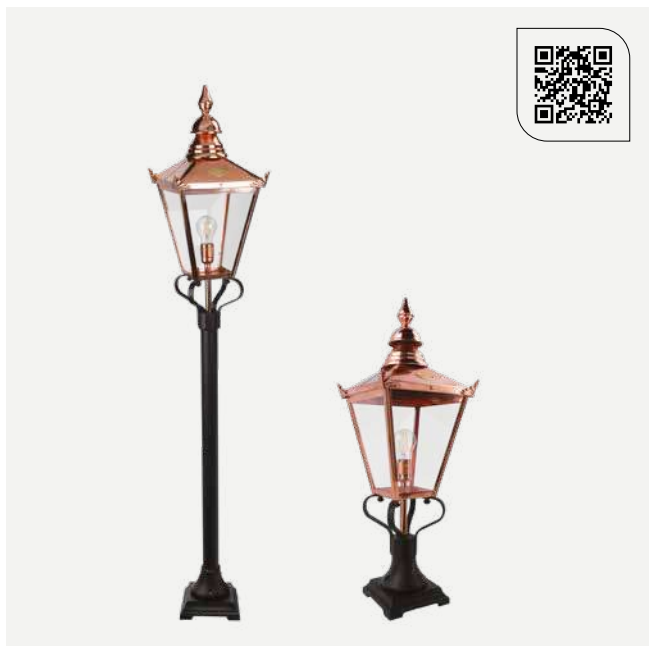

**Colour:**


 Copper



Product Eco-friendly.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Handmade product (artisanal method).

**Accessories:**

**Art. 307**

Concreting anchor.





Art	Type of light source
941CO	E27



Art	Type of light source
957CO	E27




Art	Type of light source
940CO	E27



Art	Type of light source
956CO	E27



# Chelsea

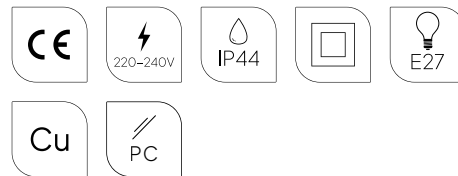

**Colour:**


 Copper



Product Eco-friendly.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.



Handmade product (artisanal method).



Art	Type of light source
961CO	E27





Art	Type of light source
951CO	E27



Art	Type of light source
953CO	E27

# Chelsea

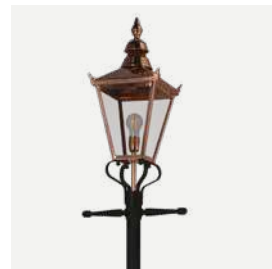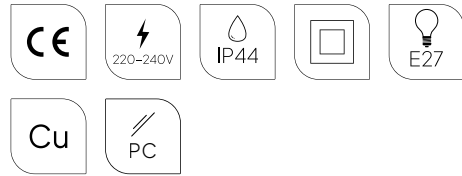


**Colour:**  
● Copper



Product Eco-friendly.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Handmade product (artisanal method).

### Accessories:


#### Art. 305

Concreting anchor.




#### Art. 306

Ground anchor.



#### Art. 108

Anchoring support.






Art	Type of light source
310BL	E27
310WH	



Art	Type of light source
311BL	E27
311WH	

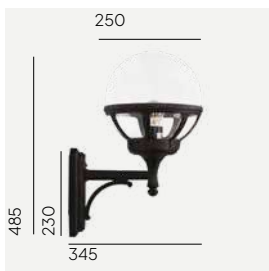

Art	Type of light source
360BL	E27
360WH	



Art	Type of light source
361BL	E27
361WH	

# Bologna




Colour:



Product Eco-friendly.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.

Accessories:


Art. 152

Mounting corner





# Bologna

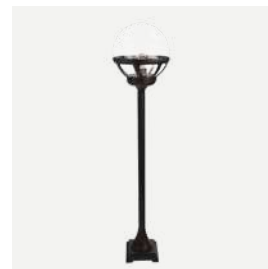


Colour:



Product Eco-friendly.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.

Accessories:

**Art. 307**

Mounting corner





Art	Type of light source
312BL	E27
312WH	



Art	Type of light source
313BL	E27
313WH	



Art	Type of light source
314BL	E27
314WH	




Art	Type of light source
315BL	E27
315WH	







# Bologna



**Colour:**


- Black
- White



Product Eco-friendly.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.

**Accessories:**


**Art. 108**

Anchoring support.




**Art. 305**

Concreting anchor.



**Art. 306**

Ground anchor.





Art	Type of light source
362BL	E27
362WH	



Art	Type of light source
363BL	E27
363WH	



Art	Type of light source
364BL	E27
364WH	




Art	Type of light source
365BL	E27
365WH	





Art	Type of light source
370BL	E27
370WH	

# Como

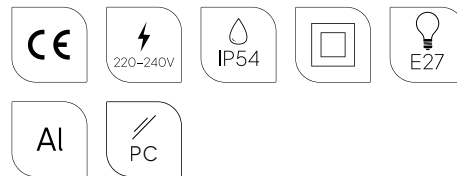


**Colour:**



Product Eco-friendly.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.

**Accessories:**

**Art. 152**

Mounting corner.






Art	Type of light source
375BL	E27
375WH	





# Como

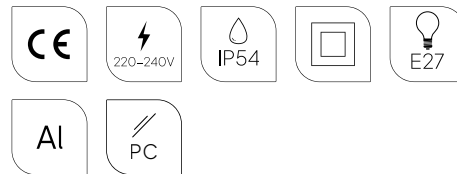


Colour:



Product Eco-friendly.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.

Accessories:



**Art. 307**

Concreting anchor.





# Como

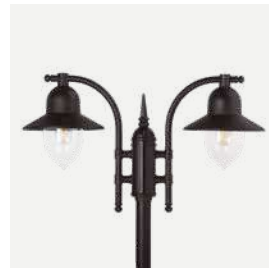

**Colour:**


- Black
- White



Product Eco-friendly.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.

**Accessories:**


**Art. 108**

Anchoring support.




**Art. 305**

Concreting anchor.



**Art. 306**

Ground anchor.



# Como



Art	Type of light source
371BL	E27
371WH	E27




Art	Type of light source
372BL	E27
372WH	E27



Art	Type of light source
373BL	E27
373WH	E27

# Florence

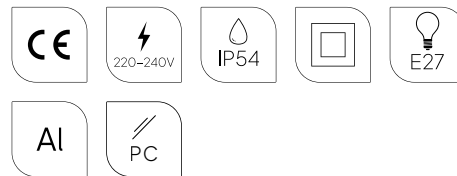


**Colour:**



Product Eco-friendly.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.

**Accessories:**

**Art. 152**

Mounting corner.






Art	Type of light source
800BL	E27
800WH	



# Florence

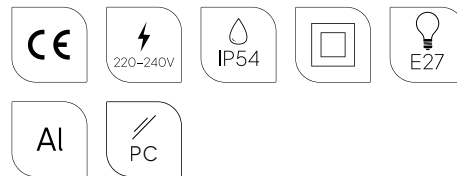


Colour:



Product Eco-friendly.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Art	Type of light source
800A/BL	E27
800A/WH	



Art	Type of light source
805BL	E27
805WH	



# Florence

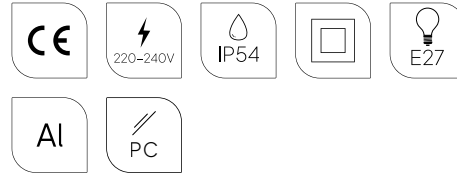


Colour:



Product Eco-friendly.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.

Accessories:

**Art. 307**

Concreting anchor.





Art	Type of light source
810BL	E27
810WH	




Art	Type of light source
820BL	E27
820WH	



Art	Type of light source
830BL	E27
830WH	

# Florence



**Colour:**


- Black
- White



Product Eco-friendly.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.

**Accessories:**


**Art. 108**

Anchoring support.




**Art. 305**

Concreting anchor.



**Art. 306**

Ground anchor.






# Genoa & Genoa Mini



Colour:


- Black
- White

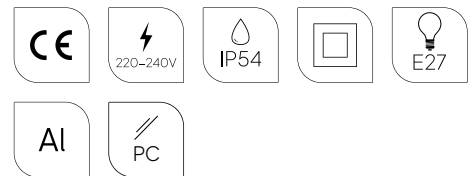

Product Eco-friendly.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Art	Type of light source
170BL	E27
170WH	



Art	Type of light source
175BL	E27
175WH	



# Glasgow

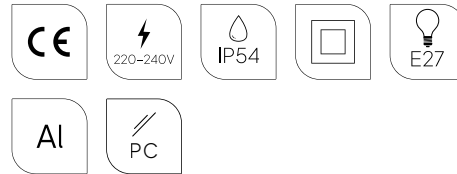

**Colour:**


- Black
- White



Product Eco-friendly.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Art	Type of light source
730BL	E27
730WH	





# London

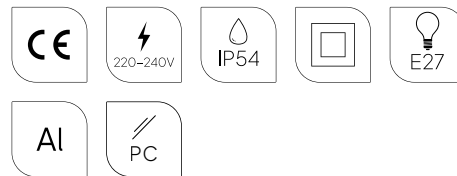

**Colour:**


- Black
- White



Product Eco-friendly.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.



Art	Type of light source
497BL	E27
497WH	



# London Big



**Colour:**

- Black
- White

**Colour temperature:**

2700K\* 3000K 4000K



\*2700K on request only, contact your supplier.


CE	220-240V	IP54	IP54/65	□
Al	PC	LED	E27	



Product Eco-friendly.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.

**Accessories:**

**Art. 152**

Mounting corner.






Art	Type of light source
490BL	E27
490WH	




Art	Type of light source
493BL	E27
493WH	



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50
4116BL	LED	9,5W	757lm	3000K	50 000h
4116WH				4000K	
4117BL			805lm		
4117WH			805lm		



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Lens
4118BL	LED	14,6W	1716lm	3000K	50 000h	IESNA type V
4118WH				4000K		
4119BL			1767lm	4000K		
4119WH						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50
4136BL	LED	9,5W	757lm	3000K	50 000h
4136WH				4000K	
4137BL			805lm	4000K	
4137WH					



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Lens
4138BL	LED	14,6W	1716lm	3000K	50 000h	IESNA type V
4138WH				4000K		
4139BL			1767lm	4000K		
4139WH						



Art	Type of light source
480BL	E27
480WH	E27



Art	Type of light source
481BL	E27
481WH	E27

# London



**Colour:**

- Black
- White

**Colour temperature:**

2700K\* 3000K 4000K



\*2700K on request only, contact your supplier.


CE	220-240V	IP54	IP54/65	□
Al	PC	LED	E27	



Product Eco-friendly.



Luminaire suitable for extreme conditions.





Fully replaceable electrical kit.

**Accessories:**

**Art. 152**

Mounting corner.



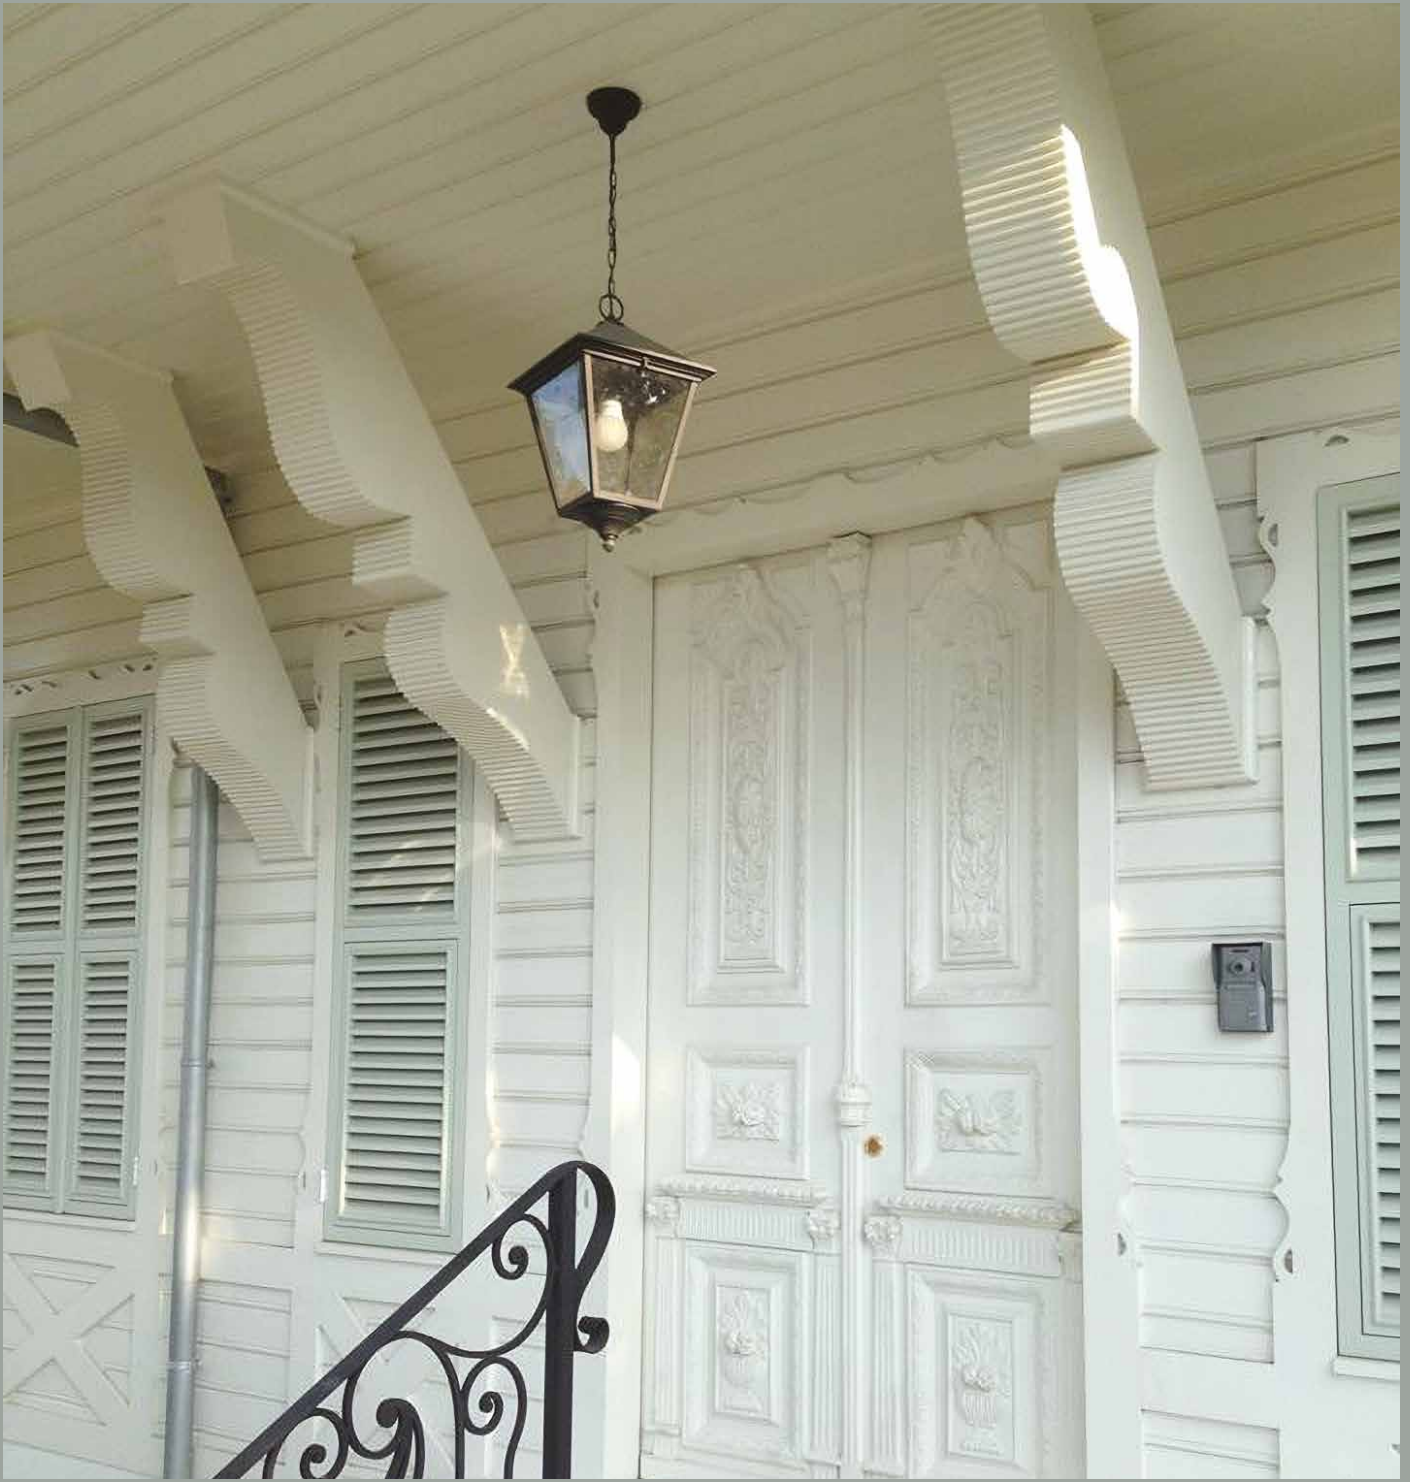

Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Lens
4140BL	LED	17,5W	1392lm	3000K	50 000h	-
4140WH				4000K		
4141BL				3000K		
4141WH				4000K		
4142BL		14,6W	1716lm	30000K	IESNA type V	
4142WH						



# London & London Big



**Colour:**

- Black
- White

**Colour temperature:**

2700K\* 3000K 4000K



\*2700K on request only, contact your supplier.


- 
- 
- 
- 
- 
- 
- 
- 
- 



Product Eco-friendly.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.

- 
- 
- 
- 
- 



Art	Type of light source
481A/BL	E27
481A/WH	

- 
- 
- 
- 
- 



Art	Type of light source
493A/BL	E27
493A/WH	



# London & London Big



**Colour:**

- Black
- White

**Colour temperature:**

2700K\* 3000K 4000K



\*2700K on request only, contact your supplier.


CE	220-240V	IP54	□	LED
Al	PC	E27		



Product Eco-friendly.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.

**Accessories:**

**Art. 307**

Concreting anchor.





Art	Type of light source
484BL	E27
484WH	



Art	Type of light source
485BL	E27
485WH	



Art	Type of light source
494BL	E27
494WH	





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50
4144BL	LED	9,3W	756lm	3000K	50 000h
4144WH					





# London & London Big

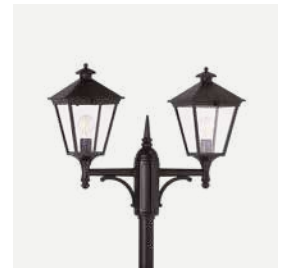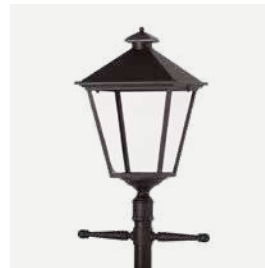

Colour:

- Black
- White

Colour temperature:

- 2700K\*
- 3000K
- 4000K


\*2700K on request only, contact your supplier.



Product Eco-friendly.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.

## Accessories:


### Art. 108

Anchoring support.




### Art. 305

Concreting anchor.



### Art. 306

Ground anchor.






Art	Type of light source
482BL	E27
482WH	



Art	Type of light source
483BL	E27
483WH	



Art	Type of light source
491BL	E27
491WH	

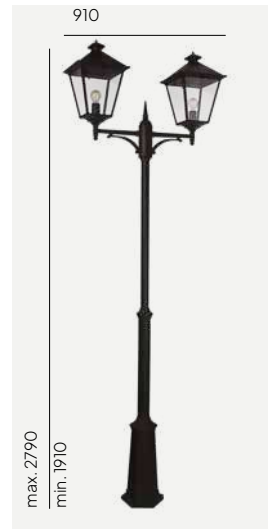


Art	Type of light source
492BL	E27
492WH	



Art	Type of light source
495BL	E27
495WH	






Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50
4124BL	LED	17,5W	1392lm	3000K	50 000h
4124WH				4000K	
4125BL					
4125WH					



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50
4128BL	LED	19W	1514lm	3000K	50 000h
4128WH				4000K	
4129BL			1514lm		
4129WH					



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50
4132BL	LED	28,5W	2271lm	3000K	50 000h
4132WH				4000K	
4133BL			2271lm		
4133WH					



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Lens
4126BL	LED	14,6W	1716lm	3000K	> 120 000h	IESNA type V
4126WH				4000K		
4127BL			1767lm	4000K		
4127WH						





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Lens
4130BL	LED	29,2W	3422lm	3000K	> 120 000h	IESNA type V
4130WH				4000K		
4131BL			3534lm	4000K		
4131WH						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Lens
4134BL	LED	43,8W	5148lm	3000K	> 120 000h	IESNA type V
4134WH				4000K		
4135BL			5301lm	4000K		
4135WH						

# Latina

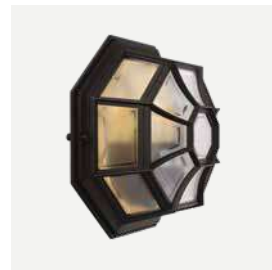

**Colour:**


- Black
- White



Product Eco-friendly.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.



Art	Type of light source
105BL	E27
105WH	




# Modena & Modena Big



**Colour:**

● Black


○ White

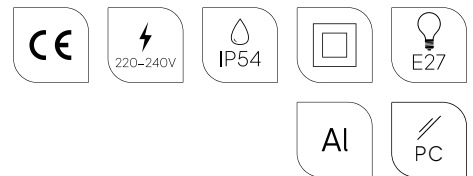

Product Eco-friendly.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.

**Accessories:**

**Art. 152**

Corner bracket





Art	Type of light source
350BL	E27
350WH	



Art	Type of light source
351BL	E27
351WH	



Art	Type of light source
380BL	E27
380WH	




Art	Type of light source
381BL	E27
381WH	

# Modena & Modena Big



Colour:


- Black
- White



Product Eco-friendly.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.



Art	Type of light source
351A/BL	E27
351A/WH	



Art	Type of light source
381A/BL	E27
381A/WH	






# Modena & Modena Big



**Colour:**

● Black


○ White



Product Eco-friendly.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.

**Accessories:**

**Art. 307**

Concreting anchor.





Art	Type of light source
304BL	E27
304WH	



Art	Type of light source
300BL	E27
300WH	



Art	Type of light source
384BL	E27
384WH	





# Modena



**Colour:**


- Black
- White



Product Eco-friendly.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.

**Accessories:**


**Art. 305**

Concreting anchor.




**Art. 306**


Ground anchor.




**Art. 108**

Anchoring support.



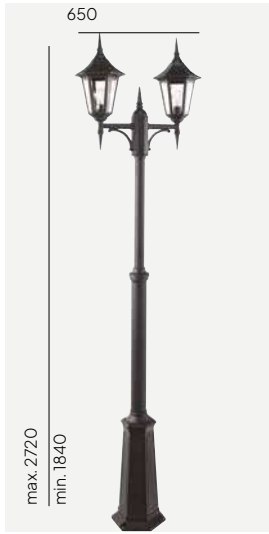


Art	Type of light source
302 BL	E27
302 WH	

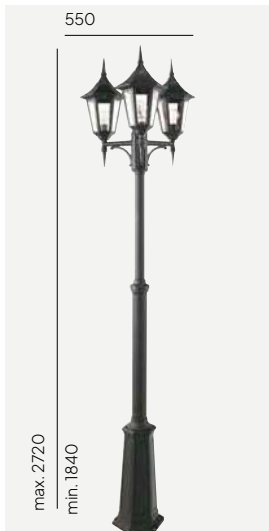

Art	Type of light source
303 BL	E27
303 WH	

# Modena Big



**Colour:**


- Black
- White



Product Eco-friendly.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.

**Accessories:**


**Art. 305**

Concreting anchor.




**Art. 306**

Ground anchor.



**Art. 108**

Anchoring support.





Art	Type of light source
301BL	E27
301WH	




Art	Type of light source
382BL	E27
382WH	



Art	Type of light source
397BL	E27
397WH	



# Venice

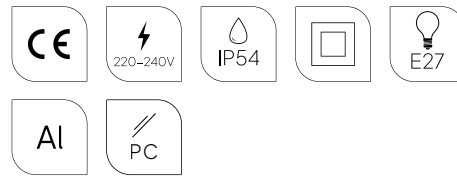

Colour:


- Black
- White



Product Eco-friendly.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.



Art	Type of light source
261BL	E27
261WH	




# Rimini



**Colour:**

● Black


○ White



Product Eco-friendly.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.

**Accessories:**

**Art. 307**

Concreting anchor.





Art	Type of light source
250BL	E27
250WH	



Art	Type of light source
404BL	E27
404WH	




Art	Type of light source
259BL	E27
259WH	



Art	Type of light source
259IBL	E27
259IWH	

# Rimini

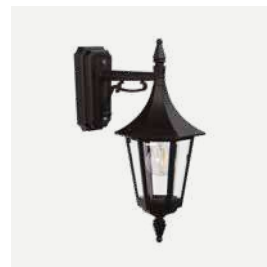

**Colour:**


- Black
- White



Product Eco-friendly.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.

**Accessories:**



**Art. 150**

Corner bracket





# Rimini & Milano

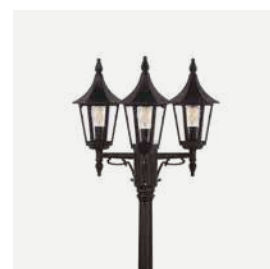


- Colour:
- Black
  - White



Product Eco-friendly.




Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.

## Accessories:

**Art. 405**  
Concreting anchor.



**Art. 406**  
Ground anchor.





Art	Type of light source
401BL	E27
401WH	



Art	Type of light source
402BL	E27
402WH	



Art	Type of light source
403BL	E27
403WH	



# Poles



Art. 1277

Art. 1275

Art. 1273


Art. 3009

Art. 3011

Colour:

-  Aluminium
-  Black
-  Graphite

Colour:

-  Aluminium
-  Black
-  Graphite

Colour:

-  Aluminium
-  Black
-  Graphite

Colour:

-  Galvanized


Colour:

-  Black
-  White

## Accessories:


### Art. 405

Concreting anchor.




### Art. 406

Ground anchor.



# Poles

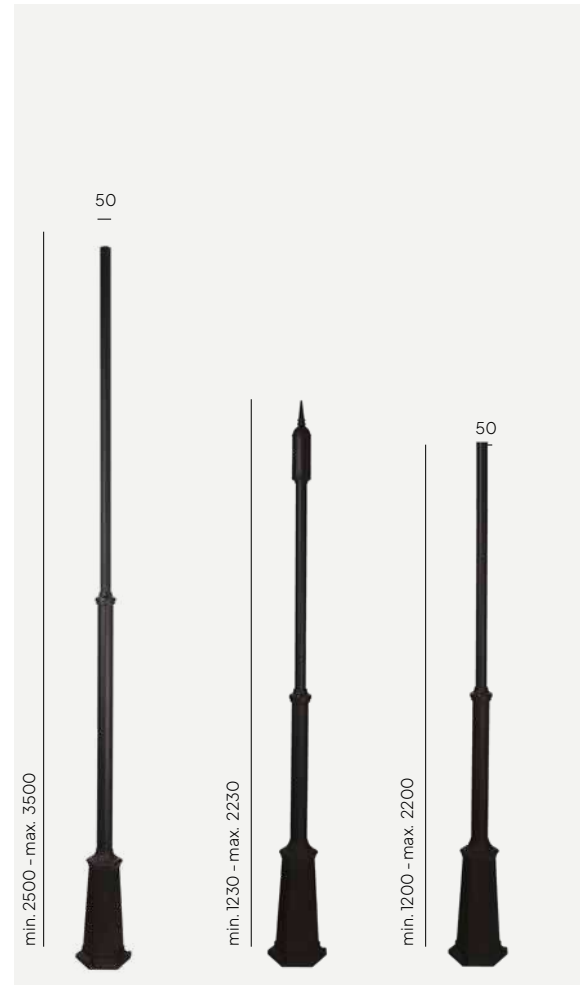

Art. 3004 Art. 3005  
Art. 3005 includes concreting anchor 7663.

Art. 2000

Art. 1255

Art. 1257

Art. 30101

Art. 3013

Art. 3010


Art. 3013 includes terminal.



Colour:



Colour:




Colour:




Colour:



Colour:



Colour:




Colour:




## Accessories:


Art. 7661  
Electric box




Art. 7662  
Pole connector.




Art. 7663  
Concreting anchor




Art. 7664  
Anchor




Art. 7668  
Electric box




Art. 144  
Pole conector



Art. 305  
Concreting anchor



Art. 306  
Ground anchor



# Special Icons




## Natural Scandinavian wood.

We use only high-quality, natural Scandinavian wood, which adds warmth and elegance to the lamps. The natural Scandinavian wood used in the fittings refers to the Nordic style, its naturalness, lightness and subtlety.



## Luminaires with energy distributor option adjustment.

Some of our lamps offer the possibility of energy distribution, allowing additional appliances or other lighting elements to be connected.




## Fully replaceable electrical kit.

If required, our lamps allow for easy replacement of electrical components, ensuring a longer product life.



## Handmade product (artisanal method).

Each lamp is meticulously handcrafted using traditional craftsmanship methods to guarantee its unique character. The power of craftsmanship.



## Multiple light variants adjustment.

We offer a variety of lighting modes, from soft light to strong illumination, adapting to different lighting needs.



## Vandal-resistant luminaire.

Our lamps are robustly manufactured and vandal-resistant, making them an ideal choice for public areas.




## Product Eco-friendly.

We care about the environment. Our products are environmentally friendly and manufactured with minimal environmental impact in mind.




## Luminaire suitable for extreme conditions.

The lamp construction is resistant to extreme weather conditions, from frost to heat, guaranteeing its durability.



## Wide range of light direction

Our lamps are equipped with an adjustable head, allowing the direction of light to be set precisely according to individual needs.



## Double corrosion protection (galvanising+powder coating).

Each lamp is protected against corrosion twice, first by galvanising and then by powder coating. This guarantees its longevity and resistance to weathering.



## Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).

Our garden lights offer advanced energy control features that allow significant savings. Features such as light dimming, motion sensor and twilight sensor ensure that the light shines only when it is needed

# Icons

## Product Characteristics



Luminaire with socket for replaceable light source (GU10, E27, E14)



Luminaire with socket for interchangeable light sources.



LED luminaire  
Luminaire equipped with LED module



Voltage 220-240V

## Control



Motion sensor  
Luminaire equipped with a motion sensor.



DIM dimmable version  
Phase dimmable luminaire



DALI light control



Light control in the D4i system

## Security



CE Certificate  
CE - Manufacturers declaration that a labelled product complies with the requirements of the EU 'p.so-called ,New Approach' directive



Protection class (I, II, III)  
Protection class I/ Luminaire with protective conductors.



Protection class II/protection by double or reinforced insulation.



Protection class III/low voltage protection.



IP  
IP rating, determines whether the electrical equipment is suitable for various environmental conditions




IK  
The IK shock resistance level is a measure of the resistance of electrical equipment enclosures to mechanical stress, particularly impact stress



## Connection / application



Specified inrun strength (for recessed luminaires)  
Overrun luminaire (for vehicles with pneumatic tyres)



Length of cable with plug or length of cable with open end.




Diameter of luminaire mounting on pole.

## Light emission



Light (up, down)  
Determination of the direction of the light beam emission.



Light (narrow down - wide up, narrow up, etc.)  
Determination of the direction and angle of the light beam emission.



Swivel and tilt range  
Adjustable light direction.



Light angle  
Determination of the angle of the light beam emission.

## Main and visual materials used



Steel



Stainless steel



Aluminium



Copper



Wood

## Type of lens



Toughened / safe glass  
Luminaire with safe glass diffuser.



PMMA (acrylic glass)  
The luminaire uses PMMA (acrylic glass) diffuser.



PC (polycarbonate)  
The luminaire uses PC (polycarbonate) diffuser.