



P

Paulmann



Comprehensive outdoor lighting solutions

Light for footpaths, entrances, façades, patios and gardens



Contents

| | |
|------------------|-----|
| Product features | 6 |
| House 230 V | 9 |
| Plug & Shine | 102 |
| Solar | 148 |
| Key | 174 |

Paulmann – a family business creating lighting ideas for 45 years

Paulmann Licht GmbH was founded in 1978 and is a leading brand manufacturer in the lighting industry. True to our motto “Realise your lighting ideas”, we offer our customers high-quality and high-efficiency feel-good light – indoors and out.

We are a German family business based in Springe, Lower Saxony, employing 450 people worldwide. Our products are sold in more than 40 countries in Europe. As a member of the UN Global Compact network, we attach great importance to sustainable business practices, environmental protection and social commitment. We are pursuing a programme to reduce the carbon footprint of our sites and products.

Our complete range features over 2,500 luminaires and lamps, and includes the right value for money bundles for any application. Our system solutions for 1-phase and 3-phase light rails, recessed luminaires and panel luminaires, bathroom luminaires, profile strips and profiles as well as the 24 V “Plug & Shine” plug-in system for outdoor use put you as a planner and craftsperson in the position to optimally implement the individual wishes of your customers – including Zigbee

luminaires and components for smart control. We are a DIALux premium partner, which means that you benefit from additional planning security and can offer solutions tailored to your customers.

Our in-house designers, structural engineers and electronics engineers combine technology, design and user benefits during product development and ensure the high-quality for which Paulmann is known.

Each of our products is accompanied by Paulmann product experts from the initial concept and across development, manufacture and final delivery. All our items and components are regularly checked by our own in-house Quality Assurance as well as by external certified test laboratories. That is why we have the confidence to grant a 5-year warranty on our Paulmann luminaires and transformers.

Our customers trust in our complete range and matching service: from product to logistics and service, to content creation and product presentation.

That is why more than 20,000 retail customers throughout Europe rely on Paulmann for their lighting needs:

- Quick and reliable delivery
- High product availability
- Goods delivered within 48 hours for customers in Germany and within 72 hours throughout Europe
- Deliveries from quantities of 1
- Low freight-free threshold
- Standardised ETIM format product data
- Options via EDIFACT: orders, order confirmations, delivery notes, invoices
- Paulmann Academy provides up-to-date product information online
- Expert service team



Sustainability at Paulmann

Social responsibility, environmental protection and sustainable corporate governance play an important role in the Paulmann family business. We have integrated a holistic sustainability strategy into our corporate strategy, which equally includes ecological, economic and social aspects. We are actively committed to achieving the Sustainable Development Goals (SDGs). We are constantly revising the way we use light and develop lamps and luminaires that ensure an economical use of energy and resources. But sustainability at Paulmann doesn't stop with the development and production of our products! At the same time, we are continuing to develop Paulmann's role as a company and our influence on the three pillars of sustainability.



Social commitment in the region

At Paulmann, we are a family – and that is reflected in the DNA of the family business. Providing equal opportunities and working for the common good are values that are deeply embedded in our culture. We work together to put the health and satisfaction of our employees and customers first.


Our goal is to actively take responsibility for our community and to set a good example. Paulmann has been supporting various local aid organisations and projects for children and young people in our region for several years.



FSC®-certified products contribute to sustainable forestry around the world. The certification ensures that wood-based raw materials for our products come from sustainable and responsible sources only.



Shipping packaging consists of 100% recycled material. To date, cardboard accounts for over 90% of our product packaging. As of 2023, all new products – where possible – will be packaged completely without plastic.

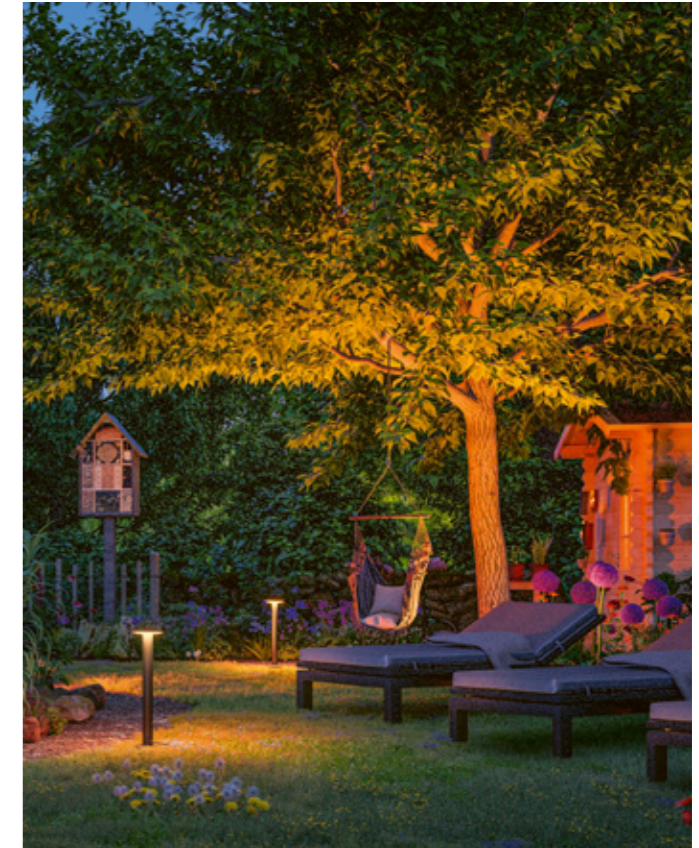

The insect-friendly outdoor luminaire range with 2200 K gold light offers safety and ambiance, while attracting almost no insects to help protect biodiversity.

Environmental responsibility – reducing our carbon footprint

From green electricity and recycling to optimising our sales packaging and shipping processes: step by step, we here at Paulmann are working to reduce our carbon footprint as much as possible. We want to consistently lower our emissions and monitor our numerous reduction measures – ideally until we achieve net zero emissions. To this end, we concentrate our resources and investments on the measurement, analysis, prevention and reduction of our emissions. We calculate our CCF, i.e. our Corporate Carbon Footprint, on an annual basis in accordance with the Greenhouse Gas Protocol to identify further improvement potential. We also aim to support the region where Paulmann has its roots: we invest in community projects and the expansion of our company-wide reduction measures. For example:

- We use green electricity from 100% renewable energy at the company headquarters in Völkzen.
- We are installing EV charging stations and are gradually converting our vehicle fleet to electric mobility.
- We are currently planning to build a photovoltaic system at our company headquarters.
- We are continuously optimising our shipping process by saving packaging material and increasing the percentage of recycled material.

Economy and governance – with responsibility and sustainability

We are convinced that responsible and long-term business activities can only be achieved by adhering to fair business practices. Sustainable business operations with high-quality materials, fair wages, career building opportunities for staff, training courses and apprenticeships for the next generation of employees as well as investment to strengthen the overall business model are just as important for ensuring a holistic sustainability strategy. Paulmann has its roots in the region and is known as a stable employer. Paulmann furthermore offers a range of apprenticeships to ensure well-qualified future talent.

Paulmann is pursuing a systematic approach to create maximum transparency in the supply chain in accordance with the requirements of the German Supply Chain Act (LkSG).



As a member of UN Global Compact, Paulmann publishes an annual progress report on the achievement of the Sustainable Development Goals.




Product features



Insect-friendly 🦋

Active protection for insects with the conscious use of colour temperature 2200 K

- When lighting is colder, brighter and more widely scattered, more insects are drawn to the light and consequently killed.
- At a colour temperature of **2200 K**, however, **90% of the emitted light is outside the visible range for insects.**
- As a result, they are barely attracted to the artificial light source.
- Outdoor lighting with a colour temperature of 2200 K or less is therefore **much friendlier to insects.**

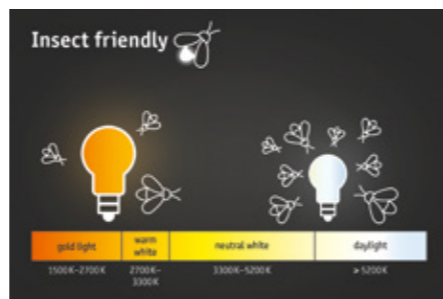

Seawater-resistant luminaires 🌊

Seawater-resistant materials for durable outdoor luminaires in coastal areas

Outdoor luminaires near the sea are exposed to more extreme environmental influences:

- The salt in the air corrodes metals and plastics more aggressively
- Paulmann luminaires made of high-quality plastic and metal are highly durable – also in coastal areas
- Luminaires bearing this seal have passed stringent quality tests
- An extended warranty period of a total of 10 years applies to products with the seawater-resistant seal, specifically to luminaires with a metal or plastic housing

Poolwater-resistant luminaires 🏊

Complete Plug & Shine luminaire range NOW confirmed as “poolwater-resistant”!

- Outdoor luminaires in pool environments are subject to more severe conditions:
- The chlorinated water can be detrimental to the luminaires over time
- All Paulmann Plug & Shine luminaires are designed to be very robust – even near pools
- Luminaires bearing the “pool water resistant” seal have passed stringent quality tests – tested to DIN EN IEC 60598-2-18 (VDE 0711-2-18) Section 18.7.3

IP protection

- IP68 Watertight for permanent immersion (and 12 V/24 V safety extra-low voltage)
- IP67 Watertight for temporary immersion (and 12 V/24 V safety extra-low voltage)
- IP65 Protected against direct water jets (and 12 V/24 V safety extra-low voltage)
- IP44 Splash protection
- IP23 Spray protection

QuickPlug 🛠️

Innovative mounting plug for quick installations

- More space for easier installation
- Simple electrification
- Time-saving plug-in system



Sensors

Mode A: Permanent lighting at 20% overall light output at dusk (<15 lux). The light is increased to 100% brightness once the motion sensor registers movement.

Mode B: The motion sensor activates at dusk (<15 lux) and switches the light on for 15 seconds when movement is detected.

Mode C: Permanent lighting during darkness hours! The light activates at dusk once a lux value of <15 lux is reached and deactivates in the morning when a lux value of >30 lux is exceeded.


The various modes are selected via on/off sequences.

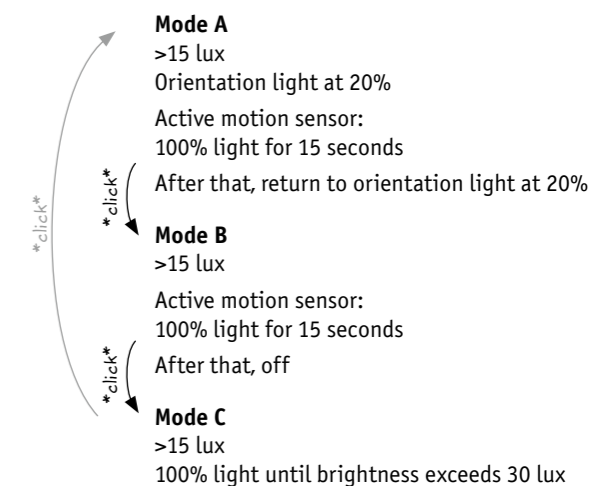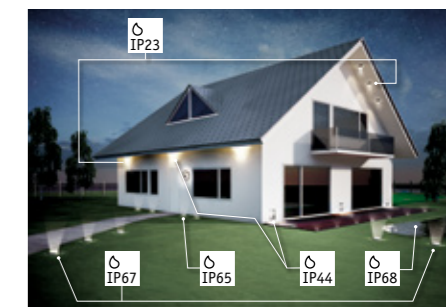



House 230 V

The reliable 230 V LED luminaires for light around the house and business

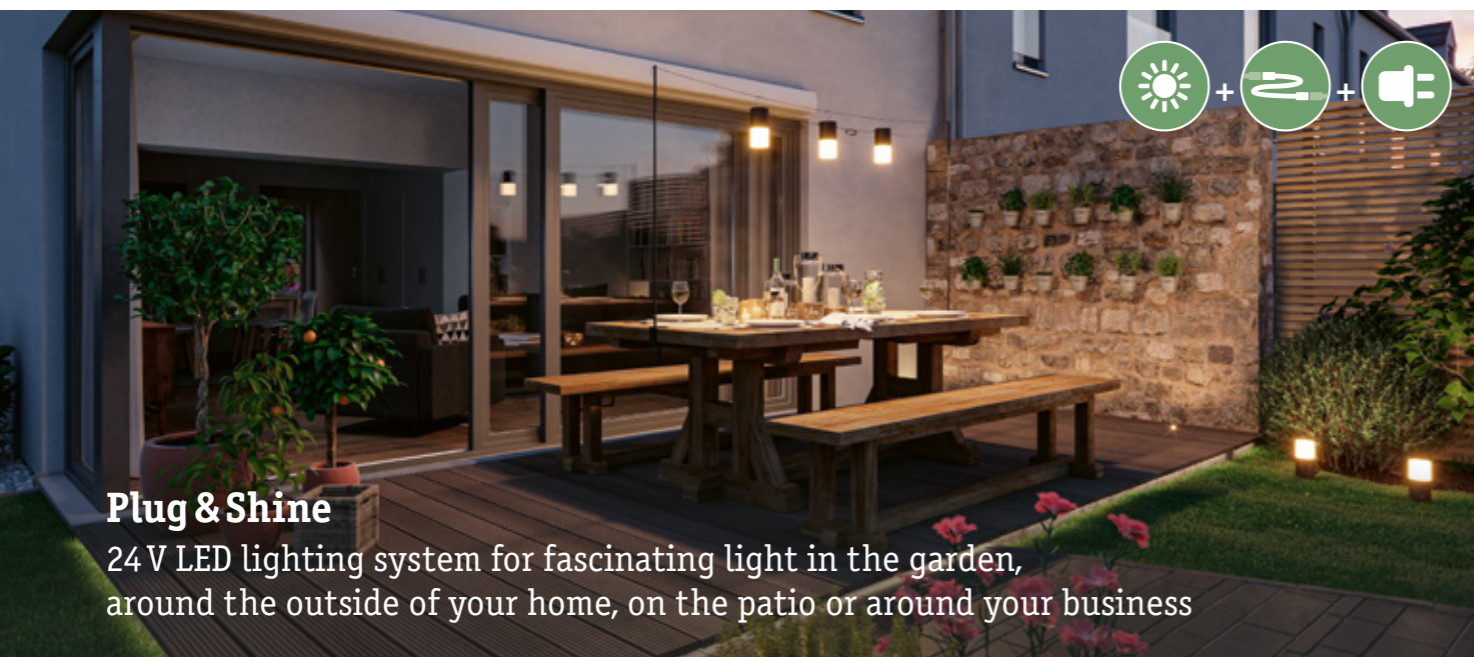


Plug & Shine

24 V LED lighting system for fascinating light in the garden, around the outside of your home, on the patio or around your business



Solar

Solar-powered luminaires, including portable models, independent of any power outlet

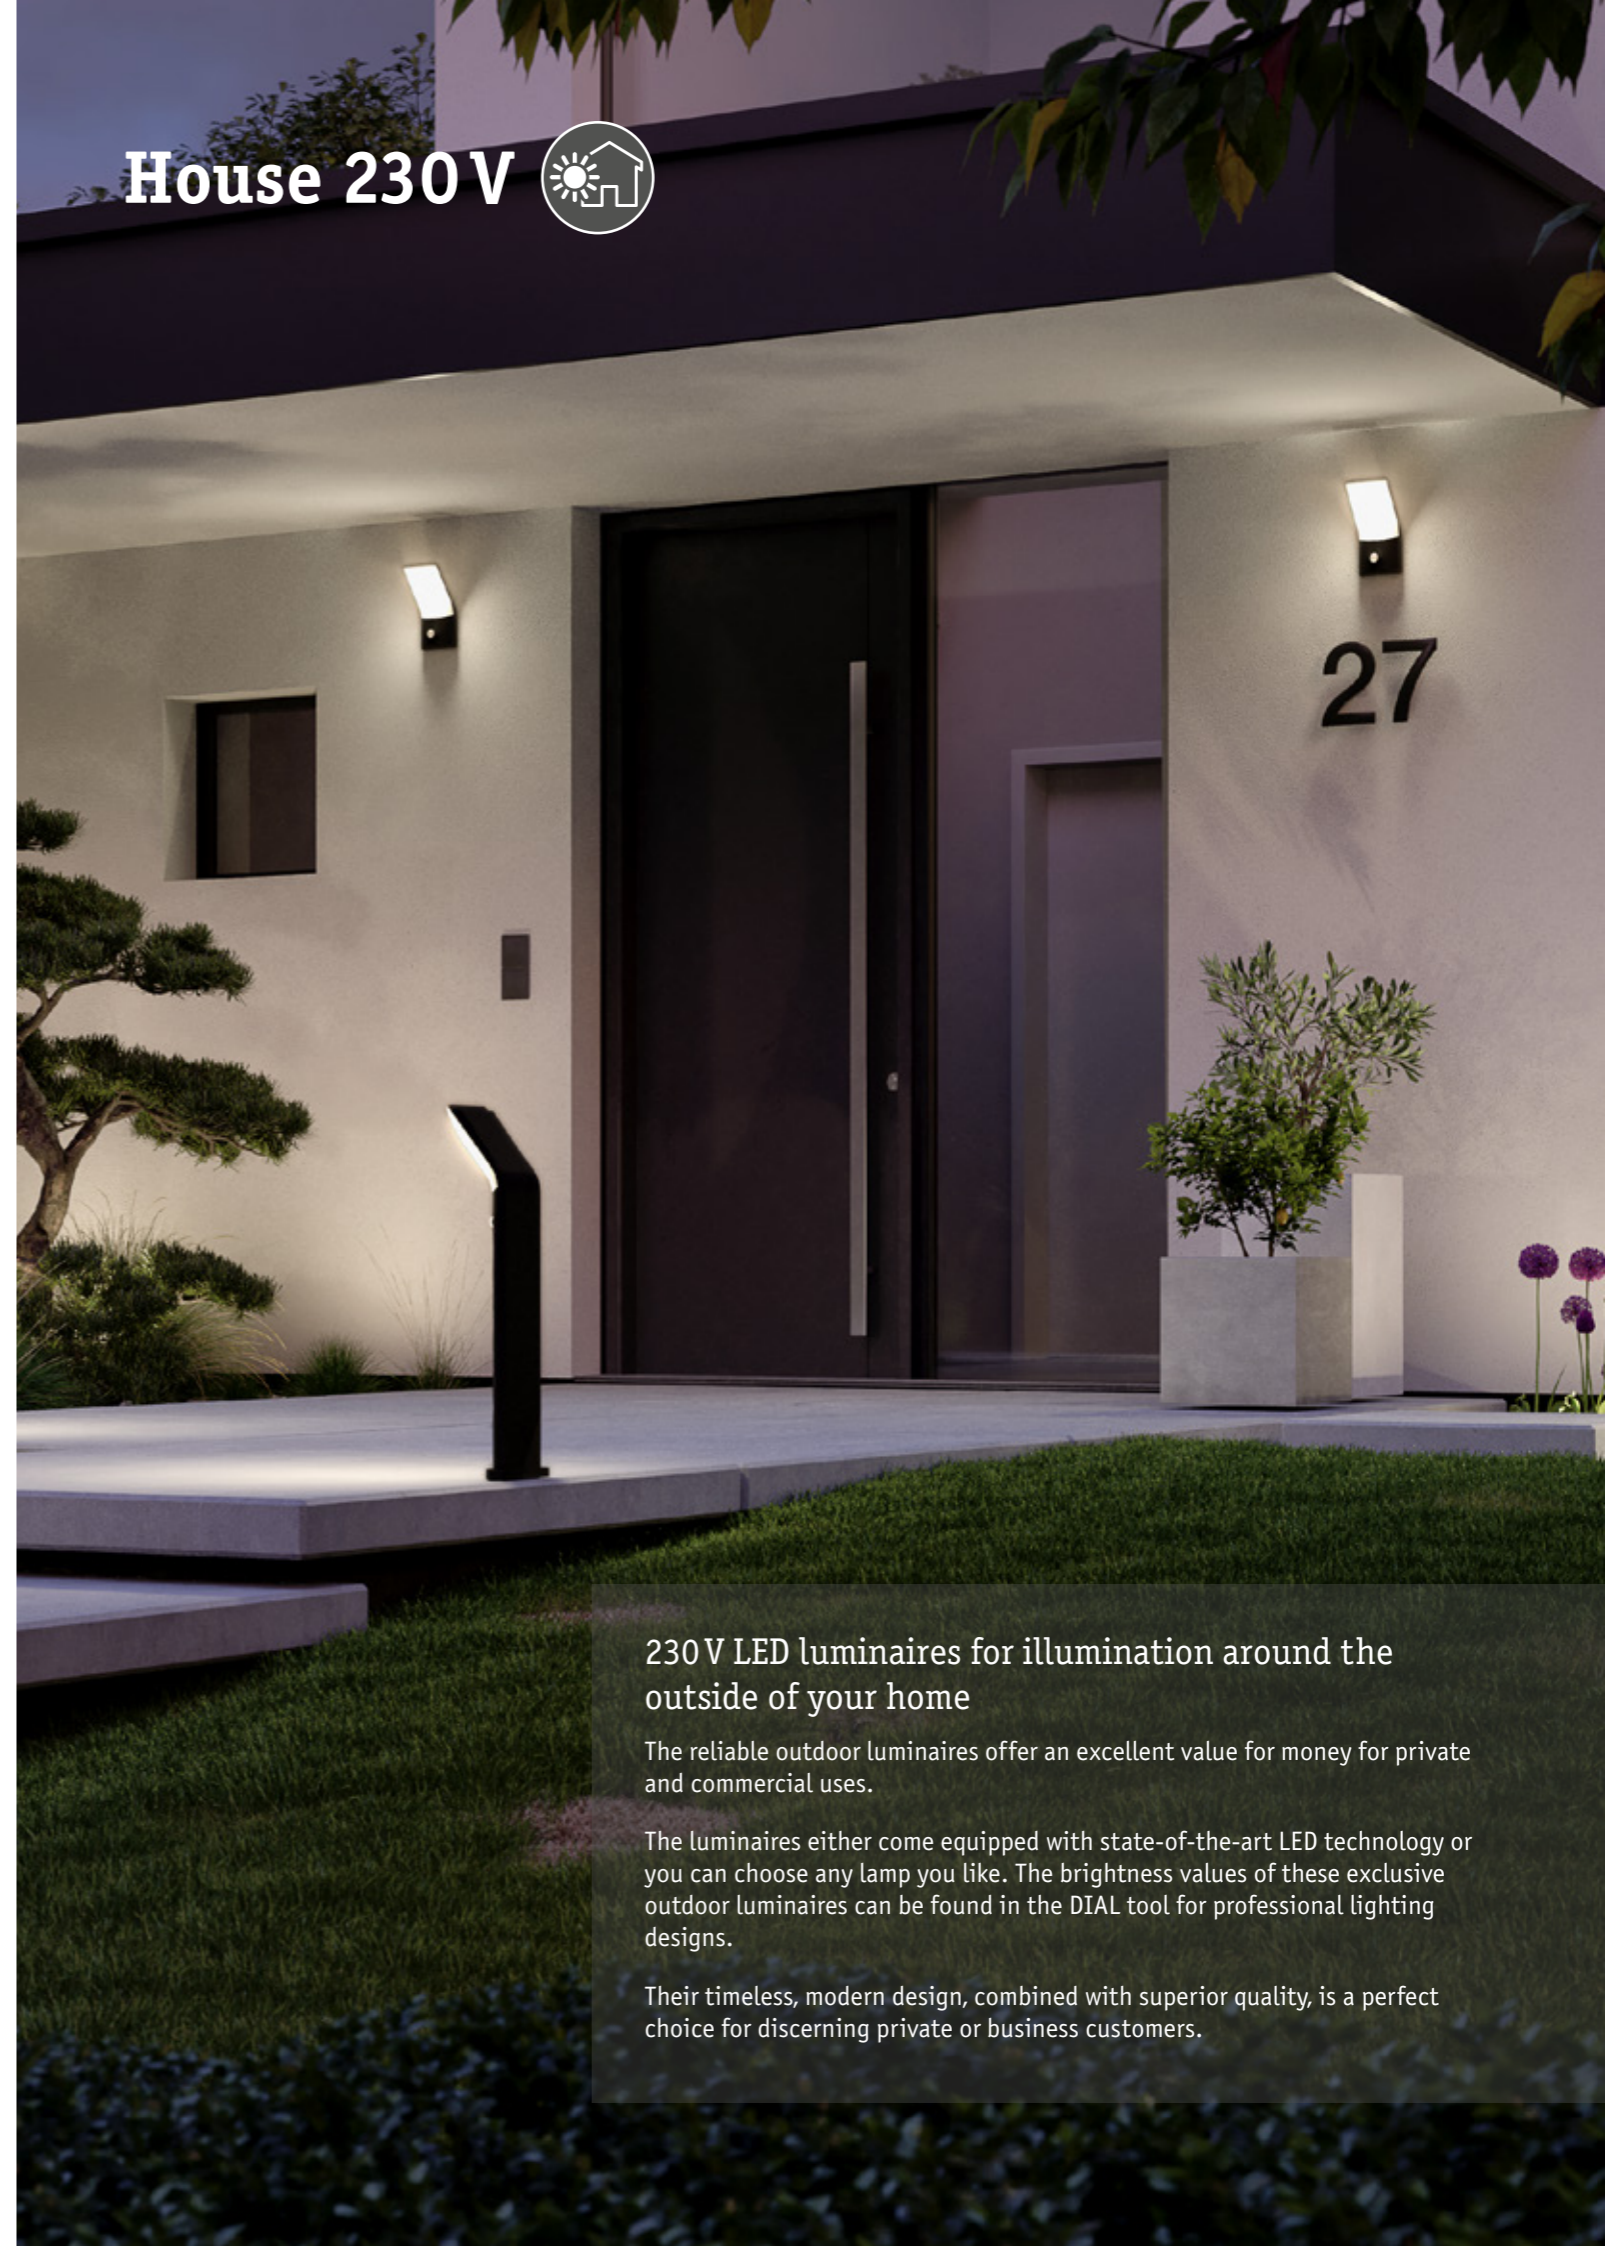

House 230 V



230 V LED luminaires for illumination around the outside of your home

The reliable outdoor luminaires offer an excellent value for money for private and commercial uses.

The luminaires either come equipped with state-of-the-art LED technology or you can choose any lamp you like. The brightness values of these exclusive outdoor luminaires can be found in the DIAL tool for professional lighting designs.

Their timeless, modern design, combined with superior quality, is a perfect choice for discerning private or business customers.





Capea wall luminaire




1, 3



2, 4



| | |
|----------------------|------------|
| Material | Aluminium |
| IP protection | IP44 |
| Voltage | 230 V |
| Dimmability | No |
| Service life | 30,000 h |
| CRI | 80 |
| Technology | LED module |

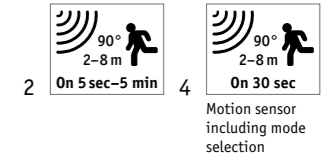


| Capea | Watt | Lumen | Kelvin | ☼ | Smart | Insect-friendly | Item |
|-----------------------------|------|--------|-------------|-----|-------|-----------------|----------|
| 1 Wall luminaire | 6 W | 500 lm | 3000 K | 98° | | | DG 94452 |
| 2 Wall luminaire PIR sensor | 6 W | 500 lm | 3000 K | 98° | | | DG 94453 |
| 3 Wall luminaire | 6 W | 550 lm | 2200 K | 98° | | 🌿 | DG 94713 |
| 4 Wall luminaire PIR sensor | 6 W | 450 lm | 2200-3000 K | 98° | | 🌿 | DG 94714 |

Capea wall luminaire & bollard light

- Attractive wall luminaires for facades and driveways with motion sensor
- Modern, linear look

Capea bollard light




| | |
|----------------------|------------|
| Material | Aluminium |
| IP protection | IP44 |
| Voltage | 230 V |
| Dimmability | No |
| Service life | 30,000 h |
| CRI | 80 |
| Technology | LED module |

| Capea | Watt | Lumen | Kelvin | ☼ | Smart | Insect-friendly | Item |
|---------------|------|--------|--------|-----|-------|-----------------|----------|
| Bollard light | 6 W | 500 lm | 3000 K | 98° | | | DG 94454 |
| Bollard light | 6 W | 450 lm | 2200 K | 98° | | 🌿 | DG 94715 |



Capea Grand wall luminaire



| | |
|----------------------|--------------------|
| Material | Die cast aluminium |
| IP protection | IP44 |
| Voltage | 230 V |
| Dimmability | No |
| Service life | 30,000 h |
| CRI | 80 |
| Technology | LED module |

Seawater resistant




| Capea Grand | Watt | Lumen | Kelvin | ⚡ | Smart | Insect-friendly | Item |
|----------------|--------|---------|--------|------|-------|-----------------|-----------------|
| Wall luminaire | 11.5 W | 1050 lm | 3000 K | 108° | | | DG 94789 |

Capea Grand wall luminaire & bollard light

- With extra-large luminaire head for ample illumination
- Luminaires with the “seawater-resistant” seal have passed stringent quality tests
- Bollard lights with base plate and bolts for installation on solid substrates

Capea Grand bollard light




| | |
|----------------------|--------------------|
| Material | Die cast aluminium |
| IP protection | IP44 |
| Voltage | 230 V |
| Dimmability | No |
| Service life | 30,000 h |
| CRI | 90 |
| Technology | LED module |

Seawater resistant



| Capea Grand | Watt | Lumen | Kelvin | ⚡ | Smart | Insect-friendly | Item |
|---------------|--------|---------|--------|------|-------|-----------------|-----------------|
| Bollard light | 11.5 W | 1050 lm | 3000 K | 108° | | | DG 94790 |

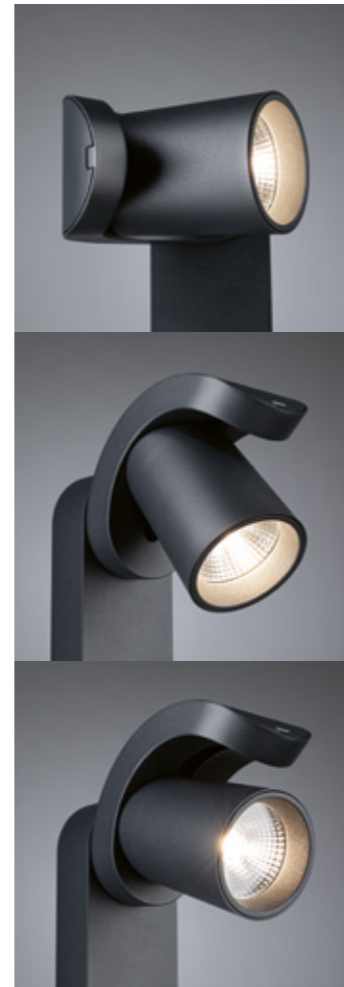

Cuff wall luminaire & bollard light

- Exchangeable LED modules
- Freely adjustable luminaire direction, thanks to swivelling spot heads
- Luminaires with the “seawater-resistant” seal have passed stringent quality tests
- Available in two colour variants: anthracite and white
- Exclusive Paulmann design

Cuff wall luminaire



| | |
|----------------------|------------|
| Material | Aluminium |
| IP protection | IP44 |
| Voltage | 230 V |
| Dimmability | No |
| Service life | 30,000 h |
| CRI | 80 |
| Technology | LED module |

Seawater resistant
 QuickPlug
 120° 4 m On 15 sec

| Cuff | Watt | Lumen | Kelvin | ∠ | Smart | Insect-friendly | Item |
|---------------------------|------|--------|--------|-----|-------|-----------------|-----------------|
| Wall luminaire PIR sensor | 10 W | 700 lm | 3000 K | 70° | | | DG 94830 |
| Wall luminaire PIR sensor | 10 W | 700 lm | 3000 K | 70° | | | W 94832 |

Cuff bollard light



| | |
|----------------------|------------|
| Material | Aluminium |
| IP protection | IP44 |
| Voltage | 230 V |
| Dimmability | No |
| Service life | 30,000 h |
| CRI | 90 |
| Technology | LED module |

Seawater resistant
 120° 4 m On 15 sec
 Motion sensor including mode selection


| Cuff | Watt | Lumen | Kelvin | ∠ | Smart | Insect-friendly | Item |
|--------------------------|------|--------|--------|-----|-------|-----------------|-----------------|
| Bollard light PIR sensor | 10 W | 700 lm | 3000 K | 70° | | | DG 94831 |
| Bollard light PIR sensor | 10 W | 700 lm | 3000 K | 70° | | | W 94833 |



Juntea wall luminaire & bollard light


- Exchangeable LED modules
- Luminaires with the “seawater-resistant” seal have passed stringent quality tests
- Exclusive Paulmann design

Juntea wall luminaire




| | |
|----------------------|------------|
| Material | Aluminium |
| IP protection | IP44 |
| Voltage | 230 V |
| Dimmability | No |
| Service life | 30,000 h |
| CRI | 90 |
| Technology | LED module |

- Seawater resistant
- QuickPlug




| Juntea | Watt | Lumen | Kelvin | Smart | Insect-friendly | Item |
|---------------------------|------|--------|--------|-------|-----------------|----------|
| Wall luminaire PIR sensor | 11 W | 900 lm | 3000 K | | | DG 94859 |

Juntea bollard light



| | |
|----------------------|------------|
| Material | Aluminium |
| IP protection | IP44 |
| Voltage | 230 V |
| Dimmability | No |
| Service life | 30,000 h |
| CRI | 90 |
| Technology | LED module |


- Seawater resistant



| Juntea | Watt | Lumen | Kelvin | Smart | Insect-friendly | Item |
|----------------------------|----------|---------|--------|-------|-----------------|----------|
| 1 Bollard light PIR sensor | 11 W | 900 lm | 3000 K | | | DG 94860 |
| 2 Bollard light | 2 x 21 W | 1600 lm | 3000 K | | | DG 94861 |



Kimu wall luminaire



| | |
|----------------------|------------|
| Material | Aluminium |
| IP protection | IP44 |
| Voltage | 230 V |
| Dimmability | No |
| Service life | 30,000 h |
| CRI | 90 |
| Technology | LED module |

- Seawater resistant
- QuickPlug





| Kimu | Watt | Lumen | Kelvin | ∠ | Smart | Insect-friendly | Item |
|----------------|-------|--------|--------|-----|-------|-----------------|----------|
| Wall luminaire | 8 W | 500 lm | 3000 K | 70° | | | DG 94820 |
| Wall luminaire | 7.8 W | 500 lm | 2200 K | 70° | | ☑ | DG 94821 |

Kimu wall luminaire & bollard light

- Exchangeable LED modules
- Freely adjustable luminaire direction, thanks to swivelling spot heads
- Luminaires with the “seawater-resistant” seal have passed stringent quality tests
- Exclusive Paulmann design

Kimu bollard light



| | |
|----------------------|------------|
| Material | Aluminium |
| IP protection | IP44 |
| Voltage | 230 V |
| Dimmability | No |
| Service life | 30,000 h |
| CRI | 90 |
| Technology | LED module |

- Seawater resistant




| Kimu | Watt | Lumen | Kelvin | ∠ | Smart | Insect-friendly | Item |
|------------------------|-------|------------|--------|-----|-------|-----------------|----------|
| 1 Bollard light | 8 W | 500 lm | 3000 K | 70° | | | DG 94822 |
| 2 Bollard light | 7.8 W | 500 lm | 2200 K | 70° | | ☑ | DG 94823 |
| 3 Double bollard light | 8 W | 2 × 500 lm | 3000 K | 70° | | | DG 94824 |
| 4 Double bollard light | 7.8 W | 2 × 500 lm | 2200 K | 70° | | ☑ | DG 94825 |



Kulma wall luminaire & bollard light

- Luminaires with the “seawater-resistant” seal have passed stringent quality tests
- Low energy consumption thanks to state-of-the-art LED technology
- Motion sensor variants: Easy setting options for switch-off delay time, brightness limit value and sensitivity of the motion sensor using the potentiometer dial on the luminaire

Kulma wall luminaire




| | |
|----------------------|------------|
| Material | Aluminium |
| IP protection | IP44 |
| Voltage | 230 V |
| Dimmability | No |
| Service life | 30,000 h |
| CRI | 80 |
| Technology | LED module |

Seawater resistant




| Kulma | Watt | Lumen | Kelvin | Smart | Insect-friendly | Item |
|-----------------------------|-------|--------|--------|-------|-----------------|----------|
| 1 Wall luminaire | 7.5 W | 520 lm | 3000 K | | | DG 94744 |
| 2 Wall luminaire PIR sensor | 7.5 W | 500 lm | 3000 K | | | DG 94745 |

Kulma bollard light



| | |
|----------------------|------------|
| Material | Aluminium |
| IP protection | IP44 |
| Voltage | 230 V |
| Dimmability | No |
| Service life | 30,000 h |
| CRI | 80 |
| Technology | LED module |

Seawater resistant




| Kulma | Watt | Lumen | Kelvin | Smart | Insect-friendly | Item |
|----------------------------|-------|--------|--------|-------|-----------------|----------|
| 1 Bollard light | 7.5 W | 520 lm | 3000 K | | | DG 94746 |
| 2 Bollard light PIR sensor | 7.5 W | 500 lm | 3000 K | | | DG 94747 |



Merano wall luminaire & bollard light


- Exchangeable LED modules
- Luminaires with the “seawater-resistant” seal have passed stringent quality tests
- Exclusive Paulmann design

Merano wall luminaire




| | |
|----------------------|------------|
| Material | Aluminium |
| IP protection | IP44 |
| Voltage | 230 V |
| Dimmability | No |
| Service life | 30,000 h |
| CRI | 90 |
| Technology | LED module |

- Seawater resistant
- QuickPlug



| Merano | Watt | Lumen | Kelvin | Smart | Insect-friendly | Item |
|--------------------------|------|--------|--------|-------|-----------------|----------|
| Wall luminaire HF sensor | 14 W | 950 lm | 3000 K | ✗ | | DG 94857 |

Merano bollard light




| | |
|----------------------|------------|
| Material | Aluminium |
| IP protection | IP44 |
| Voltage | 230 V |
| Dimmability | No |
| Service life | 30,000 h |
| CRI | 90 |
| Technology | LED module |

- Seawater resistant

| Merano | Watt | Lumen | Kelvin | Smart | Insect-friendly | Item |
|-------------------------|------|--------|--------|-------|-----------------|----------|
| Bollard light HF sensor | 14 W | 850 lm | 3000 K | ✗ | | DG 94858 |




Sienna wall luminaire



| | |
|----------------------|------------|
| Material | Aluminium |
| IP protection | IP44 |
| Voltage | 230 V |
| Dimmability | No |
| Service life | 30,000 h |
| CRI | 90 |
| Technology | LED module |

Seawater resistant




| Sienna | Watt | Lumen | Kelvin | | Smart | Insect-friendly | Item |
|--------------------------|------|--------|--------|--|-------|-----------------|-----------------|
| Wall luminaire HF sensor | 9 W | 500 lm | 3000 K | | | | DG 94834 |

Sienna wall luminaire & bollard light


- Exchangeable LED modules
- Luminaires with the “seawater-resistant” seal have passed stringent quality tests
- Exclusive Paulmann design

Sienna bollard light

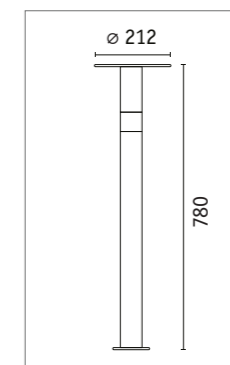

| | |
|----------------------|------------|
| Material | Aluminium |
| IP protection | IP44 |
| Voltage | 230 V |
| Dimmability | No |
| Service life | 30,000 h |
| CRI | 90 |
| Technology | LED module |

Seawater resistant




| Sienna | Watt | Lumen | Kelvin | | Smart | Insect-friendly | Item |
|-------------------------|------|--------|--------|--|-------|-----------------|-----------------|
| Bollard light HF sensor | 9 W | 400 lm | 3000 K | | | | DG 94835 |



Swivea wall luminaire & bollard light

- High-quality spotlight with gimbal-mounted light head for optimized light deflection
- Contemporary homogeneous design for optimum illumination around the house and garden
- Suitable for professional lighting design


Swivea wall luminaire



| | |
|----------------------|------------|
| Material | Aluminium |
| IP protection | IP44 |
| Voltage | 230 V |
| Dimmability | No |
| Service life | 30,000 h |
| CRI | 80 |
| Technology | LED module |

| Swivea | Watt | Lumen | Kelvin | ☒ | Smart | Insect-friendly | Item |
|--------|------|--------|--------|---|-------|-----------------|-----------------|
| Spot | 8 W | 440 lm | 3000 K | | | | DG 94406 |


Swivea spot



| | |
|----------------------|------------|
| Material | Aluminium |
| IP protection | IP44 |
| Voltage | 230 V |
| Dimmability | No |
| Service life | 30,000 h |
| CRI | 80 |
| Technology | LED module |

| Swivea | Watt | Lumen | Kelvin | ☒ | Smart | Insect-friendly | Item |
|--------|------|--------|--------|---|-------|-----------------|-----------------|
| Spot | 8 W | 460 lm | 3000 K | | | | DG 94408 |

Swivea bollard light



| | |
|----------------------|------------|
| Material | Aluminium |
| IP protection | IP44 |
| Voltage | 230 V |
| Dimmability | No |
| Service life | 30,000 h |
| CRI | 80 |
| Technology | LED module |



| Swivea | Watt | Lumen | Kelvin | ☒ | Smart | Insect-friendly | Item |
|---------------|------|--------|--------|---|-------|-----------------|-----------------|
| Bollard light | 8 W | 460 lm | 3000 K | | | | DG 94407 |



Wall luminaires and bollard lights Bonnie

- Exchangeable LED modules
- Luminaires with the “seawater-resistant” seal have passed stringent quality tests
- Exclusive Paulmann design
- Tunable Warm version: Insect-friendly illumination with colour temperature in the gold light spectrum
- Motion sensor variant: Automatic switching, thanks to integrated motion sensor and dusk sensor

Bonnie wall luminaire




| | |
|----------------------|------------|
| Material | Aluminium |
| IP protection | IP44 |
| Voltage | 230 V |
| Dimmability | No |
| Service life | 30,000 h |
| CRI | 80 |
| Technology | LED module |

Seawater resistant



| Bonnie | Watt | Lumen | Kelvin | Smart | Insect-friendly | Item |
|-----------------------------|-------|--------|-------------|-------|-----------------|-------|
| 1 Wall luminaire | 8.5 W | 560 lm | 3000 K | | | 94850 |
| 2 Wall luminaire PIR sensor | 8.5 W | 560 lm | 3000 K | | | 94851 |
| 3 Wall luminaire PIR sensor | 8.5 W | 560 lm | 2200–3000 K | | | 94853 |

Bonnie bollard light



| | |
|----------------------|------------|
| Material | Aluminium |
| IP protection | IP44 |
| Voltage | 230 V |
| Dimmability | No |
| Service life | 30,000 h |
| CRI | 80 |
| Technology | LED module |

Seawater resistant


| Bonnie | Watt | Lumen | Kelvin | Smart | Insect-friendly | Item |
|---------------|-------|--------|--------|-------|-----------------|-------|
| Bollard light | 8.5 W | 560 lm | 3000 K | | | 94852 |



Caissa luminaire wall & bollard light


- Exchangeable LED modules
- Luminaires with the “seawater-resistant” seal have passed stringent quality tests
- Exclusive Paulmann design

Caissa wall luminaire




| | |
|----------------------|------------|
| Material | Aluminium |
| IP protection | IP44 |
| Voltage | 230 V |
| Dimmability | No |
| Service life | 30,000 h |
| CRI | 90 |
| Technology | LED module |

- Seawater resistant
- QuickPlug




| Caissa | Watt | Lumen | Kelvin | ☞ | Smart | Insect-friendly | Item |
|--------------------------|------|--------|--------|-----|-------|-----------------|-----------------|
| Wall luminaire HF sensor | 9 W | 700 lm | 3000 K | 65° | | | DG 94862 |

Caissa bollard light



| | |
|----------------------|------------|
| Material | Aluminium |
| IP protection | IP44 |
| Voltage | 230 V |
| Dimmability | No |
| Service life | 30,000 h |
| CRI | 90 |
| Technology | LED module |

- Seawater resistant






| Caissa | Watt | Lumen | Kelvin | ☞ | Smart | Insect-friendly | Item |
|-------------------------|------|--------|--------|-----|-------|-----------------|-----------------|
| Bollard light HF sensor | 9 W | 700 lm | 3000 K | 65° | | | DG 94863 |



Concrea wall luminaire & bollard light

- High-quality wall luminaires made of concrete – real eye-catchers
- Create exciting lighting effects on façades or walls
- Completely corrosion-resistant


Concrea wall luminaire

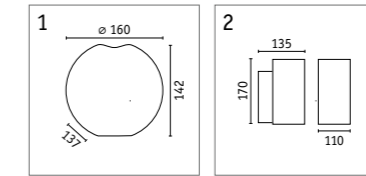

| | |
|------------------|------------|
| Material | Concrete |
| IP protection | IP65 |
| Protection class | ☐ |
| Voltage | 230 V |
| Dimmability | No |
| Service life | 30,000 h |
| CRI | 80 |
| Technology | LED module |

| Concrea | Watt | Lumen | Kelvin | ☒ | Smart | Insect-friendly | Item |
|------------------|-----------|-----------|--------|---|-------|-----------------|----------------|
| 1 Wall luminaire | 2 x 5.5 W | 2x 250 lm | 3000 K | | | | B 94499 |
| 2 Wall luminaire | 6.8 W | 300 lm | 3000 K | | | | B 94500 |


Concrea bollard light

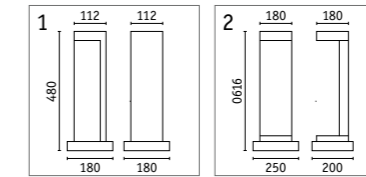

| | |
|------------------|------------|
| Material | Concrete |
| IP protection | IP65 |
| Protection class | ☐ |
| Voltage | 230 V |
| Dimmability | No |
| Service life | 30,000 h |
| CRI | 80 |
| Technology | LED module |

| Concrea | Watt | Lumen | Kelvin | ☒ | Smart | Insect-friendly | Item |
|-----------------|-------|--------|--------|---|-------|-----------------|----------------|
| 1 Bollard light | 6.8 W | 200 lm | 3000 K | | | | B 94501 |
| 2 Bollard light | 6.8 W | 200 lm | 3000 K | | | | B 94502 |

Concrea light object



| | |
|------------------|------------|
| Material | Concrete |
| IP protection | IP65 |
| Protection class | ☐ |
| Voltage | 230 V |
| Dimmability | No |
| Service life | 30,000 h |
| CRI | 80 |
| Technology | LED module |


| Concrea | Watt | Lumen | Kelvin | ☒ | Smart | Insect-friendly | Item |
|--------------|-------|--------|--------|---|-------|-----------------|----------------|
| Light object | 5.5 W | 350 lm | 3000 K | | | | B 94503 |



Ito spot & wall luminaire

- Asymmetrical beam angle for optimal illumination of wide objects
- Calculated lens for best light quality
- Robust metal housing

Ito spot






| | |
|----------------------|------------|
| Material | Metal |
| IP protection | IP67 |
| Voltage | 230 V |
| Dimmability | Yes |
| Service life | 30,000 h |
| CRI | 90 |
| Technology | LED module |




| Ito | Watt | Lumen | Kelvin | ∠ | Smart | Insect-friendly | Item |
|-------------|------|--------|--------|-----|-------|-----------------|----------|
| Wall washer | 6 W | 200 lm | 3000 K | 70° | | | DG 94670 |

Ito wall luminaire

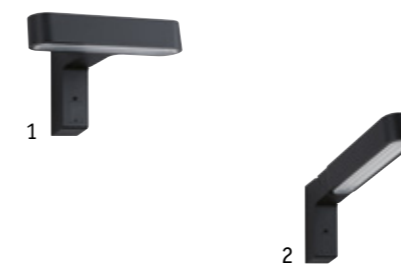

| | |
|-------------------------|----------------|
| Material | Metal, plastic |
| IP protection | IP44 |
| Protection class | ☐ |
| Voltage | 230 V |
| Dimmability | No |
| Service life | 30,000 h |
| CRI | 80 |
| Technology | LED module |




| Ito | Watt | Lumen | Kelvin | ∠ | Smart | Insect-friendly | Item |
|---------------------------------|------|--------|--------|-----|-------|-----------------|----------|
| 1 Wall luminaire horizontal PIR | 6 W | 450 lm | 3000 K | 65° | | | DG 94548 |
| 2 Wall luminaire vertical PIR | 6 W | 450 lm | 3000 K | 65° | | | DG 94549 |



Padea wall luminaire & bollard light

- Modern, linear look
- RGBW function offers a free choice of light colour
- Numbers and letters for use as a house number luminaire included

Padea wall luminaire




| | |
|-------------------------|------------|
| Material | Plastic |
| IP protection | IP44 |
| Protection class | ☐ |
| Voltage | 230 V |
| Dimmability | Yes |
| Service life | 30,000 h |
| CRI | 80 |
| Technology | LED module |




| Padea | Watt | Lumen | Kelvin | ☒ | Smart | Insect-friendly | Item |
|-------------------------|-------|--------|-------------|---|--------|-----------------|----------|
| 1 Wall luminaire sensor | 8.5 W | 550 lm | 3000 K | | | | DG 94512 |
| 2 Wall luminaire sensor | 8.2 W | 550 lm | 2200–3000 K | | | 🌿 | DG 94509 |
| 3 Wall luminaire sensor | 8.2 W | 550 lm | 3000–6500 K | | Zigbee | | DG 94513 |

Padea bollard light



| | |
|----------------------|----------------|
| Material | Metal, plastic |
| IP protection | IP44 |
| Voltage | 230 V |
| Dimmability | No |
| Service life | 30,000 h |
| CRI | 80 |
| Technology | LED module |



| Padea | Watt | Lumen | Kelvin | ☒ | Smart | Insect-friendly | Item |
|----------------------------|-------|--------|-------------|---|-------|-----------------|----------|
| 1 Bollard light PIR sensor | 8.5 W | 700 lm | 3000 K | | | | DG 94514 |
| 2 Bollard light | 8.5 W | 700 lm | 2200–3000 K | | | 🌿 | DG 94515 |





Adya wall luminaire & bollard light

- High-quality 230V outdoor wall luminaires with exceptional design
- Luminaires with diffused light for uniform light distribution and glare-free illumination
- Suitable for professional lighting design



Adya wall luminaire





Motion sensor including mode selection



| | |
|----------------------|------------|
| Material | Aluminium |
| IP protection | IP44 |
| Voltage | 230 V |
| Dimmability | No |
| Service life | 30,000 h |
| CRI | 80 |
| Technology | LED module |

| Adya | Watt | Lumen | Kelvin | ☒ | Smart | Insect-friendly | Item |
|---------------------------|------|--------|--------|---|-------|-----------------|----------|
| Wall luminaire PIR sensor | 10 W | 750 lm | 3000 K | | | | DG 94402 |

Adya bollard light



| | |
|----------------------|------------|
| Material | Aluminium |
| IP protection | IP44 |
| Voltage | 230 V |
| Dimmability | No |
| Service life | 30,000 h |
| CRI | 80 |
| Technology | LED module |

| Adya | Watt | Lumen | Kelvin | ☒ | Smart | Insect-friendly | Item |
|--------------------|------|--------|--------|---|-------|-----------------|----------|
| Bollard PIR sensor | 10 W | 750 lm | 3000 K | | | | DG 94403 |




Nostro wall luminaire & bollard light

- Wall and bollard light in one design
- High-quality material




Nostro wall luminaire



| | |
|----------------------|------------|
| Material | Aluminium |
| IP protection | IP44 |
| Voltage | 230 V |
| Dimmability | No |
| Service life | 30,000 h |
| CRI | 80 |
| Technology | LED module |

| Nostro | Watt | Lumen | Kelvin | ☒ | Smart | Insect-friendly | Item |
|----------------|------|-------|--------|---|-------|-----------------|-----------------|
| Wall luminaire | 10W | 900lm | 3000 K | | | | DG 94758 |

Nostro bollard light



| | |
|----------------------|------------|
| Material | Aluminium |
| IP protection | IP44 |
| Voltage | 230 V |
| Dimmability | No |
| Service life | 30,000 h |
| CRI | 80 |
| Technology | LED module |


| Nostro | Watt | Lumen | Kelvin | ☒ | Smart | Insect-friendly | Item |
|---------|------|-------|--------|---|-------|-----------------|-----------------|
| Bollard | 10W | 900lm | 3000 K | | | | DG 94760 |



Bako wall luminaire & bollard light

- Luminaires with the “seawater-resistant” seal have passed stringent quality tests
- Freely selectable E14 lamp – use a Zigbee lamp for smart control of the luminaire

Bako wall luminaire




| | |
|----------------------|-----------|
| Material | Aluminium |
| IP protection | IP44 |
| Voltage | 230 V |
| Dimmability | Yes |
| Technology | E14 |

Seawater resistant



| Bako | Watt | Lumen | Kelvin | | Smart | Insect-friendly | Item |
|----------------|--------------------------------|-------|--------|--|-----------|-----------------|-----------------|
| Wall luminaire | Depending on the lamp selected | | | | Ready for | | DG 94740 |

Bako bollard light



| | |
|----------------------|-----------|
| Material | Aluminium |
| IP protection | IP44 |
| Voltage | 230 V |
| Dimmability | Yes |
| Technology | E14 |

Seawater resistant





| Bako | Watt | Lumen | Kelvin | | Smart | Insect-friendly | Item |
|---------------|--------------------------------|-------|--------|--|-----------|-----------------|-----------------|
| Bollard light | Depending on the lamp selected | | | | Ready for | | DG 94741 |



Classic wall luminaire & bollard light

- Nostalgic look based on an anthracite-coloured frame and clear glass shade
- Perfect for retro-style all-glass filament lamps




Classic wall luminaire

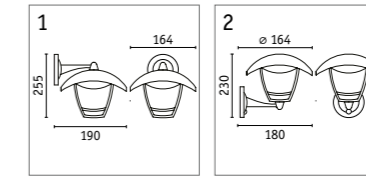

| | |
|----------------------|--------------|
| Material | Metal, glass |
| IP protection | IP44 |
| Voltage | 230 V |
| Dimmability | Yes |
| Technology | E27 |

| Classic | Watt | Lumen | Kelvin | Smart | Insect-friendly | Item |
|-----------------------------|--------------------------------|-------|--------|-------|-----------------|-------|
| 1 Wall luminaire | Depending on the lamp selected | | | | | 94392 |
| 2 Wall luminaire PIR sensor | Depending on the lamp selected | | | | | 94647 |


Classic wall luminaire

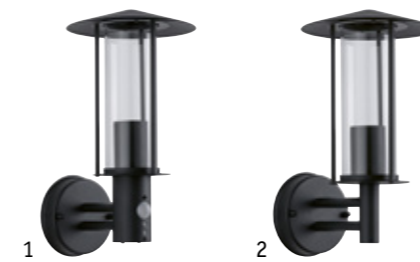

| | |
|----------------------|--------------|
| Material | Metal, glass |
| IP protection | IP44 |
| Voltage | 230 V |
| Dimmability | Yes |
| Technology | E27 |

| Classic | Watt | Lumen | Kelvin | Smart | Insect-friendly | Item |
|-----------------------------|--------------------------------|-------|--------|-------|-----------------|-------|
| 1 Wall luminaire PIR sensor | Depending on the lamp selected | | | | | 94396 |
| 2 Wall luminaire | Depending on the lamp selected | | | | | 94398 |

Classic bollard light




| | |
|----------------------|-----------|
| Material | Aluminium |
| IP protection | IP44 |
| Voltage | 230 V |
| Dimmability | Yes |
| CRI | 80 |
| Technology | E27 |

| Classic | Watt | Lumen | Kelvin | Smart | Insect-friendly | Item |
|---------------|--------------------------------|--------|--------|-------|-----------------|-------|
| Bollard light | Depending on the lamp selected | | | | | 94397 |
| Bollard light | 4.3 W | 420 lm | 2200 K | | | 94737 |



Trian wall luminaire



| | |
|----------------------|-----------|
| Material | Aluminium |
| IP protection | IP44 |
| Voltage | 230 V |
| Dimmability | Yes |
| Technology | GU10 |

Seawater resistant




| Trian | Watt | Lumen | Kelvin | | Smart | Insect-friendly | Item |
|----------------|--------------------------------|-------|--------|--|-----------|-----------------|-----------------|
| Wall luminaire | Depending on the lamp selected | | | | Ready for | | DG 94734 |

Trian wall luminaire & bollard light

- Individually rotating and swivelling luminaire head
- Luminaires with the “seawater-resistant” seal have passed stringent quality tests
- Freely selectable GU10 lamp – use a 2200 K lamp for insect-friendly operation
- When used with a Zigbee lamp, the luminaire will be smart-controllable

Trian bollard light



| | |
|----------------------|-----------|
| Material | Aluminium |
| IP protection | IP44 |
| Voltage | 230 V |
| Dimmability | Yes |
| Technology | GU10 |

Seawater resistant




| Trian | Watt | Lumen | Kelvin | | Smart | Insect-friendly | Item |
|---------------|--------------------------------|-------|--------|--|-----------|-----------------|-----------------|
| Bollard light | Depending on the lamp selected | | | | Ready for | | DG 94735 |



Vintario wall luminaire & bollard light

- Wall and bollard light in one design
- High-quality material

Vintario wall luminaire




| | |
|----------------------|-----------|
| Material | Aluminium |
| IP protection | IP44 |
| Voltage | 230 V |
| Dimmability | Yes |
| Technology | E27 |



| Vintario | Watt | Lumen | Kelvin | Smart | Insect-friendly | Item |
|----------------|--------------------------------|-------|--------|-----------|-----------------|-----------------|
| Wall luminaire | Depending on the lamp selected | | | Ready for | | DG 94757 |

Vintario bollard light




| | |
|----------------------|-----------|
| Material | Aluminium |
| IP protection | IP44 |
| Voltage | 230 V |
| Dimmability | Yes |
| Technology | E27 |



| Vintario | Watt | Lumen | Kelvin | Smart | Insect-friendly | Item |
|---------------|--------------------------------|-------|--------|-----------|-----------------|-----------------|
| Bollard light | Depending on the lamp selected | | | Ready for | | DG 94759 |



Tralia wall luminaire



| | |
|-------------------------|-----------|
| Material | Aluminium |
| IP protection | IP44 |
| Protection class | ☐ |
| Voltage | 230 V |
| Dimmability | Yes |
| Technology | E27 |


Seawater resistant

| Tralia | Watt | Lumen | Kelvin | Smart | Insect-friendly | Item |
|----------------|--------------------------------|-------|--------|-----------|-----------------|-----------------|
| Wall luminaire | Depending on the lamp selected | | | Ready for | | DG 94787 |

Tralia wall luminaire & bollard light

- Luminaires with the “seawater-resistant” seal have passed stringent quality tests
- Freely selectable E27 lamp – use a 2200 K lamp for insect-friendly operation – use a Zigbee lamp for smart control of the luminaire
- Wall and bollard light in one design

Tralia bollard light




| | |
|----------------------|-----------|
| Material | Aluminium |
| IP protection | IP44 |
| Voltage | 230 V |
| Dimmability | Yes |
| Technology | E27 |

Seawater resistant

| Tralia | Watt | Lumen | Kelvin | Smart | Insect-friendly | Item |
|---------------|--------------------------------|-------|--------|-----------|-----------------|-----------------|
| Bollard light | Depending on the lamp selected | | | Ready for | | DG 94788 |



| | |
|------------------|------------|
| Material | Plastic |
| IP protection | IP44 |
| Protection class | ☐ |
| Voltage | 230 V |
| Dimmability | Yes |
| Service life | 30,000 h |
| CRI | 80 |
| Technology | LED module |

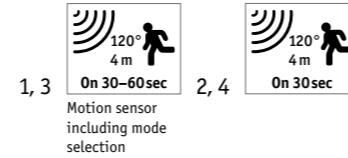

Circula ceiling luminaire


- Modern design in classic colours
- Automatic switching thanks to integrated motion sensor (invisible HF sensor)
- Can also be used as a wall luminaire



1, 2



3, 4




| Circula | Watt | Lumen | Kelvin | ↔ | Smart | Insect-friendly | Item |
|--------------------------------|------|--------|-------------|---|--------|-----------------|----------|
| 1 Ceiling luminaire PIR sensor | 14 W | 880 lm | 3000 K | | | 🦋 | DG 94526 |
| 2 Ceiling luminaire Zigbee | 14 W | 880 lm | 2200-3000 K | | Zigbee | | DG 94525 |
| 3 Ceiling luminaire PIR sensor | 14 W | 880 lm | 3000 K | | | 🦋 | W 94528 |
| 4 Ceiling luminaire Zigbee | 14 W | 880 lm | 2200-3000 K | | Zigbee | | W 94527 |



| | |
|---------------|--------------------|
| Material | Plastic, aluminium |
| IP protection | IP44 |
| Voltage | 230 V |
| Dimmability | Yes |
| Service life | 30,000 h |
| CRI | 90 |
| Technology | LED module |

- 🌊 Seawater resistant
- 🔌 QuickPlug

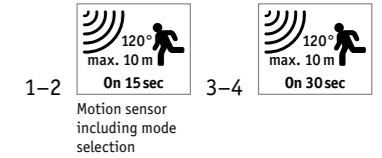

Azalena wall luminaire


- Automatic switching, thanks to integrated motion sensor and dusk sensor
- Exchangeable LED modules
- Luminaires with the “seawater-resistant” seal have passed stringent quality tests
- Exclusive Paulmann design



1, 3




2, 4



| Azalena | Watt | Lumen | Kelvin | ↔ | Smart | Insect-friendly | Item |
|-----------------------------------|-------|--------|-------------|---|--------|-----------------|----------|
| 1 Wall luminaire HF sensor | 8.5 W | 700 lm | 3000 K | | | | DG 94840 |
| 2 Wall luminaire HF sensor | 8.5 W | 700 lm | 3000 K | | | | W 94841 |
| 3 Wall luminaire Zigbee HF sensor | 8.5 W | 700 lm | 2200-3000 K | | Zigbee | 🦋 | DG 94842 |
| 4 Wall luminaire Zigbee HF sensor | 8.5 W | 700 lm | 2200-3000 K | | Zigbee | 🦋 | W 94843 |



| | |
|------------------|------------|
| Material | Plastic |
| IP protection | IP44 |
| Protection class | □ |
| Voltage | 230 V |
| Dimmability | No |
| Service life | 30,000 h |
| CRI | 80 |
| Technology | LED module |

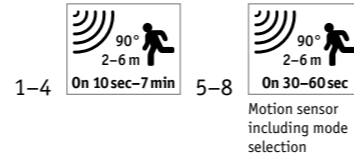

Lamina wall panel luminaire

- Attractive outdoor luminaires with uniform light coverage and a backlight effect
- For cosy and insect-friendly evening light
- Basic function 20% brightness with insect-friendly 2200 K after nightfall




| Lamina | Watt | Lumen | Kelvin | ☼ | Smart | Insect-friendly | Item |
|--|--------|---------|-------------|---|-------|-----------------|---------|
| 1 Panel luminaire round PIR sensor | 14.5 W | 1200 lm | 3000 K | | | | W 94662 |
| 2 Panel luminaire rectangular PIR sensor | 14.5 W | 950 lm | 3000 K | | | | W 94663 |
| 3 Panel luminaire round PIR sensor | 14.5 W | 1200 lm | 3000 K | | | | B 94664 |
| 4 Panel luminaire rectangular PIR sensor | 14.5 W | 950 lm | 3000 K | | | | B 94665 |
| 5 Panel luminaire round PIR sensor | 14 W | 1150 lm | 2200-3000 K | | | ☼ | W 94706 |
| 6 Panel luminaire rectangular PIR sensor | 14 W | 920 lm | 2200-3000 K | | | ☼ | W 94707 |
| 7 Panel luminaire round PIR sensor | 14 W | 1150 lm | 2200-3000 K | | | ☼ | B 94708 |
| 8 Panel luminaire rectangular PIR sensor | 14 W | 920 lm | 2200-3000 K | | | ☼ | B 94709 |




| | |
|---------------|------------|
| Material | Aluminium |
| IP protection | IP44 |
| Voltage | 230 V |
| Dimmability | No |
| Service life | 30,000 h |
| CRI | 80 |
| Technology | LED module |

- Seawater resistant
- QuickPlug



Akena wall luminaire

- Automatic switching, thanks to integrated motion sensor and dusk sensor
- Exchangeable LED modules
- Luminaires with the “seawater-resistant” seal have passed stringent quality tests
- Gold light version: gold light colour temperature for insect-friendly lighting
- Exclusive Paulmann design




| Akena | Watt | Lumen | Kelvin | ☼ | Smart | Insect-friendly | Item |
|-----------------------------|--------|--------|--------|---|-------|-----------------|----------|
| 1 Wall luminaire PIR sensor | 11 W | 800 lm | 3000 K | | | | DG 94838 |
| 2 Wall luminaire PIR sensor | 10.8 W | 800 lm | 2200 K | | | ☼ | DG 94839 |



| | |
|---------------|------------|
| Material | Plastic |
| IP protection | IP44 |
| Voltage | 230 V |
| Dimmability | No |
| Service life | 30,000 h |
| CRI | 80 |
| Technology | LED module |

- Seawater resistant
- QuickPlug




Anela wall luminaire

- Automatic switching thanks to integrated motion sensor
- Exchangeable LED modules
- Tunable Warm version: Insect-friendly illumination with colour temperature in the gold light spectrum
- Luminaires with the “seawater-resistant” seal have passed stringent quality tests
- Exclusive Paulmann design



1, 2



| Anela | Watt | Lumen | Kelvin | ↘ | Smart | Insect-friendly | Item |
|-----------------------------|--------|-------|--------|---|-------|-----------------|----------|
| 1 Wall luminaire PIR sensor | 12.5 W | 700lm | 3000 K | | | | DG 94836 |
| 2 Wall luminaire PIR sensor | 12W | 700lm | 2200K | | | 🌿 | DG 94837 |




| | |
|------------------|--------------------|
| Material | Plastic, aluminium |
| IP protection | IP65 |
| Protection class | ☐ |
| Voltage | 230 V |
| Dimmability | Yes |
| Service life | 30,000 h |
| CRI | 90 |
| Technology | LED module |

- Seawater resistant

Kikolo wall luminaire

- Optional accessories available for additional glare-reduction
- Exchangeable LED modules
- Swivelling luminaire head
- Rod length: 0.4 m
- Various beam angles for the targeted illumination of façade sections
- Luminaires with the “seawater-resistant” seal have passed stringent quality tests
- Exclusive Paulmann design



| Kikolo | Watt | Lumen | Kelvin | ↘ | Smart | Insect-friendly | Item |
|-----------------------|-------|-------|-------------|-----|--------|-----------------|----------|
| Wall luminaire Zigbee | 6.2 W | 440lm | 3000–6500 K | | Zigbee | | DG 94773 |
| Wall luminaire | 8 W | 500lm | 3000 K | 60° | | | DG 94778 |
| Wall luminaire Zigbee | 6.2 W | 400lm | 2200 K | 80° | Zigbee | 🌿 | DG 94772 |




| | |
|------------------|------------|
| Material | Aluminium |
| IP protection | IP44 |
| Protection class | ☐ |
| Voltage | 230 V |
| Dimmability | No |
| Service life | 30,000 h |
| CRI | 80 |
| Technology | LED module |

Seawater resistant

Levka wall luminaire

- Wall luminaire with dual light emission: downward and onto the wall
- Luminaires with the “seawater-resistant” seal have passed stringent quality tests
- Exclusive Paulmann design



| Levka | Watt | Lumen | Kelvin | ☐ | Smart | Insect-friendly | Item |
|----------------|--------|--------|--------|---|-------|-----------------|-----------------|
| Wall luminaire | 13.5 W | 110 lm | 3000 K | | | | DG 94786 |




| | |
|---------------|------------|
| Material | Aluminium |
| IP protection | IP44 |
| Voltage | 230 V |
| Dimmability | No |
| Service life | 30,000 h |
| CRI | 80 |
| Technology | LED module |

Seawater resistant

Stan wall luminaire

- Filigree rod look
- Luminaires with the “seawater-resistant” seal have passed stringent quality tests




| Stan | Watt | Lumen | Kelvin | ☐ | Smart | Insect-friendly | Item |
|------------------|--------|--------|--------|---|-------|-----------------|-----------------|
| 1 Wall luminaire | 9 W | 220 lm | 3000 K | | | | DG 94743 |
| 2 Wall luminaire | 11.5 W | 300 lm | 3000 K | | | | DG 94742 |



| | |
|---------------|------------|
| Material | Aluminium |
| IP protection | IP44 |
| Voltage | 230 V |
| Dimmability | No |
| Service life | 30,000 h |
| CRI | 80 |
| Technology | LED module |

Sphea wall luminaire

- Wall luminaires with diffused light for uniform light distribution and glare-free illumination
- Suitable for professional lighting design



| Sphea | Watt | Lumen | Kelvin | ✧ | Smart | Insect-friendly | Item |
|----------------|------|--------|--------|---|-------|-----------------|-----------------|
| Wall luminaire | 10W | 950 lm | 3000K | | | | DG 94401 |




| | |
|---------------|----------------|
| Material | Metal, plastic |
| IP protection | IP44 |
| Voltage | 230 V |
| Dimmability | No |
| Service life | 30,000 h |
| CRI | 80 |
| Technology | E27 |



Tubs wall luminaires

- For decorative lighting effects on house walls




| Tubs | Watt | Lumen | Kelvin | ✧ | Smart | Insect-friendly | Item |
|-----------------------------|--------------------------------|-------|--------|---|-------|-----------------|----------------|
| 1 Wall luminaire PIR sensor | Depending on the lamp selected | | | | | | G 94648 |
| 2 Wall luminaire | Depending on the lamp selected | | | | | | G 94649 |



Wall luminaires

- Luminaires with the “Seawater-Resistant” seal have passed stringent quality tests
- Exclusive Paulmann design

Mesana wall luminaire




| | |
|----------------------|------------|
| Material | Aluminium |
| IP protection | IP44 |
| Voltage | 230 V |
| Dimmability | No |
| Service life | 30,000 h |
| CRI | 80 |
| Technology | LED module |

Seawater resistant

| Mesana | Watt | Lumen | Kelvin | | Smart | Insect-friendly | Item |
|----------------|------|--------|--------|--|-------|-----------------|-------|
| Wall luminaire | 12 W | 800 lm | 3000 K | | | | 94765 |

Pekana wall luminaire




| | |
|----------------------|------------|
| Material | Aluminium |
| IP protection | IP44 |
| Voltage | 230 V |
| Dimmability | No |
| Service life | 30,000 h |
| CRI | 80 |
| Technology | LED module |

Seawater resistant

| Pekana | Watt | Lumen | Kelvin | | Smart | Insect-friendly | Item |
|----------------|---------|--------|--------|--|-------|-----------------|-------|
| Wall luminaire | 2 x 6 W | 480 lm | 3000 K | | | | 94766 |

Batona bollard light




| | |
|----------------------|------------|
| Material | Aluminium |
| IP protection | IP44 |
| Voltage | 230 V |
| Dimmability | No |
| Service life | 30,000 h |
| CRI | 80 |
| Technology | LED module |

Seawater resistant

| Batona | Watt | Lumen | Kelvin | | Smart | Insect-friendly | Item |
|----------------|------|---------|--------|--|-------|-----------------|-------|
| Wall luminaire | 12 W | 1000 lm | 3000 K | | | | 94767 |




| | |
|------------------|------------|
| Material | Plastic |
| IP protection | IP44 |
| Protection class | □ |
| Voltage | 230 V |
| Dimmability | No |
| Service life | 30,000 h |
| CRI | 80 |
| Technology | LED module |



Ikosea wall luminaire

- Space-saving thanks to rectangular design
- For cosy and insect-friendly evening light
- Automatic switching thanks to integrated motion sensor (invisible HF sensor)



| Ikosea | Watt | Lumen | Kelvin | ↔ | Smart | Insect-friendly | Item |
|-----------------------------|-------|--------|-------------|---|--------|-----------------|-----------------|
| 1 Wall luminaire Zigbee | 4.4 W | 350 lm | 2200–3000 K | | Zigbee | | DG 94516 |
| 2 Wall luminaire PIR sensor | 4.4 W | 350 lm | 3000 K | | | | DG 94517 |





| | |
|------------------|------------|
| Material | Plastic |
| IP protection | IP44 |
| Protection class | □ |
| Voltage | 230 V |
| Dimmability | No |
| Service life | 30,000 h |
| CRI | 80 |
| Technology | LED module |

Seawater resistant



Platomo wall luminaire

- For decorative lighting effects on house walls
- Economical LED technology
- Luminaires with the “seawater-resistant” seal have passed stringent quality tests

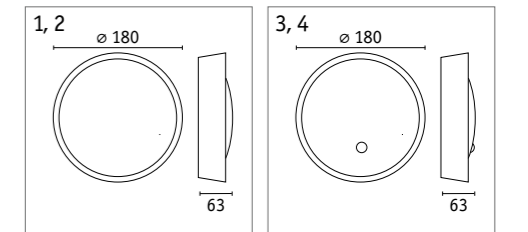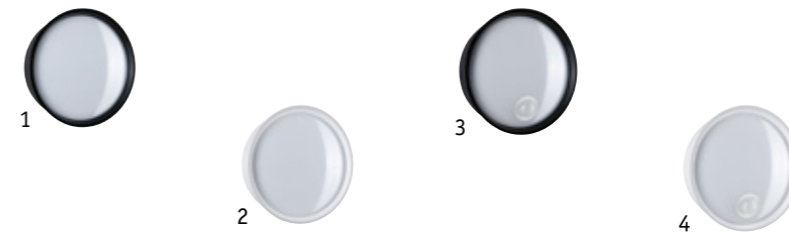


| Platomo | Watt | Lumen | Kelvin | ↔ | Smart | Insect-friendly | Item |
|-----------------------------|--------|---------|--------|---|-------|-----------------|----------------|
| 1 Wall luminaire | 14.5 W | 1200 lm | 3000 K | | | | B 94696 |
| 2 Wall luminaire | 14.5 W | 1200 lm | 3000 K | | | | W 94697 |
| 3 Wall luminaire PIR sensor | 14.5 W | 1200 lm | 3000 K | | | | B 94698 |
| 4 Wall luminaire PIR sensor | 14.5 W | 1200 lm | 3000 K | | | | W 94699 |




| | |
|---------------|------------|
| Material | Aluminium |
| IP protection | IP44 |
| Voltage | 230 V |
| Dimmability | No |
| Service life | 30,000 h |
| CRI | 80 |
| Technology | LED module |

Seawater resistant



Puka wall luminaire


- Luminaires with the “seawater-resistant” seal have passed stringent quality tests
- Low energy consumption thanks to state-of-the-art LED technology
- Motion sensor variant: Easy setting options for switch-off delay time and brightness limit value using the potentiometer dial on the luminaire

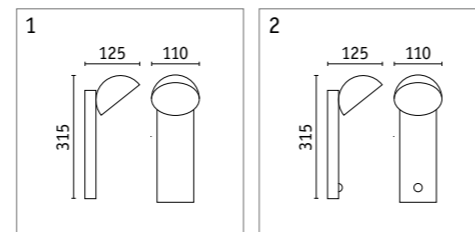

| Puka | Watt | Lumen | Kelvin | | Smart | Insect-friendly | Item |
|----------------------|-------|--------|--------|--|-------|-----------------|-------|
| 1 Wall luminaire | 8.5 W | 460 lm | 3000 K | | | | 94738 |
| 2 Wall luminaire PIR | 8.5 W | 460 lm | 3000 K | | | | 94739 |



| | |
|------------------|------------|
| Material | Plastic |
| IP protection | IP44 |
| Protection class | |
| Voltage | 230 V |
| Dimmability | No |
| Service life | 30,000 h |
| CRI | 80 |
| Technology | LED module |




Sheera wall luminaire

- Numbers and letters for use as a house number luminaire included



1-3

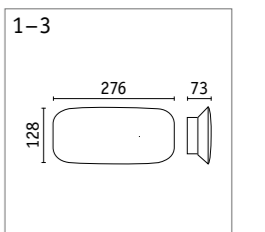

| Sheera | Watt | Lumen | Kelvin | | Smart | Insect-friendly | Item |
|--------------------------|-------|--------|-------------|--|--------|-----------------|-------|
| 1 House number HF sensor | 6.5 W | 460 lm | 3000 K | | | | 94506 |
| 2 House number Zigbee | 6.5 W | 430 lm | 2200-3000 K | | Zigbee | | 94507 |
| 3 House number Zigbee | 6.5 W | 430 lm | 3000-6500 K | | Zigbee | | 94508 |




Wall luminaires

- High-quality 230V outdoor wall luminaires with exceptional design
- Wall luminaires for uniform light distribution
- Suitable for professional lighting design




Lantea wall luminaire



| | |
|----------------------|-----------|
| Material | Aluminium |
| IP protection | IP44 |
| Voltage | 230 V |
| Dimmability | No |
| Technology | E27 |

| Lantea | Watt | Lumen | Kelvin | ☒ | Smart | Insect-friendly | Item |
|----------------|--------------------------------|-------|--------|---|-------|-----------------|----------|
| Wall luminaire | Depending on the lamp selected | | | | | | DG 94399 |

Signea wall luminaire




| | |
|----------------------|------------|
| Material | Aluminium |
| IP protection | IP44 |
| Voltage | 230 V |
| Dimmability | No |
| Service life | 30,000 h |
| CRI | 80 |
| Technology | LED module |

| Signea | Watt | Lumen | Kelvin | ☒ | Smart | Insect-friendly | Item |
|----------------|------|--------|--------|---|-------|-----------------|----------|
| Wall luminaire | 4 W | 170 lm | 3000 K | | | | DG 94400 |




Circea wall luminaire



| | |
|-------------------------|------------|
| Material | Aluminium |
| IP protection | IP44 |
| Protection class | ☐ |
| Voltage | 230 V |
| Dimmability | No |
| Service life | 30,000 h |
| CRI | 90 |
| Technology | LED module |

| Circea | Watt | Lumen | Kelvin | ☒ | Smart | Insect-friendly | Item |
|----------------|------|-------|--------|---|-------|-----------------|-----------------|
| Wall luminaire | 4 W | 90 lm | 3000 K | | | | DG 94409 |


Cliff wall luminaire



| | |
|----------------------|------------|
| Material | Aluminium |
| IP protection | IP44 |
| Voltage | 230 V |
| Dimmability | No |
| Service life | 30,000 h |
| CRI | 80 |
| Technology | LED module |

| Cliff | Watt | Lumen | Kelvin | ☒ | Smart | Insect-friendly | Item |
|----------------|-------|--------|--------|---|-------|-----------------|-----------------|
| Wall luminaire | 9.5 W | 300 lm | 3000 K | | | | DG 94733 |

Renga wall luminaire




| | |
|----------------------|------------|
| Material | Aluminium |
| IP protection | IP44 |
| Voltage | 230 V |
| Dimmability | No |
| Service life | 30,000 h |
| CRI | 80 |
| Technology | LED module |

Seawater resistant

| Renga | Watt | Lumen | Kelvin | ☒ | Smart | Insect-friendly | Item |
|----------------|------|--------|--------|---|-------|-----------------|-----------------|
| Wall luminaire | 5 W | 270 lm | 3000 K | | | | DG 94720 |

Tube wall luminaire




| | |
|----------------------|---------|
| Material | Plastic |
| IP protection | IP54 |
| Voltage | 230 V |
| Dimmability | Yes |
| Technology | E27 |

| Tube | Watt | Lumen | Kelvin | ☒ | Smart | Insect-friendly | Item |
|----------------|--------------------------------|-------|--------|---|-------|-----------------|-----------------|
| Wall luminaire | Depending on the lamp selected | | | | | | DG 94186 |




Wall wall luminaire



| | |
|----------------------|-----------|
| Material | Aluminium |
| IP protection | IP44 |
| Voltage | 230V |
| Dimmability | Yes |
| Technology | E27 |

| Wall | Watt | Lumen | Kelvin | Smart | Insect-friendly | Item |
|----------------|--------------------------------|-------|--------|-----------|-----------------|-------|
| Wall luminaire | Depending on the lamp selected | | | Ready for | | 94282 |

Lanka wall luminaire



| | |
|----------------------|-----------|
| Material | Aluminium |
| IP protection | IP44 |
| Voltage | 230V |
| Dimmability | Yes |
| Technology | E27 |


| Lanka | Watt | Lumen | Kelvin | Smart | Insect-friendly | Item |
|----------------|--------------------------------|-------|--------|-----------|-----------------|-------|
| Wall luminaire | Depending on the lamp selected | | | Ready for | | 94736 |



| | |
|----------------------|------------|
| Material | Aluminium |
| IP protection | IP44 |
| Voltage | 230V |
| Dimmability | No |
| Service life | 30,000 h |
| CRI | 80 |
| Technology | LED module |

Wall recessed wall luminaire

- Clever recessed wall luminaire for orientation lighting around the house
- Incl. mounting box for safe installation and removal for subsequent maintenance

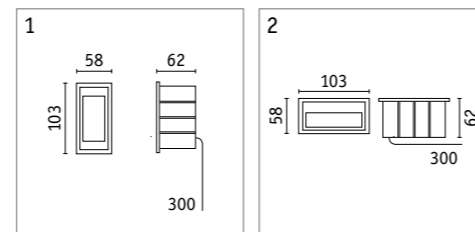

| Wall | Watt | Lumen | Kelvin | Smart | Insect-friendly | Item |
|---------------------------|------|-------|--------|-------|-----------------|-----------------|
| 1 Recessed wall luminaire | 4W | 30lm | 3000K | | | DG 94382 |
| 2 Recessed wall luminaire | 4W | 30lm | 3000K | | | DG 94383 |




| | |
|----------------------|-----------|
| Material | Aluminium |
| IP protection | IP44 |
| Voltage | 230V |
| Dimmability | Yes |
| Technology | GU10 |

Seawater resistant

Colum wall luminaire

- Luminaires with single or double light emission (uplight and downlight)
- Luminaires with the “seawater-resistant” seal have passed stringent quality tests
- Freely selectable GU10 lamp – use a 2200 K lamp for insect-friendly operation
- When used with a Zigbee lamp, the luminaire will be smart-controllable

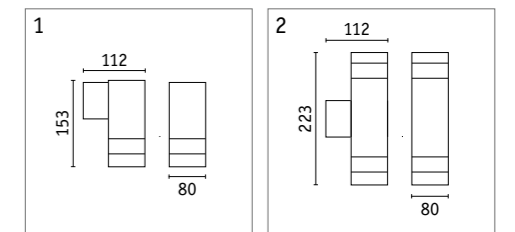


| Colum | Watt | Lumen | Kelvin | Smart | Insect-friendly | Item |
|---------------------------|--------------------------------|-------|--------|-----------|-----------------|-----------------|
| 1 Wall luminaire 1 x GU10 | Depending on the lamp selected | | | Ready for | | DG 94718 |
| 2 Wall luminaire 2 x GU10 | Depending on the lamp selected | | | Ready for | | DG 94719 |




| | |
|-------------------------|------------|
| Material | Aluminium |
| IP protection | IP44 |
| Protection class | □ |
| Voltage | 230 V |
| Dimmability | No |
| Service life | 30,000 h |
| CRI | 80 |
| Technology | LED module |

Rotating wall luminaire





Flexible beam angle

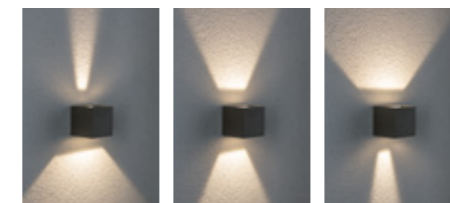

Cybo wall luminaire

- Partially rotating light module for variable light deflection (18002 and 18003)
- The colour temperature is individually and infinitely adjustable with tunable white light control
- RGBW function offers a free choice of light colour
- Compatible with various smartphone systems based on the Zigbee radio standard
- Luminaires with the “seawater-resistant” seal have passed stringent quality tests

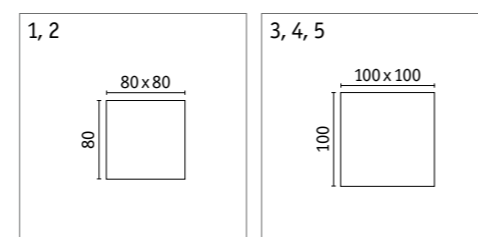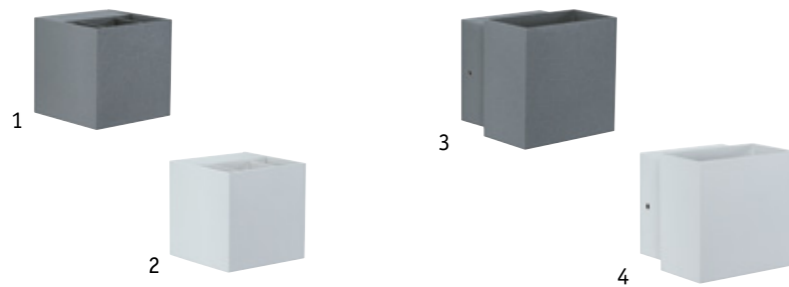


| Cybo | Watt | Lumen | Kelvin | ∠ | Smart | Insect-friendly | Item |
|-------------------------|-----------|------------|-------------|-----|--------|-----------------|----------------|
| 1 Wall luminaire | 2 x 3.5 W | 2 x 213 lm | 2700 K | 40° | | | G 18000 |
| 2 Wall luminaire | 2 x 3.5 W | 2 x 213 lm | 2700 K | 40° | | | W 18001 |
| 3 Wall luminaire | 2 x 3.5 W | 2 x 200 lm | 2700 K | 85° | | | G 18002 |
| 4 Wall luminaire | 2 x 3.5 W | 2 x 200 lm | 2700 K | 85° | | | W 18003 |
| 5 Wall luminaire Zigbee | 2 x 2.5 W | 2 x 150 lm | 2700–6500 K | | Zigbee | | G 94847 |



| | |
|----------------------|------------|
| Material | Aluminium |
| IP protection | IP44 |
| Voltage | 230 V |
| Dimmability | No |
| Service life | 30,000 h |
| CRI | 80 |
| Technology | LED module |

Flame surface-mounted wall luminaire

- Direct wall mounting for precise and sharp light effects
- Improves safety by illuminating house walls or entrance areas
- Robust and, thanks to efficient LED technology, very low-maintenance and long-lasting

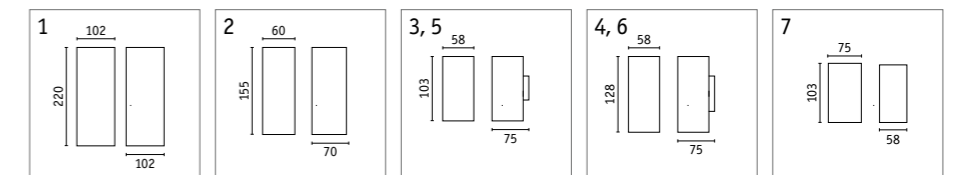


| Flame | Watt | Lumen | Kelvin | ∠ | Smart | Insect-friendly | Item |
|----------------------------------|-----------|------------|--------|------|-------|-----------------|-----------------|
| 1 Surface-mounted wall luminaire | 2 x 5.8 W | 2 x 540 lm | 3000 K | 105° | | | DG 94325 |
| 2 Surface-mounted wall luminaire | 2 x 2.8 W | 2 x 290 lm | 3000 K | 105° | | | DG 94326 |
| 3 Surface-mounted wall luminaire | 3.8 W | 320 lm | 3000 K | 75° | | | DG 94327 |
| 4 Surface-mounted wall luminaire | 2 x 3.5 W | 2 x 260 lm | 3000 K | 75° | | | DG 94328 |
| 5 Surface-mounted wall luminaire | 3.8 W | 320 lm | 3000 K | 75° | | | W 94329 |
| 6 Surface-mounted wall luminaire | 2 x 3.5 W | 2 x 260 lm | 3000 K | 75° | | | W 94330 |
| 7 Surface-mounted wall luminaire | 4 W | 265 lm | 2200 K | 75° | | | W 94711 |



| | |
|---------------|-------------------------|
| Material | Stainless steel brushed |
| IP protection | IP44 |
| Voltage | 230 V |
| Dimmability | Yes |
| Technology | 2 x GU10 |

Flame surface-mounted wall luminaire


- For attractive lighting effects
- Improves safety by illuminating house walls or entrance areas
- Robust and, thanks to efficient LED technology, very low-maintenance and long-lasting



| Flame | Watt | Lumen | Kelvin | ↔ | Smart | Insect-friendly | Item |
|--------------------------------|--------------------------------|-------|--------|---|-----------|-----------------|-------|
| Surface-mounted wall luminaire | Depending on the lamp selected | | | | Ready for | | 94331 |




| | |
|---------------|------------|
| Material | Metal |
| IP protection | IP44 |
| Voltage | 230 V |
| Dimmability | No |
| Service life | 30,000 h |
| CRI | 80 |
| Technology | LED module |



Wall Lamp

- Very bright 230V wall luminaires with diffused light for uniform light distribution and glare-free illumination
- Motion sensor functions can be adjusted via the pushbutton switch
- Suitable for professional lighting design

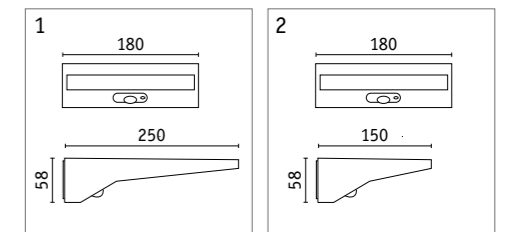


| Wall Lamp | Watt | Lumen | Kelvin | ↔ | Smart | Insect-friendly | Item |
|------------------------|--------|--------|--------|---|-------|-----------------|-------|
| 1 Wall Lamp PIR sensor | 10.5 W | 680 lm | 3000 K | | | | 94332 |
| 2 Wall Lamp PIR sensor | 7.4 W | 400 lm | 3000 K | | | | 94333 |



| | |
|---------------|-------|
| Material | Wood |
| IP protection | IP44 |
| Voltage | 230 V |
| Dimmability | Yes |
| Technology | E27 |

Timba bollard light

- Distinctive colour and material combinations for a super modern look
- Optional Smart Home lamps

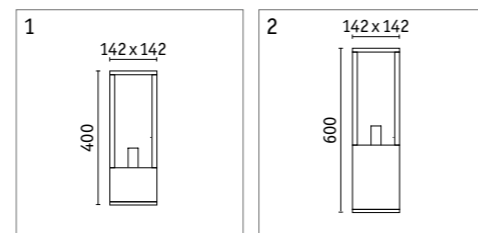


| Timba | Watt | Lumen | Kelvin | ☼ | Smart | Insect-friendly | Item |
|-----------|--------------------------------|-------|--------|---|-----------|-----------------|-----------------|
| 1 Bollard | Depending on the lamp selected | | | | Ready for | | WD 94675 |
| 2 Bollard | Depending on the lamp selected | | | | Ready for | | WD 94676 |



| | |
|---------------|------------|
| Material | Wood |
| IP protection | IP44 |
| Voltage | 230 V |
| Dimmability | No |
| Service life | 15,000 h |
| CRI | 80 |
| Technology | LED module |

Trabia bollard light

- Distinctive colour and material combinations for a super modern look
- Optional Smart Home lamps

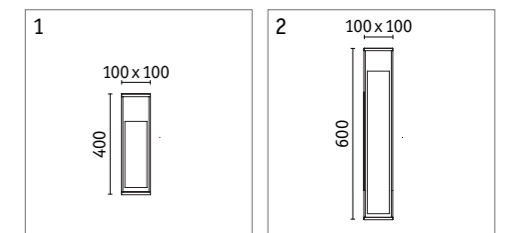


| Trabia | Watt | Lumen | Kelvin | ☼ | Smart | Insect-friendly | Item |
|-----------|-------|--------|--------|-----|-----------|-----------------|-----------------|
| 1 Bollard | 3.5 W | 230 lm | 3000 K | 38° | Ready for | | WD 94677 |
| 2 Bollard | 3.5 W | 230 lm | 3000 K | 38° | Ready for | | WD 94678 |



| | |
|---------------|------------|
| Material | Aluminium |
| IP protection | IP44 |
| Voltage | 230 V |
| Dimmability | Yes |
| Service life | 30,000 h |
| CRI | 90 |
| Technology | LED module |

Plate bollard

- Luminaire with 360-degree, downward directed light emission
- Tunable white light control for continuous and customised adjustment of the colour temperature
- RGBW function offers a free choice of light colour




| Plate | Watt | Lumen | Kelvin | ↔ | Smart | Insect-friendly | Item |
|---------|-------|--------|-------------|---|-------|-----------------|----------|
| Bollard | 5.5 W | 280 lm | 2200–3000 K | | | | DG 94755 |
| Bollard | 5 W | 200 lm | 3000–6500 K | | | | DG 94756 |



| | |
|---------------|------------|
| Material | Aluminium |
| IP protection | IP65 |
| Voltage | 230 V |
| Dimmability | No |
| Service life | 30,000 h |
| CRI | 90 |
| Technology | LED module |

Ivo bollard

- Ivo bollard light with distinctive light emission
- Suitable for professional lighting design





| Ivo | Watt | Lumen | Kelvin | ↔ | Smart | Insect-friendly | Item |
|---------|-------|--------|--------|---|-------|-----------------|---------|
| Bollard | 5.5 W | 150 lm | 3000 K | | | | G 94380 |



| | |
|---------------|------------|
| Material | Aluminium |
| IP protection | IP44 |
| Voltage | 230 V |
| Dimmability | No |
| Service life | 30,000 h |
| CRI | 80 |
| Technology | LED module |

Dobla bollard

- High-quality bollard light with diffused light emission for uniform light distribution on two sides and glare-free illumination
- Suitable for professional lighting design

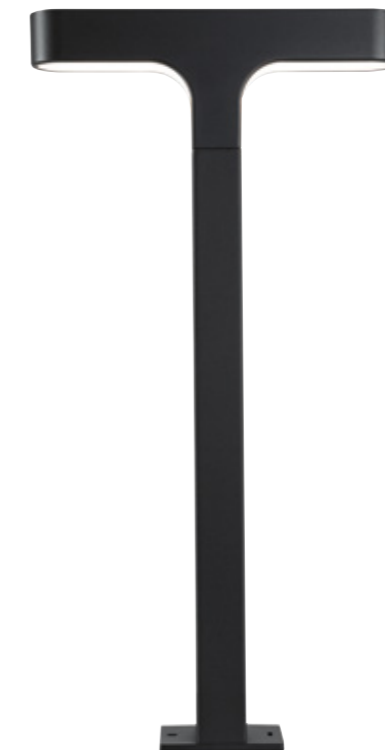

| Dobla | Watt | Lumen | Kelvin | ↔ | Smart | Insect-friendly | Item |
|---------|-------|--------|--------|---|-------|-----------------|-----------------|
| Bollard | 8.5 W | 290 lm | 3000 K | | | | DG 94405 |



| | |
|------------------|--------------------------|
| Material | Stainless steel, plastic |
| IP protection | IP67 |
| Protection class | ☐ |
| Voltage | 230 V |
| Dimmability | No |
| Service life | 30,000 h |
| CRI | 80 |
| Technology | LED module |

Floor in-ground luminaire

- 230V in-ground luminaires with decorative lighting effects for orientation light from ground level
- Optional decorative cover for special lighting effects
- Max. load capacity of 500 kg
- Wall box included for safe installation and removal for maintenance



| Floor | Watt | Lumen | Kelvin | ∠ | Smart | Insect-friendly | Item |
|-----------------------------------|-------|-------|--------|------|-------|-----------------|-------|
| 1 Square in-ground luminaire | 2 W | 60 lm | 3000 K | 120° | | | 94366 |
| 2 Deko Square in-ground luminaire | 2 W | 20 lm | 3000 K | 120° | | | 94364 |
| 3 Round in-ground luminaire | 2 W | 60 lm | 3000 K | 120° | | | 94365 |
| 4 Round in-ground luminaire | 2.2 W | 60 lm | 2200 K | | | ☑ | 94726 |
| 5 Deko Round in-ground luminaire | 2.2 W | 15 lm | 2200 K | | | ☑ | 94727 |
| 6 Deko Round in-ground luminaire | 2 W | 20 lm | 3000 K | 120° | | | 94363 |



| | |
|---------------|------------|
| Material | Aluminium |
| IP protection | IP67 |
| Voltage | 230 V |
| Dimmability | No |
| Service life | 30,000 h |
| CRI | 80 |
| Technology | LED module |

Vanea in-ground luminaire

- LED lamp (non-replaceable) included in delivery
- Rustproof, waterproof and dustproof – it provides light in all weather conditions




| Vanea | Watt | Lumen | Kelvin | ∠ | Smart | Insect-friendly | Item |
|----------------------------|--------|--------|--------|-----|-------|-----------------|-------|
| 1 Recessed floor luminaire | 3.5 W | 160 lm | 3000 K | 93° | | | 94748 |
| 2 Recessed floor luminaire | 15.5 W | 800 lm | 3000 K | 65° | | | 94749 |



Floor in-ground luminaire

- Dust-tight and waterproof for temporary immersion (IP67)
- Direct operation with 230 V
- Max. load capacity of 500 kg


Floor in-ground luminaire



| | |
|----------------------|--------------------------|
| Material | Stainless steel, plastic |
| IP protection | IP65 |
| Voltage | 230 V |
| Dimmability | No |
| Service life | 15,000 h |
| CRI | 80 |
| Technology | GU10 |

| Floor | Watt | Lumen | Kelvin | ☼ | Smart | Insect-friendly | Item |
|---------------------------|-------|--------|--------|-----|-------|-----------------|-------|
| In-ground luminaire round | 4.3 W | 320 lm | 2200 K | 38° | | | 94732 |


Floor in-ground luminaire

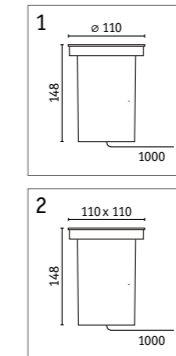

| | |
|----------------------|------------|
| Material | Aluminium |
| IP protection | IP67 |
| Voltage | 230 V |
| Dimmability | Yes |
| Service life | 25,000 h |
| CRI | 80 |
| Technology | LED module |

| Floor | Watt | Lumen | Kelvin | ☼ | Smart | Insect-friendly | Item |
|--|-------|--------|-------------|------|--------|-----------------|-------|
| 1 In-ground luminaire round Zigbee | 4.9 W | 300 lm | 2700–6500 K | 120° | Zigbee | | 94845 |
| 2 In-ground luminaire rectangular Zigbee | 4.9 W | 300 lm | 2700–6500 K | 120° | Zigbee | | 94846 |

Floor in-ground luminaire

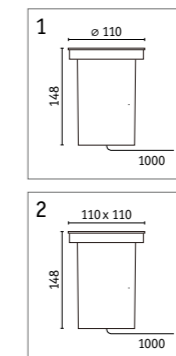

| | |
|----------------------|-----------------|
| Material | Stainless steel |
| IP protection | IP67 |
| Voltage | 230 V |
| Dimmability | No |
| Service life | 15,000 h |
| CRI | 80 |
| Technology | GU10 |


| Floor | Watt | Lumen | Kelvin | ☼ | Smart | Insect-friendly | Item |
|-----------------------------------|-------|--------|--------|-----|-------|-----------------|-------|
| 1 In-ground luminaire rectangular | 3.5 W | 230 lm | 3000 K | 38° | | | 93993 |
| 2 In-ground luminaire round | 3.5 W | 230 lm | 3000 K | 38° | | | 93992 |



Floor in-ground luminaire

- Dust-tight and waterproof for temporary immersion (IP67)
- Direct operation with 230 V
- Max. load capacity of 500 kg


Floor in-ground luminaire



| | |
|----------------------|------------|
| Material | Metal |
| IP protection | IP67 |
| Voltage | 230 V |
| Dimmability | No |
| Service life | 20,000 h |
| CRI | 80 |
| Technology | LED module |

| Floor | Watt | Lumen | Kelvin | ↗ | Smart | Insect-friendly | Item |
|---------------------------|-------|-------|--------|------|-------|-----------------|-------|
| In-ground luminaire round | 1.2 W | 20 lm | 2700 K | 120° | | | 93788 |


Floor in-ground luminaire



| | |
|----------------------|-----------------|
| Material | Stainless steel |
| IP protection | IP65 |
| Voltage | 230 V |
| Dimmability | Yes |
| Technology | GU10 |

| Floor | Watt | Lumen | Kelvin | ↗ | Smart | Insect-friendly | Item |
|---------------------------|--------------------------------|-------|--------|---|-----------|-----------------|-------|
| In-ground luminaire round | Depending on the lamp selected | | | | Ready for | | 94390 |

Floor in-ground luminaire



| | |
|----------------------|------------|
| Material | Aluminium |
| IP protection | IP67 |
| Voltage | 230 V |
| Dimmability | No |
| Service life | 30,000 h |
| CRI | 90 |
| Technology | LED module |


| Floor | Watt | Lumen | Kelvin | ↗ | Smart | Insect-friendly | Item |
|----------------------------|-------|--------|--------|---|-------|-----------------|-------|
| 1 Recessed floor luminaire | 5.5 W | 320 lm | 3000 K | | | | 94378 |
| 2 Recessed floor luminaire | 11 W | 680 lm | 3000 K | | | | 94377 |



| | |
|---------------|------------|
| Material | Metal |
| IP protection | IP67 |
| Voltage | 230 V |
| Dimmability | Yes |
| Service life | 30,000 h |
| CRI | 90 |
| Technology | LED module |

Ocos wall washer

- Wall washer as a recessed floor luminaire for optimal illumination of walls and plants
- Robust metal housing
- Two cable guides for the easy installation of multiple luminaires
- Installation housing included






| Ocos | Watt | Lumen | Kelvin | ↘ | Smart | Insect-friendly | Item |
|-------------|-------|--------|--------|-----|-------|-----------------|-----------------|
| Wall washer | 6.2 W | 190 lm | 3000 K | 75° | | | DG 94672 |



| | |
|---------------|------------|
| Material | Metal |
| IP protection | IP67 |
| Voltage | 230 V |
| Dimmability | Yes |
| Service life | 30,000 h |
| CRI | 80 |
| Technology | LED module |

Durea in-ground luminaire

- Recessed floor luminaire for the effective illumination of structures and plants
- Robust metal housing
- Two cable guides for the easy installation of multiple luminaires
- Installation housing included




| Durea | Watt | Lumen | Kelvin | ↘ | Smart | Insect-friendly | Item |
|----------------------------|--------|---------|--------|-----|-------|-----------------|-------|
| 1 Recessed floor luminaire | 8 W | 530 lm | 3000 K | 75° | | | 94654 |
| 2 Recessed floor luminaire | 12.5 W | 870 lm | 3000 K | 60° | | | 94655 |
| 3 Recessed floor luminaire | 15 W | 1040 lm | 3000 K | 80° | | | 94656 |



| | |
|---------------|------------|
| Material | Metal |
| IP protection | IP67 |
| Voltage | 230 V |
| Dimmability | Yes |
| Service life | 30,000 h |
| CRI | 90 |
| Technology | LED module |

Ito wall washer


- Asymmetrical beam angle for optimal illumination of wide objects
- Calculated lens for best light quality
- Robust metal housing



| Ito | Watt | Lumen | Kelvin | ↗ | Smart | Insect-friendly | Item |
|-------------|------|--------|--------|-----|-------|-----------------|-----------------|
| Wall washer | 6 W | 200 lm | 3000 K | 70° | | | DG 94671 |






| | |
|------------------|------------------------|
| Material | Metal, stainless steel |
| IP protection | IP67 |
| Protection class | ☐ |
| Voltage | 230 V |
| Dimmability | No |
| Service life | 30,000 h |
| CRI | 80 |
| Technology | LED module |



Brick in-ground luminaire

- Brick in-ground luminaires including motion sensor for safety and orientation on all footpaths
- Choice of continuous light at dusk or orientation light and full illumination when movement is detected – can be adjusted via a switch on the luminaire
- Max. load capacity of 500 kg
- Standard brick size 10 x 10 or 10 x 20 cm

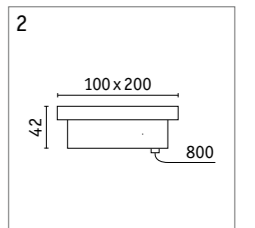


| Brick | Watt | Lumen | Kelvin | ↗ | Smart | Insect-friendly | Item |
|----------------------------------|-------|-------|--------|---|-------|-----------------|-------|
| 1 In-ground luminaire PIR sensor | 0.8 W | 25 lm | 3000 K | | | | 94336 |
| 2 In-ground luminaire PIR sensor | 1.6 W | 50 lm | 3000 K | | | | 94337 |



Spots

- Targeted illumination of trees, shrubs, flowers, façades, or sculptures
- Ground spike for flexible placement


Garden spot



| | |
|----------------------|------------|
| Material | Aluminium |
| IP protection | IP65 |
| Voltage | 230 V |
| Dimmability | No |
| Service life | 15,000 h |
| CRI | 80 |
| Technology | LED module |

| Garden | Watt | Lumen | Kelvin | ∠ | Smart | Insect-friendly | Item |
|----------|-------|--------|--------|-----|-------|-----------------|----------------|
| Spot | 3.5 W | 230 lm | 3000 K | 38° | | | B 98896 |
| Spot 3 x | 3.5 W | 230 lm | 3000 K | 38° | | | B 98897 |
| Spot | 4.3 W | 320 lm | 2200 K | 38° | | | B 94731 |


Garden spot



| | |
|----------------------|-----------|
| Material | Aluminium |
| IP protection | IP65 |
| Voltage | 230 V |
| Dimmability | Yes |
| Technology | GU10 |

| Garden | Watt | Lumen | Kelvin | ∠ | Smart | Insect-friendly | Item |
|--------|--------------------------------|-------|--------|---|-----------|-----------------|-------|
| Spot | Depending on the lamp selected | | | | Ready for | | 93751 |

Kikolo spot




Seawater resistant

| | |
|----------------------|--------------------|
| Material | Aluminium, plastic |
| IP protection | IP65 |
| Voltage | 230 V |
| Dimmability | No |
| Service life | 30,000 h |
| CRI | 90 |
| Technology | LED module |

| Kikolo | Watt | Lumen | Kelvin | ∠ | Smart | Insect-friendly | Item |
|--------|-------|--------|-------------|-----|-------|-----------------|-----------------|
| Spot | 8 W | 520 lm | 3000 K | 20° | | | DG 94777 |
| Spot | 8 W | 500 lm | 3000 K | 60° | | | DG 94776 |
| Spot | 6.2 W | 400 lm | 2200–3000 K | 80° | | | DG 94770 |
| Spot | 6.2 W | 440 lm | 3000–6500 K | | | | DG 94771 |




Radon spot



| | |
|----------------------|------------|
| Material | Aluminium |
| IP protection | IP65 |
| Voltage | 230 V |
| Dimmability | No |
| Service life | 30,000 h |
| CRI | 90 |
| Technology | LED module |

| Radon | Watt | Lumen | Kelvin | ☒ | Smart | Insect-friendly | Item |
|-------|------|--------|--------|---|-------|-----------------|----------------|
| Spot | 11 W | 650 lm | 3000 K | | | | G 94375 |

Radix spot



| | |
|----------------------|------------|
| Material | Aluminium |
| IP protection | IP65 |
| Voltage | 230 V |
| Dimmability | No |
| Service life | 30,000 h |
| CRI | 90 |
| Technology | LED module |

| Radix | Watt | Lumen | Kelvin | ☒ | Smart | Insect-friendly | Item |
|-------|-------|--------|--------|---|-------|-----------------|----------------|
| Spot | 5.5 W | 260 lm | 3000 K | | | | G 94376 |



| | |
|-------------------------|---------|
| Material | Plastic |
| IP protection | IP44 |
| Protection class | □ |
| Voltage | 230 V |
| Dimmability | Yes |
| Technology | E27 |



Fairy lights

- Freely selectable E27 lamp – use a 2200 K lamp for insect-friendly operation – use a Zigbee lamp for smart control of the luminaire
- Space for seven lamps with E27 base
- Decorative effect lighting creates a beautiful ambiance.
- The classic shape allows the use of many luminaire types.
- Efficient LED technology with low energy consumption and a long service life

| | | |
|---------------------|---------------|----------------|
| Fairy lights | length | Item |
| Fairy lights | 8.5 m | B 94316 |



| | |
|-------------|-------------|
| Lamp | Item |
| Green | 28724 |
| Blue | 28721 |
| Yellow | 28722 |
| Red | 28723 |

Smart Home



- Direct and simple Touchlink control for Zigbee 3.0 light products
- Easy switching, dimming and adjustment of white tone and colour
- Convenient use of existing and custom pre-sets




- Easy smart switching of illumination or garden pumps (up to 3680 W)
- Perfect combination with Plug & Shine outdoor luminaires
- Repeater capability allows you to expand the Zigbee mesh network
- Optional inclusion of automated routines
- Optional direct switching at the socket

| | |
|----------------|----------------|
| Gent 2 | Item |
| Remote control | W 50140 |

| | |
|---------------------------|----------------|
| Outdoor Smart Plug | Item |
| Outdoor Smart Plug ⚡ | B 50138 |

Rio socket column



| | |
|---|----------|
| IP protection | IP44 |
| Voltage | 230 V |
| Dimmability | No |
| Service life | 20,000 h |
|  Schuko plug | |

| | |
|---|-----------------|
| Rio | Item |
| 1 Socket column 2-outlet | DG 94657 |
| 2 Socket column 2-outlet with timer | DG 94314 |
| 3 Socket column 2-outlet with dusk sensor | DG 94315 |
| 4 Socket column 4-outlet | DG 94313 |

Junction box



| | |
|----------------------|---------|
| Material | Plastic |
| IP protection | IP68 |

| | |
|---|--------------|
| Junction box | Item |
| Junction box 3-way (for cable diameters of up to 15 mm) | B 237 |

Plug & Shine



The innovative 24 V LED plug-in system for fascinating light in the garden, around the outside of your home and on the patio

The time-saving Plug & Shine plug-in system creates customised light scenarios to transform gardens and patios – in just a few simple steps and with cable routing over or underground.


- All luminaires are dimmable, corrosion-resistant and waterproof (IP65/67).
- The luminaires are easily controlled via remote control or Zigbee controller.
- 24 V plug-in system for foolproof connection
- Can be extended to up to 50 metres
- Powerful IP67 transformers and bite-resistant, UV-resistant IP68 cables
- 5-year warranty

Follow just 3 easy steps to create your custom lighting solution:


1. Place the luminaires where you want them
2. Assemble the cable system: from the power outlet to the furthest point
3. Choose a transformer to match the total output

DONE!




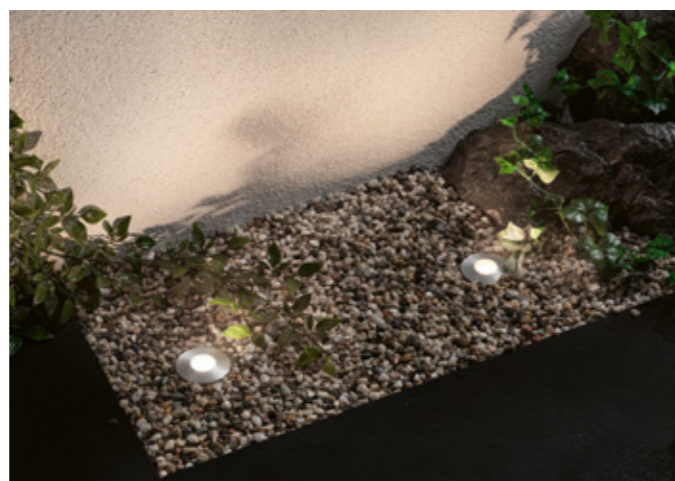

Floor ground luminaire




| | |
|-------------------------|-----------------------|
| Material | Plastic |
| IP protection | IP67/transformer IP44 |
| Protection class | ⚡/transformer □ |
| Voltage | 230/24 V |
| Dimmability | Yes |
| Service life | 30,000 h |
| CRI | 80 |
| | Pool water resistant |



| Floor | Watt | Lumen | Kelvin | ⚡ | Transformer | Smart | Insect-friendly | Item |
|-----------------------------|------|-------|-------------|-----|-------------|--------|-----------------|--------------|
| Luminaire | 2 W | 50 lm | 3000 K | 90° | | | | 93953 |
| Luminaire 3 x (starter set) | 2 W | 50 lm | 3000 K | 90° | 21 VA | | | 93692 94689 |
| Luminaire | 2 W | 90 lm | 2200 K | 90° | | | | 94721 |
| Luminaire 3 x (starter set) | 2 W | 90 lm | 2200 K | 90° | 21 VA | | | 94722 |
| Luminaire | 2 W | 65 lm | 3000–6500 K | 90° | | Zigbee | | 94751 |
| Luminaire 3 x (starter set) | 2 W | 65 lm | 3000–6500 K | 90° | 21 VA | Zigbee | | 94752 94691 |

Floor Mini ground luminaire




| | |
|-------------------------|--------------------------|
| Material | Stainless steel, plastic |
| IP protection | IP67/transformer IP44 |
| Protection class | ⚡/transformer □ |
| Voltage | 230/24 V |
| Dimmability | Yes |
| Service life | 30,000 h |
| CRI | 80 |

Pool water resistant

| Floor Mini Luminaire | Watt | Lumen | Kelvin | ⚡ | Transformer | Smart | Insect-friendly | Item |
|-----------------------------|-------|-------|--------|-----|-------------|-------|-----------------|--------------|
| Luminaire | 2.5 W | | 3000 K | 95° | | | | 93951 |
| Luminaire 3 x (starter set) | 2.5 W | 50 lm | 3000 K | 95° | 21 VA | | | 93697 94690 |
| Luminaire 3 x (add-on set) | 2.5 W | 50 lm | 3000 K | 95° | | | | 93949 |

Floor ground luminaire




| | |
|-------------------------|-----------|
| Material | Aluminium |
| IP protection | IP67 |
| Protection class | ⚡ |
| Voltage | 24 V |
| Dimmability | Yes |
| Service life | 30,000 h |
| CRI | 90 |

Pool water resistant

| Floor Luminaire | Watt | Lumen | Kelvin | ⚡ | Transformer | Smart | Insect-friendly | Item |
|-----------------|------|--------|--------|---|-------------|-------|-----------------|-------|
| Luminaire | 11 W | 680 lm | 3000 K | | | | | 94369 |
| Luminaire | 6 W | 340 lm | 3000 K | | | | | 94370 |

Floor ground luminaire



| | |
|-------------------------|-----------------|
| Material | Metal, plastic |
| IP protection | IP67 |
| Protection class | ⚡/transformer □ |
| Voltage | 24 V |
| Dimmability | No |
| Service life | 30,000 h |
| CRI | 80 |

Pool water resistant

| Floor Luminaire | Watt | Lumen | Kelvin | ⚡ | Transformer | Smart | Insect-friendly | Item |
|-------------------------|-------|--------|--------|---|-------------|-------|-----------------|-------|
| Luminaire | 4.5 W | 180 lm | 2200 K | | | | | 94716 |
| Luminaire (starter set) | 4.5 W | 180 lm | 2200 K | | | | | 94717 |




| | |
|------------------|----------|
| Material | Metal |
| IP protection | IP67 |
| Protection class | ⚡ |
| Voltage | 24 V |
| Dimmability | Yes |
| Service life | 30,000 h |
| CRI | 80 |

Pool water resistant

Floor ground luminaire

- Perfect for the illumination of taller trees or façades
- Targeted illumination with defined beam angle and swivel function
- Sunken light source for shielded lighting
- Unencumbered lawn mowing
- Max. load capacity of 500 kg



| Floor | Watt | Lumen | Kelvin | ⚡ | Transformer | Smart | Insect-friendly | Item |
|-----------|------|--------|--------|-----|-------------|-------|-----------------|-------|
| Luminaire | 6 W | 490 lm | 3000 K | 38° | | | | 93908 |
| Luminaire | 6 W | 428 lm | 3000 K | 20° | | | | 93907 |




| | |
|------------------|-----------------------|
| Material | Metal, plastic |
| IP protection | IP65/transformer IP44 |
| Protection class | ⚡/transformer ⚡ |
| Voltage | 24 V |
| Dimmability | Yes |
| Service life | 30,000 h |
| CRI | 80 |

Pool water resistant

Floor ground luminaire

- For cosy and insect-friendly evening light
- Rustproof, waterproof and dustproof – it provides light in all weather conditions
- The tunable warm white light control allows individual, continuous adjustment of the colour temperature

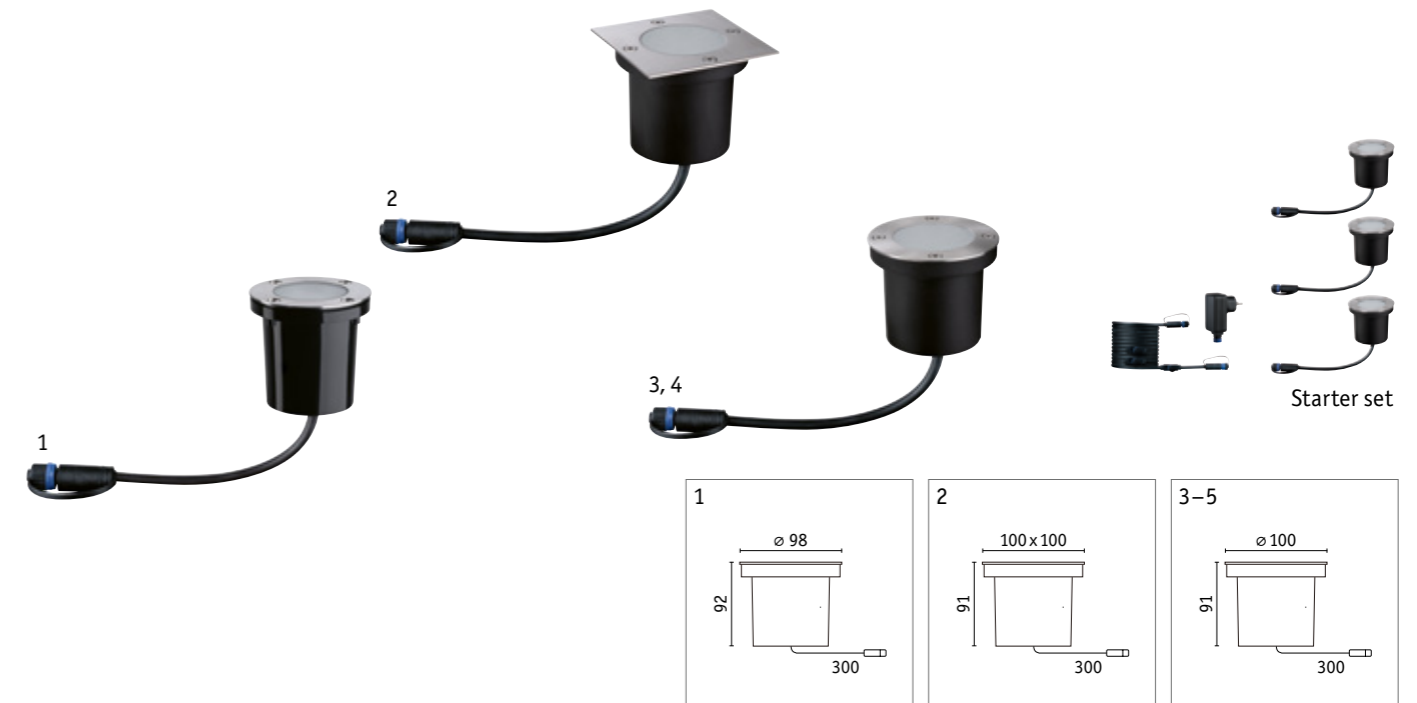

| Floor | Watt | Lumen | Kelvin | ⚡ | Transformer | Smart | Insect-friendly | Item |
|-------------------------------------|-------|--------|-------------|-----|-------------|--------|-----------------|-------|
| 1 Luminaire round | 4.6 W | 250 lm | 2000–2700 K | | | Zigbee | | 94588 |
| 2 Luminaire rectangular | 3.6 W | 300 lm | 3000 K | | | | | 94227 |
| 3 Luminaire round | 3.8 W | 300 lm | 3000 K | | | | | 94228 |
| 4 Luminaire round | 3.6 W | 190 lm | 3000–6500 K | 93° | | Zigbee | | 94274 |
| 5 Luminaire round 3 x (starter set) | 3.6 W | 190 lm | 3000–6500 K | 93° | | Zigbee | | 94275 |




| | |
|-------------------------|-----------------------|
| Material | Stainless steel |
| IP protection | IP67/transformer IP44 |
| Protection class | ⚡/transformer □ |
| Voltage | 230/24 V |
| Dimmability | No |
| Service life | 30,000 h |
| CRI | 80 |

Pool water resistant

MicroPen ground luminaire

- Easy mounting with attachment clips
- Suitable for wooden decks and stone patios
- Starter set with 5 luminaires and a transformer
- Suitable for wooden decks and stone patios
- Max. load of 130 kg



| MicroPen | Watt | Lumen | Kelvin | ⚡ | Transformer | Smart | Insect-friendly | Item |
|-----------------------------|--------|--------|--------|-----|-------------|-------|-----------------|-------|
| Luminaire 5 x (starter set) | 0.22 W | 1.8 lm | 3000 K | 22° | 21 VA | | | 93695 |
| Luminaire (add-on set) | 0.22 W | 1.8 lm | 3000 K | 22° | | | | 93694 |





| | |
|-------------------------|--------------------|
| Material | Die cast aluminium |
| IP protection | IP67 |
| Protection class | ⚡ |
| Voltage | 24 V |
| Dimmability | Yes |
| Service life | 30,000 h |
| CRI | 80 |

Pool water resistant

Floor ground luminaire

- Perfect for driveway illumination
- Strip lighting for glare-free illumination
- Extra heavy quality
- Drive-over resistant (93920 only)
- Max. load capacity of 2000 kg

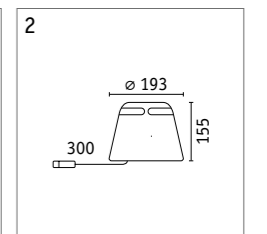

| Floor | Watt | Lumen | Kelvin | ⚡ | Transformer | Smart | Insect-friendly | Item |
|-------------|-------|--------|--------|------|-------------|-------|-----------------|-----------------|
| 1 Luminaire | 3.3 W | 330 lm | 3000 K | 180° | | | | DG 93920 |
| 2 Luminaire | 3 W | 120 lm | 3000 K | 180° | | | | DG 93917 |



| | |
|------------------|----------|
| Material | Metal |
| IP protection | IP67 |
| Protection class | ⚡ |
| Voltage | 24 V |
| Dimmability | Yes |
| Service life | 30,000 h |
| CRI | 90 |

Pool water resistant

Ito wall washer

- Asymmetrical beam angle for optimal illumination of wide objects
- Calculated lens for best light quality
- Robust metal housing



| Ito | Watt | Lumen | Kelvin | ⚡ | Transformer | Smart | Insect-friendly | Item |
|---------------|-------|--------|--------|-----|-------------|-------|-----------------|-------|
| 1 Wall washer | 6.1 W | 270 lm | 3000 K | 70° | | | | 94668 |
| 2 Wall washer | 6.1 W | 270 lm | 3000 K | 70° | | | | 94667 |



| | |
|------------------|----------|
| Material | Metal |
| IP protection | IP67 |
| Protection class | ⚡ |
| Voltage | 24 V |
| Dimmability | Yes |
| Service life | 30,000 h |
| CRI | 90 |

Pool water resistant

Ocos wall washer


- Wall washer as a recessed floor luminaire for optimal illumination of walls and plants
- Robust metal housing
- Easy to integrate into the Plug & Shine system
- Installation housing included



| Ocos | Watt | Lumen | Kelvin | ⚡ | Transformer | Smart | Insect-friendly | Item |
|-------------|-------|--------|--------|-----|-------------|-------|-----------------|-------|
| Wall washer | 6.1 W | 210 lm | 3000 K | 75° | | | | 94669 |




| | |
|------------------|--------------------|
| Material | Die cast aluminium |
| IP protection | IP67 |
| Protection class | ⬡ |
| Voltage | 24 V |
| Dimmability | Yes |
| Service life | 30,000 h |
| CRI | 80 |

 Pool water resistant

Floor wall washer


- Perfect for uniform, wide-beam and bright illumination of walls, hedges, façades and for the eye-catching highlighting of structural features
- Sunken light source for shielded lighting
- Unencumbered lawn mowing

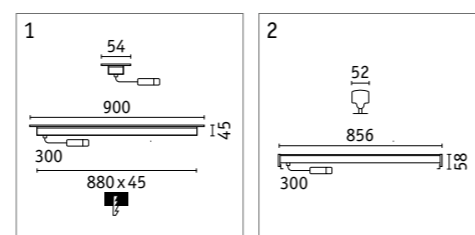

| Floor | Watt | Lumen | Kelvin | ⤵ | Transformer | Smart | Insect-friendly | Item |
|---------------|------|--------|--------|------|-------------|-------|-----------------|-----------------|
| 1 Wall washer | 8 W | 570 lm | 3000 K | 95° | | | | DG 93921 |
| 2 Wall washer | 8 W | 660 lm | 3000 K | 115° | | | | DG 93922 |



| | |
|-------------------------|-----------------------|
| Material | Aluminium |
| IP protection | IP67/transformer IP44 |
| Protection class | ⚡/transformer □ |
| Voltage | 24 V |
| Dimmability | Yes |
| Service life | 30,000 h |
| CRI | 80 |


 Pool water resistant




Sting spot

- Perfect for illuminating bushes and flower beds
- Metal spike for easy installation in the garden




Starter set



| Sting | Watt | Lumen | Kelvin | ⤵ | Transformer | Smart | Insect-friendly | Item |
|-----------------------------|-------|--------|--------|------|-------------|-------|---|---|
| Luminaire | 6 W | 270 lm | 3000 K | 100° | | | | DG 93934 |
| Luminaire 3 x (starter set) | 6 W | 270 lm | 3000 K | 100° | 75 VA | | | DG 93696  94693 |
| Luminaire 3 x (add-on set) | 6 W | | 3000 K | 100° | | | | DG 93689 |
| Luminaire | 6.3 W | 280 lm | 2200 K | 100° | | |  | DG 94728 |
| Luminaire 3 x (starter set) | 6.3 W | 280 lm | 2200 K | 100° | 75 VA | |  | DG 94729 |



| | |
|-------------------------|-----------------------|
| Material | Plastic |
| IP protection | IP65/transformer IP44 |
| Protection class | ⚡/transformer □ |
| Voltage | 24 V |
| Dimmability | Yes |
| Service life | 30,000 h |
| CRI | 80 |


 Pool water resistant



Spot Pike

- With 45° beam angle ideal for spotlighting plants or objects
- Ground spike for easy installation in any garden

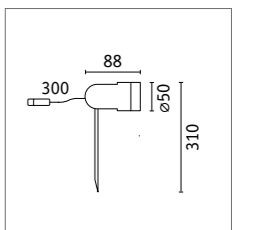


Starter set



| Pike | Watt | Lumen | Kelvin | ⤵ | Transformer | Smart | Insect-friendly | Item |
|-----------------------------|-------|--------|-------------|-----|-------------|--------|-----------------|---|
| Luminaire | 2.2 W | 240 lm | 3000 K | 45° | | | | DG 94241 |
| Luminaire 3 x (starter set) | 2.2 W | 240 lm | 3000 K | 45° | 21 VA | | | DG 94242  94686 |
| Luminaire | 4.5 W | 170 lm | 3000–6500 K | | | Zigbee | | DG 94283 |
| Luminaire 3 x (starter set) | 4.5 W | 170 lm | 3000–6500 K | | 21 VA | Zigbee | | DG 94284  94685 |




| | |
|------------------|-----------------------|
| Material | Aluminium |
| IP protection | IP65/transformer IP44 |
| Protection class | ⚡/transformer □ |
| Voltage | 24 V |
| Dimmability | Yes |
| Service life | 30,000 h |
| CRI | 80 |

 Pool water resistant

Plantini spot


- Small, flexible garden spot for lighting accents in flower beds or planters




| Plantini | Watt | Lumen | Kelvin | ⚡ | Transformer | Smart | Insect-friendly | Item |
|------------------------|------|-------|--------|-----|-------------|-------|-----------------|---|
| Spot | 2 W | 90 lm | 3000 K | 45° | | | |  93997 |
| Spot 3 x (starter set) | 2 W | 90 lm | 3000 K | 45° | 21 VA | | |  94154 |



| | |
|------------------|--------------------|
| Material | Aluminium, plastic |
| IP protection | IP65 |
| Protection class | ⚡ |
| Voltage | 24 V |
| Dimmability | Yes |
| Service life | 30,000 h |
| CRI | 90 |





 Pool water resistant

 Seawater resistant

Kikolo spot


- Exchangeable LED module
- Cable length: 0.5 m
- Available with a choice of two beam angles – for targeted illumination
- RGBW variant: Free selection of light colour and stepless adjustability of the colour temperature
- Luminaires with the “seawater-resistant” seal have passed stringent quality tests
- Exclusive Paulmann design



| Kikolo | Watt | Lumen | Kelvin | ⚡ | Transformer | Smart | Insect-friendly | Item |
|--------|-------|--------|-------------|-----|-------------|--------|---|---|
| Spot | 7.2 W | 460 lm | 3000 K | 60° | | | |  94774 |
| Spot | 6.2 W | 400 lm | 2200–3000 K | 80° | | Zigbee |  |  94768 |
| Spot | 6.2 W | 400 lm | 3000–6500 K | | | Zigbee | |  94769 |




| | |
|------------------|-----------|
| Material | Aluminium |
| IP protection | IP65 |
| Protection class | ◊ |
| Voltage | 24 V |
| Dimmability | Yes |
| Service life | 30,000 h |
| CRI | 90 |


 Pool water resistant

Radix spot


- Very bright spot for the illumination of trees or façades from ground level
- Suitable for professional lighting design



| Radix | Watt | Lumen | Kelvin | ✕ | Transformer | Smart | Insect-friendly | Item |
|-------|------|--------|--------|---|-------------|-------|-----------------|---|
| Spot | 6 W | 300 lm | 3000 K | | | | |  94368 |

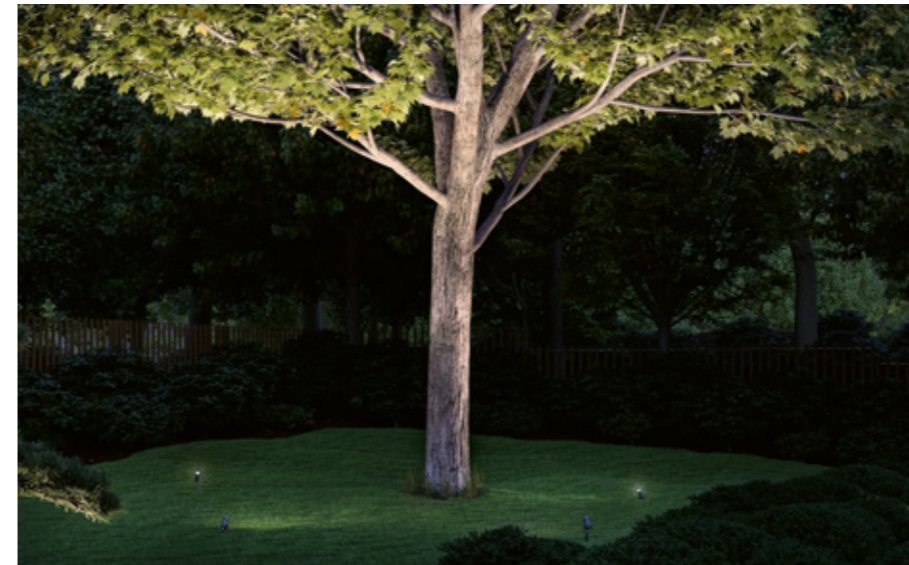


| | |
|------------------|-----------|
| Material | Aluminium |
| IP protection | IP65 |
| Protection class | ◊ |
| Voltage | 24 V |
| Dimmability | Yes |
| Service life | 30,000 h |
| CRI | 90 |

 Pool water resistant

Radon spot

- Very bright spot for the illumination of trees or façades from ground level
- Suitable for professional lighting design



| Radon | Watt | Lumen | Kelvin | ✕ | Transformer | Smart | Insect-friendly | Item |
|-------|------|--------|--------|---|-------------|-------|-----------------|---|
| Spot | 11 W | 600 lm | 3000 K | | | | |  94367 |




| | |
|------------------|-----------|
| Material | Aluminium |
| IP protection | IP65 |
| Protection class | ⚡ |
| Voltage | 24 V |
| Dimmability | Yes |
| Service life | 30,000 h |
| CRI | 80 |

Pool water resistant

Shira spot

- Colour temperature individually and continuously adjustable thanks to tunable white/white light control
- RGBW function offers a free choice of light colour
- Completely weather-resistant



| Shira | Watt | Lumen | Kelvin | ✂ | Transformer | Smart | Insect-friendly | Item |
|-------|-------|--------|-------------|---|-------------|--------|-----------------|-------|
| Spot | 6.5 W | 250 lm | 2000–6500 K | | | Zigbee | | 94849 |





| | |
|------------------|----------------|
| Material | Metal, plastic |
| IP protection | IP65 |
| Protection class | ⚡ |
| Voltage | 24 V |
| Dimmability | Yes |
| Service life | 30,000 h |
| CRI | 80 |

Pool water resistant

Ito spot

- Asymmetrical beam angle for optimised illumination of wide or tall objects
- Developed specifically for this application
- Robust metal housing
- Profile doubles as ground spike



| Ito | Watt | Lumen | Kelvin | ✂ | Transformer | Smart | Insect-friendly | Item |
|-------------------|------|--------|--------|-----|-------------|-------|-----------------|-------|
| 1 Spot horizontal | 6 W | 450 lm | 3000 K | 65° | | | | 94544 |
| 2 Spot vertical | 6 W | 450 lm | 3000 K | 65° | | | | 94545 |




| | |
|------------------|----------|
| Material | Metal |
| IP protection | IP65 |
| Protection class | ⚡ |
| Voltage | 24 V |
| Dimmability | No |
| Service life | 30,000 h |
| CRI | 80 |

Pool water resistant

Classic spot

- Classic look garden spots
- The 40° beam angle is perfect for highlighting plants or objects



| Classix | Watt | Lumen | Kelvin | ∠ | Transformer | Smart | Insect-friendly | Item |
|---------------|-------|--------|--------|-----|-------------|-------|-----------------|-------|
| Luminaire | 5.1 W | 310 lm | 3000 K | 32° | | | | 94285 |
| Luminaire 3 x | 5.1 W | 310 lm | 3000 K | 32° | 75 VA | | | 94688 |




| | |
|------------------|-----------|
| Material | Aluminium |
| IP protection | IP65 |
| Protection class | ⚡ |
| Voltage | 24 V |
| Dimmability | No |
| Service life | 30,000 h |
| CRI | 80 |

Pool water resistant

Flood Spot floodlight

- Plug & Shine floodlight for the bright illumination of objects or façades
- With earth spike for placement flexibility



| Flood Spot | Watt | Lumen | Kelvin | ∠ | Transformer | Smart | Insect-friendly | Item |
|------------|--------|---------|--------|---|-------------|-------|-----------------|-------|
| Spot | 6.8 W | 580 lm | 3000 K | | | | | 94574 |
| Spot | 15.5 W | 1400 lm | 3000 K | | | | | 94575 |



| | |
|------------------|----------------|
| Material | Metal, plastic |
| IP protection | IP44 |
| Protection class | ⚡ |
| Voltage | 24 V |
| Dimmability | Yes |
| Service life | 30,000 h |
| CRI | 90 |







 Pool water resistant

Plate bollard


- Reliable bollard with high luminosity
- Luminaire with 360-degree, downward directed light emission
- For cosy and insect-friendly evening light



| Plate | Watt | Lumen | Kelvin | ⚡ | Transformer | Smart | Insect-friendly | Item |
|---------|-------|--------|-------------|---|-------------|-------|---|---|
| Bollard | 6.1 W | 355 lm | 3000 K | | | | |  94312 |
| Bollard | 7 W | 380 lm | 2200 K | | | |  |  94723 |
| Bollard | 5 W | 200 lm | 3000–6500 K | | | | |  94750 |






| | |
|------------------|----------------|
| Material | Metal, plastic |
| IP protection | IP65 |
| Protection class | ⚡ |
| Voltage | 24 V |
| Dimmability | Yes |
| Service life | 30,000 h |
| CRI | 80 |

 Pool water resistant

Ito bollard

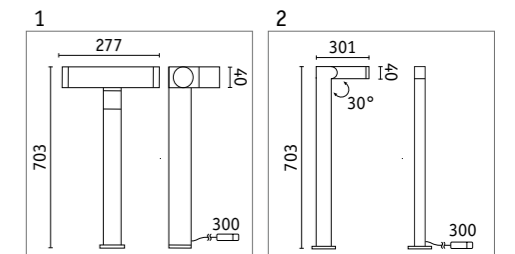
- Asymmetrical beam angle for optimised illumination of wide or tall objects
- Calculated lens for best light quality
- Robust metal housing



| Ito | Watt | Lumen | Kelvin | ⚡ | Transformer | Smart | Insect-friendly | Item |
|----------------------|------|--------|--------|-----|-------------|-------|-----------------|---|
| 1 Bollard horizontal | 6 W | 450 lm | 3000 K | 65° | | | |  94546 |
| 2 Bollard vertical | 6 W | 450 lm | 3000 K | 65° | | | |  94547 |




| | |
|------------------|--------------------|
| Material | Aluminium, plastic |
| IP protection | IP44 |
| Protection class | ⚡ |
| Voltage | 24 V |
| Dimmability | Yes |
| Service life | 30,000 h |
| CRI | 80 |

 Pool water resistant

Pin bollard


- Understated light stick for illumination along paths and flower beds
- With spike for easy and flexible installation options



| Pin | Watt | Lumen | Kelvin | ⚡ | Transformer | Smart | Insect-friendly | Item |
|---------|-------|--------|--------|---|-------------|-------|-----------------|---|
| Bollard | 5.5 W | 180 lm | 3000 K | | | | |  94530 |




| | |
|------------------|-----------|
| Material | Aluminium |
| IP protection | IP65 |
| Protection class | ⚡ |
| Voltage | 24 V |
| Dimmability | Yes |
| Service life | 30,000 h |
| CRI | 90 |

 Pool water resistant

Iwo bollard

- An eye-catcher for special lighting effects
- Suitable for professional lighting design

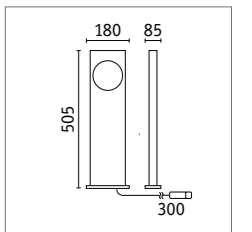

| Iwo | Watt | Lumen | Kelvin | ⚡ | Transformer | Smart | Insect-friendly | Item |
|---------|-------|--------|--------|---|-------------|-------|-----------------|---|
| Bollard | 6.5 W | 160 lm | 3000 K | | | | |  94372 |




| | |
|------------------|----------|
| Material | Metal |
| IP protection | IP44 |
| Protection class | ⚡ |
| Voltage | 24 V |
| Dimmability | Yes |
| Service life | 30,000 h |
| CRI | 80 |

Pool water resistant

Classic bollard

- Bollard lights with a classic look and dimmable warm white 24 V filament lamps
- Omnidirectional illumination for paths, squares or flower bed borders

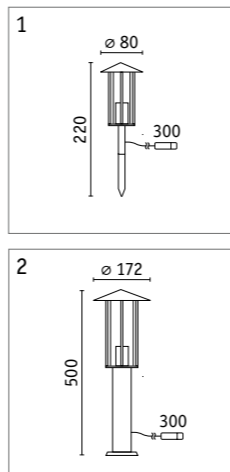

| Classic | Watt | Lumen | Kelvin | ⚡ | Transformer | Smart | Insect-friendly | Item |
|----------------|------|--------|--------|---|-------------|-------|-----------------|-------|
| 1 Mini bollard | 2 W | 160 lm | 3000 K | | | | | 94323 |
| 2 Bollard | 2 W | 160 lm | 3000 K | | | | | 94322 |




| | |
|------------------|----------|
| Material | Metal |
| IP protection | IP65 |
| Protection class | ⚡ |
| Voltage | 24 V |
| Dimmability | Yes |
| Service life | 30,000 h |
| CRI | 80 |

Pool water resistant

Flarea bollard

- Perfect for the illumination of paths, squares or flower bed borders
- Bollard lights in three sizes for customised installation
- Ground spike for exceptionally easy installation in soft soil

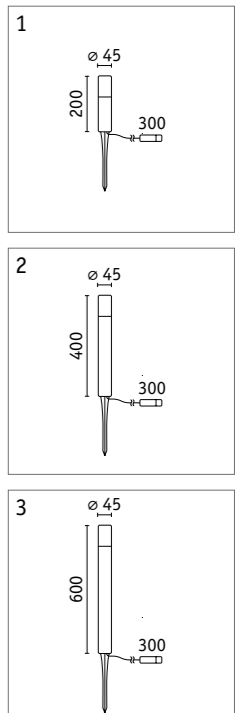

| Flarea | Watt | Lumen | Kelvin | ⚡ | Transformer | Smart | Insect-friendly | Item |
|-----------|-------|--------|--------|---|-------------|-------|-----------------|-------|
| 1 Bollard | 3.6 W | 150 lm | 3000 K | | | | | 94533 |
| 2 Bollard | 3.6 W | 150 lm | 3000 K | | | | | 94536 |
| 3 Bollard | 3.6 W | 150 lm | 3000 K | | | | | 94537 |




| | |
|------------------|-----------|
| Material | Aluminium |
| IP protection | IP44 |
| Protection class | ⚡ |
| Voltage | 24 V |
| Dimmability | Yes |
| Service life | 30,000 h |
| CRI | 80 |

Pool water resistant

Kofia pendant

- Two models with individual pendant shades
- Cable length: 5 m
- Luminaires with the “seawater-resistant” seal have passed stringent quality tests
- Freely selectable E14 lamp
- Exclusive Paulmann design

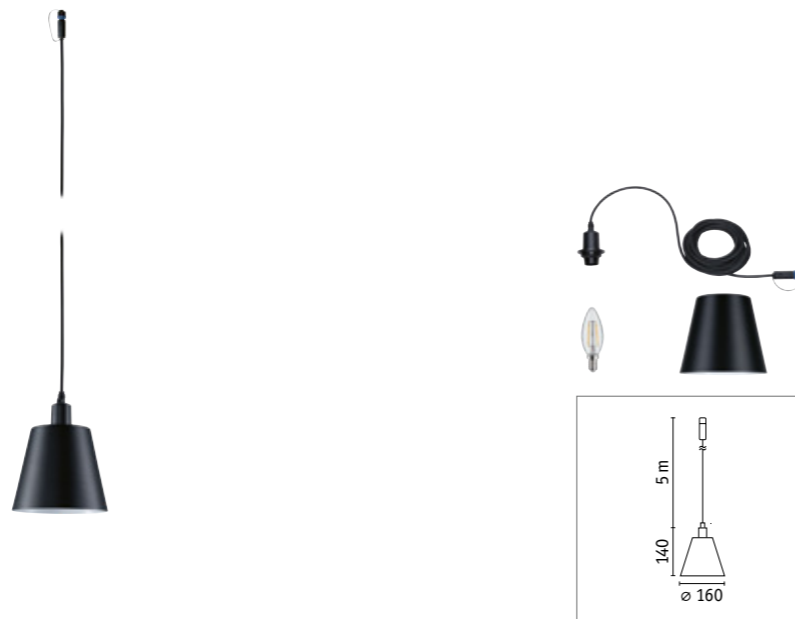

| Kofia | Watt | Lumen | Kelvin | ↔ | Transformer | Smart | Insect-friendly | Item |
|---------|------|--------|--------|---|-------------|-------|-----------------|-----------------|
| Pendant | 2 W | 160 lm | 3000 K | | | | | DG 93104 |



| | |
|------------------|-----------|
| Material | Aluminium |
| IP protection | IP44 |
| Protection class | ⚡ |
| Voltage | 24 V |
| Dimmability | Yes |
| Service life | 30,000 h |
| CRI | 80 |

Pool water resistant

Seawater resistant

Mapalo pendant

- Two models with individual pendant shades
- Cable length: 5 m
- Luminaires with the “seawater-resistant” seal have passed stringent quality tests
- Freely selectable E14 lamp
- Exclusive Paulmann design



| Mapalo | Watt | Lumen | Kelvin | ↔ | Transformer | Smart | Insect-friendly | Item |
|---------|------|--------|--------|---|-------------|-------|-----------------|-----------------|
| Pendant | 2 W | 160 lm | 3000 K | | | | | DG 93103 |




| | |
|------------------|----------|
| Material | Plastic |
| IP protection | IP68 |
| Protection class | ⚡ |
| Voltage | 24 V |
| Dimmability | Yes |
| Service life | 30,000 h |
| CRI | 80 |

Pool water resistant

Smooth strip

- Available in three different lengths
- Remote controlled switching and dimming via the Plug & Shine controller

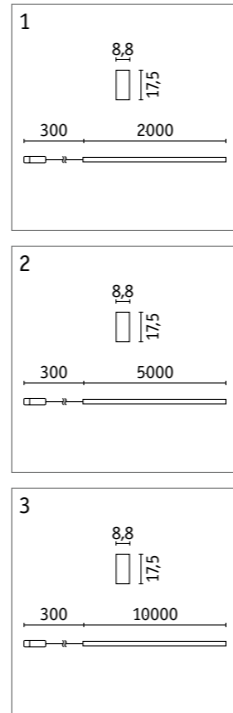

| Smooth | Watt | Lumen | Kelvin | ✂ | Transformer | Smart | Insect-friendly | Item |
|--------------|------|---------|--------|---|-------------|-------|-----------------|-------|
| 1 Strip 2 m | 12 W | 235 lm | 3000 K | | | | | 94679 |
| 2 Strip 5 m | 26 W | 870 lm | 3000 K | | | | | 94680 |
| 3 Strip 10 m | 46 W | 1540 lm | 3000 K | | | | | 94681 |




| | |
|------------------|----------|
| Material | Plastic |
| IP protection | IP67 |
| Protection class | ⚡ |
| Voltage | 24 V |
| Dimmability | Yes |
| Service life | 30,000 h |
| CRI | 80 |

Pool water resistant

| Accessories | Item |
|------------------------------|-------|
| Neon strip clip | 94215 |
| Neon strip aluminium profile | 94216 |

Neon strip


- Plug & Shine Smooth strip for colourful lighting effects
- Controllable via app, voice or remote

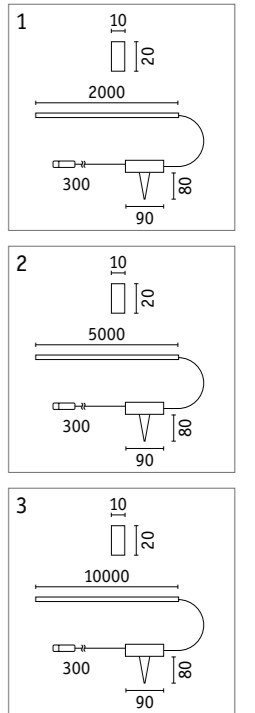

| Neon | Watt | Lumen | Kelvin | ✂ | Transformer | Smart | Insect-friendly | Item |
|-------|------|---------|-------------|---|-------------|-------|-----------------|-------|
| Strip | 11 W | 280 lm | 3000–6500 K | | | | | 94560 |
| Strip | 22 W | 700 lm | 3000–6500 K | | | | | 94561 |
| Strip | 39 W | 1400 lm | 3000–6500 K | | | | | 94562 |




| | |
|------------------|-----------|
| Material | Aluminium |
| IP protection | IP68 |
| Protection class | ⚡ |
| Voltage | 24 V |
| Dimmability | Yes |
| Service life | 30,000 h |
| CRI | 80 |

 Pool water resistant

Underwater pool spot


- Underwater luminaire with chlorine water resistance for screw mounting on walls or floors
- 2-metre supply line for more flexibility



| Underwater | Watt | Lumen | Kelvin | ☞ | Transformer | Smart | Insect-friendly | Item |
|------------|------|--------|--------|-----|-------------|-------|-----------------|----------------|
| Pool spot | 5 W | 300 lm | 3000 K | 25° | | | | B 94559 |




| | |
|------------------|-----------|
| Material | Aluminium |
| IP protection | IP68 |
| Protection class | ⚡ |
| Voltage | 24 V |
| Dimmability | Yes |
| Service life | 30,000 h |
| CRI | 80 |


 Pool water resistant

Underwater pond luminaire

- IP68 underwater spot for ponds – with metal plate for underwater installation




| Underwater | Watt | Lumen | Kelvin | ☞ | Transformer | Smart | Insect-friendly | Item |
|----------------|-------|--------|--------|-----|-------------|-------|-----------------|----------------|
| Pond luminaire | 2.8 W | 260 lm | 3000 K | 25° | | | | B 94209 |

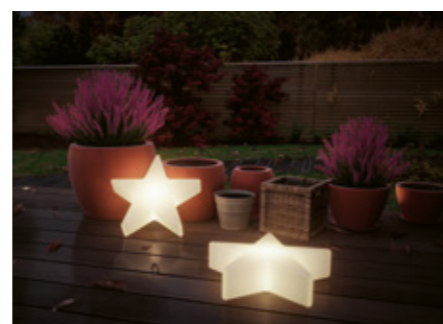

Light objects

Light objects for the atmospheric illumination of gardens and patios

Star light object




| | |
|-------------------------|----------|
| Material | Plastic |
| IP protection | IP67 |
| Protection class | ⚡ |
| Voltage | 24 V |
| Dimmability | Yes |
| Service life | 30,000 h |
| CRI | 80 |

Poolwater-resistant

| Star | Watt | Lumen | Kelvin | ⚡ | Transformer | Smart | Insect-friendly | Item |
|--------------|-------|--------|--------|---|-------------|-------|-----------------|-------|
| Light object | 2.8 W | 160 lm | 3000 K | | | | | 94184 |

Cube light object





| | |
|-------------------------|----------|
| Material | Plastic |
| IP protection | IP67 |
| Protection class | ⚡ |
| Voltage | 24 V |
| Dimmability | Yes |
| Service life | 30,000 h |
| CRI | 80 |

Pool water resistant

| Cube | Watt | Lumen | Kelvin | ⚡ | Transformer | Smart | Insect-friendly | Item |
|--------------|-------|--------|--------|---|-------------|-------|-----------------|-------|
| Light object | 6.5 W | 410 lm | 3000 K | | | | | 94181 |

Globe light object

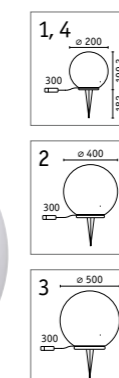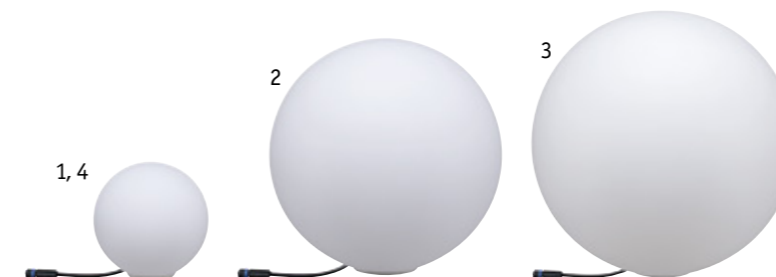


| | |
|-------------------------|----------|
| Material | Plastic |
| IP protection | IP67 |
| Protection class | ⚡ |
| Voltage | 24 V |
| Dimmability | Yes |
| Service life | 30,000 h |
| CRI | 80 |

Pool water resistant

| Globe | Watt | Lumen | Kelvin | ⚡ | Transformer | Smart | Insect-friendly | Item |
|----------------|-------|--------|-------------|---|-------------|--------|-----------------|-------|
| 1 Light object | 2.8 W | 160 lm | 3000 K | | | | | 94177 |
| 2 Light object | 6.5 W | 620 lm | 3000 K | | | | | 94178 |
| 3 Light object | 6.5 W | 620 lm | 3000 K | | | | | 94179 |
| 4 Light object | 2.8 W | 110 lm | 3000–6500 K | | | Zigbee | | 94269 |

Stone light object



| | |
|-------------------------|----------|
| Material | Plastic |
| IP protection | IP67 |
| Protection class | ⚡ |
| Voltage | 24 V |
| Dimmability | Yes |
| Service life | 30,000 h |
| CRI | 80 |

Pool water resistant


| Stone | Watt | Lumen | Kelvin | ⚡ | Transformer | Smart | Insect-friendly | Item |
|----------------|-------|--------|--------|---|-------------|-------|-----------------|-------|
| 1 Light object | 2.8 W | 160 lm | 3000 K | | | | | 94175 |
| 2 Light object | 2.8 W | 170 lm | 3000 K | | | | | 94176 |



Light objects

Light objects for the atmospheric illumination of gardens and patios

Tree light object




| | |
|-------------------------|----------|
| Material | Plastic |
| IP protection | IP67 |
| Protection class | ⚡ |
| Voltage | 24 V |
| Dimmability | Yes |
| Service life | 30,000 h |
| CRI | 80 |

Pool water resistant

| Tree | Watt | Lumen | Kelvin | ✂ | Transformer | Smart | Insect-friendly | Item |
|--------------|-------|--------|--------|---|-------------|-------|-----------------|-------|
| Light object | 2.8 W | 230 lm | 3000 K | | | | | 94185 |


Venea light object

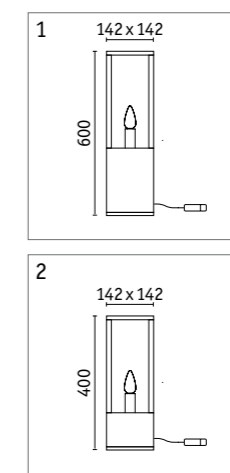

| | |
|-------------------------|----------|
| Material | Wood |
| IP protection | IP44 |
| Protection class | ⚡ |
| Voltage | 24 V |
| Dimmability | Yes |
| Service life | 15,000 h |
| CRI | 80 |

Pool water resistant


| Venea | Watt | Lumen | Kelvin | ✂ | Transformer | Smart | Insect-friendly | Item |
|----------------|------|--------|--------|---|-------------|-------|-----------------|-----------------|
| 1 Light object | 2 W | 140 lm | 1900 K | | | | | WD 94674 |
| 2 Light object | 2 W | 140 lm | 1900 K | | | | | WD 94673 |

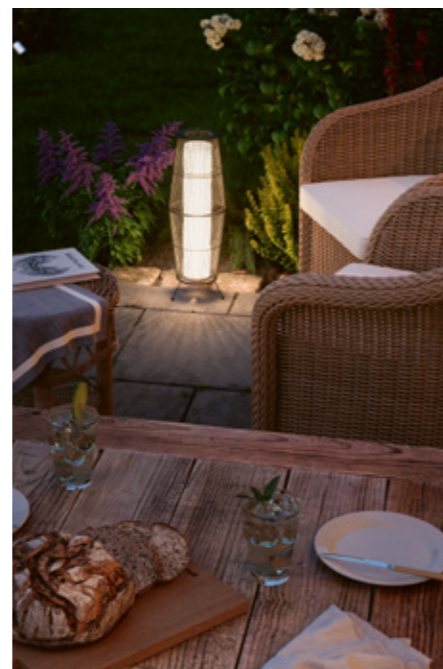


Lanterns

Lanterns for flexible, decorative auxiliary lighting in the garden, in seating areas or on the patio


Light Basket lantern

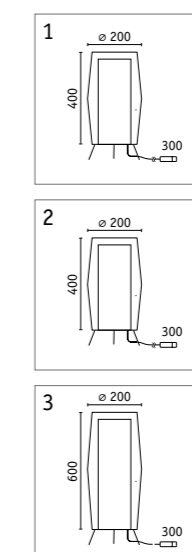



| | |
|---|----------|
| Material | Plastic |
| IP protection | IP44 |
| Voltage | 24 V |
| Dimmability | Yes |
| Service life | 30,000 h |
| CRI | 80 |
|  Pool water resistant | |

| Light Basket | Watt | Lumen | Kelvin | ✂ | Transformer | Smart | Insect-friendly | Item |
|---|-------|--------|--------|---|-------------|--------|-----------------|-------|
| 1 Lantern  | 7.8 W | 320 lm | 3000 K | | | | | 94319 |
| 2 Lantern  | 3.2 W | 180 lm | 2700 K | | | Zigbee | | 94754 |
| 3 Lantern  | 8 W | 350 lm | 3000 K | | | | | 94320 |

Classic lantern

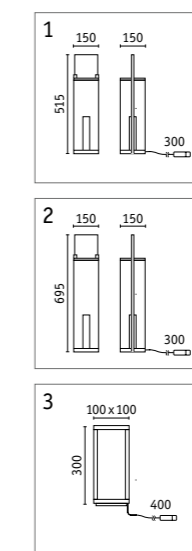

| | |
|---|---|
| Material | Plastic |
| IP protection | IP44 |
| Protection class |  |
| Voltage | 24 V |
| Dimmability | Yes |
| Service life | 30,000 h |
| CRI | 80 |
|  Pool water resistant | |


| Classic | Watt | Lumen | Kelvin | ✂ | Transformer | Smart | Insect-friendly | Item |
|-----------|------|--------|--------|---|-------------|--------|-----------------|-------|
| 1 Lantern | 2 W | 140 lm | 1900 K | | | | | 94318 |
| 2 Lantern | 2 W | 140 lm | 1900 K | | | | | 94317 |
| 3 Lantern | 2 W | 90 lm | 3000 K | | | Zigbee | | 94753 |



Fairy lights

Light chains for flexible, decorative auxiliary lighting in the garden, in seating areas or on the patio


Fairy lights

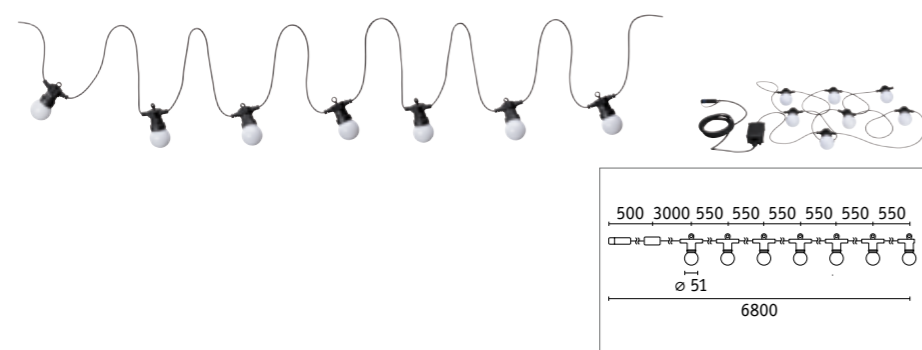

| | |
|-------------------------|----------------------|
| Material | Plastic |
| IP protection | IP44 |
| Protection class | ⚡ |
| Voltage | 24 V |
| Dimmability | Yes |
| Service life | 15,000 h |
| CRI | 80 |
| | Pool water resistant |

| Fairy lights | Watt | Lumen | Kelvin | ⚡ | Transformer | Smart | Insect-friendly | Item |
|--------------|-------|-------|--------|---|-------------|-------|-----------------|-------|
| Fairy lights | 0.2 W | 7 lm | 3000 K | | | | | 94165 |


Fairy lights

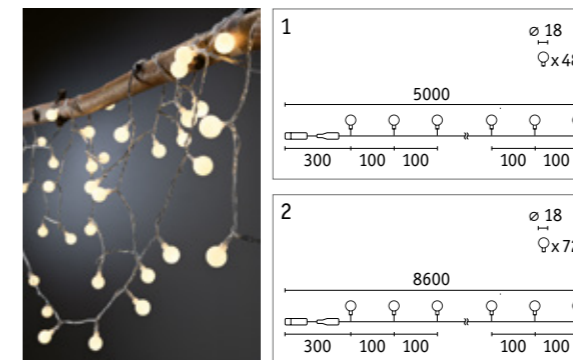

| | |
|-------------------------|----------------------|
| Material | Plastic |
| IP protection | IP44 |
| Protection class | ⚡ |
| Voltage | 24 V |
| Dimmability | Yes |
| Service life | 20,000 h |
| CRI | 80 |
| | Pool water resistant |

| Fairy lights | Watt | Lumen | Kelvin | ⚡ | Transformer | Smart | Insect-friendly | Item |
|----------------------|-------|--------|--------|---|-------------|-------|-----------------|-------|
| 1 Fairy lights 5 m | 1.8 W | 96 lm | 3000 K | | | | | 94558 |
| 2 Fairy lights 7.5 m | 2 W | 140 lm | 1900 K | | | | | 94557 |

Classic fairy lights

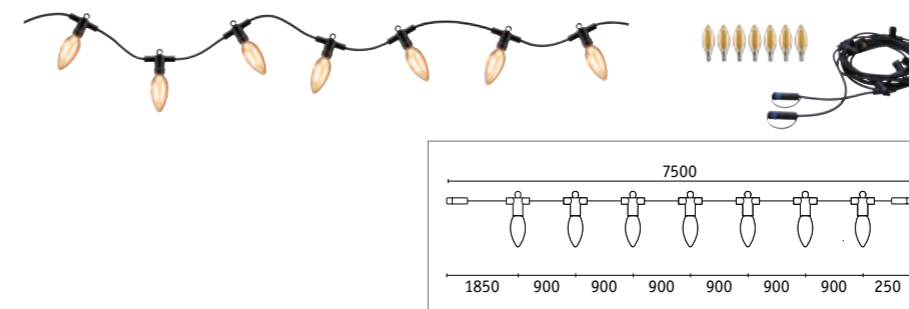

| | |
|-------------------------|----------------------|
| Material | Plastic |
| IP protection | IP44 |
| Protection class | ⚡ |
| Voltage | 24 V |
| Dimmability | Yes |
| Service life | 15,000 h |
| CRI | 80 |
| | Pool water resistant |

| Classic | Watt | Lumen | Kelvin | ⚡ | Transformer | Smart | Insect-friendly | Item |
|--------------|------|--------|--------|---|-------------|-------|-----------------|-------|
| Fairy lights | 2 W | 140 lm | 1900 K | | | | | 94324 |

Tubs fairy lights



| | |
|-------------------------|----------------------|
| Material | Aluminium |
| IP protection | IP44 |
| Protection class | ⚡ |
| Voltage | 24 V |
| Dimmability | Yes |
| Service life | 15,000 h |
| CRI | 80 |
| | Pool water resistant |


| Tubs | Watt | Lumen | Kelvin | ⚡ | Transformer | Smart | Insect-friendly | Item |
|--------------|------|--------|--------|---|-------------|-------|-----------------|-------|
| Fairy lights | 2 W | 160 lm | 3000 K | | | | | 94761 |

Plug & Shine cables

| | | Outdoor Plug & Shine | length | Item |
|---|--|--------------------------------|--------|-------|
| 1 | | Cable 1 in 3 out | 1 m | 93994 |
| 2 | | Cable 1 in 2 out | 2 m | 93926 |
| 3 | | Cable 1 in 2 out | 5 m | 93927 |
| 4 | | Cable 1 in 4 out | 5 m | 94596 |
| 5 | | Cable 1 in 2 out | 10 m | 93928 |
| 6 | | Cable 1 in 7 out | 15 m | 93931 |
| 7 | | Cable 1 in 5 out | 10 m | 93930 |
| 8 | | Distribution device 1 in 3 out | - | 93929 |

| | |
|-------------------------|---------|
| Material | Plastic |
| IP protection | IP68 |
| Voltage | 24 V |
| Protection class | ⚡ |

Plug & Shine transformer

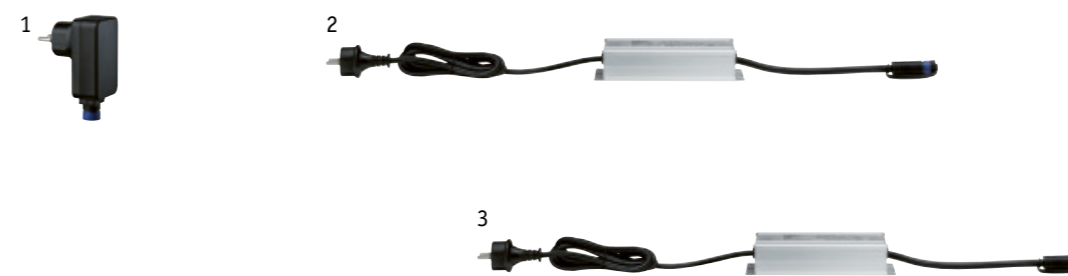

| Outdoor Plug & Shine | Voltage | IP protection | Material | Colour | Item |
|----------------------|----------|---------------|-----------|--------|-------|
| 1 Transformer 21 W | 230/24 V | IP44 | Plastic | Black | 98848 |
| 2 Transformer 75 W | 230/24 V | IP67 | Aluminium | Silver | 98849 |
| 3 Transformer 150 W | 230/24 V | IP67 | Aluminium | Silver | 98850 |



| Outdoor Plug & Shine | Material | Colour | Item |
|----------------------|----------|--------|-------|
| Cover | Plastic | Grey | 93904 |



Plug & Shine controller




| Outdoor Plug & Shine controller | Voltage | IP protection | Colour | Item |
|--|---------|---------------|------------|-------|
| 1 Controller 433 MHz | 24V | IP68 | Black | 18010 |
| 2 Controller 433 MHz | 24V | IP68 | Black | 18011 |
| 3 Controller Zigbee 24 V DC max. 75 W | 24V | IP68 | Black | 93999 |
| 4 Wireless twilight sensor motion detect Zigbee PIR sensor | 4.8V | IP44 | Anthracite | 18012 |
| 5 Gent 2 remote control | - | IP20 | White | 50140 |
| 6 Outdoor Smart Plug | - | IP44 | Black | 50138 |

Plug & Shine accessories



| Outdoor Plug & Shine | IP protection | Voltage | Item |
|----------------------|---------------|---------|-------|
| Twilight sensor | IP67 | 24V | 94587 |



| Outdoor Plug & Shine | IP protection | Voltage | Item |
|----------------------------|---------------|---------|-------|
| 1 Rio socket column | IP44 | 230V | 94700 |
| 2 Rio socket column sensor | IP44 | 230V | 94701 |



| Lamp | Watt | Lumen | Kelvin | Base | EEL | Item |
|-----------------------------|------|-------|--------|------|-----|-----------|
| 1 LED Filament Gold Candle | 2 W | 140 | 1900 | E14 | | 330028740 |
| 2 LED Filament Clear Candle | 2 W | 160 | 3000 | E14 | | 330028741 |



| Bollard light accessories | Dimensions | Item |
|---------------------------|------------------|-------|
| Ground spike | ∅ 102 mm ∓ 40 cm | 94695 |

Solar



Solar luminaires


Solar luminaires offer sustainable alternatives for outdoor lighting at low cost in the long term. The luminaires can be positioned and installed wherever you want them – and are completely independent of a power outlet:

- Powerful and reliable in any weather
- Special add-on functions for enhanced benefits: night light, motion sensor or Zigbee 3.0 controller
- Replaceable and rechargeable lithium-ion batteries with 5-year warranty



House number luminaires

- Innovative backlit house numbers in the digits 1 to 0
- Can be mounted on the house wall independently of the power outlet thanks to solar power
- During the day, the invisible solar panel is charged by sunlight, at night the decorative number is indirectly illuminated.
- Supplied with replaceable and rechargeable lithium-ion battery and mounting template

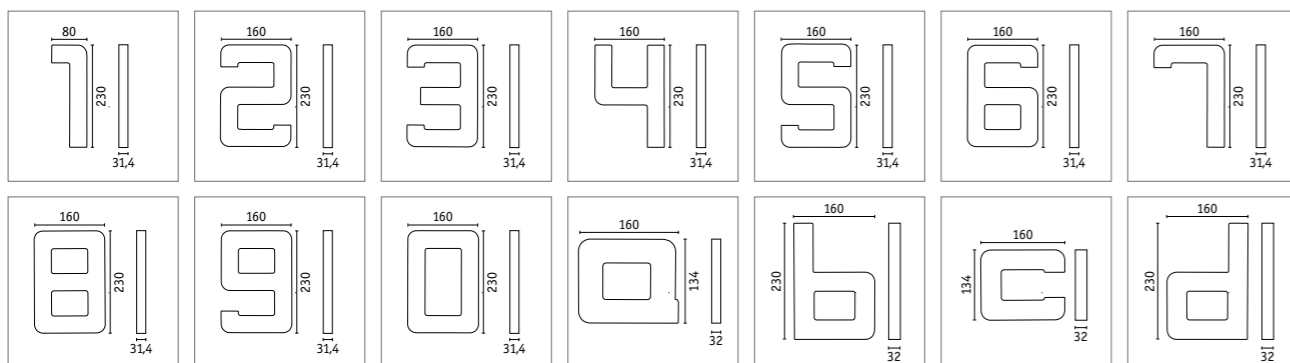

House number luminaires



| | |
|------------------|---------------------|
| Material | Plastic |
| IP protection | IP44 |
| Protection class | ◊ |
| Dimmability | No |
| Service life | 30,000 h |
| CRI | 80 |
| Charging time | 6–8 h |
| Light time | 8 h |
| Replaceability | Replaceable battery |


| House number luminaires | Watt | Lumen | Kelvin | ☼ | Smart | Insect-friendly | Item |
|-------------------------|-------|-------|--------|---|-------|-----------------|----------------|
| House number 1 | 0.2 W | 6 lm | 3000 K | | | | B 79842 |
| House number 2 | 0.2 W | 6 lm | 3000 K | | | | B 79843 |
| House number 3 | 0.2 W | 6 lm | 3000 K | | | | B 79844 |
| House number 4 | 0.2 W | 6 lm | 3000 K | | | | B 79845 |
| House number 5 | 0.2 W | 6 lm | 3000 K | | | | B 79846 |
| House number 6 | 0.2 W | 6 lm | 3000 K | | | | B 79847 |
| House number 7 | 0.2 W | 6 lm | 3000 K | | | | B 79848 |
| House number 8 | 0.2 W | 6 lm | 3000 K | | | | B 79849 |
| House number 9 | 0.2 W | 6 lm | 3000 K | | | | B 79850 |
| House number 0 | 0.2 W | 6 lm | 3000 K | | | | B 79851 |
| House number a | 0.2 W | 6 lm | 3000 K | | | | B 94650 |
| House number b | 0.2 W | 6 lm | 3000 K | | | | B 94651 |
| House number c | 0.2 W | 6 lm | 3000 K | | | | B 94652 |
| House number d | 0.2 W | 6 lm | 3000 K | | | | B 94653 |



House number luminaires

- Numbers and letters for use as a house number luminaire included


House number luminaire



| | |
|-----------------------|---------------------|
| Material | Plastic |
| IP protection | IP44 |
| Dimmability | No |
| Service life | 30,000 h |
| CRI | 80 |
| Charging time | 6–8 h |
| Light time | 3 days |
| Replaceability | Replaceable battery |

| House number luminaire | Watt | Lumen | Kelvin | ☒ | Smart | Insect-friendly | Item |
|--------------------------|-------|-------|--------|---|-------|-----------------|----------------|
| House number luminaire ☒ | 0.2 W | 14 lm | 3000 K | | | | B 94694 |


Dayton house number luminaire



| | |
|-----------------------|---------------------|
| Material | Plastic |
| IP protection | IP44 |
| Dimmability | No |
| Service life | 10,000 h |
| CRI | 80 |
| Charging time | 6–8 h |
| Light time | 4–6 h |
| Replaceability | Replaceable battery |

| Dayton | Watt | Lumen | Kelvin | ☒ | Smart | Insect-friendly | Item |
|--------------------------|--------|-------|--------|---|-------|-----------------|----------------|
| House number luminaire ☒ | 0.05 W | 2 lm | 3000 K | | | | B 95388 |


House number luminaire



| | |
|-----------------------|---------------------|
| Material | Plastic |
| IP protection | IP44 |
| Dimmability | No |
| Service life | 10,000 h |
| CRI | 80 |
| Charging time | 6–8 h |
| Light time | 4–6 h |
| Replaceability | Replaceable battery |

| House number luminaire | Watt | Lumen | Kelvin | ☒ | Smart | Insect-friendly | Item |
|--------------------------|-------|-------|--------|---|-------|-----------------|----------------|
| House number luminaire ☒ | 0.2 W | 14 lm | 3000 K | | | | W 93765 |

Neda house number



| | |
|-----------------------|-------------------------|
| Material | Plastic |
| IP protection | IP44 |
| Dimmability | No |
| Service life | 30,000 h |
| CRI | 80 |
| Charging time | 6–8 h |
| Light time | 4–15 h |
| Replaceability | Non-replaceable battery |


| Neda | Watt | Lumen | Kelvin | ☒ | Smart | Insect-friendly | Item |
|--------------------------|------|-------|--------|---|-------|-----------------|-----------------|
| House number luminaire ☒ | 1 W | 27 lm | 3000 K | | | | DG 94577 |



Wall luminaires

- Can be mounted on the house wall independently of the power outlet thanks to solar power
- The luminaire comes with a dusk sensor for automatic switching and an attached on/off switch


Elliot wall-mounted path luminaire



| | |
|-------------------------|---------------------|
| Material | Plastic |
| IP protection | IP44 |
| Protection class | ⚡ |
| Dimmability | No |
| Service life | 10,000 h |
| CRI | 80 |
| Charging time | 6–8 h |
| Light time | 8 h |
| Replaceability | Replaceable battery |

| Elliot | Watt | Lumen | Kelvin | ↔ | Smart | Insect-friendly | Item |
|----------------|--------|-------|--------|---|-------|-----------------|--------------------------|
| Path luminaire | 0.05 W | 5 lm | 3000 K | | | | DG 94233 |

Step and stair luminaire



| | |
|-------------------------|-------------------------|
| Material | Plastic |
| IP protection | IP44 |
| Protection class | ⚡ |
| Dimmability | No |
| Service life | 10,000 h |
| CRI | 80 |
| Charging time | 6–8 h |
| Light time | 8 h |
| Replaceability | Non-replaceable battery |


| Step and stair luminaire | Watt | Lumen | Kelvin | ↔ | Smart | Insect-friendly | Item |
|--------------------------|--------|-------|--------|---|-------|-----------------|--------------------------|
| Step and stair luminaire | 0.05 W | 2 lm | 3000 K | | | | DG 94234 |



Wall luminaires

- For wide-area light on house walls and entrance areas
- No power connection required thanks to solar technology
- Extremely sustainable and economical



Diskola wall luminaire



| | |
|-----------------------|---------------------|
| Material | Plastic |
| IP protection | IP44 |
| Dimmability | No |
| Service life | 30,000 h |
| CRI | 80 |
| Charging time | 6–8 h |
| Light time | 8 h |
| Replaceability | Replaceable battery |

| Diskola | Watt | Lumen | Kelvin | ☒ | Smart | Insect-friendly | Item |
|-----------------------------|-------|--------|--------|---|-------|-----------------|----------|
| Wall luminaire PIR sensor ☒ | 3.5 W | 400 lm | 3000 K | | | | DG 94854 |



Borola wall luminaire



| | |
|-----------------------|---------------------|
| Material | Plastic |
| IP protection | IP44 |
| Dimmability | No |
| Service life | 30,000 h |
| CRI | 80 |
| Charging time | 6–8 h |
| Light time | 8 h |
| Replaceability | Replaceable battery |

| Borola | Watt | Lumen | Kelvin | ☒ | Smart | Insect-friendly | Item |
|-----------------------------|-------|--------|--------|---|-------|-----------------|----------|
| Wall luminaire PIR sensor ☒ | 3.5 W | 220 lm | 3000 K | | | | DG 94855 |

Sorova wall luminaire



| | |
|-----------------------|-------------------------|
| Material | Plastic |
| IP protection | IP44 |
| Dimmability | No |
| Service life | 30,000 h |
| CRI | 80 |
| Charging time | 6–8 h |
| Light time | 8 h |
| Replaceability | Non-replaceable battery |

| Sorova | Watt | Lumen | Kelvin | ☒ | Smart | Insect-friendly | Item |
|-----------------------------|-------|--------|--------|---|-------|-----------------|----------|
| Wall luminaire PIR sensor ☒ | 3.5 W | 220 lm | 3000 K | | | | DG 94856 |



Wall luminaires


- Attractive and wide-area lighting on façades and in entrance areas
- The light is automatically switched on by the motion sensor

Ronas wall luminaire

| | |
|-----------------------|---------------------|
| Material | Aluminium |
| IP protection | IP44 |
| Dimmability | No |
| Service life | 30,000 h |
| CRI | 80 |
| Charging time | 8 h |
| Light time | 1: 2–8 h; 2: 3–12 h |
| Replaceability | Replaceable battery |

| Ronas | Watt | Lumen | Kelvin | ☼ | Smart | Insect-friendly | Item |
|-----------------------------|-------|--------|--------|---|-------|-----------------|----------|
| 1 Wall luminaire PIR sensor | 5 W | 320 lm | 3000 K | | | | DG 94334 |
| 2 Wall luminaire PIR sensor | 3.4 W | 180 lm | 3000 K | | | | DG 94335 |


Yoko wall luminaire



| | |
|-----------------------|---------------------|
| Material | Plastic |
| IP protection | IP44 |
| Dimmability | No |
| Service life | 30,000 h |
| CRI | 80 |
| Charging time | 6–8 h |
| Light time | 1.5–15 h |
| Replaceability | Replaceable battery |

| Yoko | Watt | Lumen | Kelvin | ☼ | Smart | Insect-friendly | Item |
|---------------------------|-------|-------|--------|---|-------|-----------------|----------|
| Wall luminaire PIR sensor | 1.2 W | 42 lm | 3000 K | | | | DG 94245 |


Eloise wall luminaire



| | |
|-----------------------|---------------------|
| Material | Plastic |
| IP protection | IP44 |
| Dimmability | No |
| Service life | 30,000 h |
| CRI | 80 |
| Charging time | 6–8 h |
| Light time | 2 h |
| Replaceability | Replaceable battery |

| Eloise | Watt | Lumen | Kelvin | ☼ | Smart | Insect-friendly | Item |
|----------------|------|-------|--------|---|-------|-----------------|----------|
| Wall luminaire | 1 W | 50 lm | 3000 K | | | | DG 94264 |

Helena wall luminaire



| | |
|-----------------------|---------------------|
| Material | Plastic |
| IP protection | IP44 |
| Dimmability | No |
| Service life | 30,000 h |
| CRI | 80 |
| Charging time | 6–8 h |
| Light time | 1.5 h |
| Replaceability | Replaceable battery |


| Helena | Watt | Lumen | Kelvin | ☼ | Smart | Insect-friendly | Item |
|----------------|------|-------|--------|---|-------|-----------------|----------|
| Wall luminaire | 3 W | 56 lm | 3000 K | | | | DG 94265 |



Wall luminaires

- Attractive and wide-area lighting on façades and in entrance areas
- The light is automatically switched on by the motion sensor



Eileen wall luminaire



| | |
|-----------------------|---------------------|
| Material | Plastic |
| IP protection | IP44 |
| Dimmability | No |
| Service life | 30,000 h |
| CRI | 80 |
| Charging time | 6–8 h |
| Light time | 8 h |
| Replaceability | Replaceable battery |

| Eileen | Watt | Lumen | Kelvin | Smart | Insect-friendly | Item |
|---------------------------|-------|--------|--------|-------|-----------------|----------------|
| Wall luminaire PIR sensor | 5.5 W | 400 lm | 3000 K | | | B 94570 |


Adya wall luminaire



| | |
|-----------------------|---------------------|
| Material | Plastic |
| IP protection | IP44 |
| Dimmability | No |
| Service life | 30,000 h |
| CRI | 80 |
| Charging time | 6–8 h |
| Light time | 8 h |
| Replaceability | Replaceable battery |

| Adya | Watt | Lumen | Kelvin | Smart | Insect-friendly | Item |
|---------------------------|-------|--------|--------|-------|-----------------|----------------|
| Wall luminaire PIR sensor | 2.5 W | 200 lm | 3000 K | | | B 94571 |

Solveig wall luminaire



| | |
|-----------------------|---------------------|
| Material | Plastic |
| IP protection | IP44 |
| Dimmability | No |
| Service life | 30,000 h |
| CRI | 80 |
| Charging time | 8–10 h |
| Light time | 1–8 h |
| Replaceability | Replaceable battery |


| Solveig | Watt | Lumen | Kelvin | Smart | Insect-friendly | Item |
|---------------------------|-------|--------|--------|-------|-----------------|----------------|
| Wall luminaire PIR sensor | 4.8 W | 338 lm | 3000 K | | | B 95393 |



In-ground luminaires

- In-ground luminaire with orientation light and motion sensor
- The IP67 protection class makes this in-ground luminaire waterproof, rustproof and suitable for installations in outdoor pedestrian areas – offering a max. load capacity of 500 kg
- A practical helper thanks to intelligent additional functions: Motion sensor, dusk sensor, and orientation light function

Aron in-ground luminaire

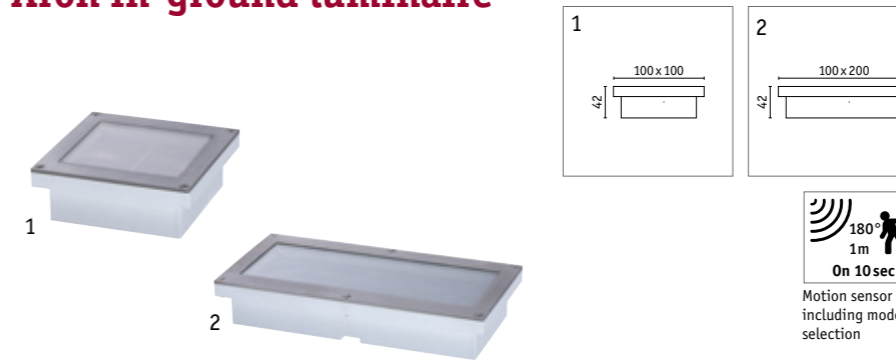

| | |
|-----------------------|--------------------------|
| Material | Stainless steel, plastic |
| IP protection | IP67 |
| Dimmability | No |
| Service life | 30,000 h |
| CRI | 80 |
| Charging time | 6–8 h |
| Light time | 15 h |
| Replaceability | Non-replaceable battery |

| Aron | Watt | Lumen | Kelvin | ☼ | Smart | Insect-friendly | Item |
|----------------------------------|-------|-------|--------|---|-------|-----------------|-------|
| 1 In-ground luminaire PIR sensor | 0.7 W | 12 lm | 3000 K | | | | 94238 |
| 2 In-ground luminaire PIR sensor | 1.5 W | 40 lm | 3000 K | | | | 94239 |

Domenic in-ground luminaire



| | |
|-----------------------|-------------------------|
| Material | Plastic |
| IP protection | IP67 |
| Dimmability | No |
| Service life | 30,000 h |
| CRI | 80 |
| Charging time | 6–8 h |
| Light time | 8 h |
| Replaceability | Non-replaceable battery |

| Domenic | Watt | Lumen | Kelvin | ☼ | Smart | Insect-friendly | Item |
|-----------------------|-------|---------|--------|---|-------|-----------------|-------|
| 1 In-ground luminaire | 0.1 W | 0.12 lm | 3000 K | | | | 94578 |
| 2 In-ground luminaire | 0.1 W | 0.12 lm | 3000 K | | | | 94576 |

Cube & Box in-ground luminaire



| | |
|-----------------------|--------------------------------|
| Material | Stainless steel, polycarbonate |
| IP protection | IP67 |
| Dimmability | No |
| Service life | 15,000 h |
| CRI | 80 |
| Charging time | 6–8 h |
| Light time | 8–10 h |
| Replaceability | Replaceable battery |

| Recessed floor luminaire | Watt | Lumen | Kelvin | ☼ | Smart | Insect-friendly | Item |
|--------------------------|--------|--------|--------|---|-------|-----------------|-------|
| 1 Cube | 0.24 W | 3.6 lm | 2700 K | | | | 93774 |
| 2 Box | 0.6 W | 7.5 lm | 2700 K | | | | 93775 |




Ryse wall luminaire & bollard light

- No power connection is required for installation thanks to the convenient solar technology
- Motion sensor for automatic switch-over to function light

Ryse wall luminaire




| | |
|-------------------------|---------------------|
| Material | Plastic |
| IP protection | IP44 |
| Protection class | ⬢ |
| Dimmability | No |
| Service life | 30,000 h |
| CRI | 80 |
| Charging time | 6–8 h |
| Light time | 4 h |
| Replaceability | Replaceable battery |




| Ryse | Watt | Lumen | Kelvin | Beam angle | Smart | Insect-friendly | Item |
|---------------------------|-------|-------|--------|------------|-------|-----------------|-----------------|
| Wall luminaire PIR sensor | 1.2 W | 30 lm | 3000 K | ⧘ 45° | | | DG 94246 |
| Wall luminaire PIR sensor | 1.2 W | 30 lm | 3000 K | ⧘ 45° | | | W 94247 |

Ryse bollard light

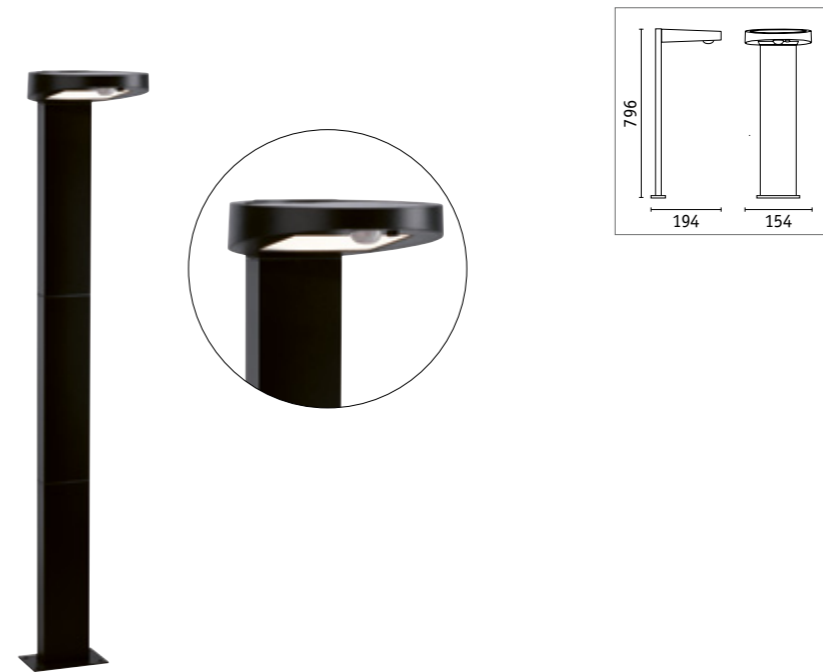

| | |
|-------------------------|-------------------------|
| Material | Plastic, metal |
| IP protection | IP44 |
| Protection class | ⬢ |
| Dimmability | No |
| Service life | 30,000 h |
| CRI | 80 |
| Charging time | 6–8 h |
| Light time | 4 h |
| Replaceability | Non-replaceable battery |




| Ryse | Watt | Lumen | Kelvin | ⧘ | Smart | Insect-friendly | Item |
|--------------------------|-------|-------|--------|-----|-------|-----------------|-----------------|
| Bollard light PIR sensor | 1.2 W | 30 lm | 3000 K | 45° | | | DG 94249 |



Soley wall luminaire & bollard light

- No power connection is required for installation thanks to the convenient solar technology
- Motion sensor for automatic switch-over to function light
- The wall luminaire can be used as a house number luminaire if combined with an optionally available attachment


Soley wall luminaire



| | |
|-------------------------|---------------------|
| Material | Plastic, metal |
| IP protection | IP44 |
| Protection class | ⚡ |
| Dimmability | No |
| Service life | 30,000 h |
| CRI | 80 |
| Charging time | 6–8 h |
| Light time | 1–15 h |
| Replaceability | Replaceable battery |

| Soley | Watt | Lumen | Kelvin | ☼ | Smart | Insect-friendly | Item |
|---------------------------|--------|-------|--------|---|-------|-----------------|-----------------|
| Wall luminaire PIR sensor | 1.22 W | 42 lm | 3000 K | | | | DG 94250 |

Soley bollard light




| | |
|-------------------------|-------------------------|
| Material | Plastic, metal |
| IP protection | IP44 |
| Protection class | ⚡ |
| Dimmability | No |
| Service life | 30,000 h |
| CRI | 80 |
| Charging time | 6–8 h |
| Light time | 1–15 h |
| Replaceability | Non-replaceable battery |

| Soley | Watt | Lumen | Kelvin | ☼ | Smart | Insect-friendly | Item |
|--------------------------|--------|-------|--------|---|-------|-----------------|-----------------|
| Bollard light PIR sensor | 1.22 W | 42 lm | 3000 K | | | | DG 94252 |



Kiran wall luminaire



| | |
|-------------------------|---------------------|
| Material | Plastic |
| IP protection | IP44 |
| Protection class | ⚡ |
| Dimmability | No |
| Service life | 30,000 h |
| CRI | 80 |
| Charging time | 6–8 h |
| Light time | 1 h |
| Replaceability | Replaceable battery |





| Kiran | Watt | Lumen | Kelvin | ☼ | Smart | Insect-friendly | Item |
|----------------|------|--------|--------|---|-------|-----------------|-----------------|
| Wall luminaire | 5 W | 280 lm | 3000 K | | | | DG 94339 |

Kiran wall luminaire

- Astounding lumen output from solar energy
- Unique technical design
- Includes motion sensor
- Replaceable lithium-ion battery

Kiran wall luminaire



| | |
|-------------------------|---------------------|
| Material | Plastic |
| IP protection | IP44 |
| Protection class | ⚡ |
| Dimmability | No |
| Service life | 30,000 h |
| CRI | 80 |
| Charging time | 6–8 h |
| Light time | 1 h |
| Replaceability | Replaceable battery |





| Kiran | Watt | Lumen | Kelvin | ☼ | Smart | Insect-friendly | Item |
|----------------|------|--------|--------|---|-------|-----------------|-----------------|
| Wall luminaire | 3 W | 180 lm | 3000 K | | | | DG 94340 |



Marisol wall luminaire & light object

- Wall luminaire and light object with a contemporary look
- The light is automatically switched on by the motion sensor

Marisol wall luminaire




Motion sensor including mode selection



| | |
|-------------------------|---------------------|
| Material | Plastic |
| IP protection | IP44 |
| Protection class | ◊ |
| Dimmability | No |
| Service life | 30,000 h |
| CRI | 80 |
| Charging time | 6–8 h |
| Light time | 8 h |
| Replaceability | Replaceable battery |

| Marisol | Watt | Lumen | Kelvin | ☼ | Smart | Insect-friendly | Item |
|---------------------------|-------|--------|--------|---|-------|-----------------|----------------|
| Wall luminaire PIR sensor | 5.5 W | 350 lm | 3000 K | | | | B 94572 |

Marisol light object



Motion sensor including mode selection



| | |
|-------------------------|-------------------------|
| Material | Plastic |
| IP protection | IP44 |
| Protection class | ◊ |
| Dimmability | No |
| Service life | 30,000 h |
| CRI | 80 |
| Charging time | 6–8 h |
| Light time | 8 h |
| Replaceability | Non-replaceable battery |


| Marisol | Watt | Lumen | Kelvin | ☼ | Smart | Insect-friendly | Item |
|-------------------------|-------|--------|--------|---|-------|-----------------|----------------|
| Light object PIR sensor | 5.5 W | 350 lm | 3000 K | | | | B 94573 |



| | |
|------------------|------------------------|
| Material | Stainless steel, glass |
| IP protection | IP44 |
| Protection class | ⚡ |
| Dimmability | No |
| Service life | 30,000 h |
| CRI | 80 |
| Charging time | 6–8 h |
| Light time | 4–6 h |
| Replaceability | Replaceable battery |

Ufo solar ground spike

- Customised illumination of footpaths




| Ufo | Watt | Lumen | Kelvin | ☼ | Smart | Insect-friendly | Item |
|--------------------|-------|-------|--------|---|-------|-----------------|-------|
| Solar ground spike | 0.2 W | 14 lm | 3000 K | | | | 93764 |



| | |
|------------------|---------------------|
| Material | Plastic, metal |
| IP protection | IP44 |
| Protection class | ⚡ |
| Dimmability | Yes |
| Service life | 30,000 h |
| CRI | 80 |
| Charging time | 10 h |
| Light time | 5 h |
| Replaceability | Replaceable battery |

Lillesol table luminaire









- The luminaire offers three dimming levels




| Lillesol | Watt | Lumen | Kelvin | ☼ | Smart | Insect-friendly | Item |
|-----------------|-------|-------|--------|---|-------|-----------------|-------|
| Table luminaire | 0.8 W | 45 lm | 3000 K | | | | 94309 |

Key

Light characteristics & quality

| | |
|---|---|
| Lumen (lm) | Lumen (lm) is the unit of measure for luminous flux. Luminous flux is the total amount of light emitted by the lamp. |
| Watt (W) | Physical unit of output. |
| Kelvin (K) | The light colour of a lamp is described by the term "colour temperature". The unit of measure for colour temperature is Kelvin (K). |
| ↘ | Beam angle |
|  | Pool water resistant |
|  | Seawater resistant |
|  | Insect-friendly |
| Ready for  | Smart operation possible when used with specific lamps |
|  | QuickPlug |
|  | Schuko plug |
|  | Product comes with plug for Switzerland |
| Protection class  | Classification of the protection against electrical shock. The protection classes are I, II and III. Protection class I features a grounding strand (cable identification green/yellow). The double insulation of protection class II is used in conjunction with Euro plugs without grounding wire. Protection class III defines devices operated with low-voltage protectors. |

ZigBee  ZigBee 3.0 allows luminaires to be controlled using app, voice or remote control.

IP protection classes IP44 splash protection & IP65 water jet protection for direct water jets (*and 12 V / 24 V safety extra-low voltage)


5-year warranty In addition to statutory warranty, Paulmann Licht GmbH also guarantees the correct functioning of products from the Paulmann brand for a period of 5 years after purchase, when used as intended and subject to an average on-time of max. 4500 h/year after professional installation.

5 Jahre Year Ans
Jaar Años Annos
Garantie

You can find the complete warranty conditions at www.paulmann.com/guarantee

All illustrations and information regarding dimensions, colours, etc. are subject to possible production tolerances and are non-binding. We reserve the right to make changes to products at any time.

Sensor data

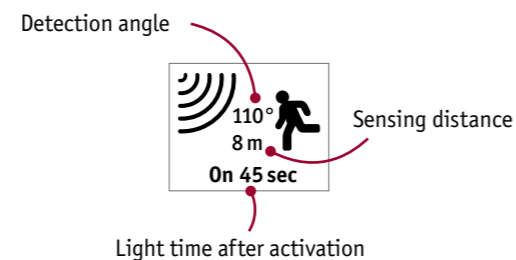


Colours

- DG** Dark grey/anthracite
- G** Grey
- WD** Wood
- B** Black
- W** White

P

Paulmann

You will find more items in our brochures:

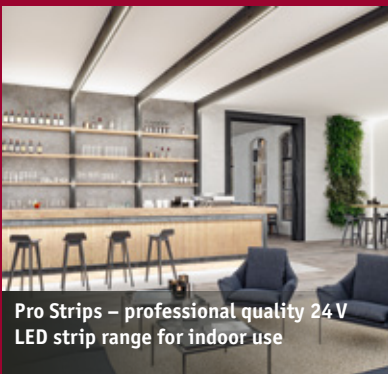

**Pro Strips – professional quality 24 V
LED strip range for indoor use**



**3-phase rail system ProRail3
1-phase rail system URail**



**Holistic lighting concepts for perfect
bathroom lighting**

Contact Germany

Paulmann Licht GmbH
Quezinger Feld 2
31832 Springe Völksen
Phone: +49 5041 998 317
fachvertrieb@paulmann.de