

# OUTDOOR LIGHTING



 **Zambelis**  
LIGHTS



## SVĚTELNÉ STUDIO

Náměstí Na Sádkách 705  
252 41 Dolní Břežany (Praha západ)

Telefon: +420 246 083 152

Mobil.: +420 702 061 783

E-mail: [studio@aulix.cz](mailto:studio@aulix.cz)


Web: [www.aulix.cz](http://www.aulix.cz)

Sledujte nás také na sociálních sítích:



Connect to our B2B platform through our website and access everything you need, anytime - 24/7

-  B2B Online Order/Open Orders
-  Product Availability & Arrival Dates
-  Extensive Range of Products
-  HD Photos
-  Product Data Sheets
-  Installation Manuals
-  Flexibility & Customized Products
-  Manufacturing Products
-  Photometric Files
-  CE Certificates
-  COC Certificates
-  3D Models / 3D Viewer on Website

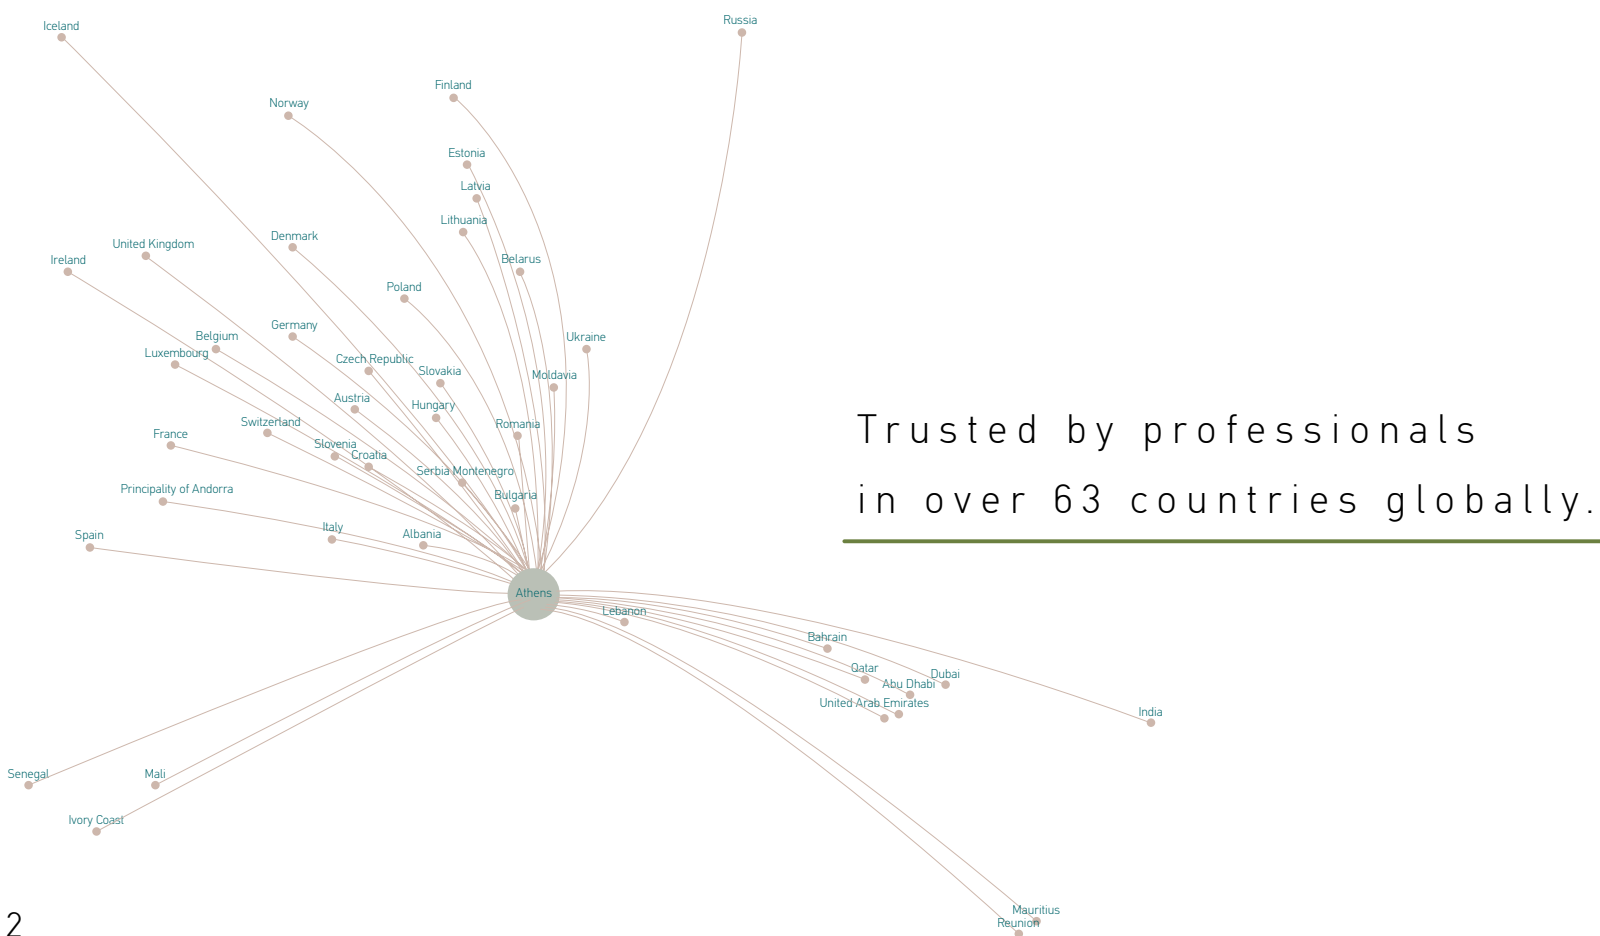

Trusted by professionals  
in over 63 countries globally.

# SUSTAINABILITY

Lighting the Future Responsibly.

We design lighting solutions that combine efficiency, durability and innovation - with minimal footprint and maximum purpose.

For us, green isn't just a color.  
It's a mindset shaping everything we create.



Scan to learn how we go green.



# TABLE OF CONTENTS

---

- 01. PORTABLE | p.012-035
- 02. CONCRETE | p.036-059
- 03. FLOOR & WALL | p.060-153
- 04. WALL | p.154-245
- 05. SPIKES | p.246-293
- 06. STEP | p.294-325
- 07. CEILING | p.326-341
- 08. INGROUND | p.342-365
- 09. WALL WASHER | p.366-379
- 10. IP65 SURFACE LIGHTING SYSTEM | p.380-389

# WE MAKE IT EASY

Virtual Light - ZambelisLights App



---

## 4 simple steps to light up your place

Download the  
Virtual Light App  
Scan QR


Find the ideal light  
by browsing our  
categories

View in your space  
through your mobile  
camera

Enjoy your  
new atmosphere!







E294 p.310



E242-W p.312



E241-G p.313



E241-W p.313



E247-G p.316



E246-W p.317



E229 p.318



E392 p.380

NEW



E389 p.381

NEW



E393 p.381

NEW



E391 p.381

NEW



E386 p.382

NEW



E387 p.382

NEW



E388 p.382

NEW



E230 p.319



E184 p.320



E181 p.320



E187 p.322



E333 p.326



S131 p.330



S113 p.332



E501 p.384

NEW



E397 p.386

NEW



SIL-385 p.386

NEW



E340 p.332



E220 p.334



E309 p.334



E270 p.336



E327 p.338



E502 p.342

NEW



E504 p.344

NEW



E508 p.348

NEW



E180 p.350



E178 p.351



E365 p.352



E366 p.355



E461 p.356

NEW



E364 p.357



E363 p.358



E362 p.358



E361 p.360



E359 p.363



E189 p.363



E496 p.366

NEW



E495 p.368

NEW



E499 p.370

NEW



E382 p.372



E380 p.375



E377 p.376



E375 p.376



E385 p.380

NEW



E390 p.380


NEW

Tap. Dim. Light Up.  
Prepare warm ambience with portable lights.



01 . PORTABLE



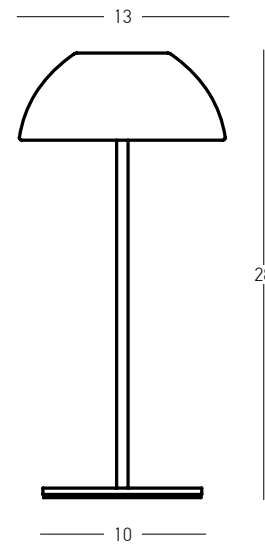

Power 2W  
 Input 5V DC  
 Battery 1200 MAH  
 Color Temperature 2700K  
 Lumen 104Lm  
 Cri 80  
 IP 44  
 Dimensions Ø: 13cm H: 28cm  
 Shade Ø: 13cm H: 5.5cm  
 Touch Dimming   
 Material Metal - Aluminium - PC Diffuser  
 Special Feature Portable Table Lamp  
 USB Cable Included  
 Power-Off Memory Function  
 Working Time 100% of Light - 5.5H  
 50% of Light - 10H  
 10% of Light - 135H  
 Charging Time 3.5H  
 Color Sandy Black / **Code E485**  
 Color Sand / **Code E486**  
 Color Sandy Milk Tea / **Code E487**




**White AC-DC Adaptor for Portable Light**




Input 220-240V, 50/60Hz  
 Output 5V, 1A  
 Color White / **Code E099**





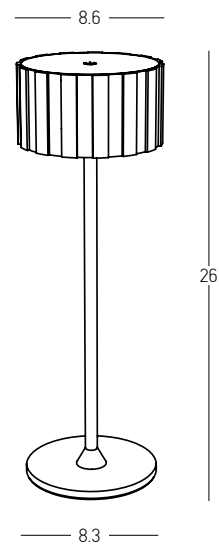

Power 2W  
 Input 5V DC  
 Battery 1800 MAH  
 Color Temperature 2700K, 4000K, 6500K  
 Lumen 124Lm  
 Cri 80  
 IP 44  
 Dimensions Ø: 8.6cm H: 26cm  
 Shade Ø: 8.6cm H: 4.7cm  
 Touch Dimming ☉  
 Material Metal - Aluminium - PC Diffuser  
 Special Feature Portable Table Lamp  
 USB Cable Included  
 Power-Off & Brightness Memory Function  
 Working Time 100% of Light - 6H  
 50% of Light - 11.5H  
 10% of Light - 60H  
 Charging Time 4H  
 Color Sand / **Code E488**  
 Color Sandy Milk Tea / **Code E489**  
 Color Sandy Green / **Code E490**

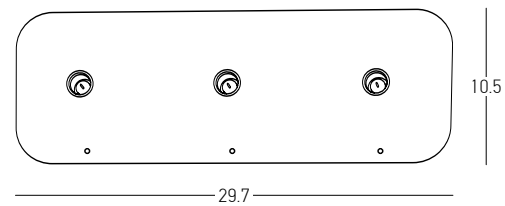


Input 220-240V, 50/60Hz  
 Output 5V, 2A  
 IP 20  
 Dimensions L: 29.7cm W: 10.5cm H: 2cm  
 Material Aluminium  
 Special Feature Portable Charging Base for 3pcs  
 100cm Cable Included  
 Color Black / **Code 25280**

White AC-DC Adaptor for Portable Light



Input 220-240V, 50/60Hz  
 Output 5V, 1A  
 Color White / **Code E099**



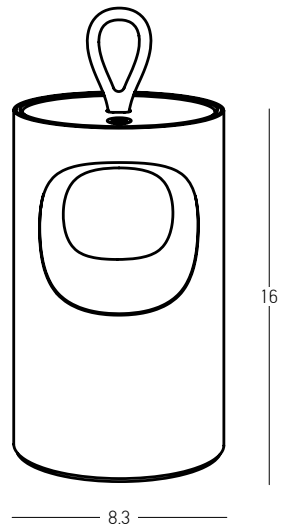


Power	2W
Input	5V DC
Battery	2000 MAH
Color Temperature	2700K
Lumen	103Lm
Cri	80
IP	44
Dimensions	L: 8.3cm W: 6cm H: 16cm
Touch Dimming	○
Material	Metal - Aluminium - PC Diffuser
Special Feature	Portable Table Lamp Charging Base with USB Cable Included Power-Off Memory Function
Working Time	100% of Light - 6H 50% of Light - 11H 10% of Light - 95H
Charging Time	3.5H
Color	Black Matt / <b>Code E482</b>
Color	White Matt / <b>Code E483</b>
Color	Brushed Gold / <b>Code E484</b>





**White AC-DC Adaptor for Portable Light**



Input	220-240V, 50/60Hz
Output	5V, 1A
Color	White / <b>Code E099</b>

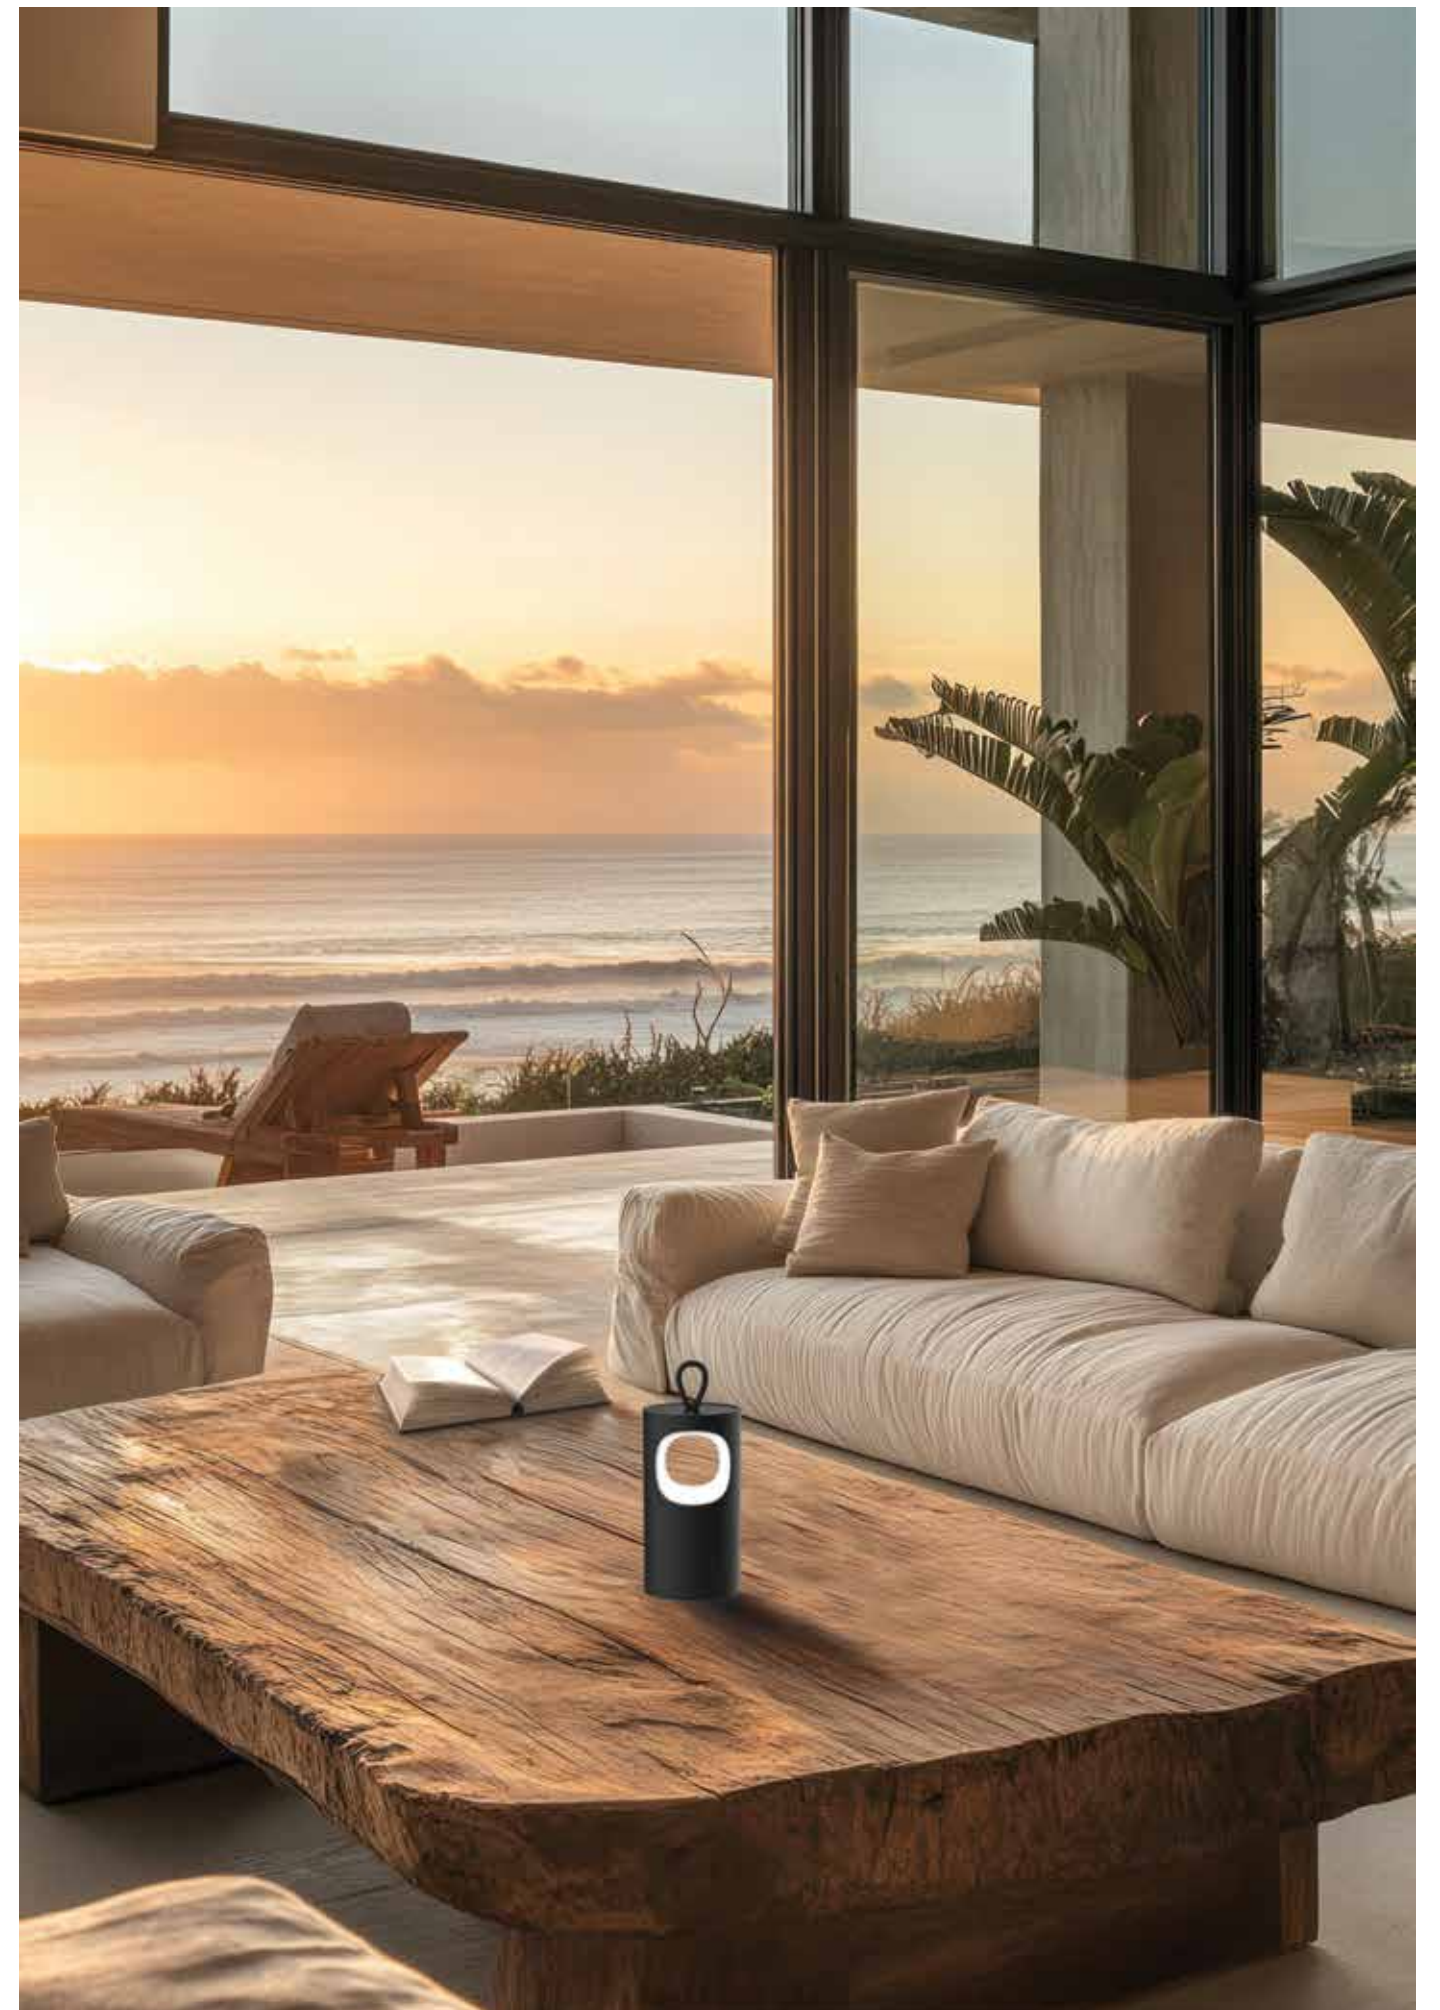

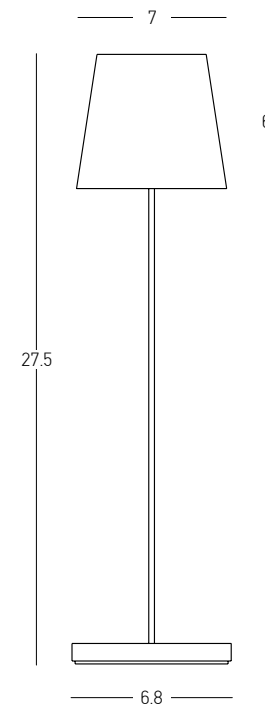

Power 1.5W  
 Input 5V DC  
 Battery 1900 MAH  
 Color Temperature 3000K  
 Lumen 181Lm  
 Cri 80  
 IP 54  
 Dimensions Ø: 7cm H: 27.5cm  
 Shade Ø: 7cm H: 6cm  
 Touch Dimming   
 Material Metal - Aluminium - PC Diffuser  
 Special Feature Portable Table Lamp  
 Charging Base with USB Cable Included  
 Power-Off Memory Function  
 Working Time 100% of Light - 10H  
 50% of Light - 20H  
 10% of Light - 100H  
 Charging Time 4H  
 Color Black / **Code E369**  
 Color Brick / **Code E370**  
 Color Sand / **Code E371**




White AC-DC Adaptor for Portable Light



Input 220-240V, 50/60Hz  
 Output 5V, 1A  
 Color White / **Code E099**




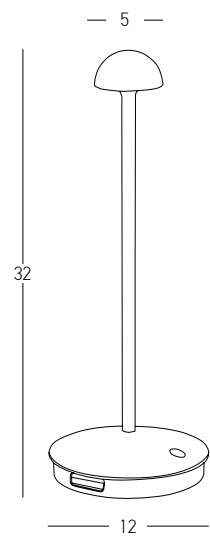


Power 2W  
 Input 3.7V DC  
 Battery 1800 MAH  
 Color Temperature 3000K  
 Lumen 124Lm  
 Cri 80  
 IP 54  
 Dimensions Ø: 12cm H: 32cm  
 Shade Ø: 5cm H: 2.6cm  
 Touch Dimming ☉  
 Material Metal - Aluminium - PC Frosted  
 Special Feature Portable Table Lamp  
 USB Cable & Adaptor Included  
 Power-Off Memory Function

Working Time  
 100% of Light - 7H  
 50% of Light - 14H  
 10% of Light - 70H

Charging Time 4.5H  
 Color Sandy Black / **Code E314**  
 Color Sandy White / **Code E313**

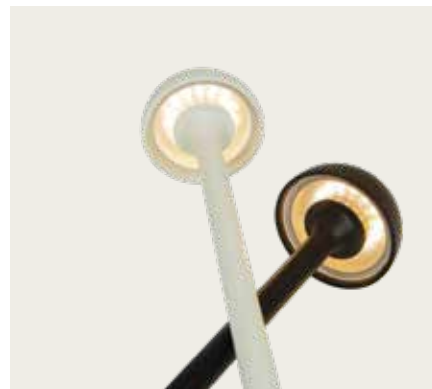

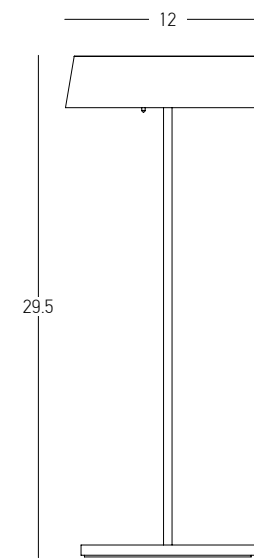



Power	2W
Input	3.7V DC
Battery	2200 MAH
Color Temperature	3000K
Lumen	210Lm
Cri	80
IP	54
Dimensions	Ø: 12cm H: 29.5cm
Shade	Ø: 12cm H: 3.2cm
Touch Dimming	○
Material	Metal - Aluminium - PC Diffuser
Special Feature	Portable Table Lamp USB Cable Included Power-Off Memory Function
Working Time	100% of Light - 10H 50% of Light - 20H 10% of Light - 110H
Charging Time	5H
Color	Sandy Black / <b>Code E289</b>
Color	Sandy White / <b>Code E290</b>
Color	Gold Matt / <b>Code E291</b>



**White AC-DC Adaptor for Portable Light**



Input	220-240V, 50/60Hz
Output	5V, 1A
Color	White / <b>Code E099</b>

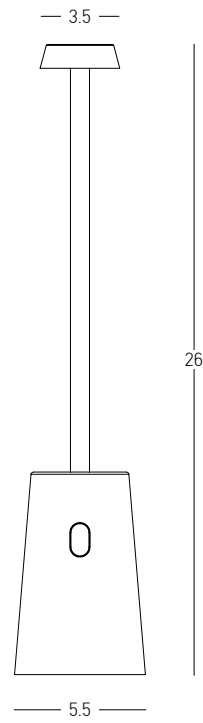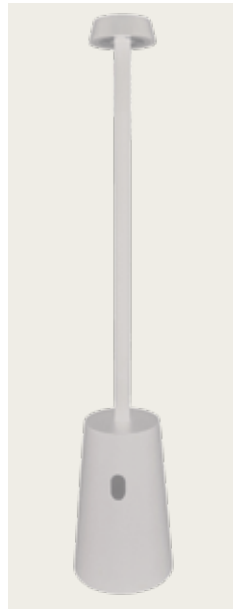

Power 2W  
 Input 3.7V DC  
 Battery 2000 MAH  
 Color Temperature 3000K  
 Lumen 168Lm  
 Cri 80  
 IP 44  
 Dimensions Ø: 5.5cm H: 26cm  
 Shade Ø: 3.5cm H: 1cm  
 Touch Dimming ○  
 Material Metal - Aluminium - Glass  
 Special Feature Portable Table Lamp  
 Charging Base with USB Cable Included  
 Power-Off Memory Function  
 Working Time  
 100% of Light - 8H  
 50% of Light - 16H  
 10% of Light - 80H  
 Charging Time 4.5H  
 Color White / **Code E398**  
 Color Black / **Code E399**  
 Color Green / **Code E400**





White AC-DC Adaptor for Portable Light



Input 220-240V, 50/60Hz  
 Output 5V, 1A  
 Color White / **Code E099**



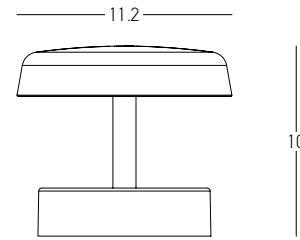

Power 1W  
 Input 5V DC  
 Battery 1200 MAH  
 Color Temperature 3000K  
 Lumen 80Lm  
 Cri 80  
 IP 44  
 Dimensions Ø: 11.2cm H: 10cm  
 Shade Ø: 11.2cm H: 2.4cm  
 Touch Dimming   
 Material Plastic  
 Special Feature Portable Table Lamp  
 USB Cable Included  
 Power-Off Memory Function  
 Working Time 100% of Light - 6H  
 50% of Light - 12H  
 10% of Light - 70H  
 Charging Time 3.5H  
 Color White / **Code E401**  
 Color Black / **Code E402**



White AC-DC Adaptor for Portable Light




Input 220-240V, 50/60Hz  
 Output 5V, 1A  
 Color White / **Code E099**





Power 2W  
 Input 3.7V DC  
 Battery 2200 MAH  
 Color Temperature 3000K  
 Lumen 260Lm  
 Cri 80  
 IP 54  
 Dimensions Ø: 11cm H: 38cm  
 Shade Ø: 11cm H: 10.5cm  
 Touch Dimming ☉  
 Material Metal - Aluminium - PC Diffuser  
 Special Feature Portable Table Lamp  
 USB Cable & Adaptor Included  
 Power-Off Memory Function  
 Working Time 100% of Light - 10H  
 50% of Light - 20H  
 10% of Light - 100H  
 Charging Time 5.5H  
 Color Sandy White / Code E193  
 Color Sandy Black / Code E194

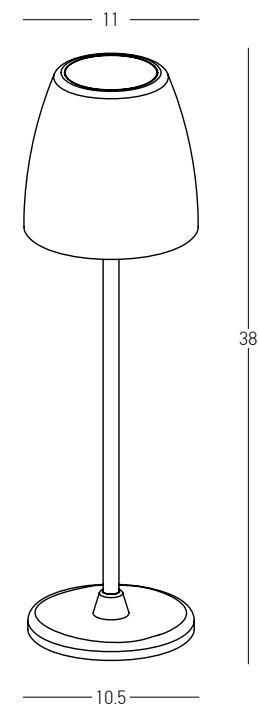


Concrete Glow - Natural Flow  
Rugged elegance for unique outdoor space.




02. CONCRETE




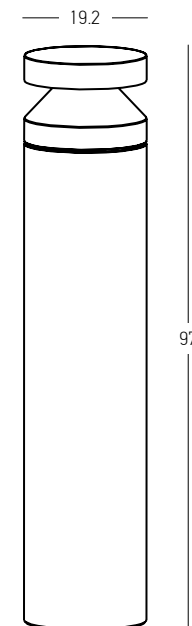

Power 20W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 509Lm  
 Cri 90  
 IP 65  
 Dimensions Ø: 19.2cm H: 97cm  
 Base Ø: 19.2cm H: 0.3cm  
 Material Concrete - Metal - Glass  
 Color Natural Concrete / **Code E478**

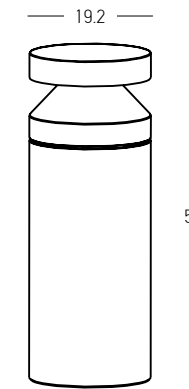



Power 20W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 509Lm  
 Cri 90  
 IP 65  
 Dimensions Ø: 19.2cm H: 52cm  
 Base Ø: 19.2cm H: 0.3cm  
 Material Concrete - Metal - Glass  
 Color Natural Concrete / **Code E477**

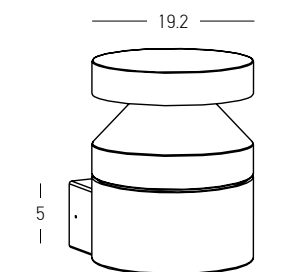

Power 15W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 414Lm  
 Cri 90  
 IP 65  
 Dimensions Ø: 19.2cm L: 21.5cm H: 24cm  
 Base W: 12cm H: 5cm  
 Material Concrete - Metal - Glass  
 Color Natural Concrete / **Code E474**






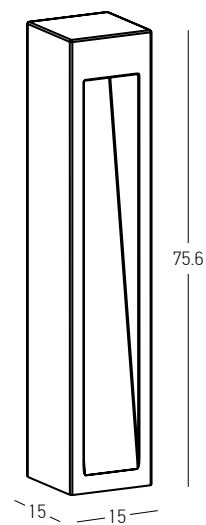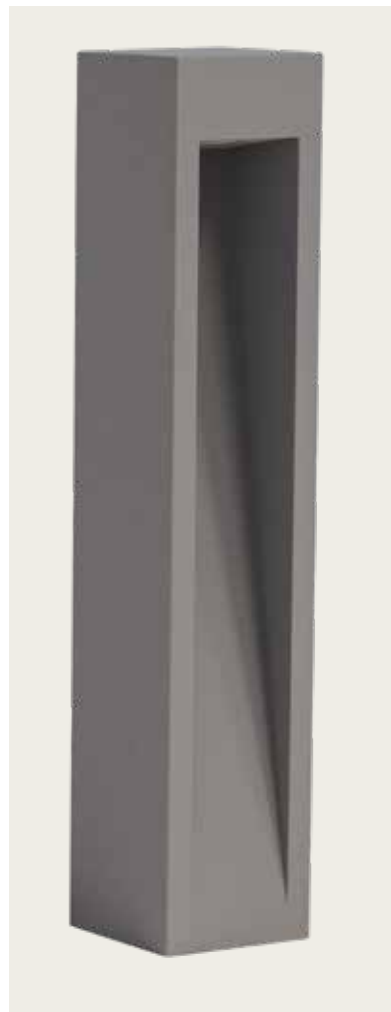


Power 9W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 426Lm  
 Cri 90  
 IP 65  
 Dimensions L: 15cm W: 15cm H: 75.6cm  
 Material Concrete - Metal - Glass  
 Color Natural Concrete / **Code E475**



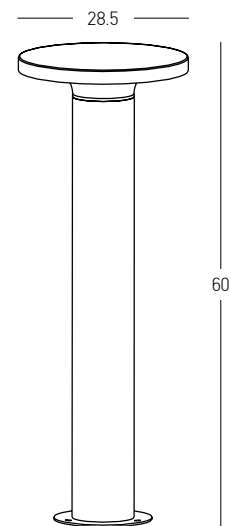


Power 11W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 755Lm  
 Cri 90  
 IP 65  
 Dimensions Ø: 28.5cm H: 60cm  
 Base Ø: 16.5cm H: 0.3cm  
 Shade Ø: 28.5cm H: 2.2cm  
 Material Concrete - Metal - PC Diffuser  
 Color Natural Concrete-Sandy Black / Code **E476**







Power 4W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 340Lm  
 Cri 80  
 IP 65  
 Dimensions L: 9.7cm W: 9.1cm H: 10.5cm  
 Beam Angle 36°  
 Dimmable Triac   
 Material Concrete - Aluminium  
 Color Natural Concrete / **Code E253**

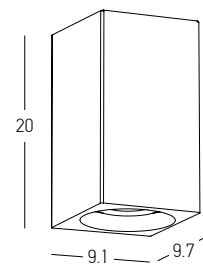


Power 2x 4W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 600Lm  
 Cri 80  
 IP 65  
 Dimensions L: 9.7cm W: 9.1cm H: 20cm  
 Beam Angle 36°  
 Dimmable Triac   
 Material Concrete - Aluminium  
 Special Feature Up-Down Lighting  
 Color Natural Concrete / **Code E254**

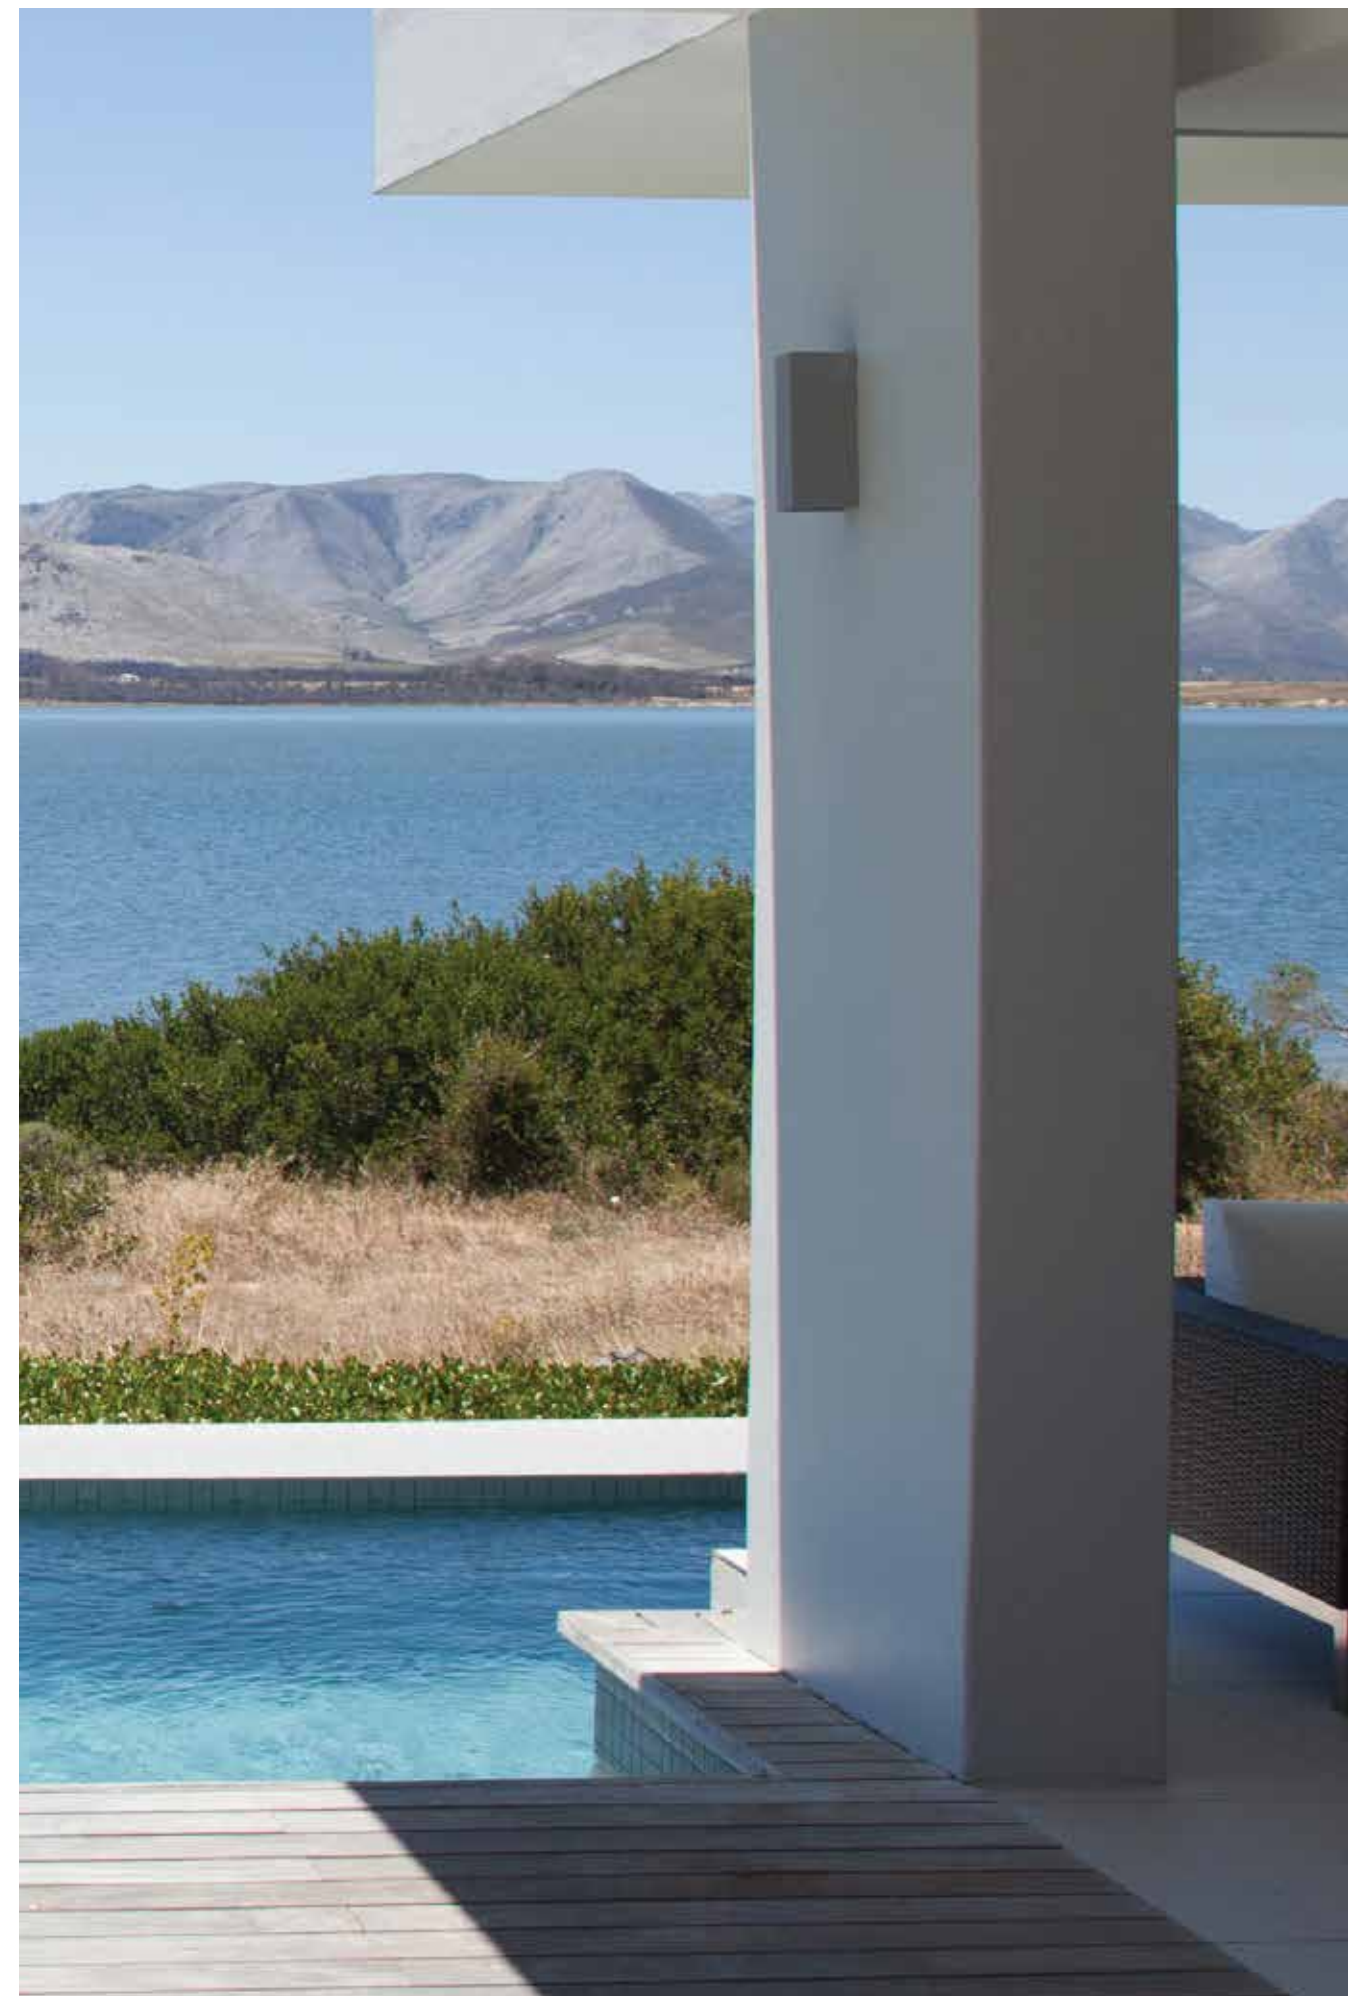

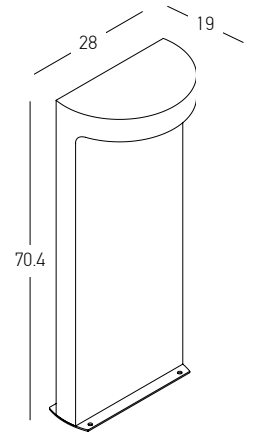


Power 8W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 490Lm  
 Cri 80  
 IP 65  
 Dimensions L: 19cm W: 28cm H: 70.4cm  
 Base L: 10cm W: 28cm H: 0.5cm  
 Material Concrete - Metal - Glass  
 Color Natural Concrete / **Code E383**

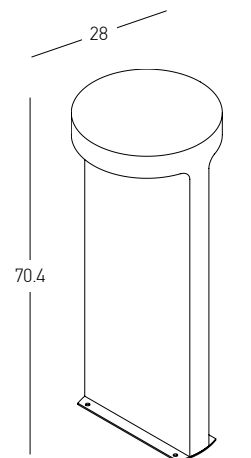

Power 2x 8W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 780Lm  
 Cri 80  
 IP 65  
 Dimensions Ø: 28cm H: 70.4cm  
 Base L: 10cm W: 28cm H: 0.5cm  
 Material Concrete - Metal - Glass  
 Color Natural Concrete / **Code E384**



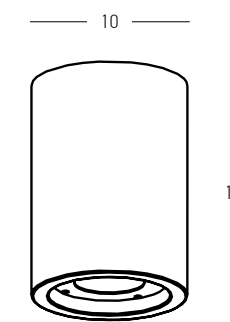


Bulb	1x GU10 LED
Power	9W MAX
Input	220-240V, 50/60Hz
IP	54
Dimensions	Ø: 10cm H: 14cm
Material	Concrete - Metal
Color	Natural Concrete / <b>Code E480</b>







Power 10W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 363Lm  
 Cri 90  
 IP 65  
 Dimensions Ø: 8.6cm H: 58.3cm  
 Base Ø: 12.5cm H: 0.5cm  
 Material Concrete - Metal - PC Diffuser  
 Color Natural Concrete-Black / **Code E410**


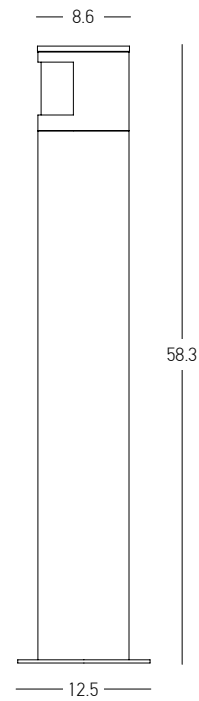


Power 10W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 395Lm  
 Cri 90  
 IP 65  
 Dimensions Ø: 8.6cm H: 58.3cm  
 Base Ø: 12.5cm H: 0.5cm  
 Material Concrete - Metal - PC Diffuser  
 Color Natural Concrete-Black / **Code E411**

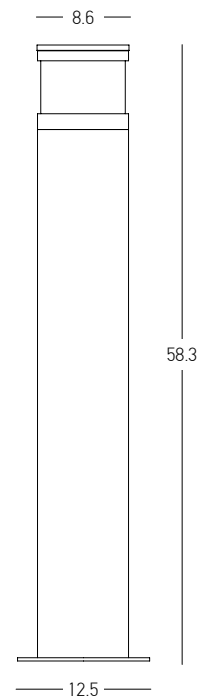


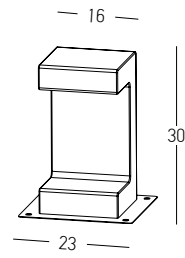

Power 8W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 490Lm  
 Cri 90  
 IP 54  
 Dimensions L: 15cm W: 16cm H: 30cm  
 Base L: 21cm W: 23cm  
 Material Concrete  
 Color Natural Concrete / **Code E191**

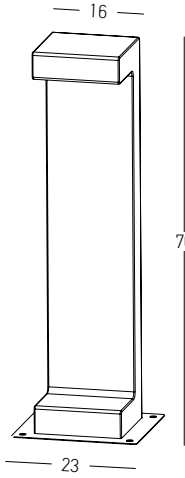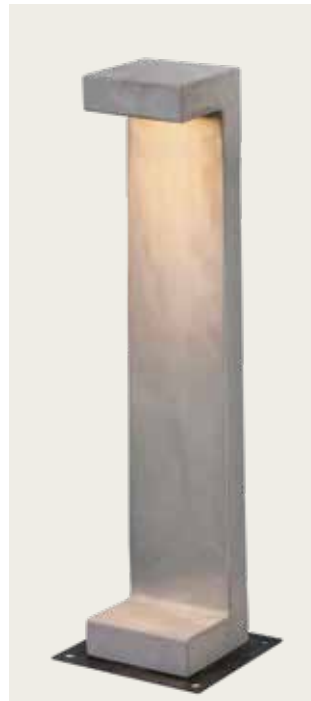


Power 8W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 490Lm  
 Cri 90  
 IP 54  
 Dimensions L: 15cm W: 16cm H: 70cm  
 Base L: 21cm W: 23cm  
 Material Concrete  
 Color Natural Concrete / **Code E192**

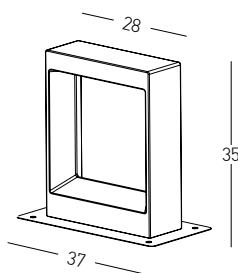


Power 8W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 490Lm  
 Cri 90  
 IP 54  
 Dimensions L: 10cm W: 28cm H: 35cm  
 Base L: 19cm W: 37cm  
 Material Concrete  
 Color Natural Concrete / **Code E190**



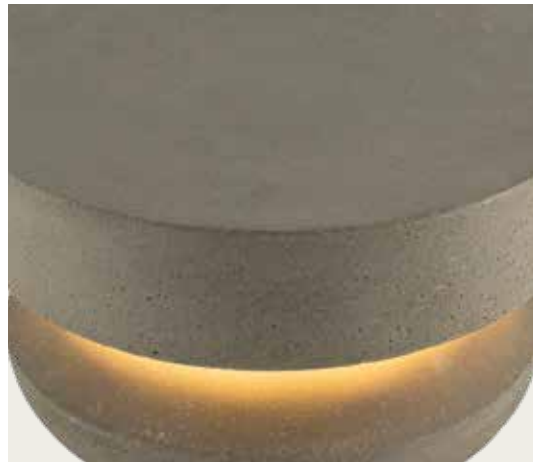

Power 7W  
 Input 24V  
 Color Temperature 3000K  
 Lumen 135Lm  
 Cri 90  
 IP 65  
 Dimensions Ø: 20cm H: 12cm  
 Material Concrete - Glass  
 Special Feature Spike & Base Included  
 Recommended Driver LPV-35-24 (Not Included)  
 In Parallel Connection 1-4pcs  
 Color Natural Concrete / **Code E479**

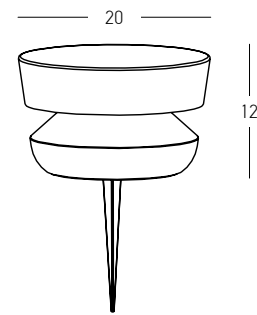


Wall to Floor - One Style  
Seamless design connection across surfaces.





03. FLOOR & WALL



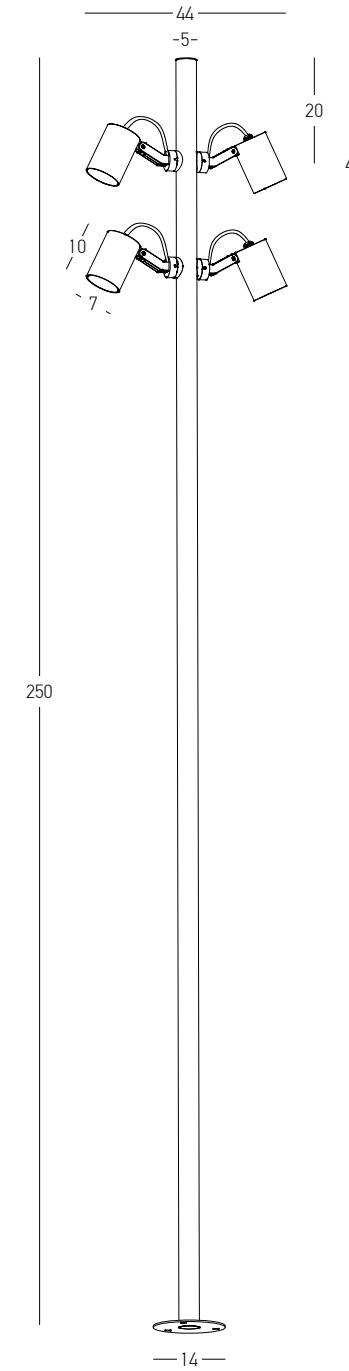


Power	35W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	2148Lm
Cri	90
IP	65
Dimensions	L: 44cm W: 7cm H: 250cm
Spots	Ø: 7cm H: 10cm
Base	Ø: 14cm H: 0.5cm
Beam Angle	60°
Material	Aluminium
Special Feature	Tilt Up Down Spots
Color	Sandy Black / <b>Code E406</b>

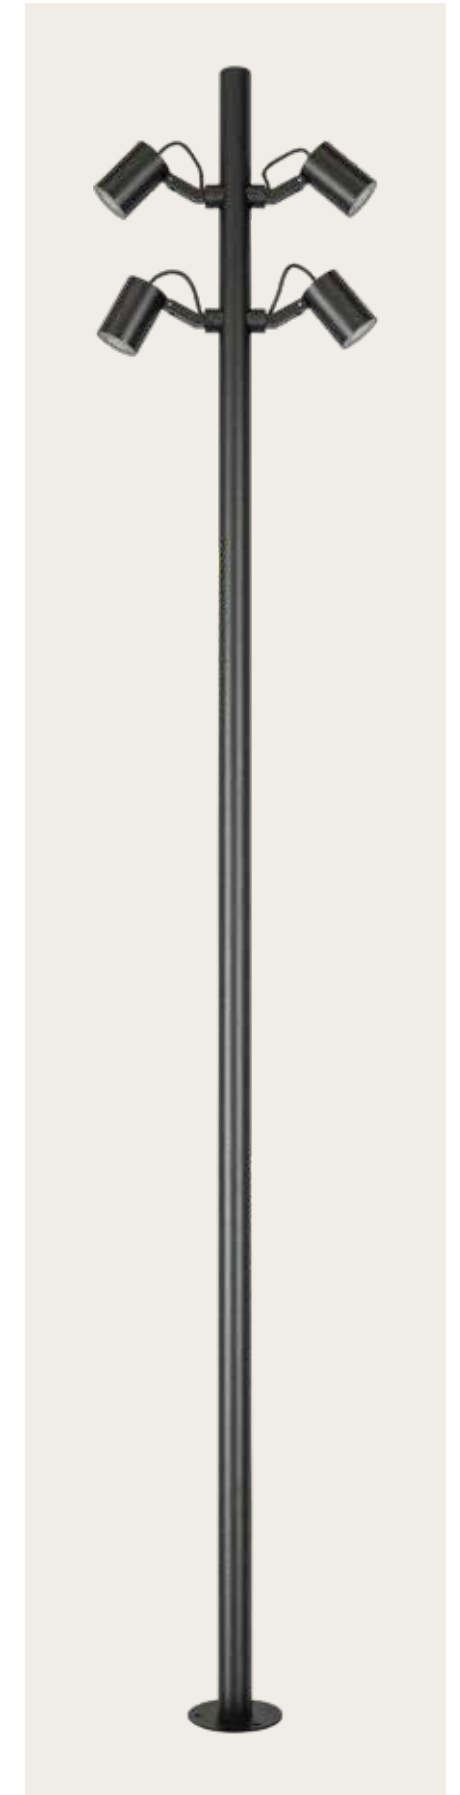

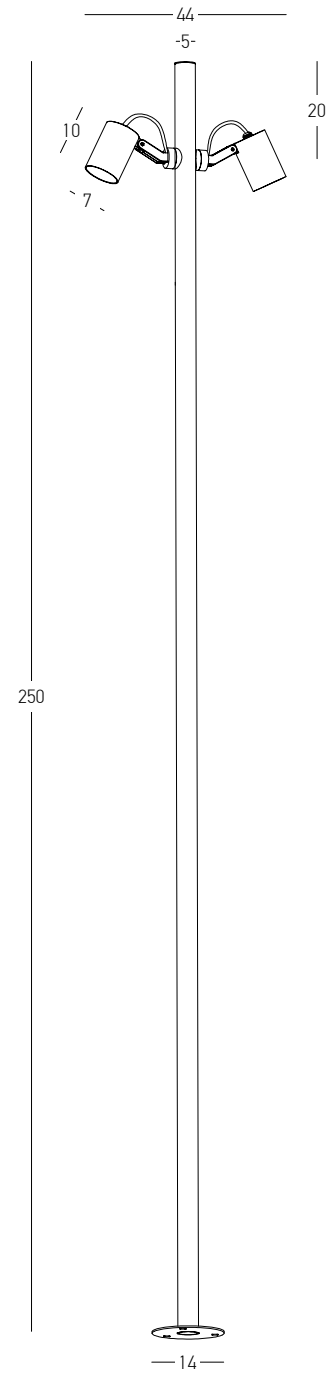


Power 17W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 1072Lm  
 Cri 90  
 IP 65  
 Dimensions L: 44cm W: 7cm H: 250cm  
 Spots Ø: 7cm H: 10cm  
 Base Ø: 14cm H: 0.5cm  
 Beam Angle 60°  
 Material Aluminium  
 Special Feature Tilt Up Down Spots  
 Color Sandy Black / **Code E405**





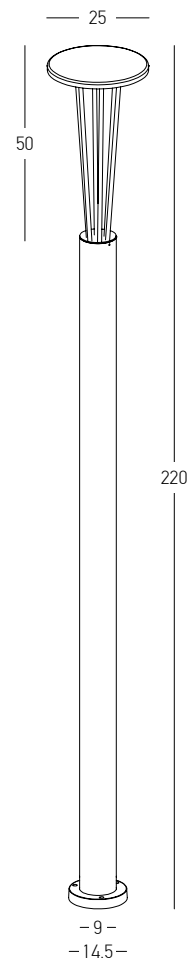

Power 15.5W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 1005Lm  
 Cri 85  
 IP 65  
 Dimensions Ø: 25cm H: 220cm  
 Base Ø: 14.5cm H: 2.5cm  
 Material Aluminium - PC Diffuser  
 Color Graphite / **Code E445**



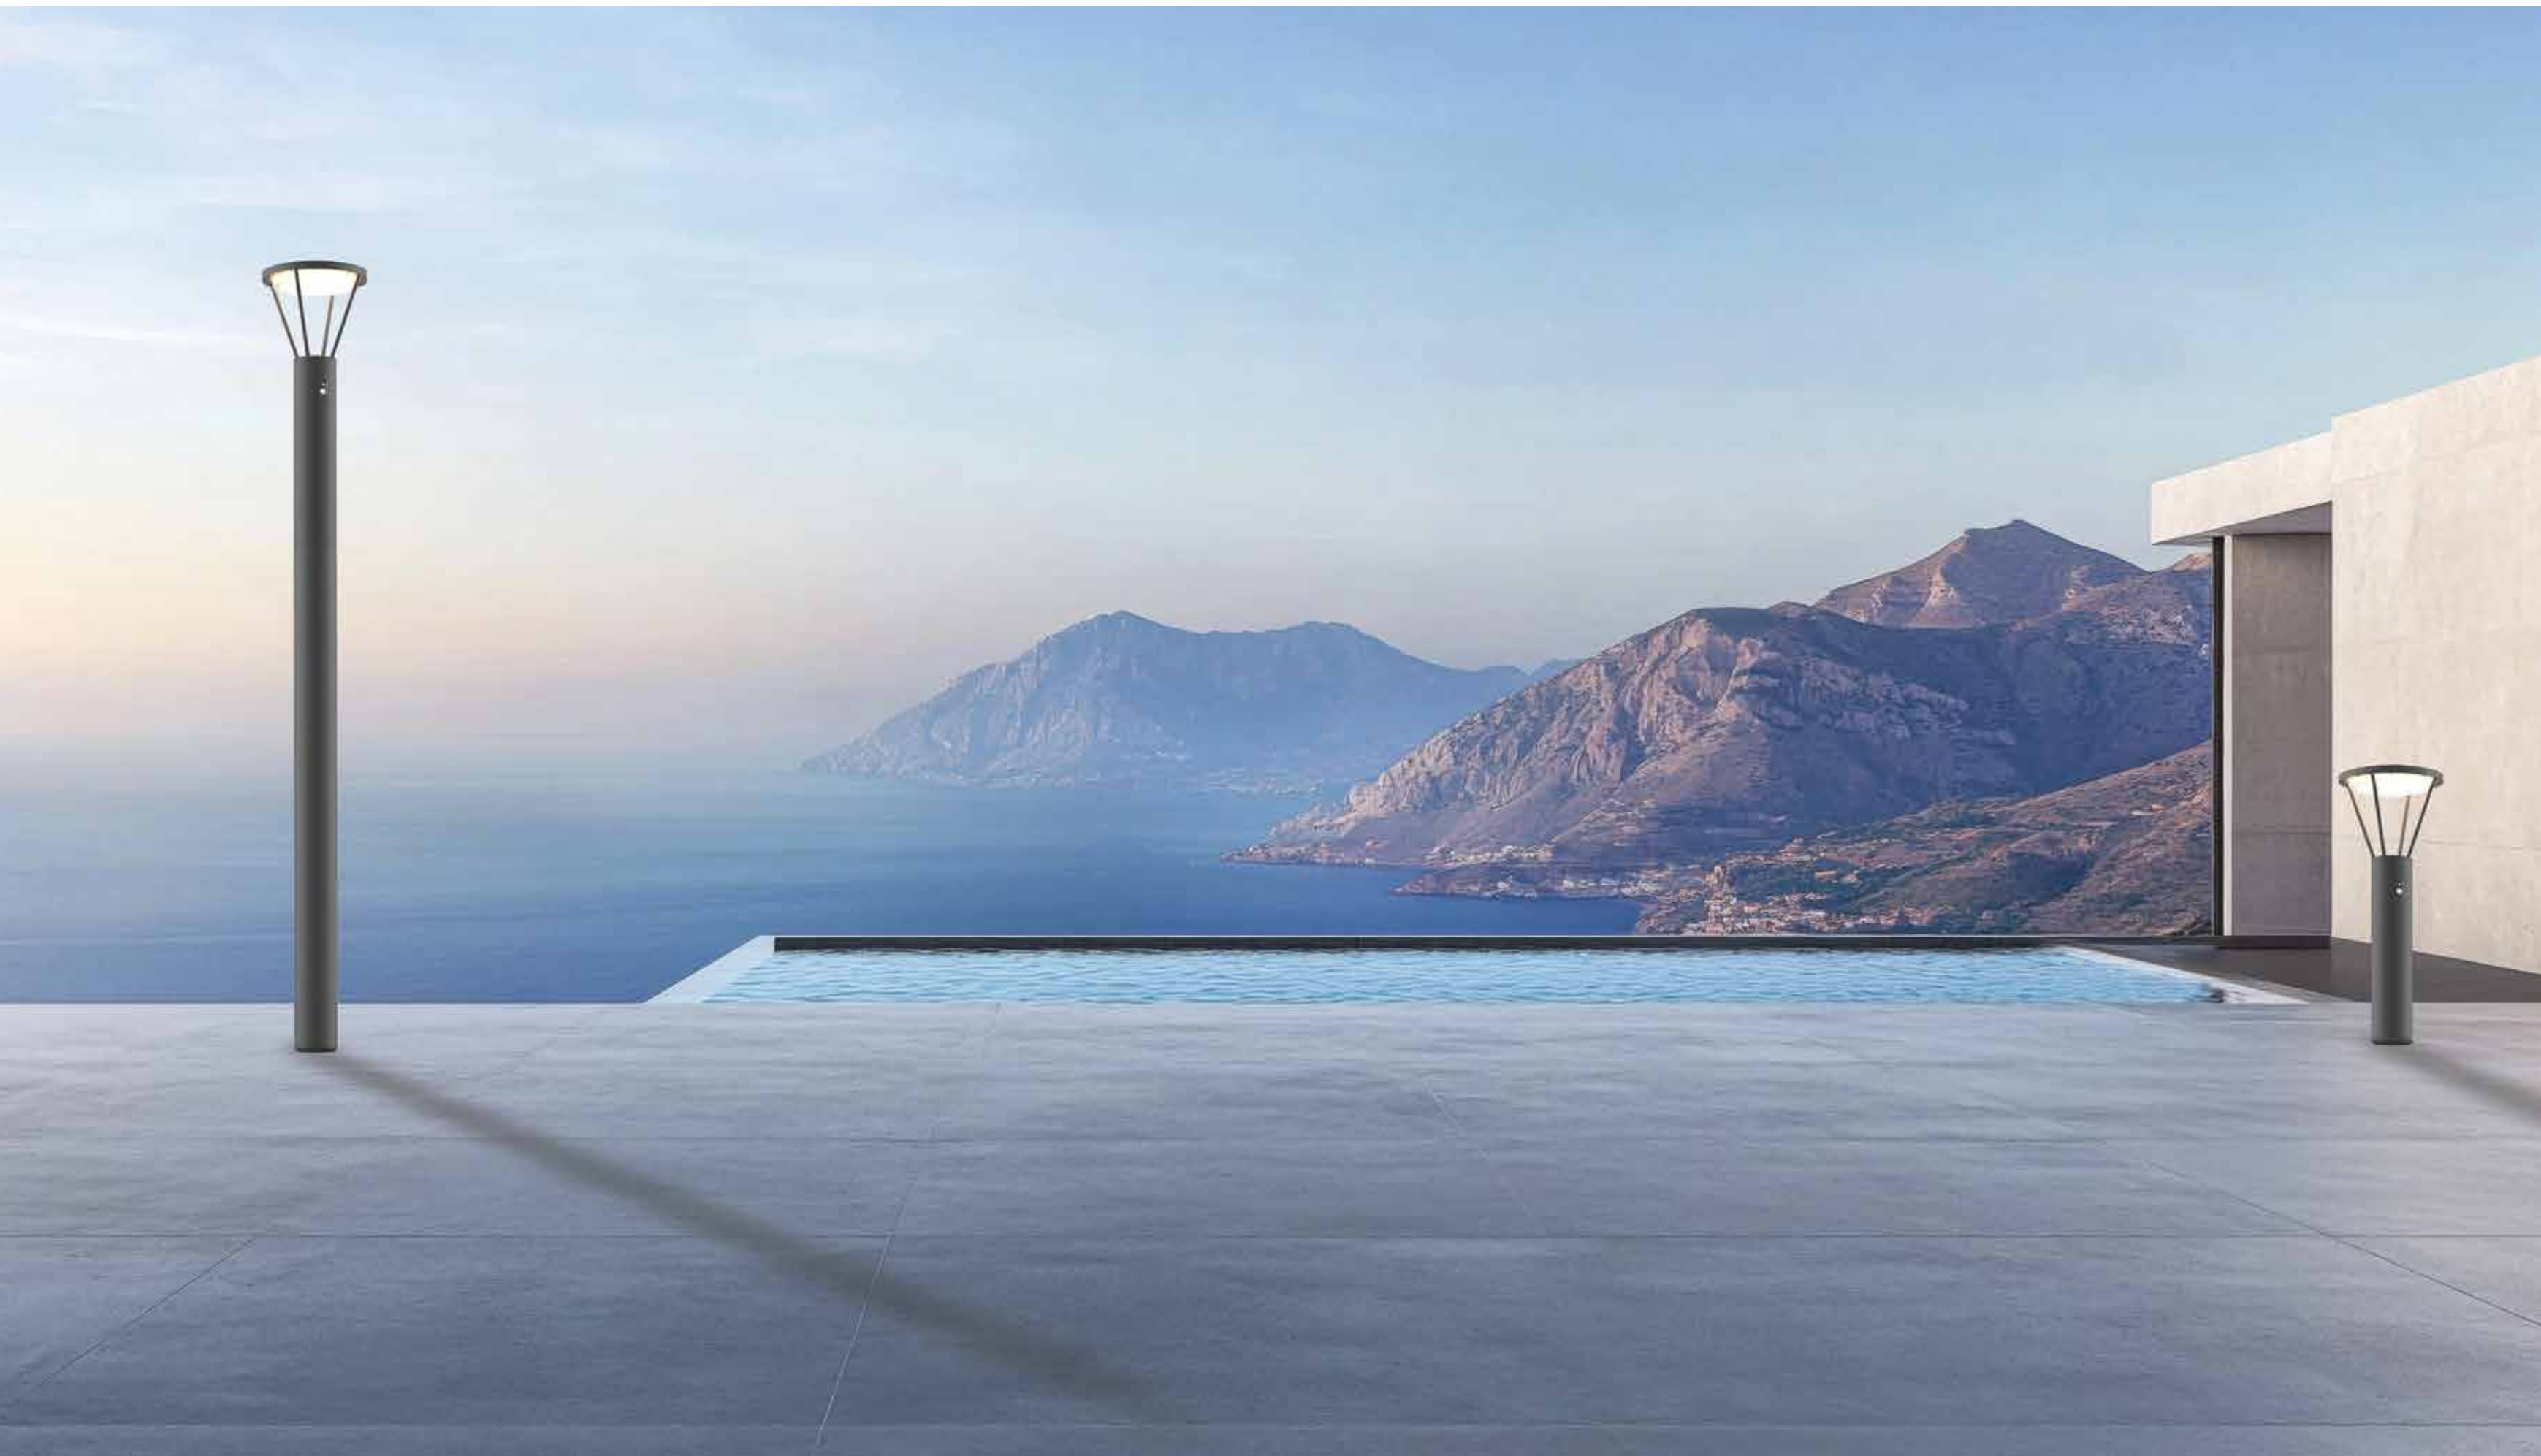

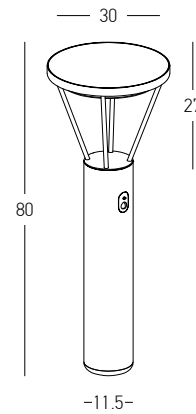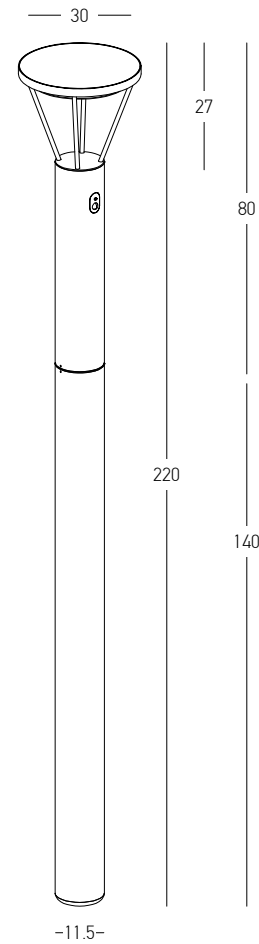

Power 5W  
 Input 3.7V DC  
 Battery 2x2200 MAH  
 Color Temperature 3000K  
 Lumen 378Lm  
 Cri 80  
 IP 54  
 Dimensions Ø: 30cm H: 80-220cm  
 Material Aluminium - PC Diffuser  
 Special Feature Solar Panel  
 3 Lighting Modes  
 Sense Distance 3-5m  
 Color Graphite / **Code E448**



LIGHTING MODES OVERVIEW

**Mode 1 • Dim + Motion Sensor**


LED operates at 10% brightness when ambient light <20 lux. Upon motion detection, brightness increases to 100% during movement. After 5 hours, standby dims to 5%, and motion-triggered output drops to 70%. Lamp switches off when ambient light >20 lux.

**Mode 2 • Constant Light**


Motion sensor disabled. LED runs at 50% when ambient light <20 lux, reduces to 30% after 2 hours, and 20% after 5 hours. Turns off when ambient light >20 lux.

**Mode 3 • Motion Only**

No light at standby. LED activates at 100% upon motion detection and stays on for 25 seconds after movement stops. After 5 hours, motion-triggered output reduces to 70%. Turns off automatically when ambient light >20 lux.

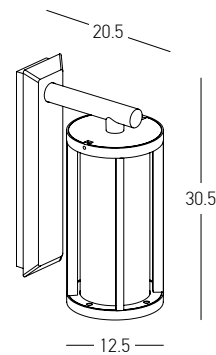


Bulb 1x E27  
 Power 15W MAX  
 Input 220-240V, 50/60Hz  
 IP 65  
 Dimensions L: 20.5cm W: 12.5cm H: 30.5cm  
 Base L: 3cm W: 7.5cm H: 28.5cm  
 Shade Ø: 12.5cm H: 24cm  
 Material Aluminium - Clear Diffuser  
 Color Sandy Black / Code E338

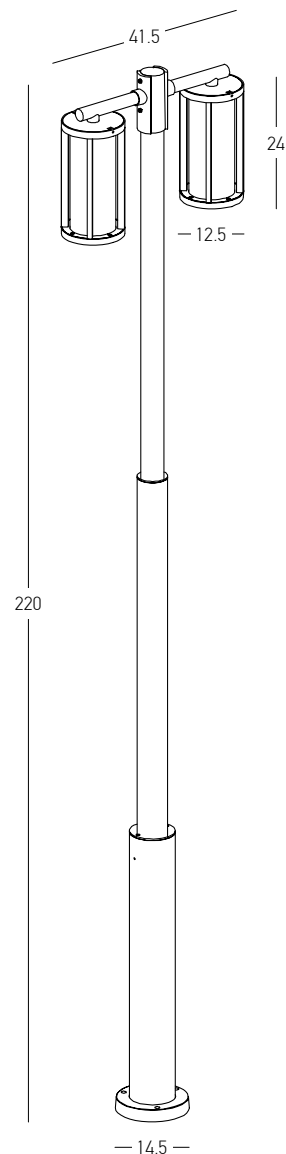


Bulb 2x E27  
 Power 15W MAX  
 Input 220-240V, 50/60Hz  
 IP 65  
 Dimensions L: 12.5cm W: 41.5cm H: 220cm  
 Base Ø: 14.5cm H: 3cm  
 Shades Ø: 12.5cm H: 24cm  
 Material Aluminium - Clear Diffuser  
 Color Sandy Black / Code E339



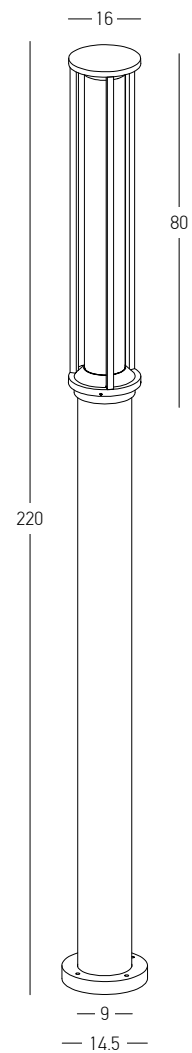

Power 17W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 1488Lm  
 Cri 80  
 IP 65  
 Dimensions Ø: 16cm H: 220cm  
 Base Ø: 14.5cm H: 2.5cm  
 Material Aluminium - PC Diffuser  
 Color Graphite / Code E348





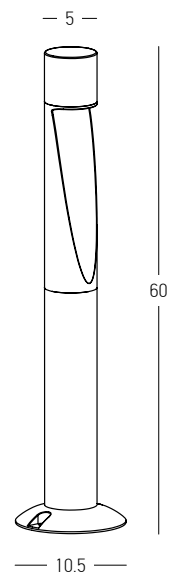

Power 6W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 187Lm  
 Cri 90  
 IP 65  
 Dimensions Ø: 5cm H: 60cm  
 Base Ø: 10.5cm  
 Material Aluminium - Glass  
 Color Sandy Black / Code E463

IP 65 LED



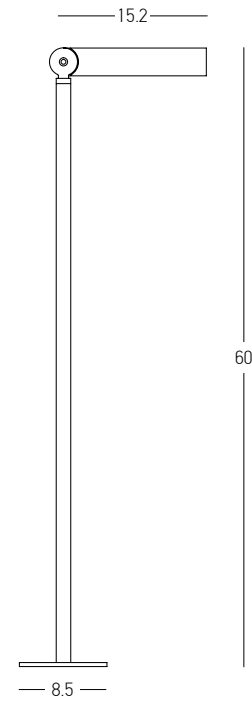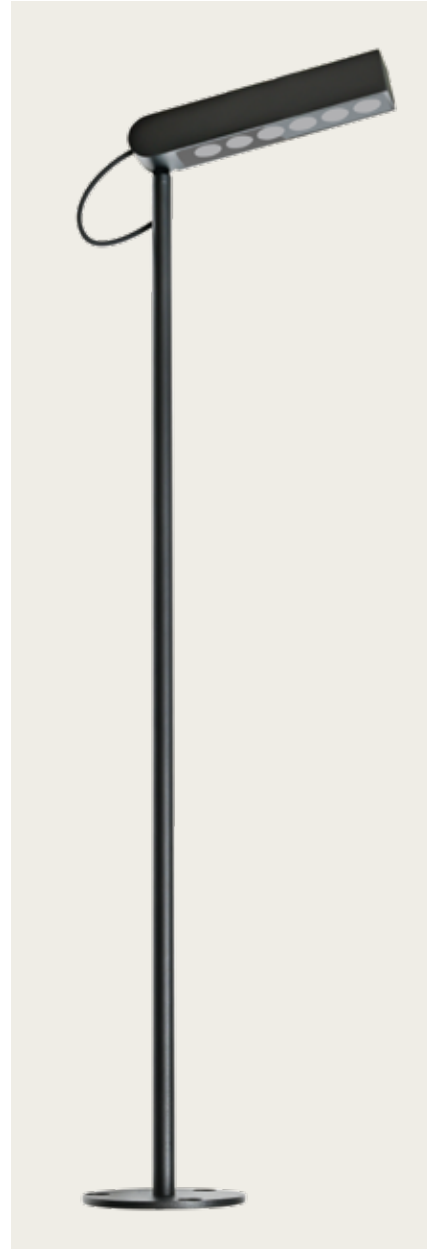


Power	8W
Input	24V, 50/60Hz
Color Temperature	3000K
Lumen	363Lm
Cri	90
IP	65
Dimensions	L: 15.2cm W: 4cm H: 60cm
Base	Ø: 8.5cm H: 0.5cm
Beam Angle	36°
Material	Aluminium - Tempered Glass
Recommended Driver	LPV-35-24 (Not Included)
Special Feature	In Parallel Connection 1-4pcs Tilt Up-Down Connection Box Included
Color	Sandy Black / <b>Code E407</b>




<b>Driver</b>	<b>LPV-35-24</b>
Power	35W
Input	220-240V, 50/60Hz
Output	24V
Dimensions	L: 14.8cm W: 4cm H: 3cm
IP	67



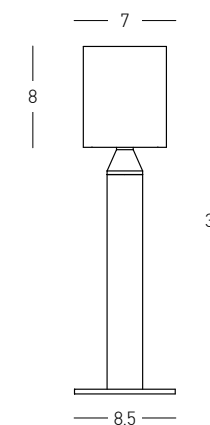




Power	8W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	363Lm
Cri	90
IP	65
Dimensions	Ø: 7cm H: 30cm
Base	Ø: 8.5cm H: 0.5cm
Shade	Ø: 7cm H: 8cm
Material	Aluminium - Tempered Glass
Special Feature	Connection Box Included
Color	Sandy Black / <b>Code E408</b>



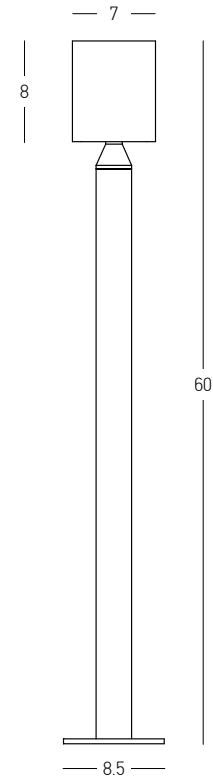


Power 8W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 363Lm  
 Cri 90  
 IP 65  
 Dimensions Ø: 7cm H: 60cm  
 Base Ø: 8.5cm H: 0.5cm  
 Shade Ø: 7cm H: 8cm  
 Material Aluminium - Tempered Glass  
 Special Feature Connection Box Included  
 Color Sandy Black / **Code E409**

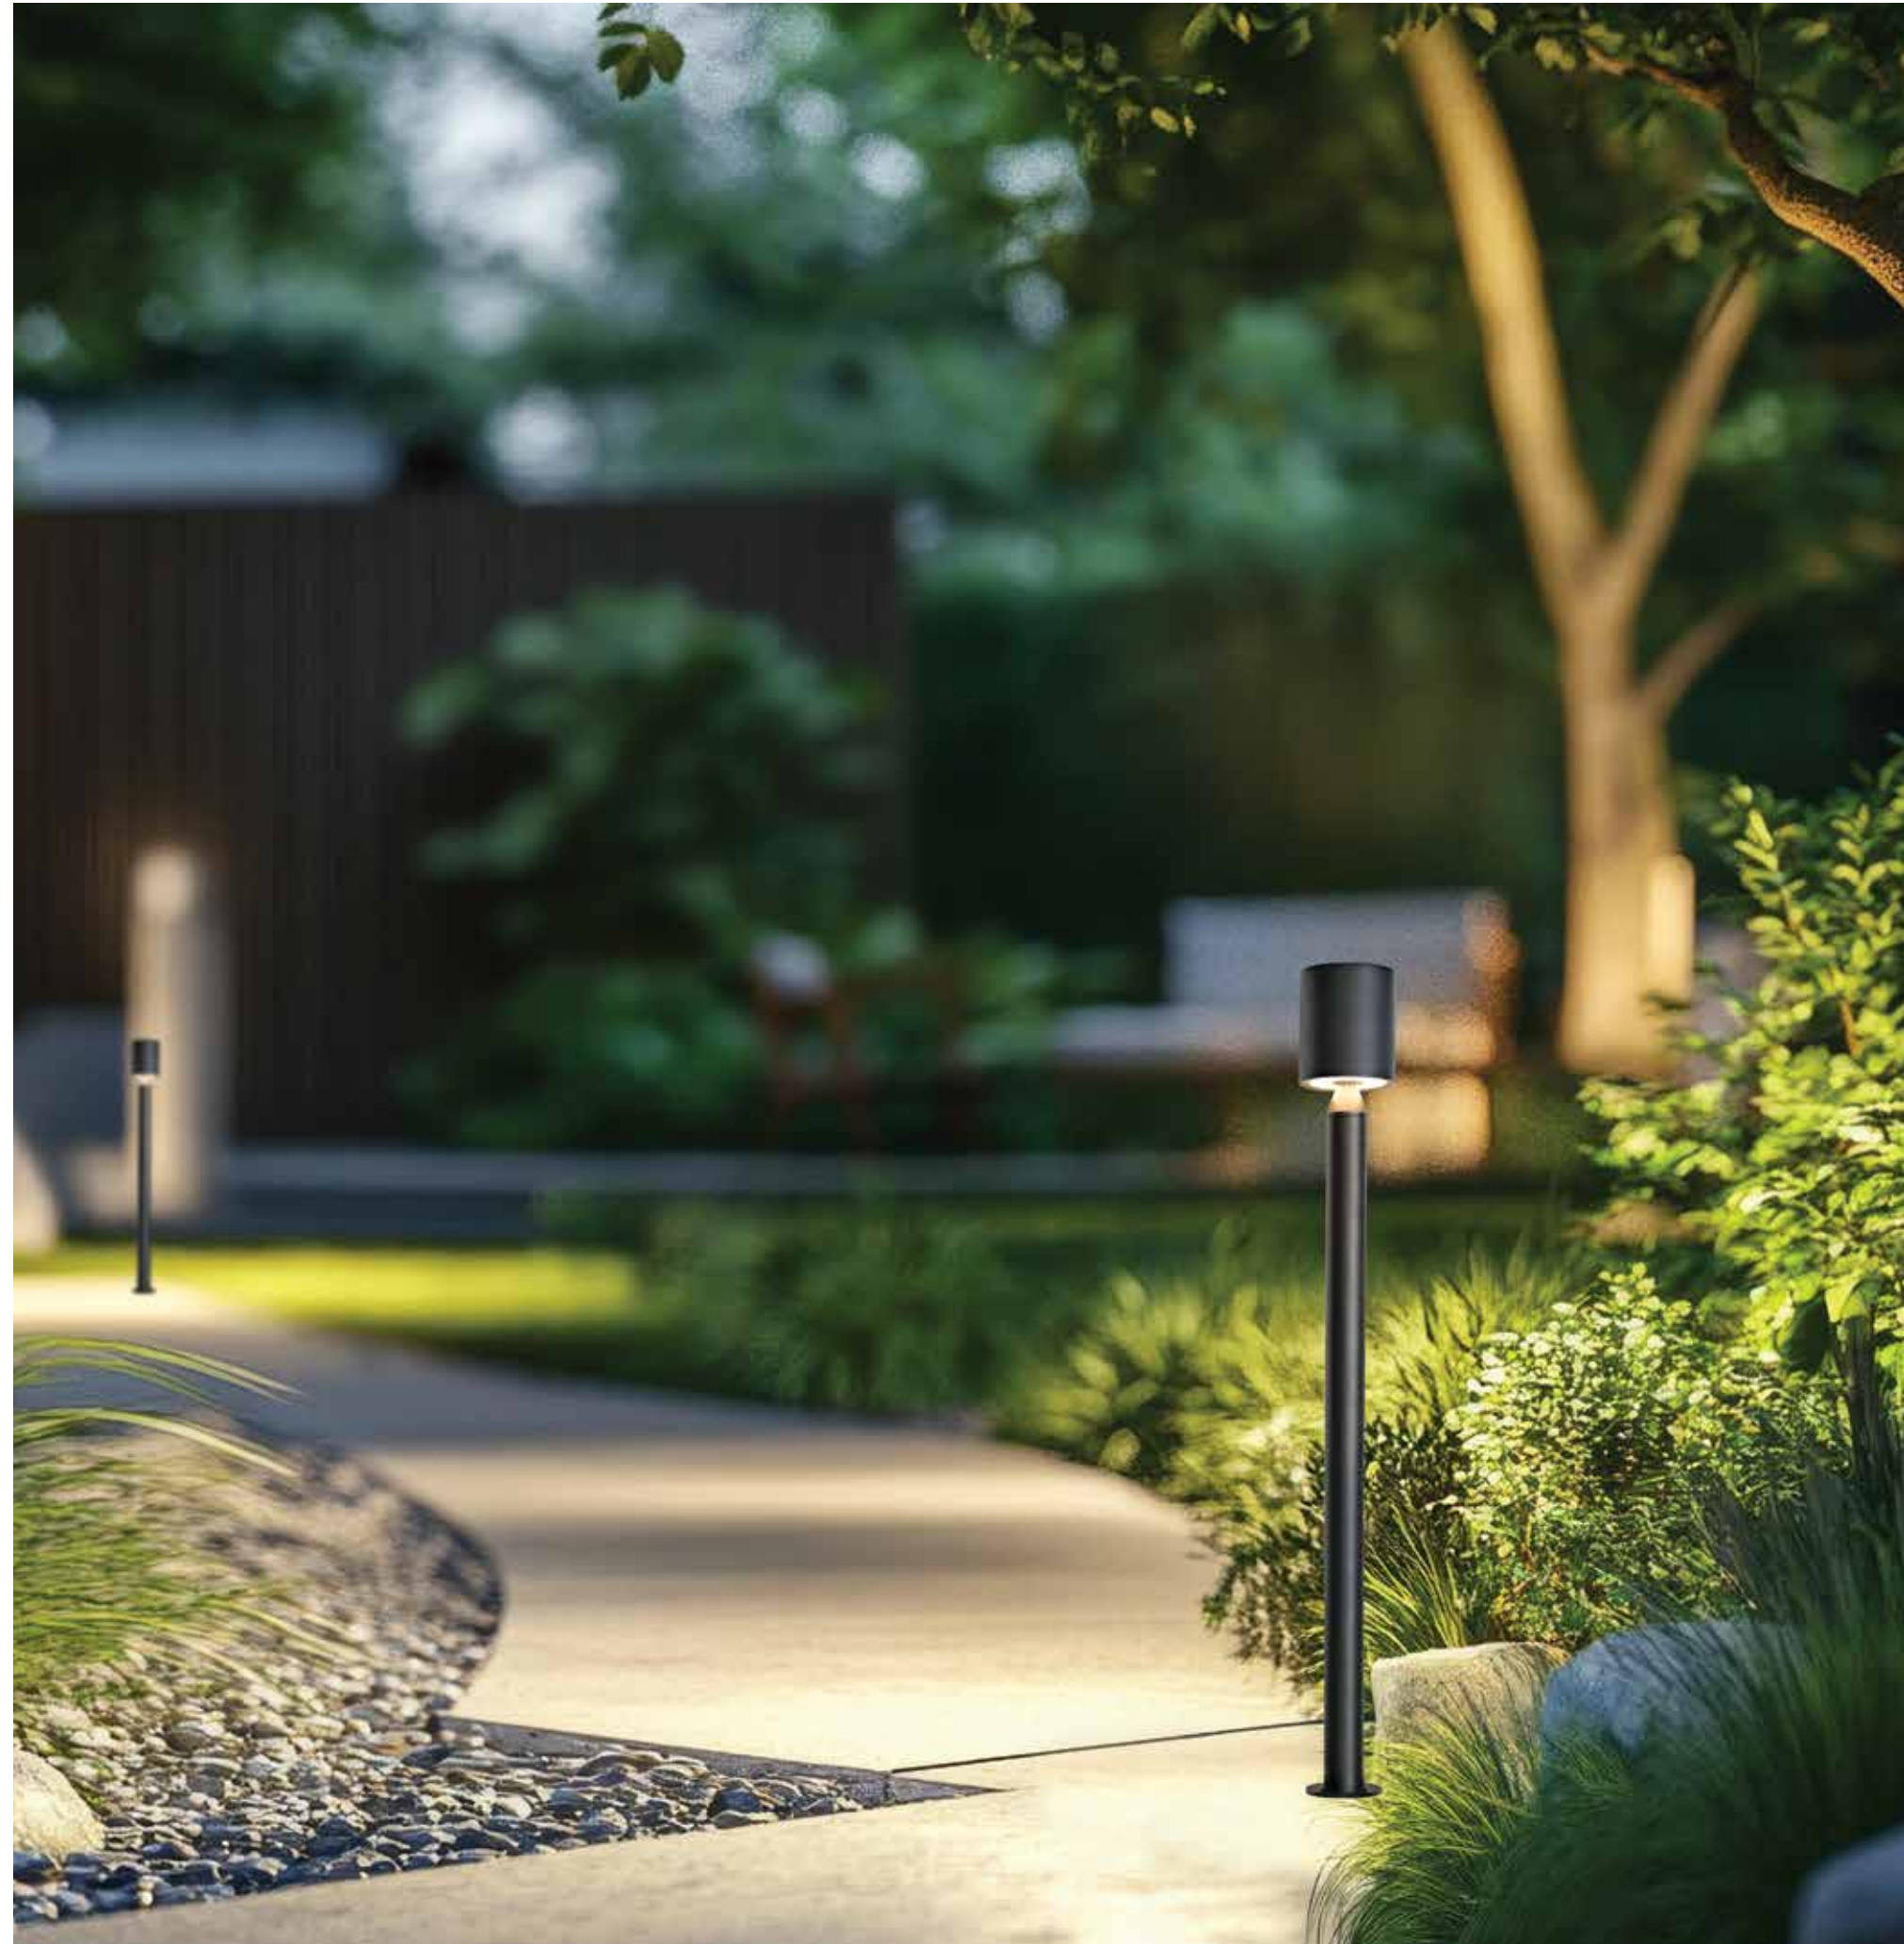

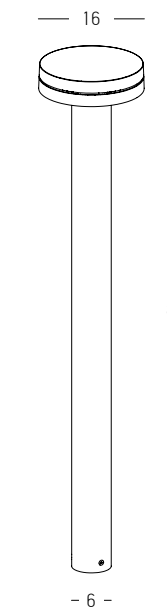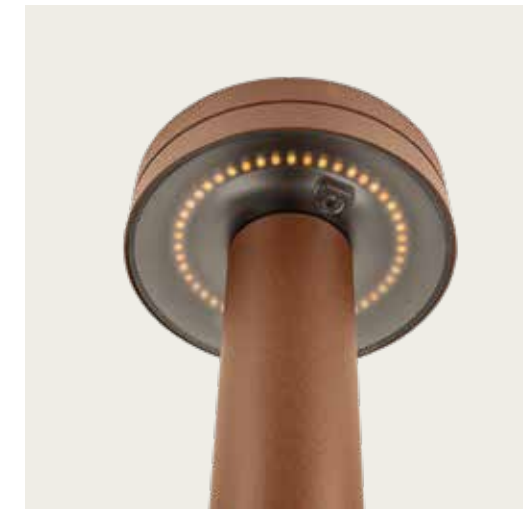


Power	12W
Input	220-240V, 50/60Hz
Color Temperature	2200K, 2700K, 3200K, 4000K
Lumen	566Lm, 610Lm, 658Lm, 712Lm
Cri	80
IP	65
Dimensions	Ø: 16cm H: 80cm
Material	Aluminium - PC Diffuser
Special Feature	CCT Switch
Color	Dark Brown / <b>Code E466</b>






Power 8W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 200Lm  
Cri 95  
IP 65  
Dimensions Ø: 6cm H: 60cm  
Material Aluminium - PC Diffuser  
Color Dark Coffee / **Code E423**



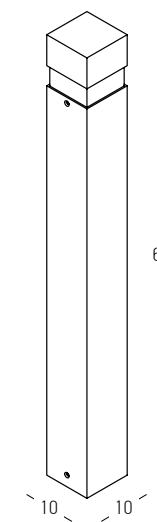


Power	15W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	438Lm
Cri	95
IP	65
Dimensions	L: 10cm W: 10cm H: 60cm
Material	Aluminium - PC Diffuser
Color	Dark Coffee / <b>Code E425</b>



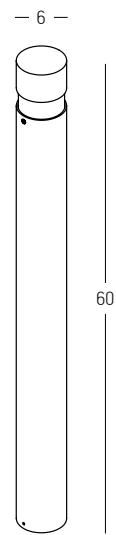

Power 8W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 200Lm  
Cri 95  
IP 65  
Dimensions Ø: 6cm H: 60cm  
Material Aluminium - PC Diffuser  
Color Graphite-Wood / **Code E424**




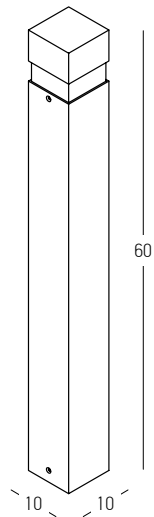


Power 15W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 438Lm  
 Cri 95  
 IP 65  
 Dimensions L: 10cm W: 10cm H: 60cm  
 Material Aluminium - PC Diffuser  
 Color Graphite-Wood / Code E426







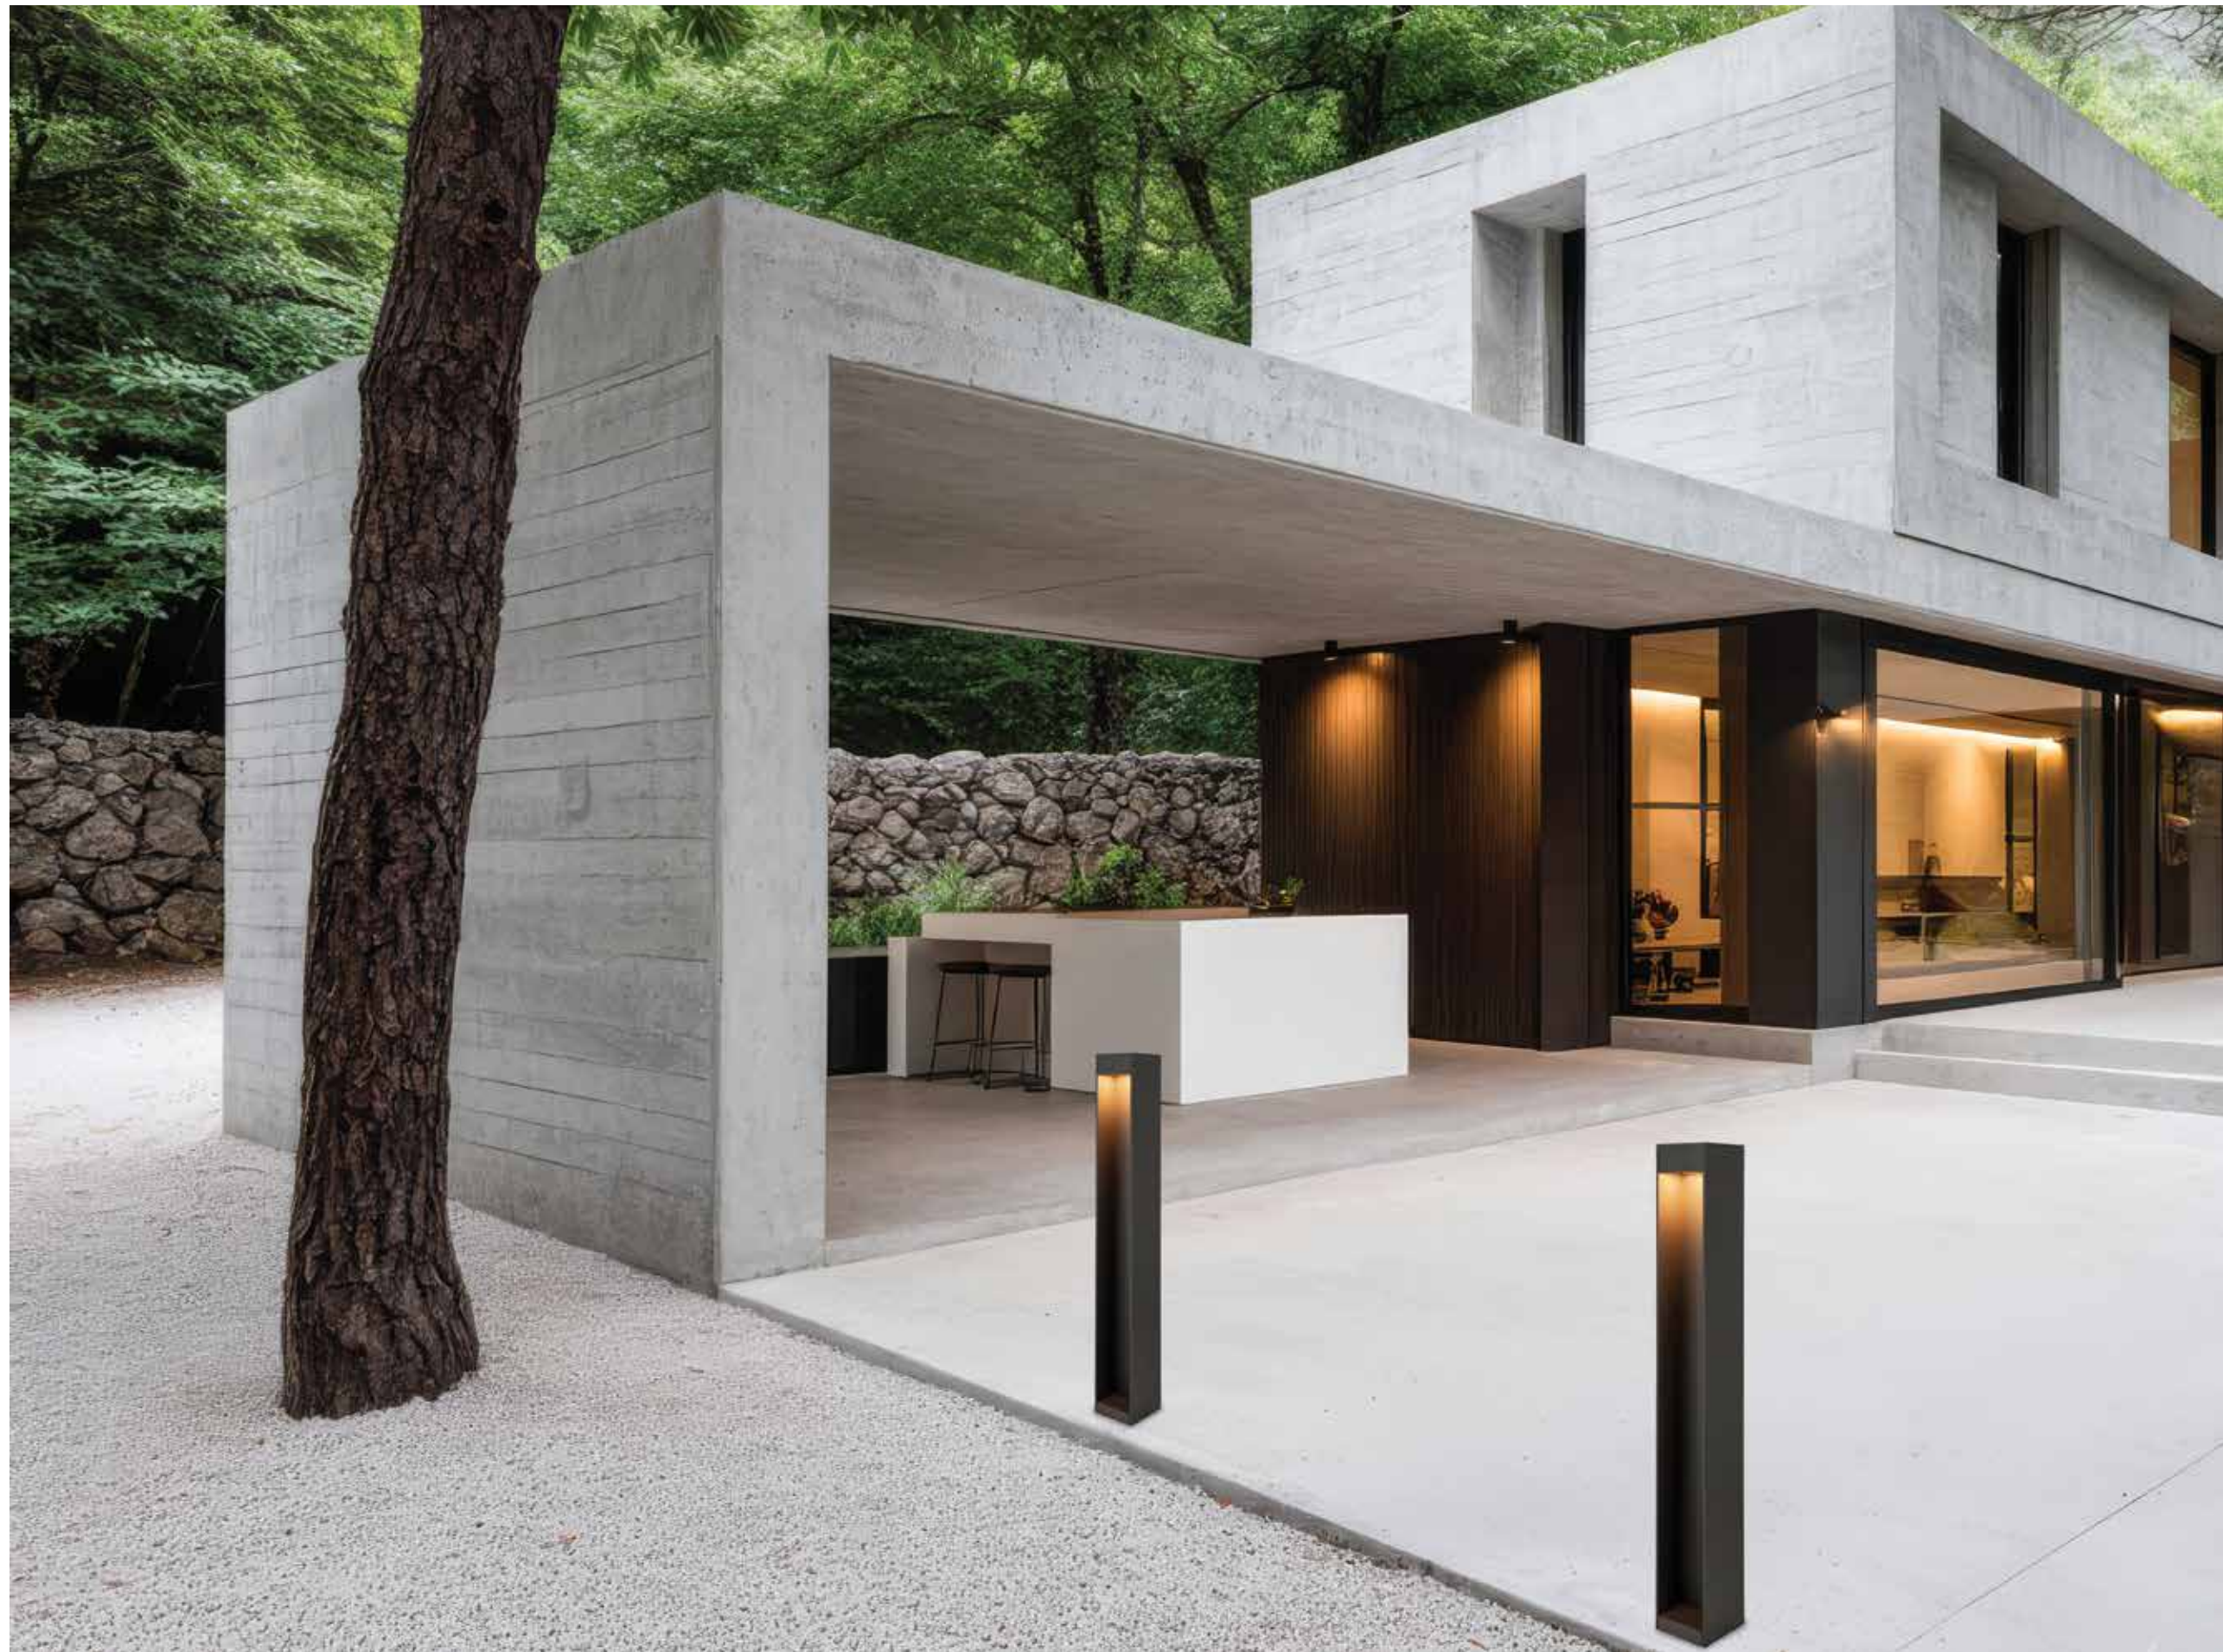



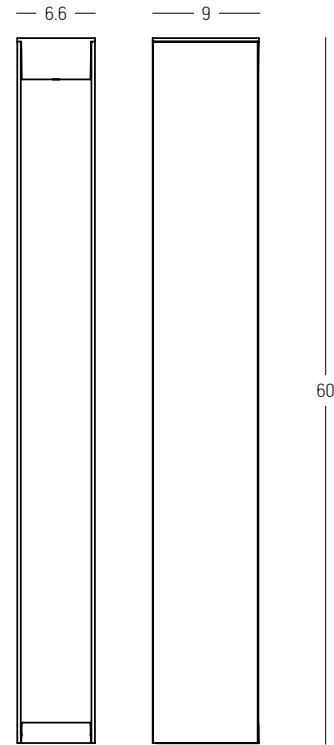
Power 12W  
 Input 220-240V, 50/60Hz  
 Color Temperature 2200K, 2700K, 3200K, 4000K  
 Lumen 320Lm, 341Lm, 358Lm, 375Lm  
 Cri 80  
 IP 65  
 Dimensions L: 9cm W: 6.6cm H: 60cm  
 Material Aluminium - PC Diffuser  
 Special Feature CCT Switch  
 Color Graphite / **Code E467**



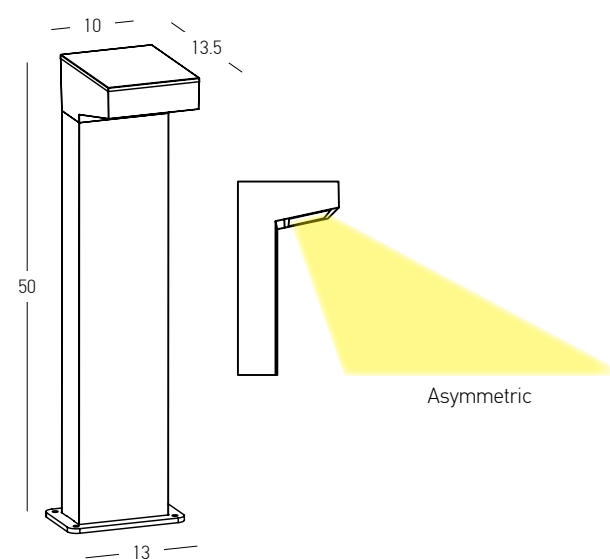



Power 12W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 760Lm  
 Cri 85  
 IP 65  
 Dimensions L: 13.5cm W: 10cm H: 50cm  
 Base L: 8cm W: 13cm H: 0.5cm  
 Material Aluminium - Tempered Glass  
 Special Feature Asymmetric Beam Angle  
 Color Graphite / **Code E418**

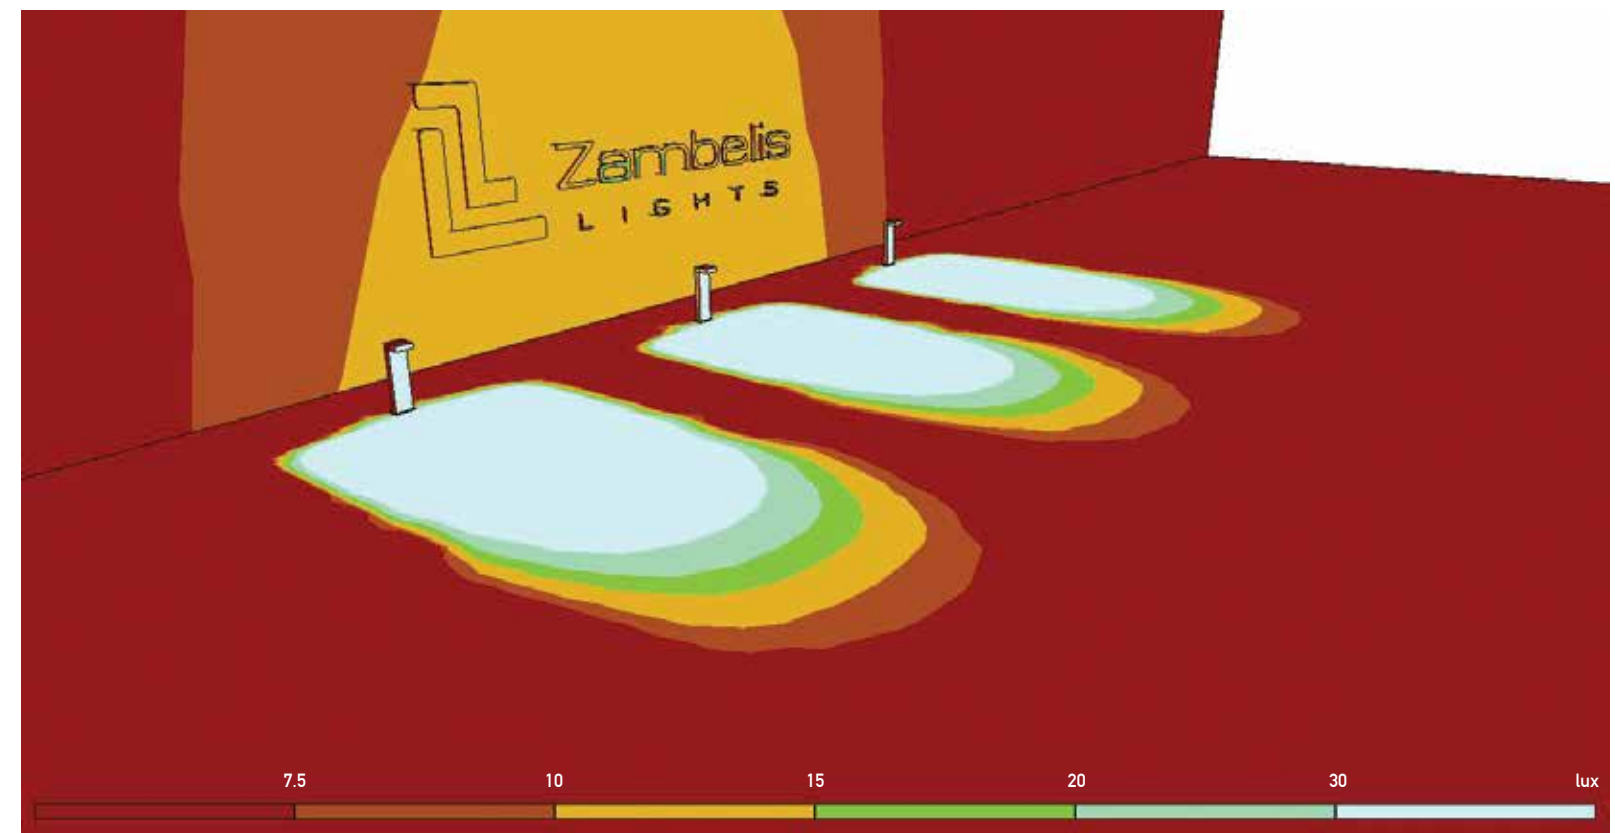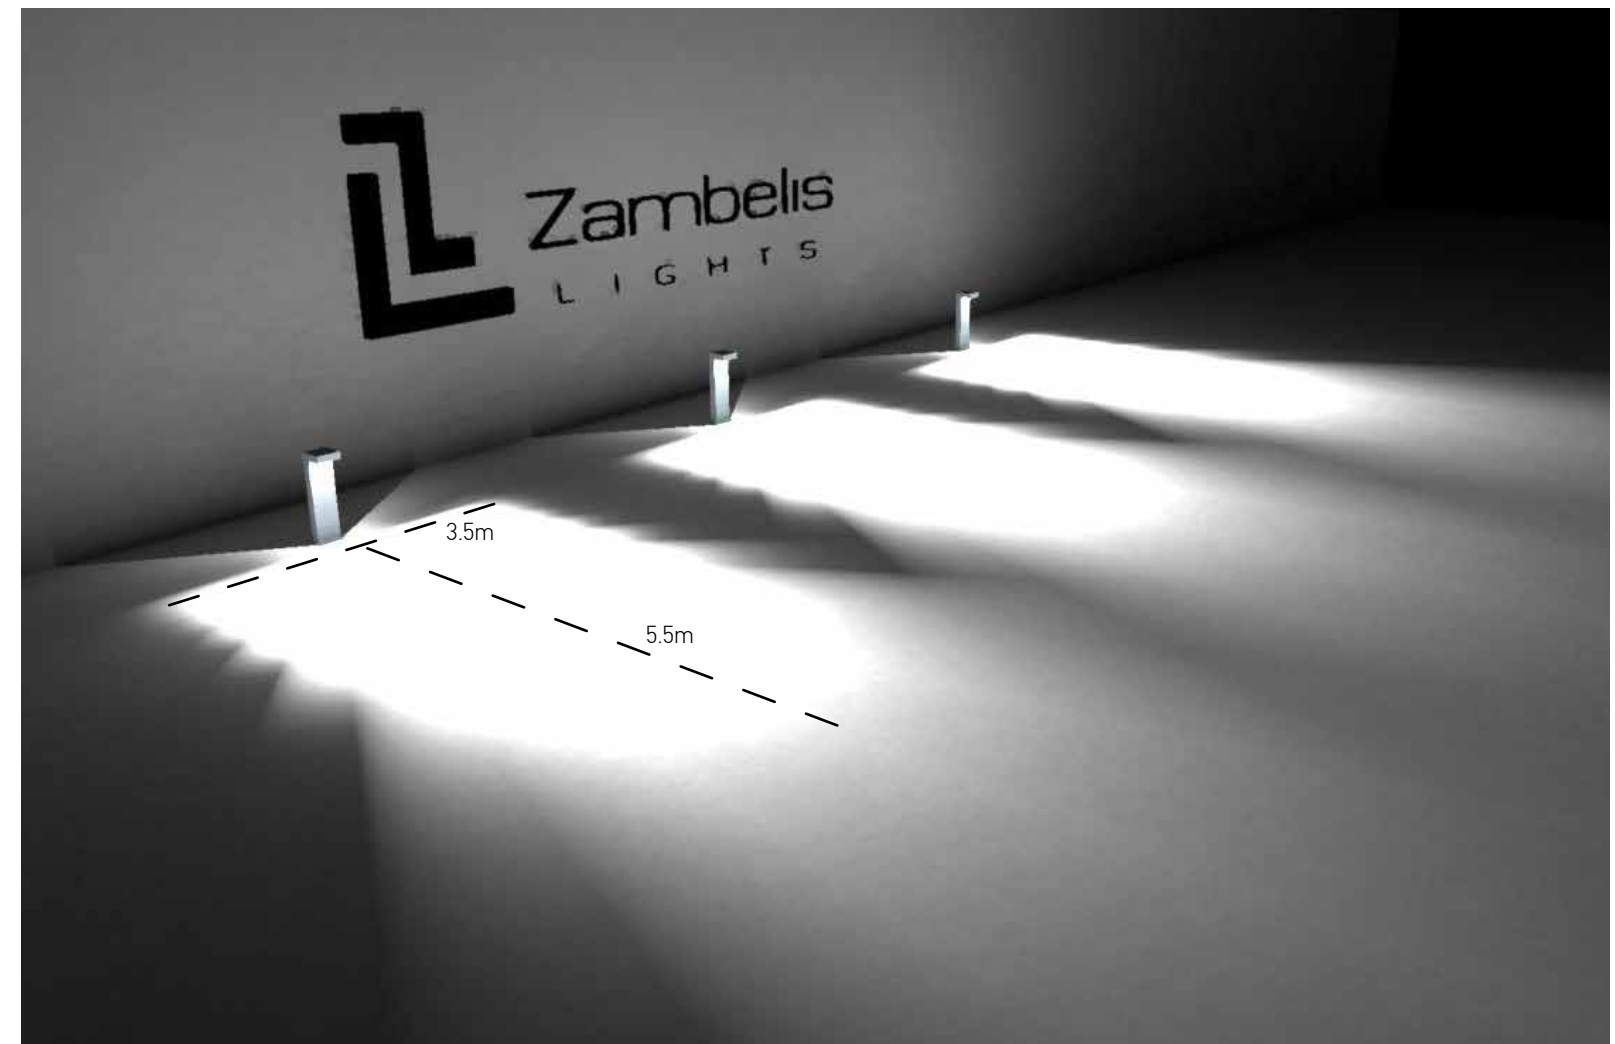


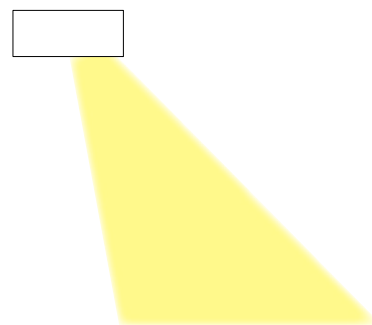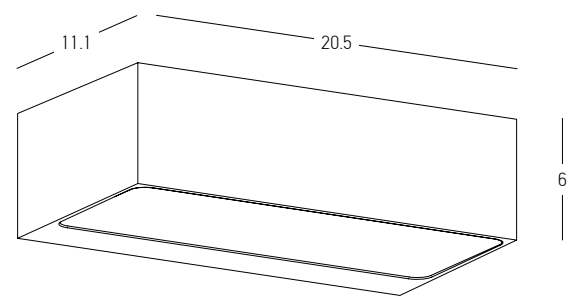

Asymmetric


Power	3x 4.5W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	968Lm
Cri	85
IP	54
Dimensions	L: 11.1cm W: 20.5cm H: 6cm
Material	Aluminium - Tempered Glass
Special Feature	Asymmetric Beam Angle
Color	Graphite / <b>Code E518</b>

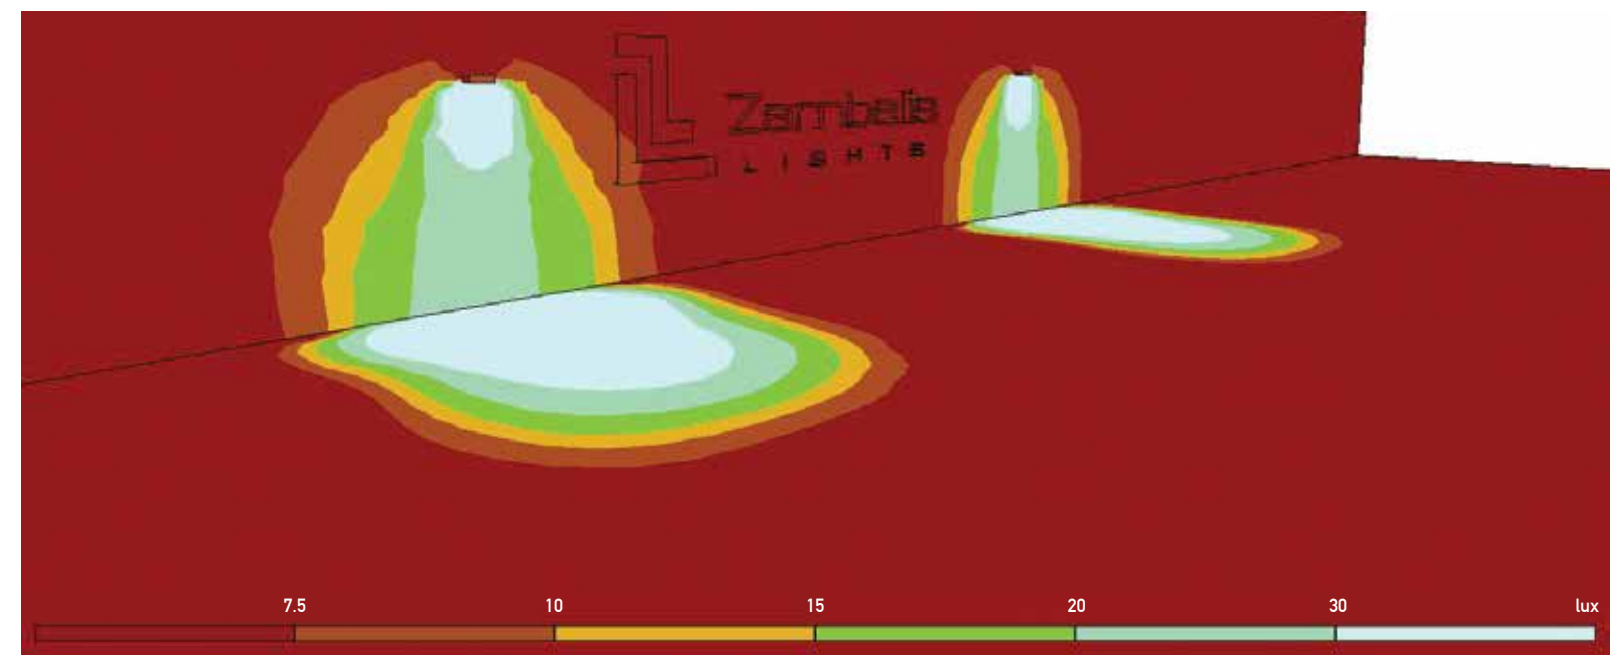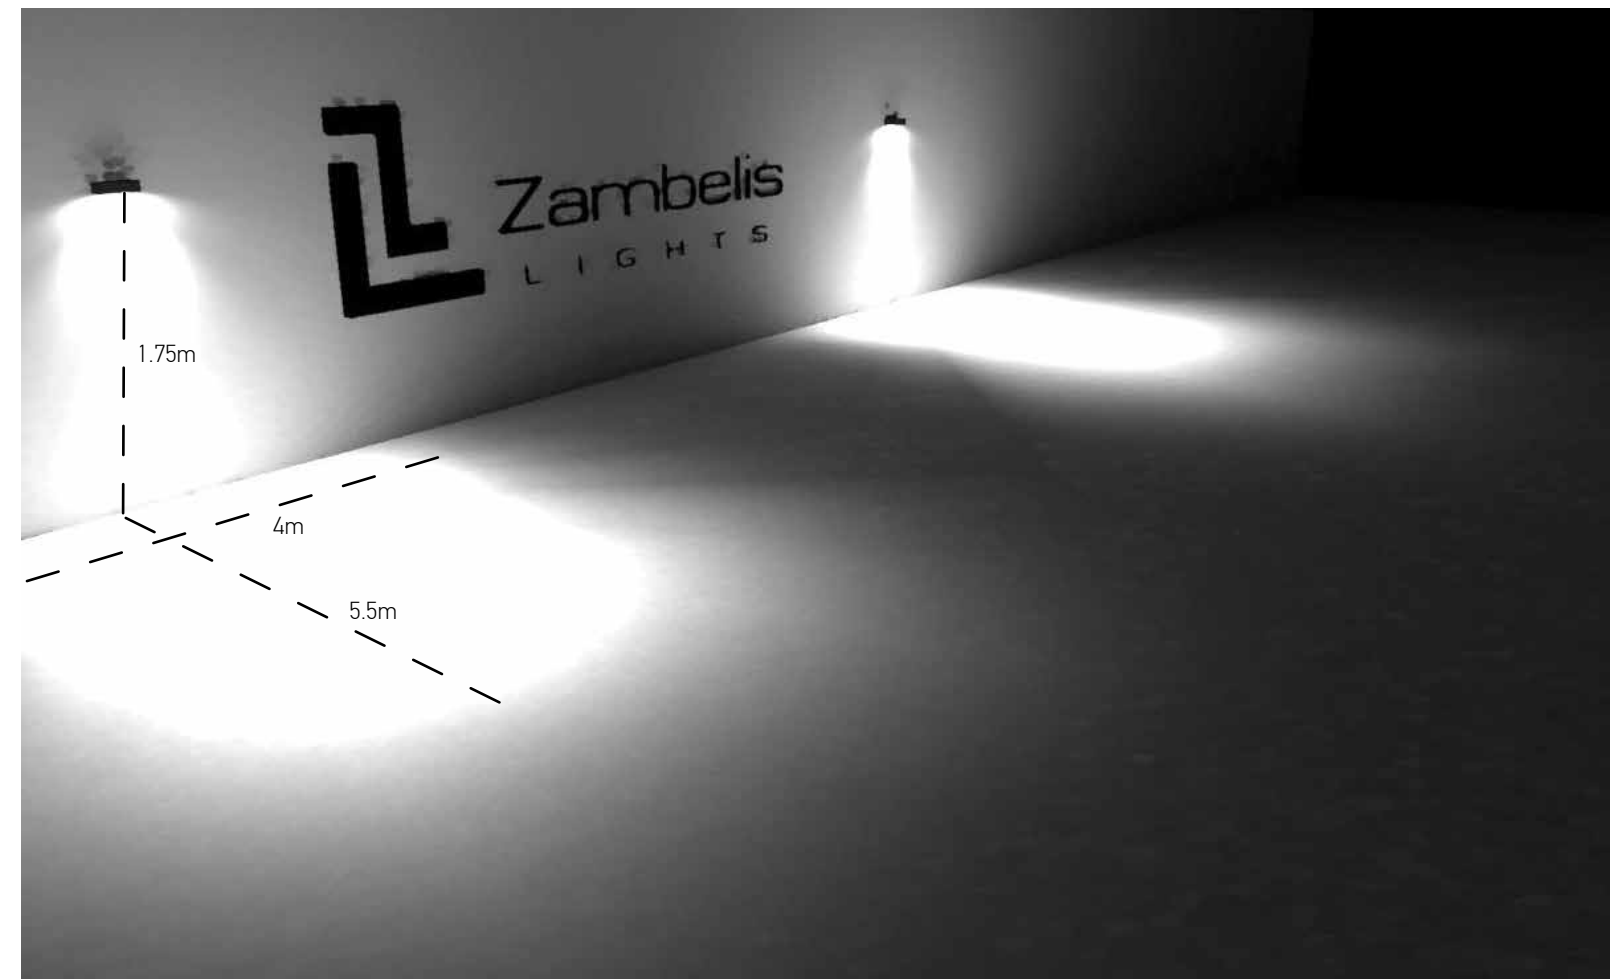

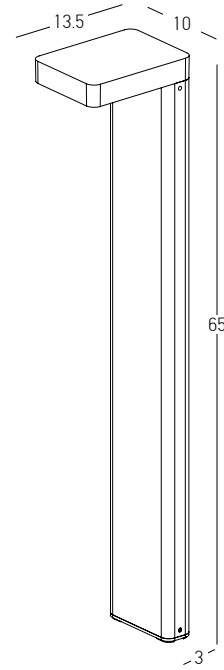


Power 9W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 710Lm  
 Cri 80  
 IP 54  
 Dimensions L: 13.5cm W: 10cm H: 65cm  
 Beam Angle 120°  
 Material Aluminium - Tempered Glass  
 Color Graphite / **Code E297**





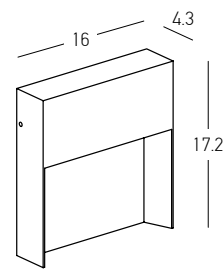


Power 6.5W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 316Lm  
 Cri 80  
 IP 65  
 Dimensions L: 4.3m W: 16cm H: 17.2cm  
 Material Aluminium - Glass  
 Color Graphite / **Code E446**


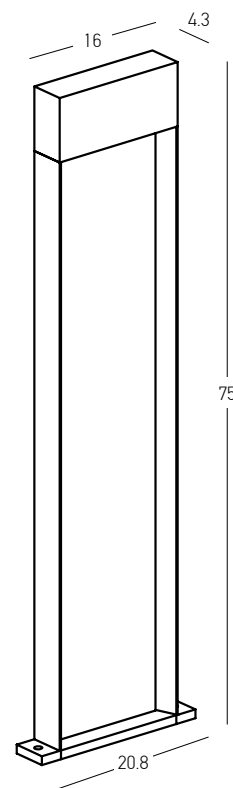


Power 6.5W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 316Lm  
 Cri 80  
 IP 65  
 Dimensions L: 4.3m W: 16cm H: 75cm  
 Base L: 4.3m W: 20.8cm H: 1cm  
 Material Aluminium - Glass  
 Color Graphite / **Code E447**

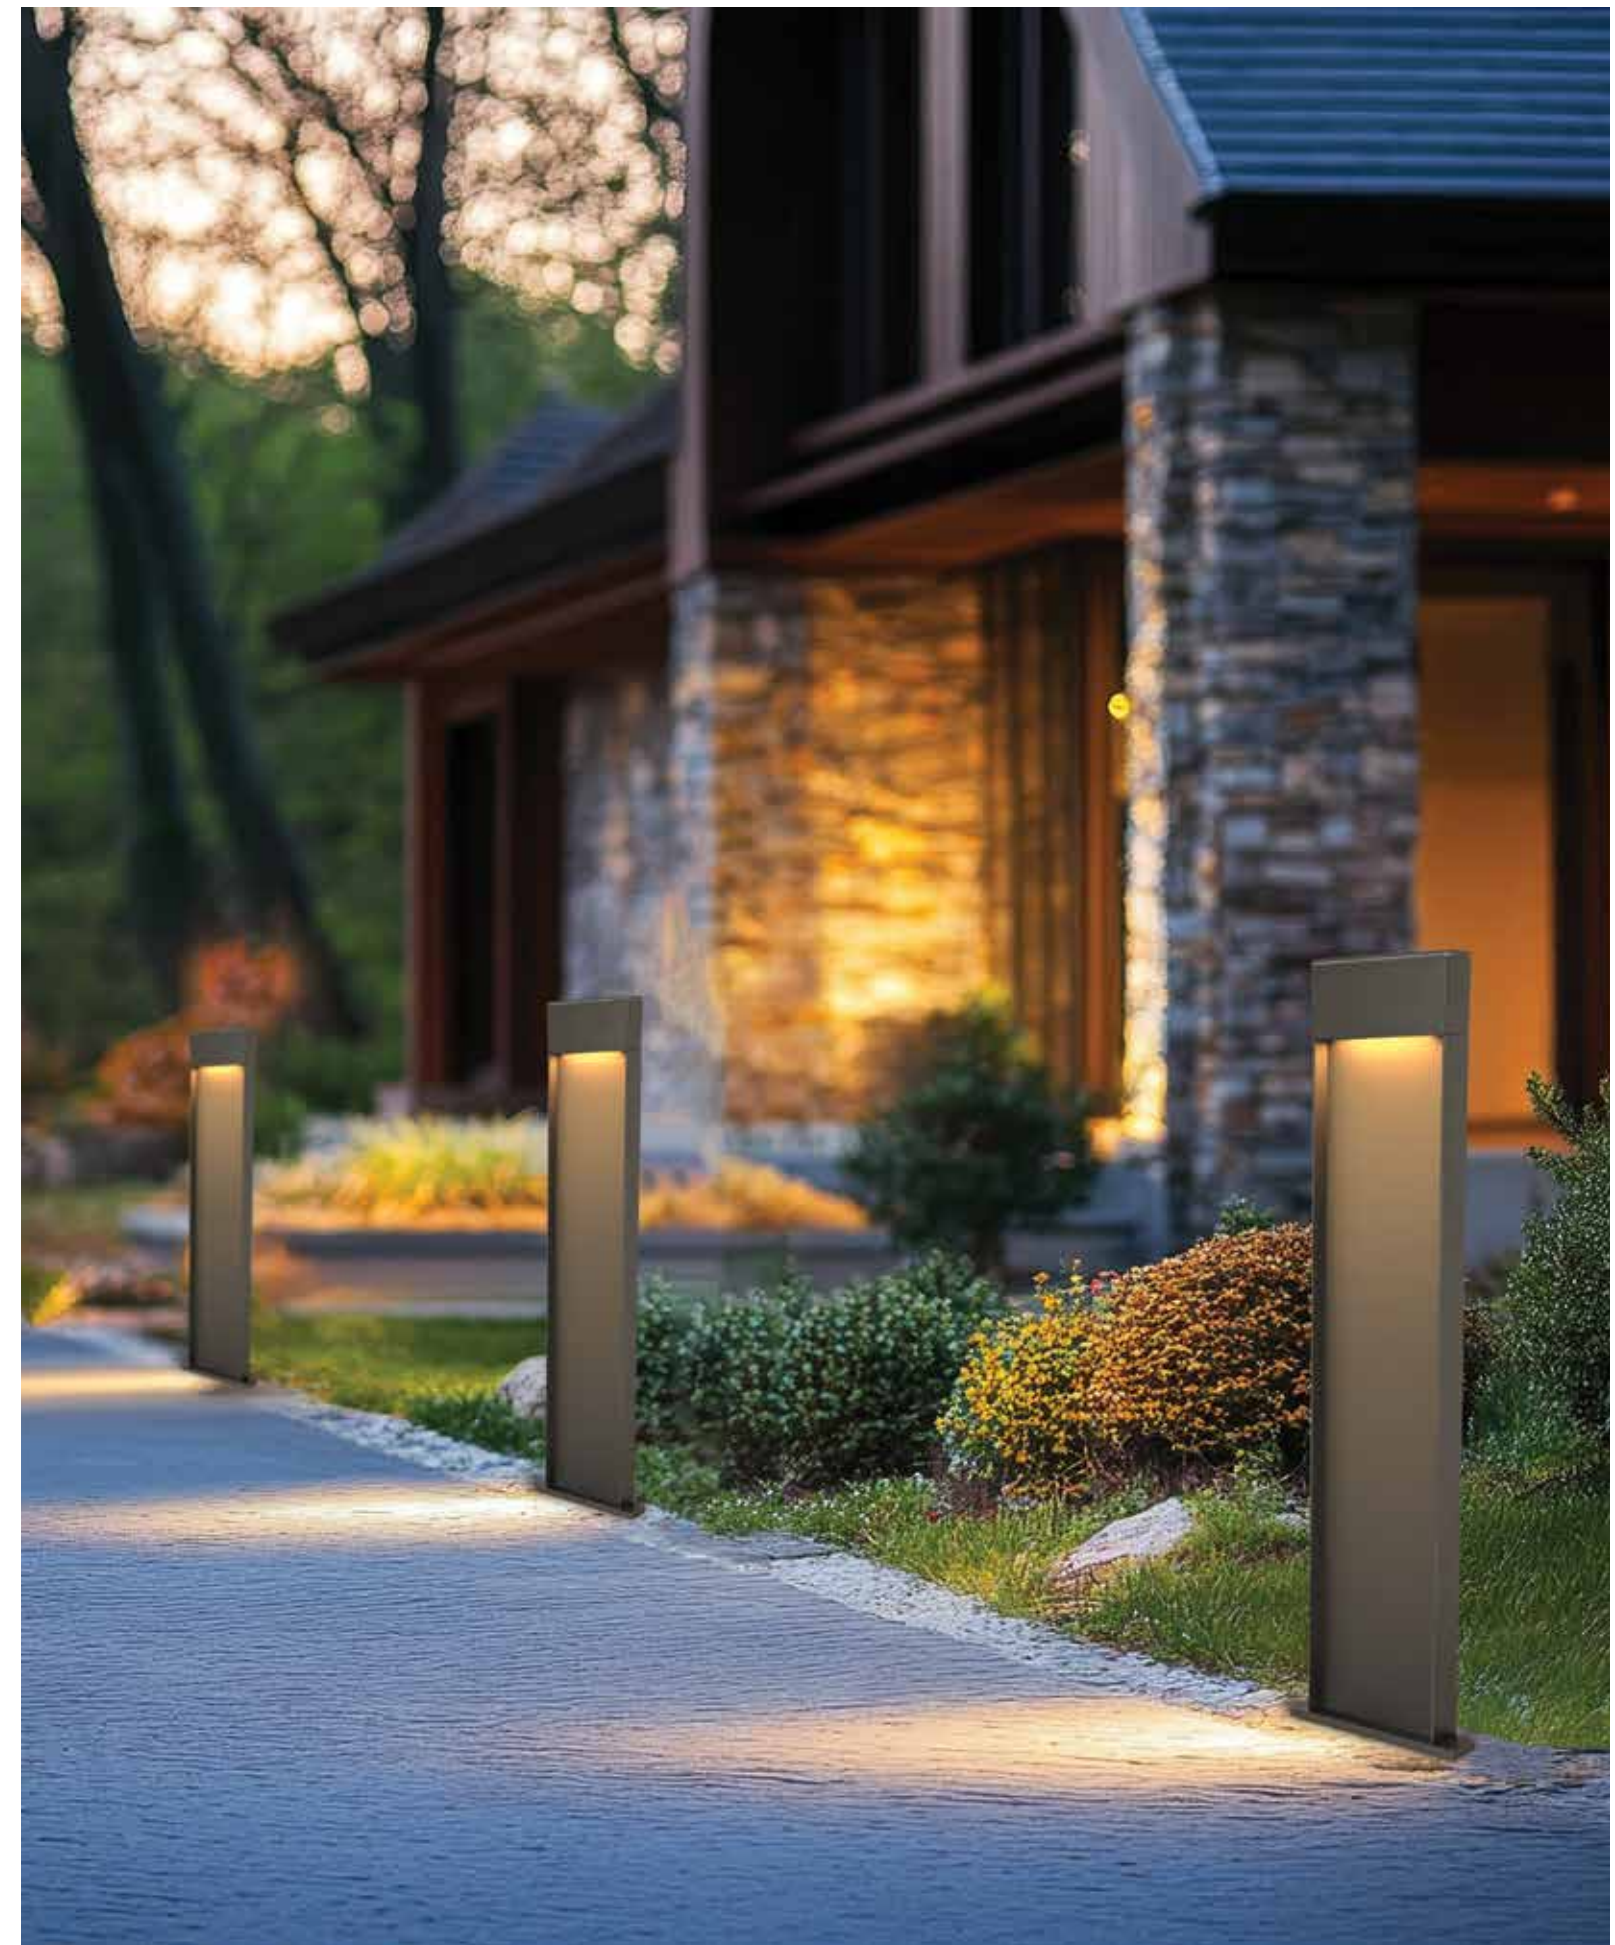

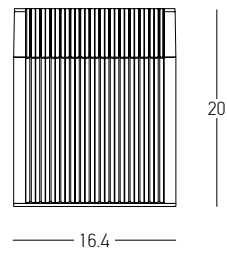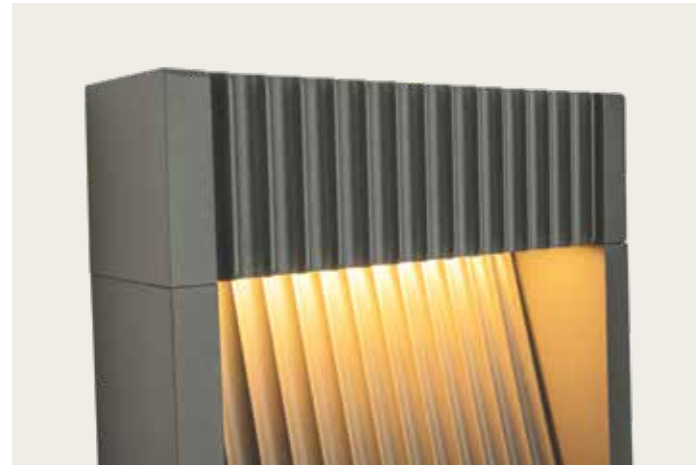


Power 13W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 638Lm  
 Cri 80  
 IP 65  
 Dimensions L: 4.7cm W: 16.4cm H: 20cm  
 Material Aluminium - Tempered Glass  
 Color Graphite / **Code E353**

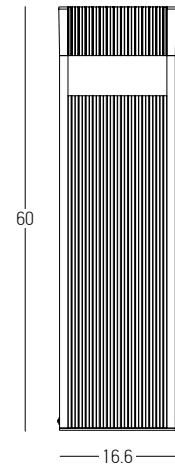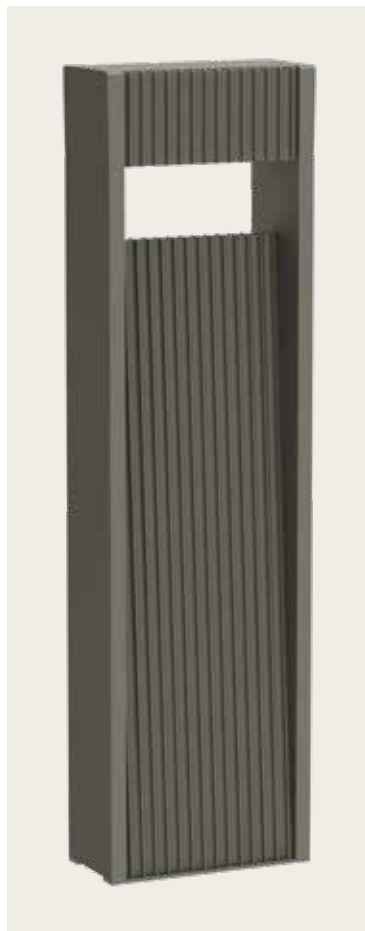


Power 30W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 986Lm  
 Cri 80  
 IP 65  
 Dimensions L: 8m W: 16.6cm H: 60cm  
 Material Aluminium - Tempered Glass  
 Special Feature Double Sided Lighting  
 Color Graphite / **Code E368**






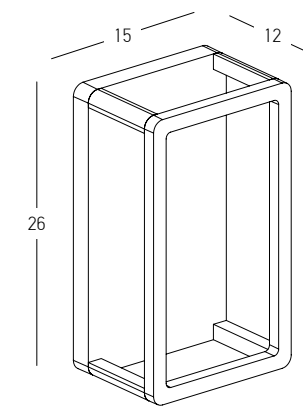

Power 8W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 481Lm  
 Cri 80  
 IP 65  
 Dimensions L: 12cm W: 15cm H: 26cm  
 Material Aluminium - PC Diffuser  
 Color Graphite / **Code E336**


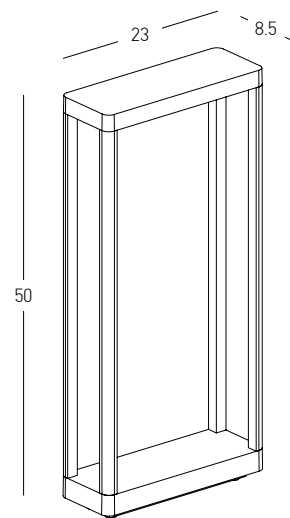


Power 8W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 587Lm  
 Cri 80  
 IP 65  
 Dimensions L: 8.5cm W: 23cm H: 50cm  
 Material Aluminium - Clear Glass  
 Color Graphite / **Code E335**

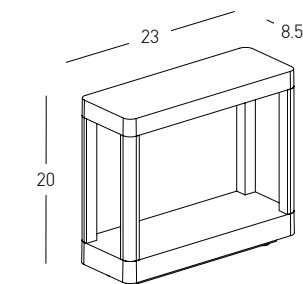


Power 8W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 587Lm  
 Cri 80  
 IP 65  
 Dimensions L: 8.5cm W: 23cm H: 20cm  
 Material Aluminium - Clear Glass  
 Color Graphite / **Code E334**



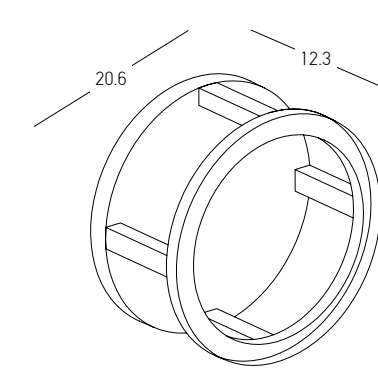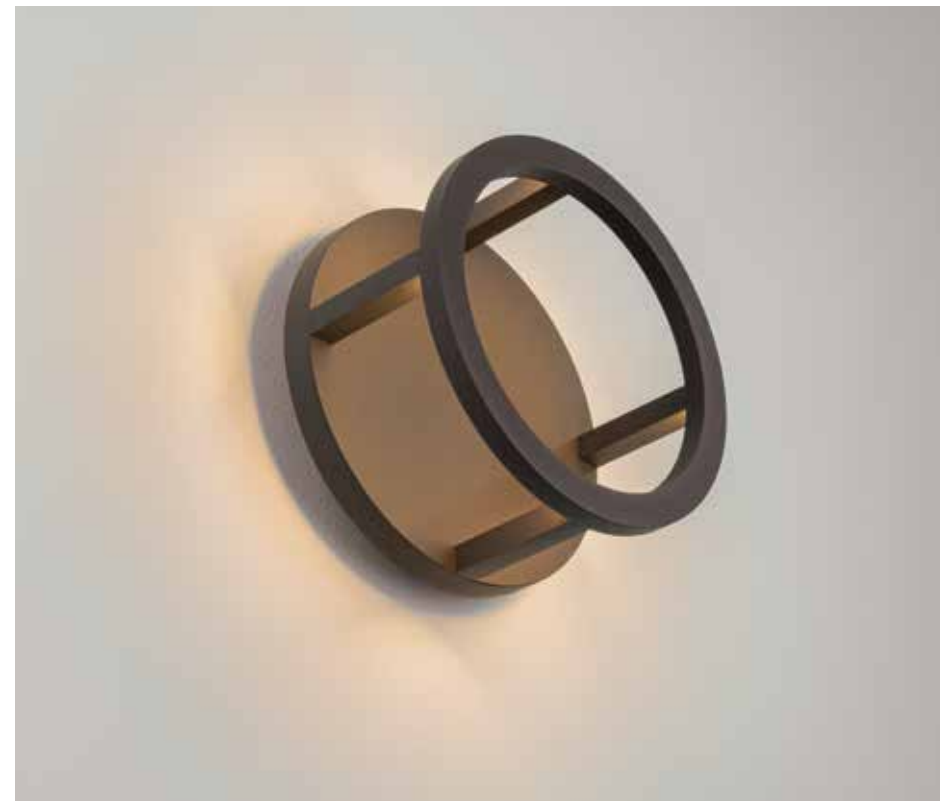



Power	9.2W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	368Lm
Cri	85
IP	65
Dimensions	Ø: 20.6cm L: 12.3cm
Material	Aluminium - PC Diffuser
Color	Graphite / <b>Code E443</b>




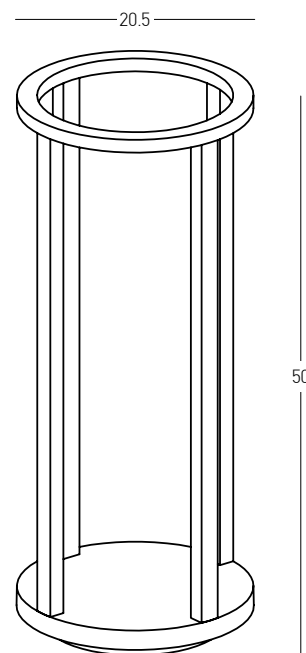


Power 9.2W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 450Lm  
Cri 85  
IP 65  
Dimensions Ø: 20.5cm H: 50cm  
Material Aluminium - PC Diffuser  
Color Graphite / **Code E444**

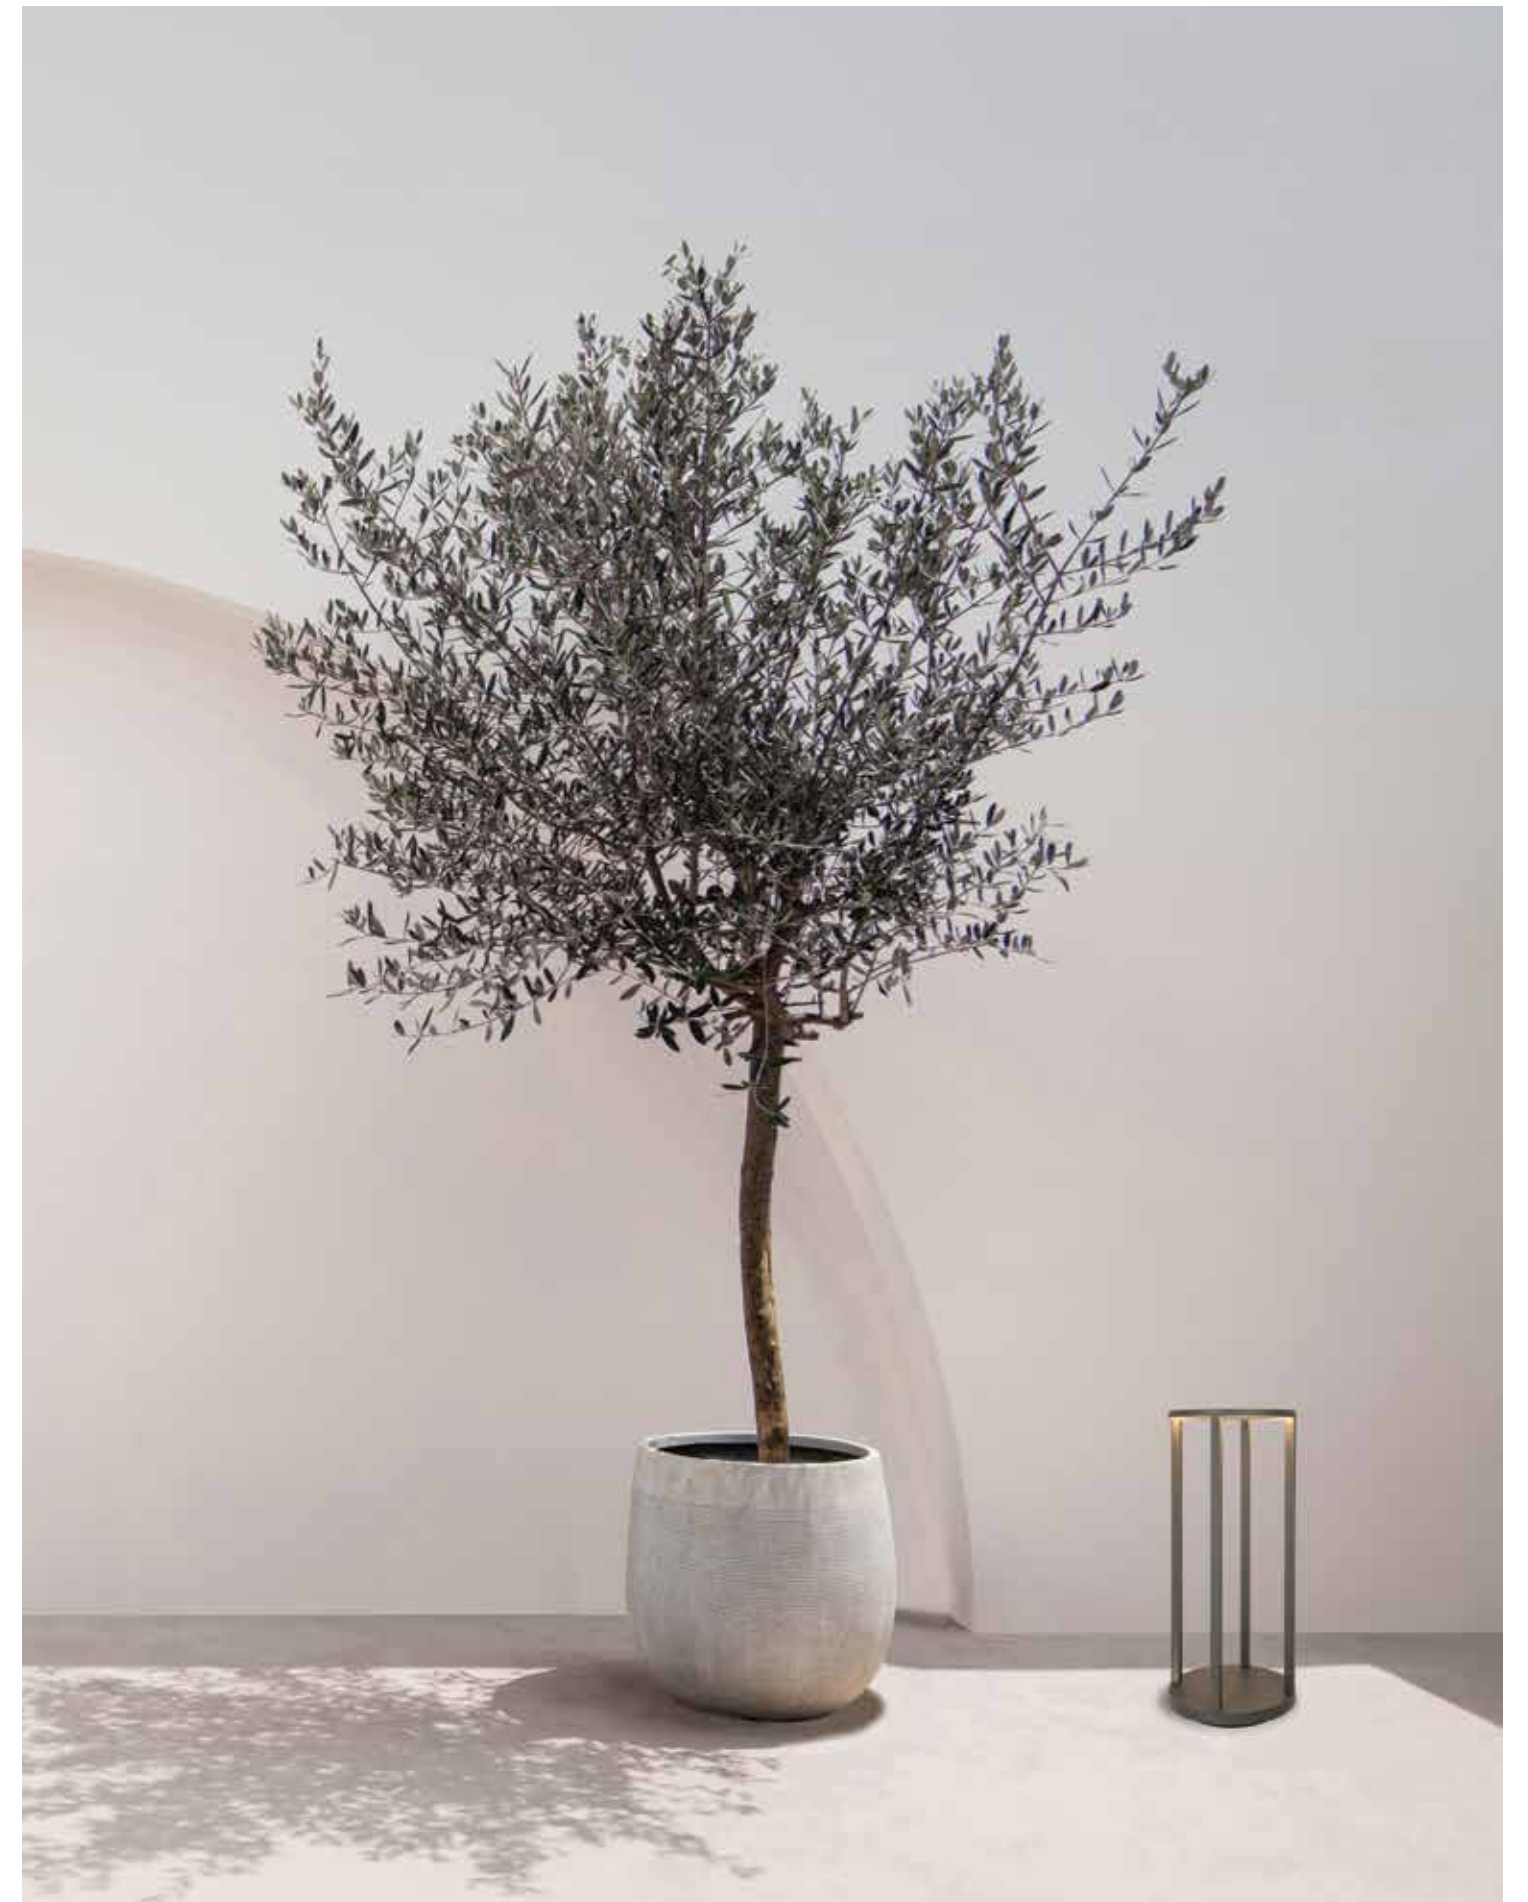





Power 9W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 704Lm  
 Cri 80  
 IP 54  
 Dimensions L: 18cm W: 18cm H: 23cm  
 Material Aluminium - Tempered Glass  
 Color Graphite / **Code E203**

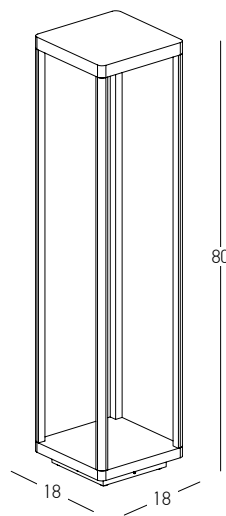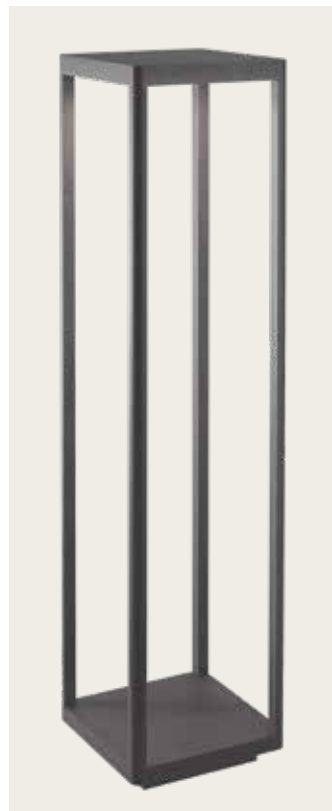

Power 9W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 704Lm  
 Cri 80  
 IP 54  
 Dimensions L: 18cm W: 18cm H: 80cm  
 Material Aluminium - Tempered Glass  
 Color Graphite / **Code E204**

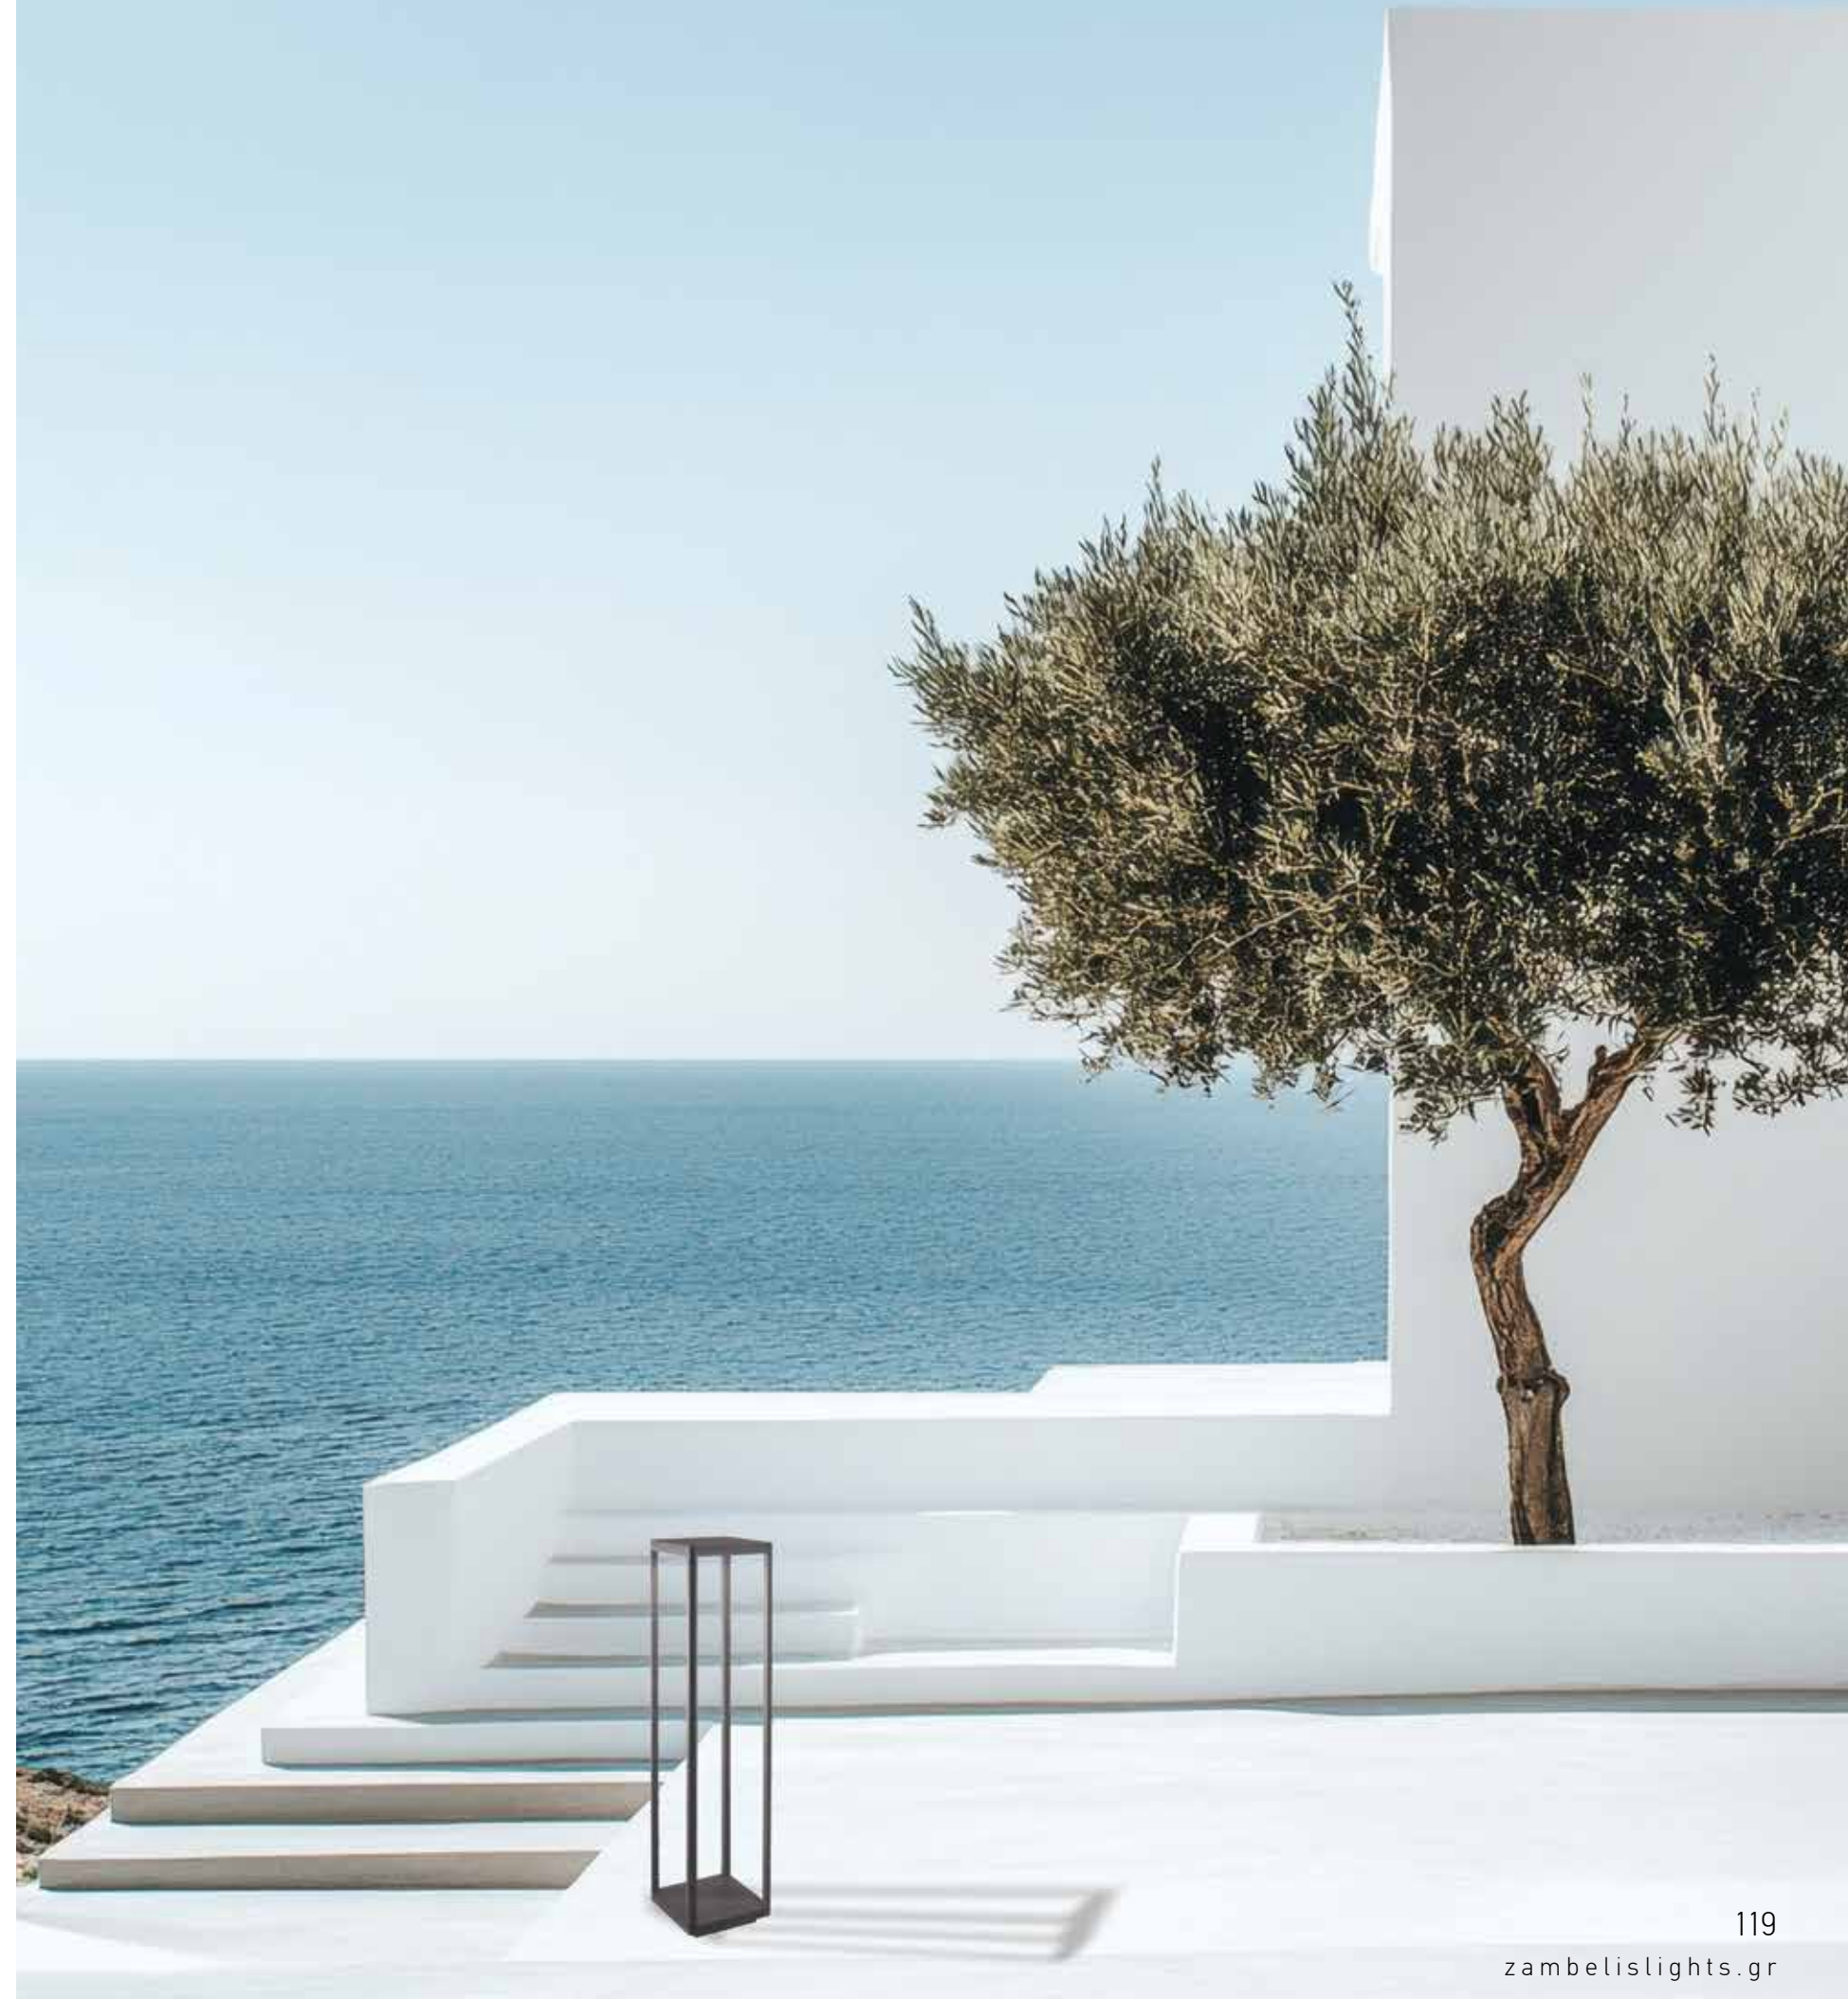

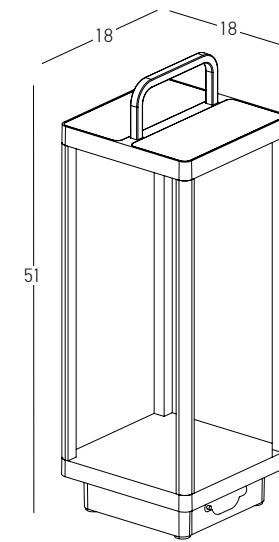

Power	3W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	390Lm
Cri	80
IP	54
Dimensions	L: 18cm W: 18cm H: 51
Switch	1 Switch On/Off
Material	Aluminium - Tempered Glass
Special Feature	Solar Panel Portable Lamp USB Cable Included
Color	Graphite / <b>Code E302</b>




#### LIGHTING MODES OVERVIEW

##### Charging Instructions:


Before first use, charge the lamp under direct sunlight for 3 full days or use the included USB cable with a 1A adaptor for 4-5 hours. (USB cable included in the package.)

##### Lighting Modes:

- Mode 1: First press • 100% brightness**
- Mode 2: Second press • 50% brightness**
- Mode 3: Third press • Light OFF**

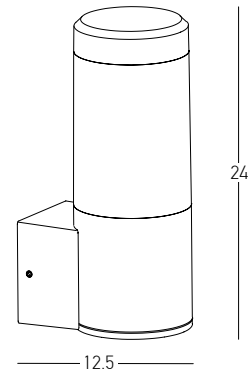


Power 10W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 990Lm  
 Cri 80  
 IP 54  
 Dimensions L: 12.5cm W: 9cm H: 24cm  
 Material Aluminium - PC Diffuser  
 Color Graphite / **Code E276**

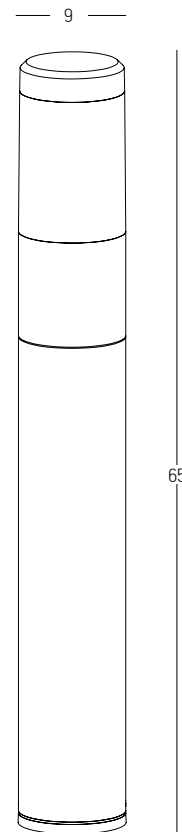


Power 10W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 993Lm  
 Cri 80  
 IP 54  
 Dimensions Ø: 9cm H: 65cm  
 Material Aluminium - PC Diffuser  
 Color Graphite / **Code E277**



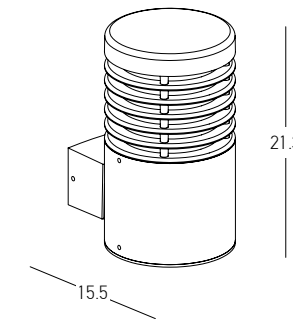


Power 10W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 919Lm  
 Cri 80  
 IP 65  
 Dimensions Ø: 12cm L: 15.5cm H: 21.3cm  
 Material Aluminium - PC Diffuser  
 Color Graphite / **Code E344**

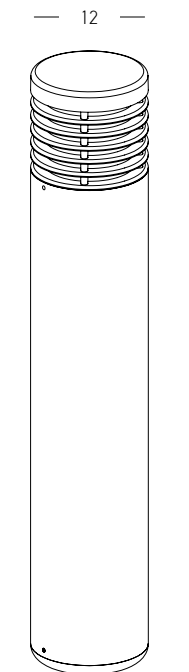

Power 10W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 923Lm  
 Cri 80  
 IP 65  
 Dimensions Ø: 12cm H: 50cm  
 Material Aluminium - PC Diffuser  
 Color Graphite / **Code E345**



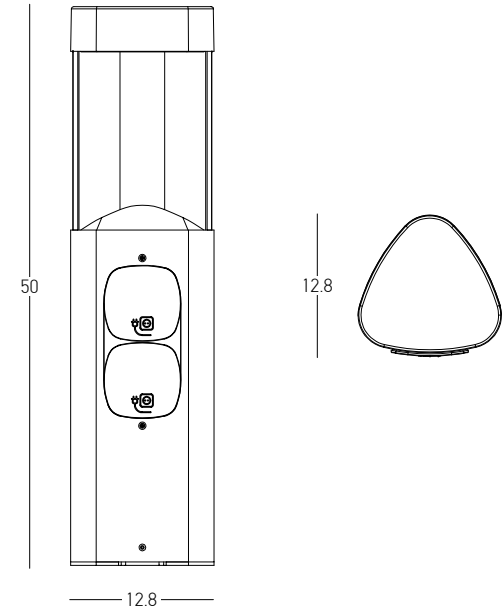


Power	7W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	639Lm
Cri	80
IP	54
Dimensions	L: 12.8cm W: 12.8cm H: 50cm
Material	Aluminium - PC Diffuser
Special Feature	2 European Sockets 220-240V
Color	Graphite / <b>Code E354</b>





\*Power sockets operate only when the light is switched on.



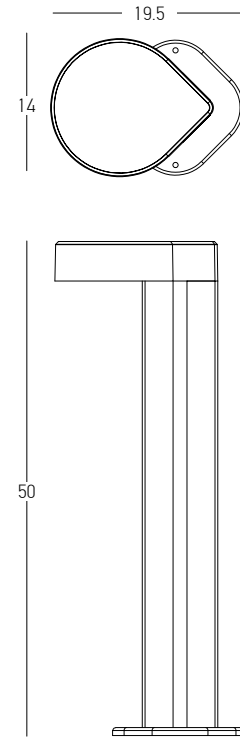



Power 13W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 1035Lm  
 Cri 80  
 IP 65  
 Dimensions L: 19.5cm W: 14cm H: 50cm  
 Beam Angle 120°  
 Material Aluminium - PC Diffuser  
 Color Graphite / **Code E357**



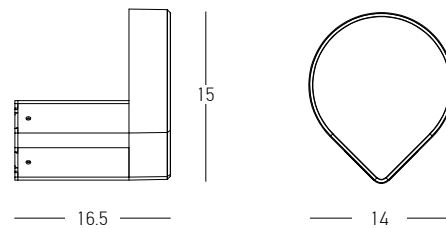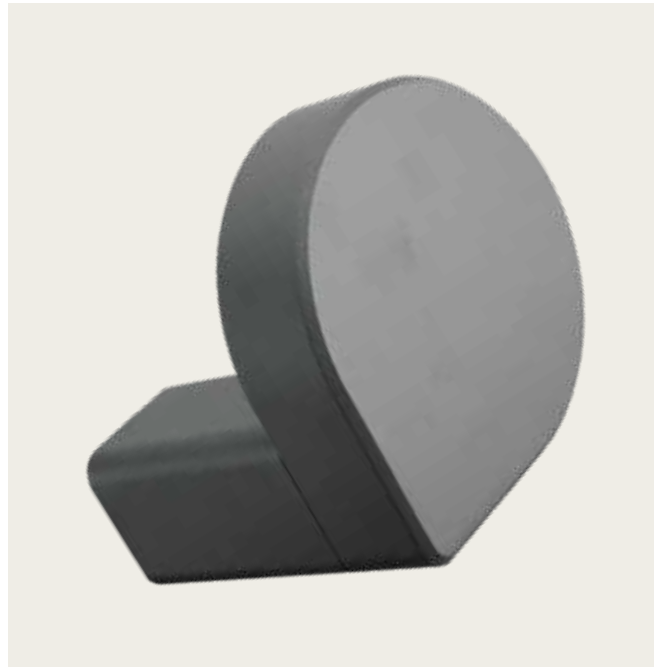


Power 13W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 1035Lm  
Cri 80  
IP 65  
Dimensions L: 16.5cm W: 14cm H: 15cm  
Beam Angle 120°  
Material Aluminium - PC Diffuser  
Color Graphite / **Code E358**

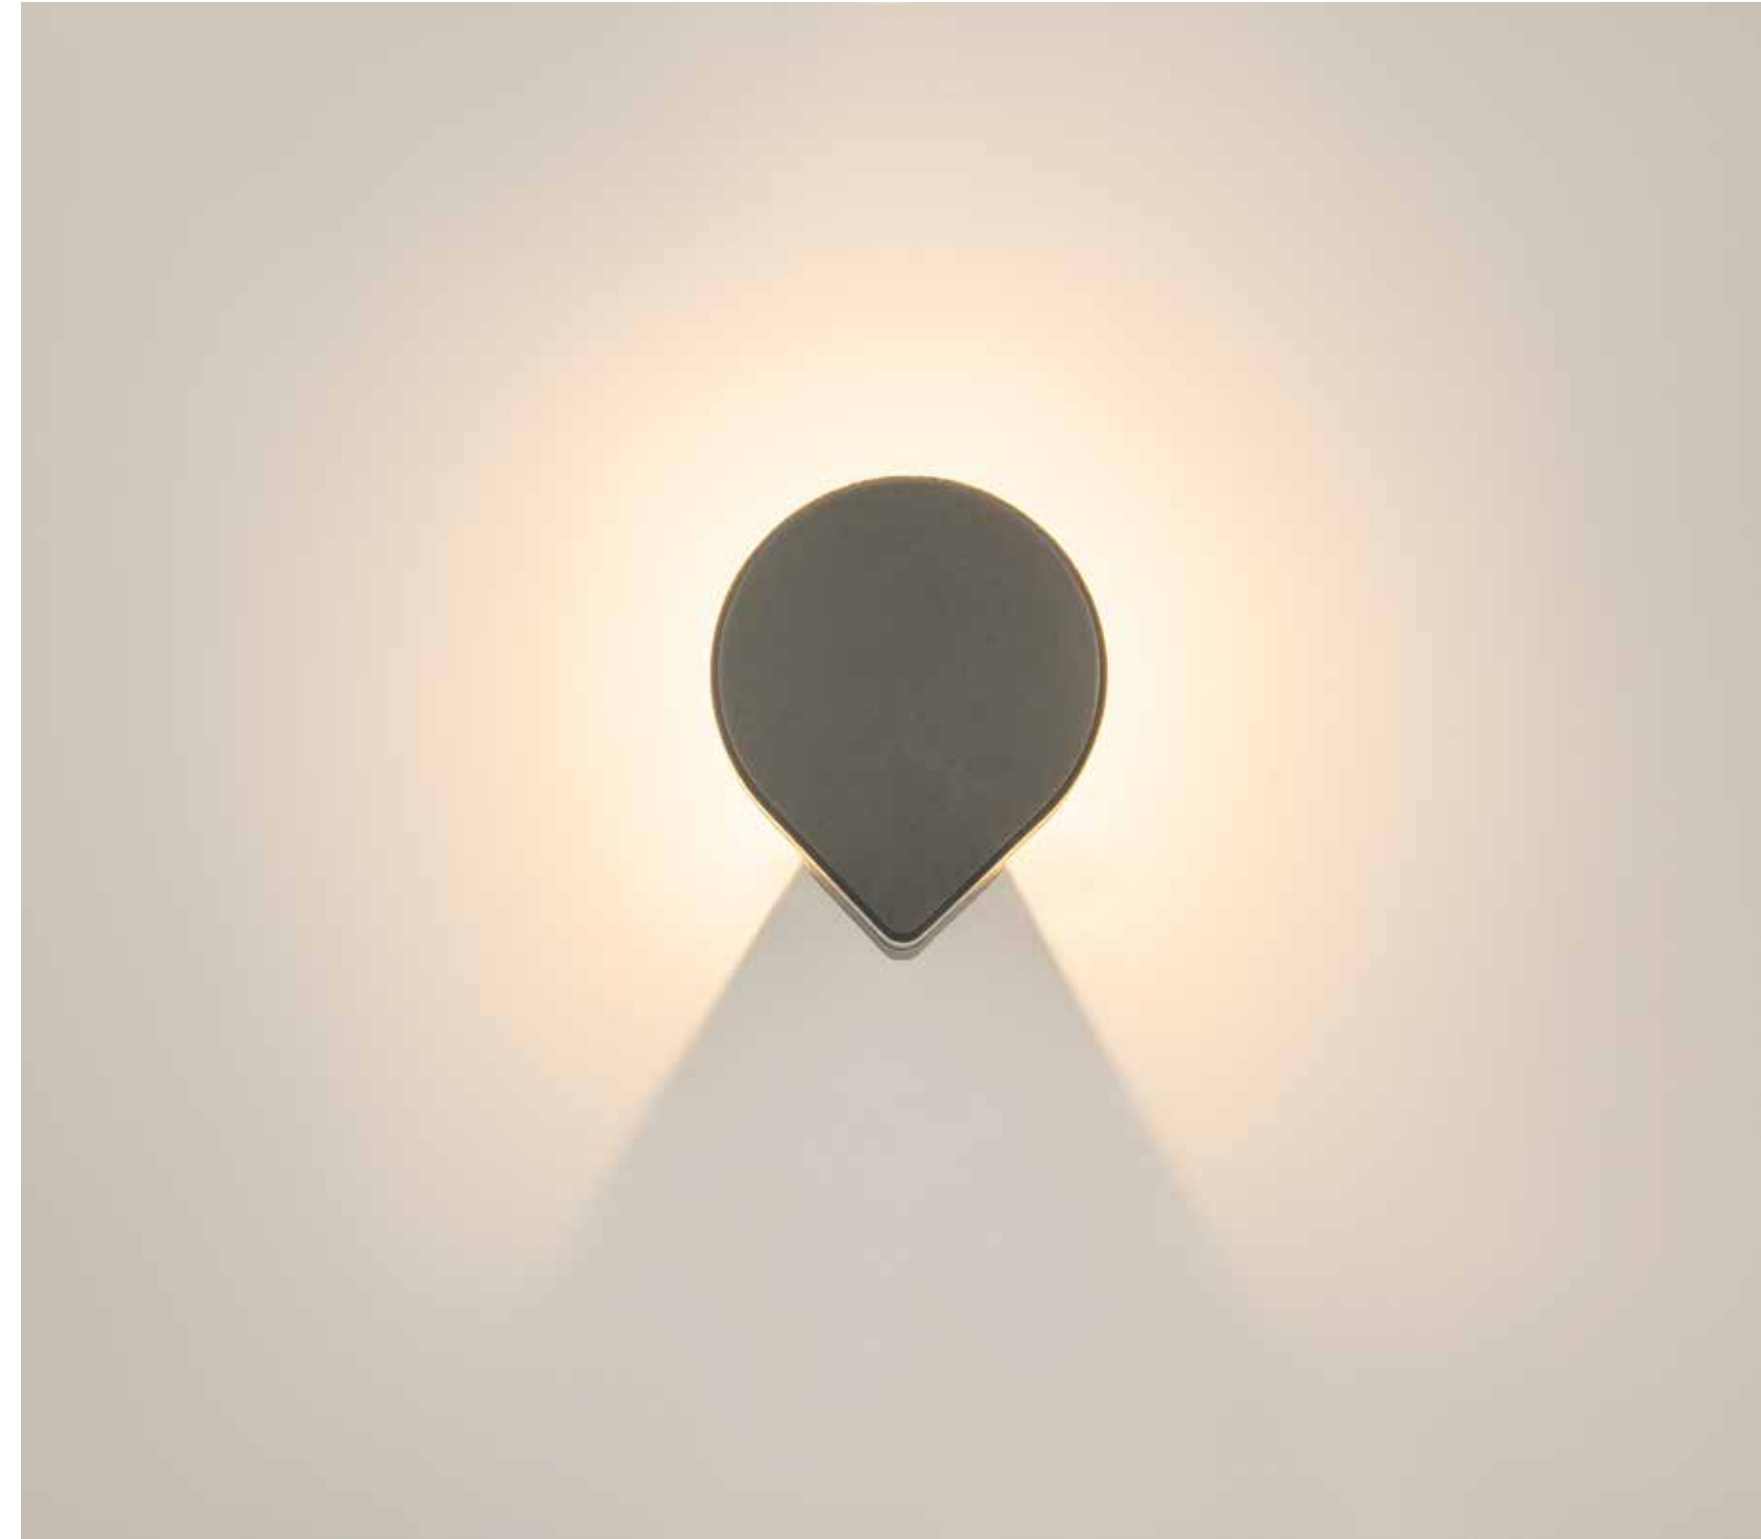



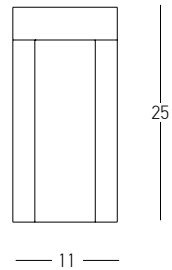


Power 12W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 867Lm  
 Cri 80  
 IP 54  
 Dimensions Ø: 11cm H: 25cm  
 Material Aluminium  
 Color Graphite / **Code E133**

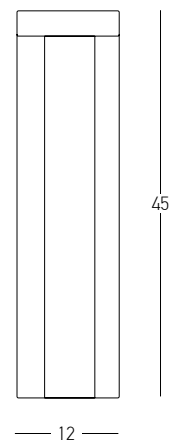

Power 3x 5W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 1117Lm  
 Cri 80  
 IP 54  
 Dimensions Ø: 12cm H: 45cm  
 Material Aluminium  
 Color Graphite / **Code E132**

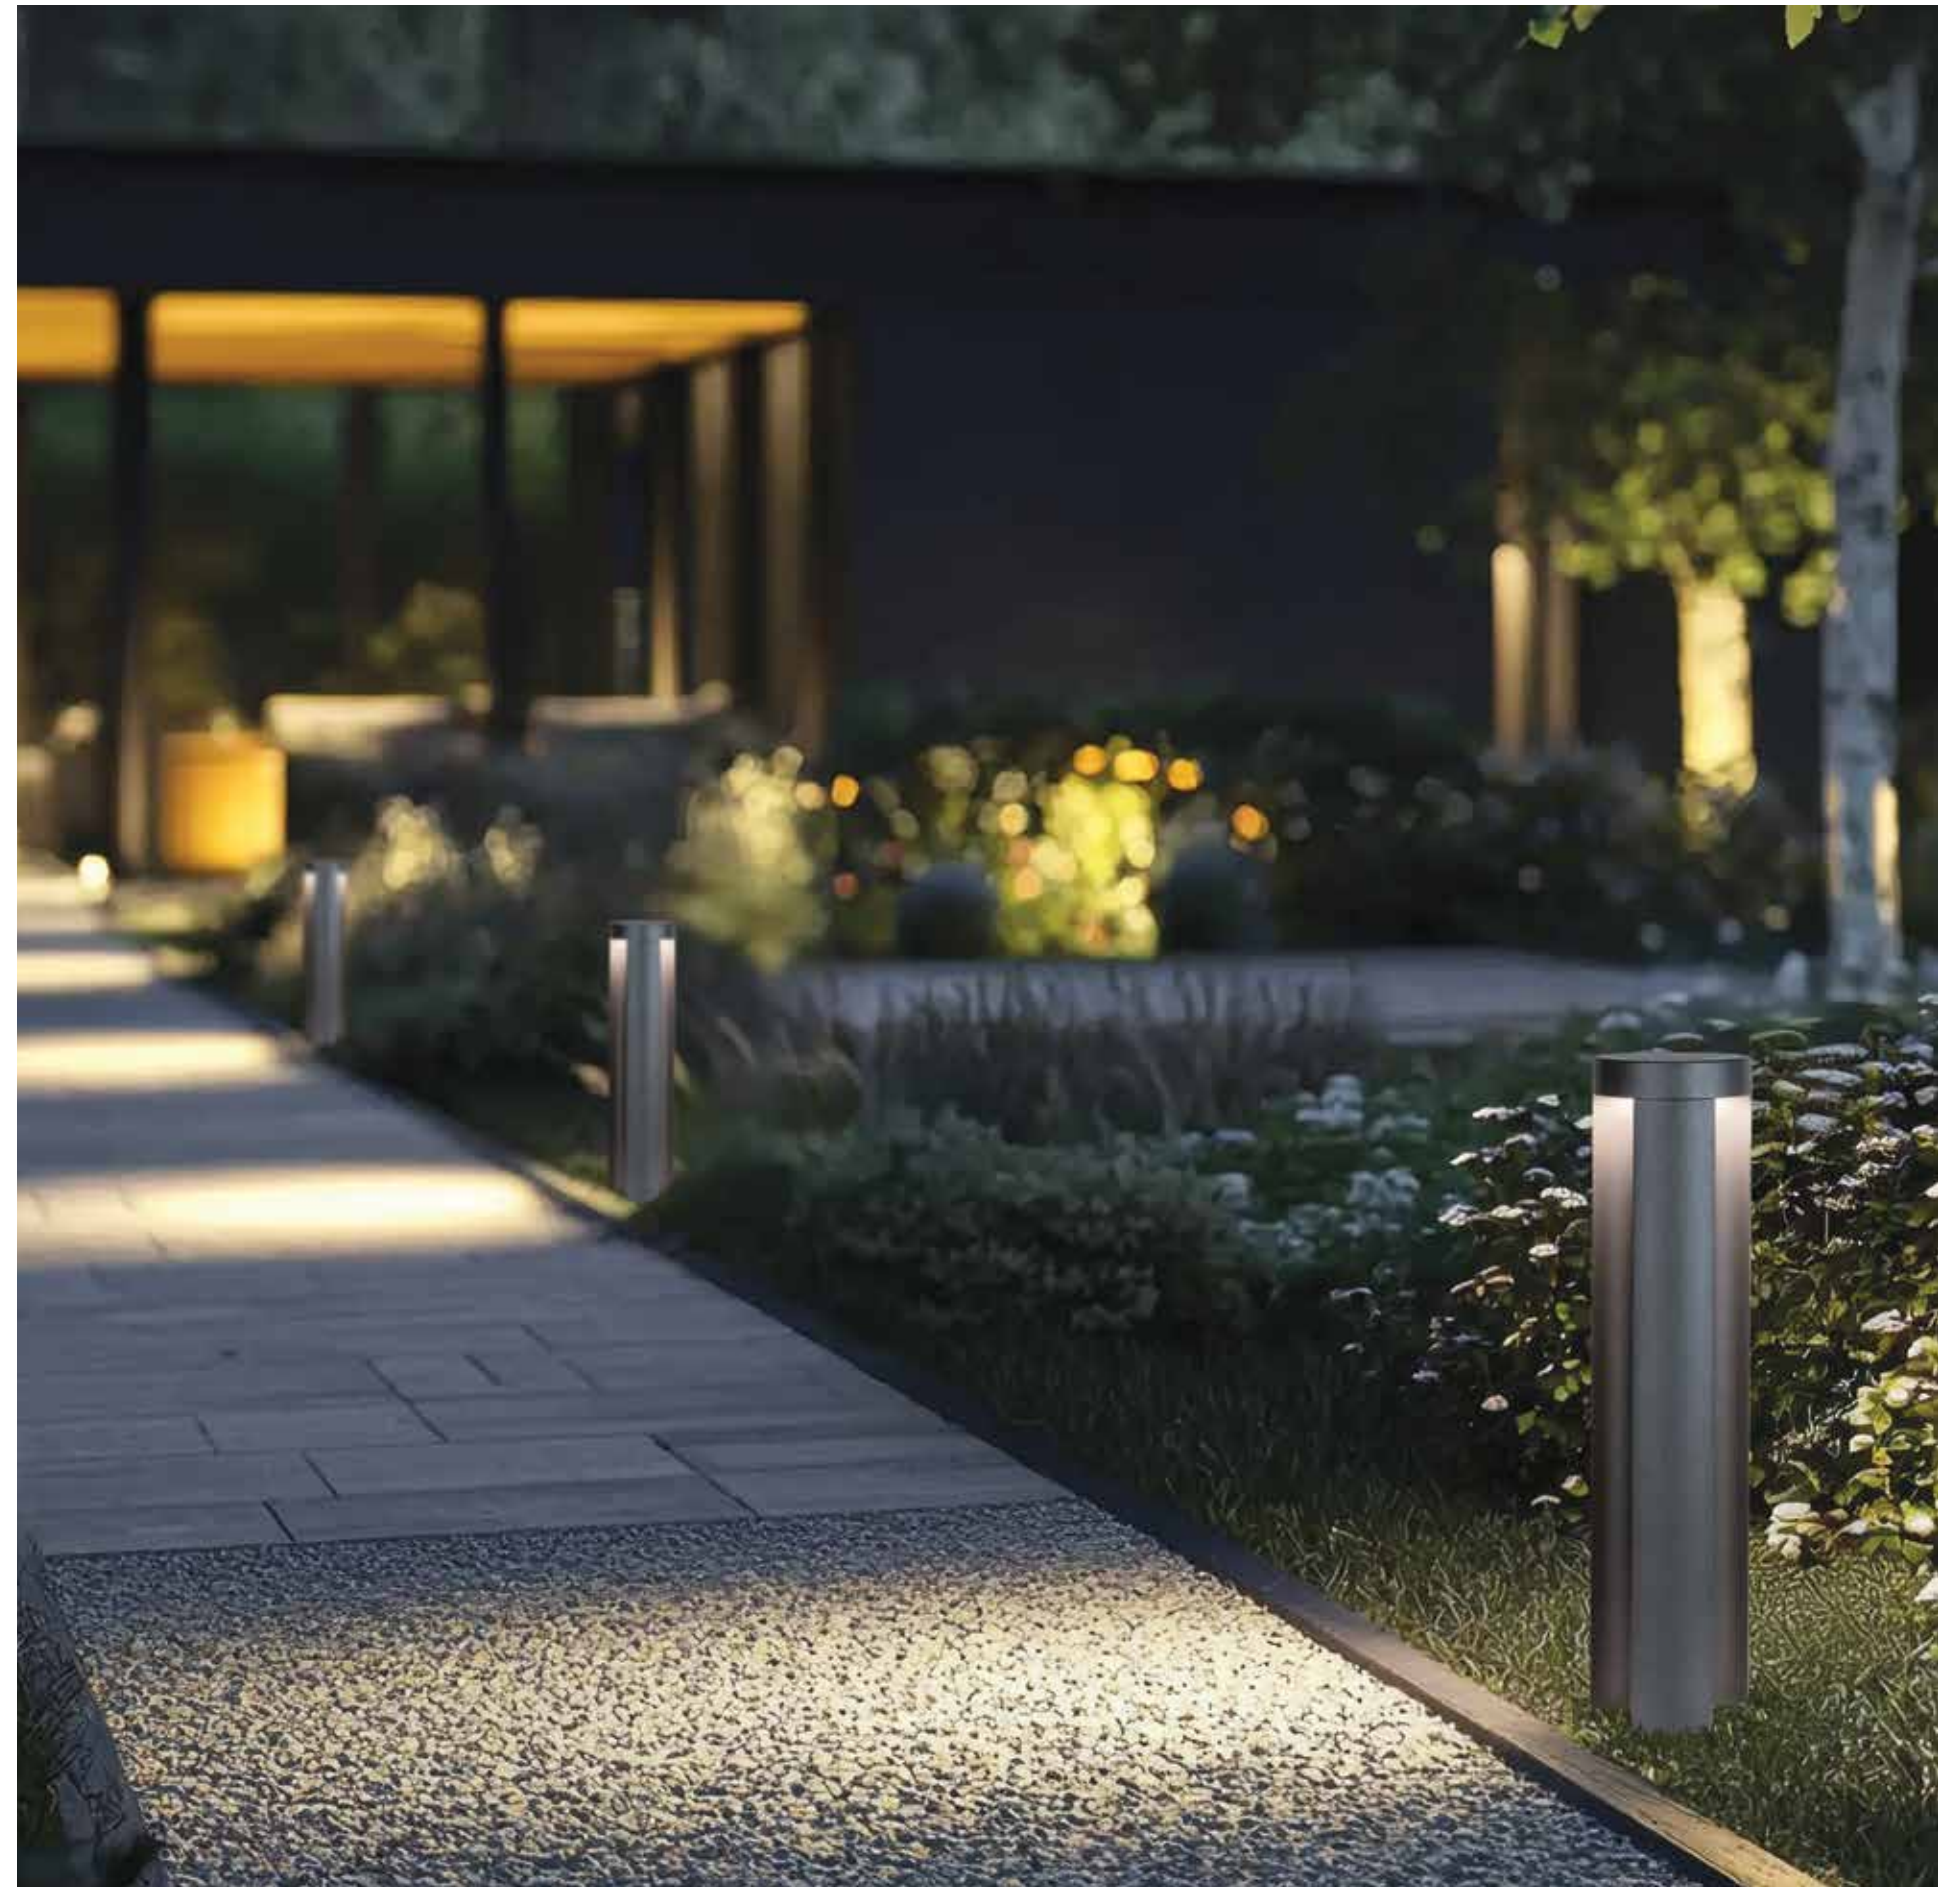


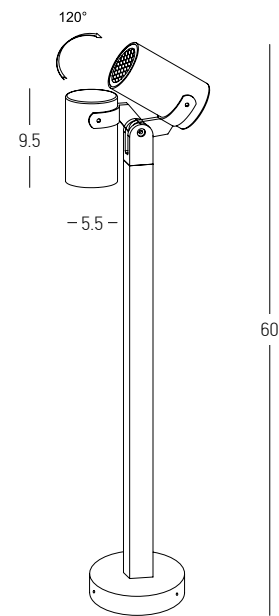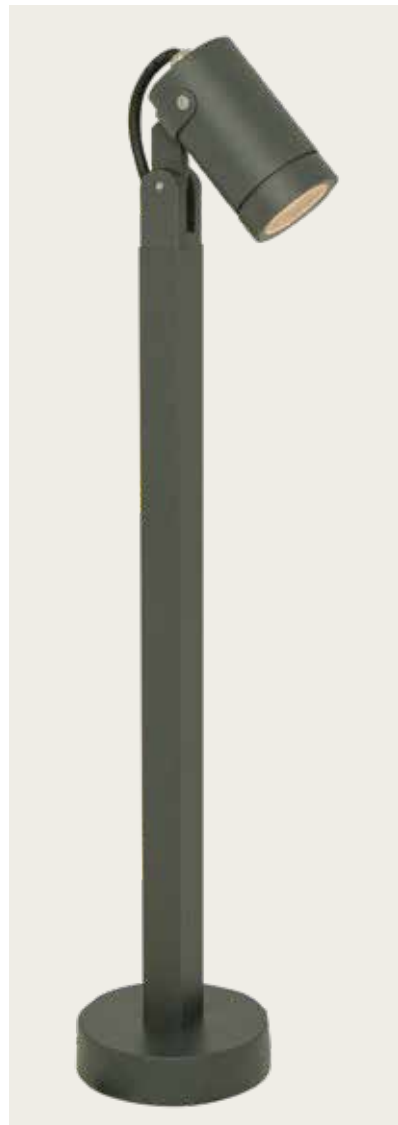


Bulb 1x GU10  
 Power 15W MAX  
 Input 220-240V, 50/60Hz  
 IP 54  
 Dimensions L: 11.5cm W: 5.5cm H: 60cm  
 Base Ø: 11.5cm H: 3cm  
 Spot Dimensions Ø: 5.5cm L: 9.5cm  
 Material Aluminium - Tempered Glass  
 Special Feature Tilt Up-Down  
 Honeycomb Included  
 Color Graphite / **Code E325**








Power 12W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 920Lm  
 Cri 80  
 IP 54  
 Dimensions Ø: 15cm L: 5.5cm  
 Material Aluminium - PC Diffuser  
 Color Graphite / **Code E237**

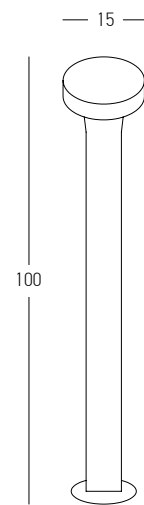



Power 11W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 792Lm  
 Cri 80  
 IP 65  
 Dimensions Ø: 15cm H: 100cm  
 Material Aluminium - PC Diffuser  
 Color Graphite / **Code E249**




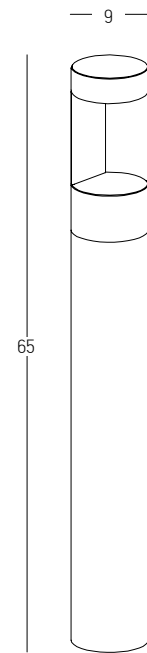


Power 9W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 1180Lm  
Cri 90  
IP 54  
Dimensions Ø: 9cm H: 65cm  
Beam Angle 120°  
Material Aluminium - Tempered Glass  
Color Graphite / **Code E298**



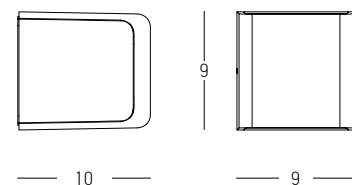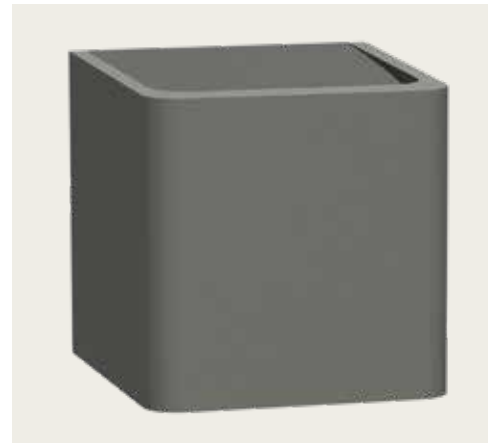


Power 13W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 767Lm  
 Cri 80  
 IP 65  
 Dimensions L: 10cm W: 9cm H: 9cm  
 Material Aluminium  
 Special Feature Up-Down Lighting  
 Color Graphite / **Code E352**

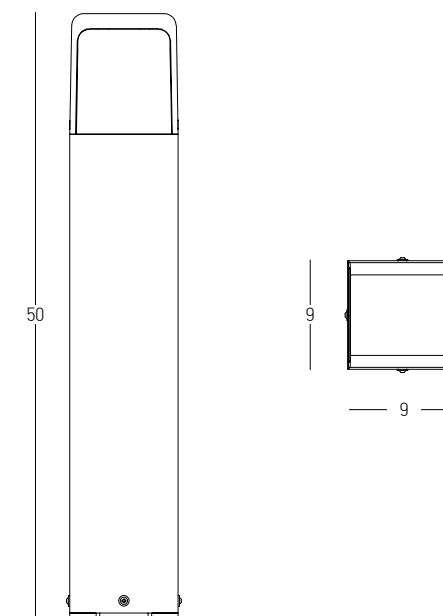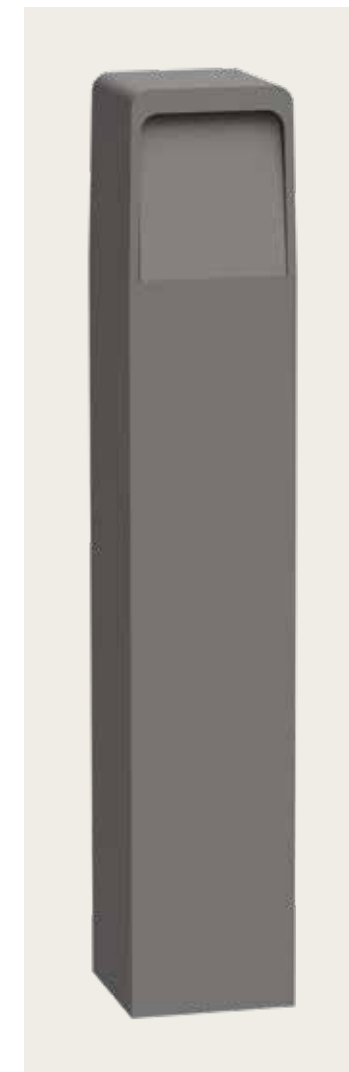



Power 13W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 767Lm  
 Cri 80  
 IP 65  
 Dimensions L: 9cm W: 9cm H: 50cm  
 Material Aluminium  
 Special Feature Double Sided Lighting  
 Color Graphite / **Code E351**




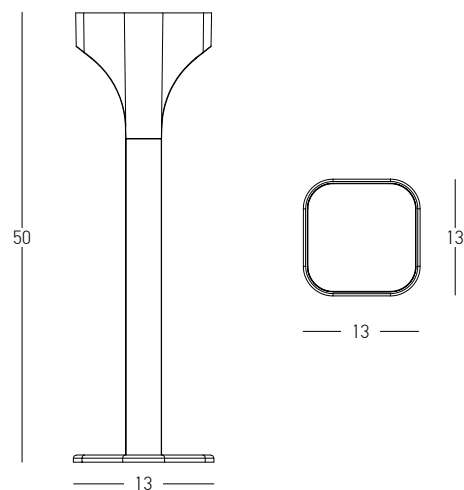


Power 11W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 993Lm  
 Cri 80  
 IP 65  
 Dimensions L: 13cm W: 13cm H: 50cm  
 Base L: 13cm W: 13cm H: 0.5cm  
 Beam Angle 120°  
 Material Aluminium - PC Diffuser  
 Special Feature Double Sided Lighting  
 Color Graphite / **Code E356**

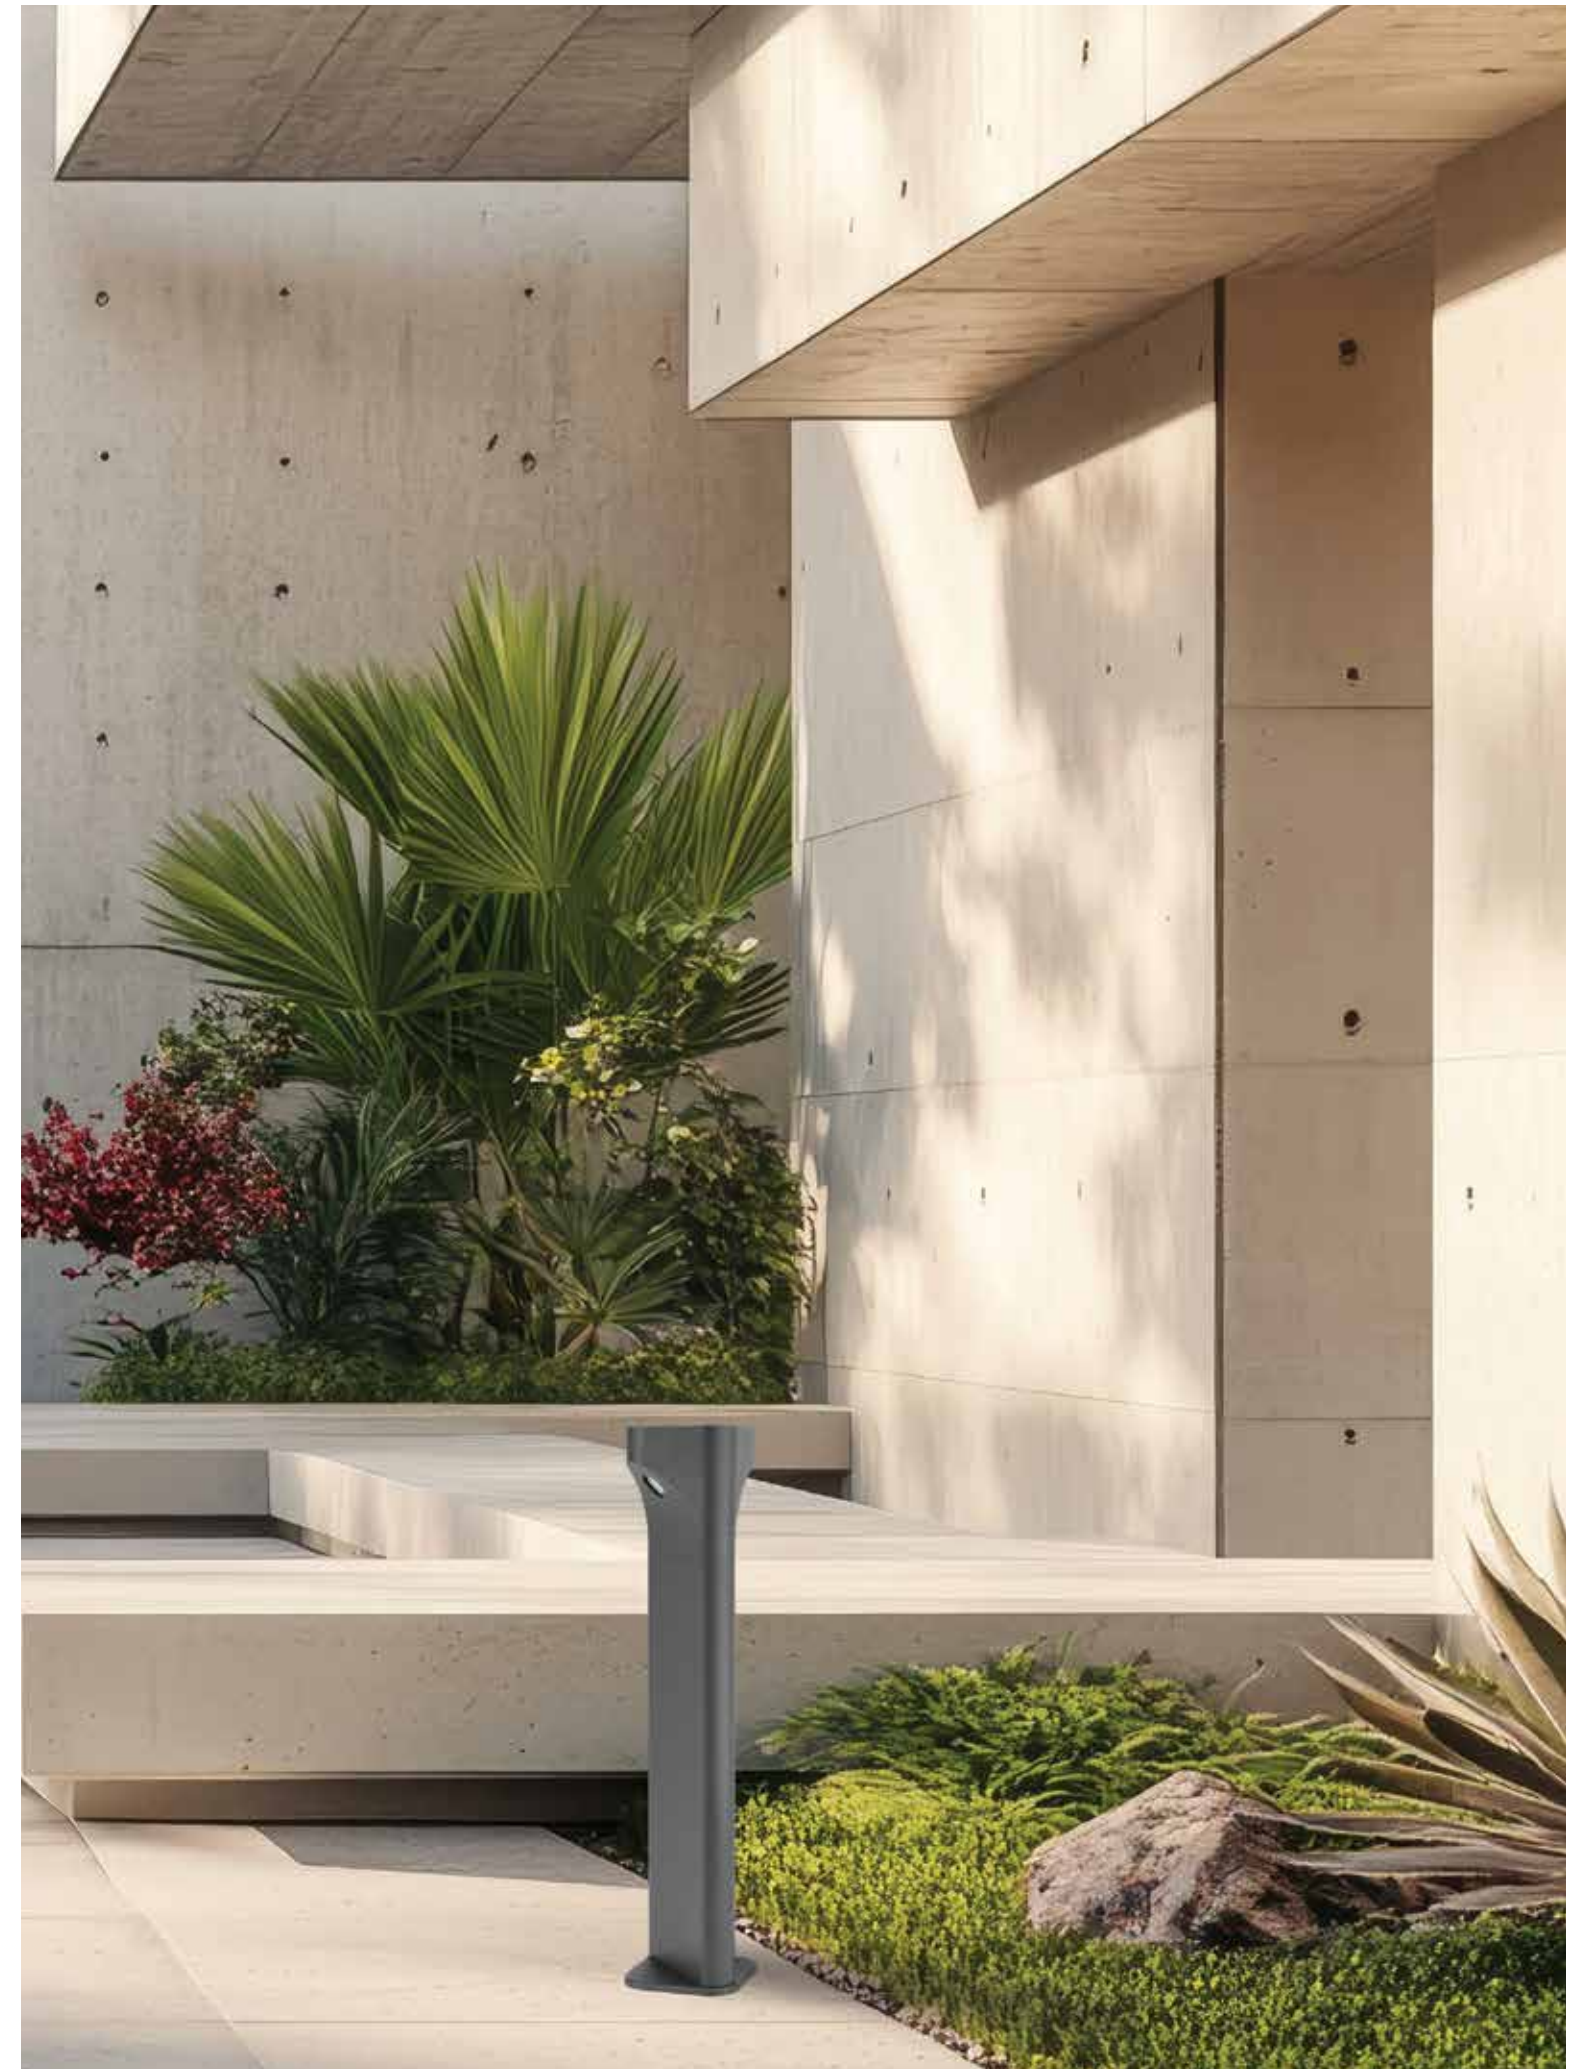

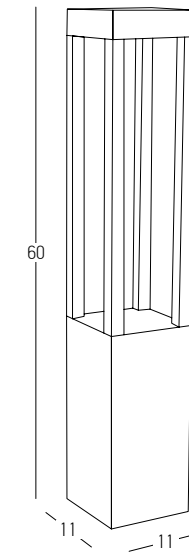


Power 7W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 658Lm  
 Cri 80  
 IP 67  
 Dimensions L: 11cm W: 11cm H: 60cm  
 Beam Angle 120°  
 Material Aluminium - Clear Glass  
 Color Graphite / **Code E367**

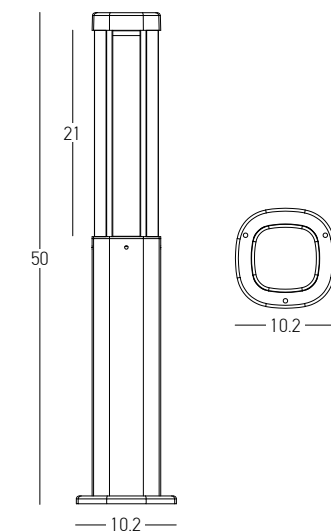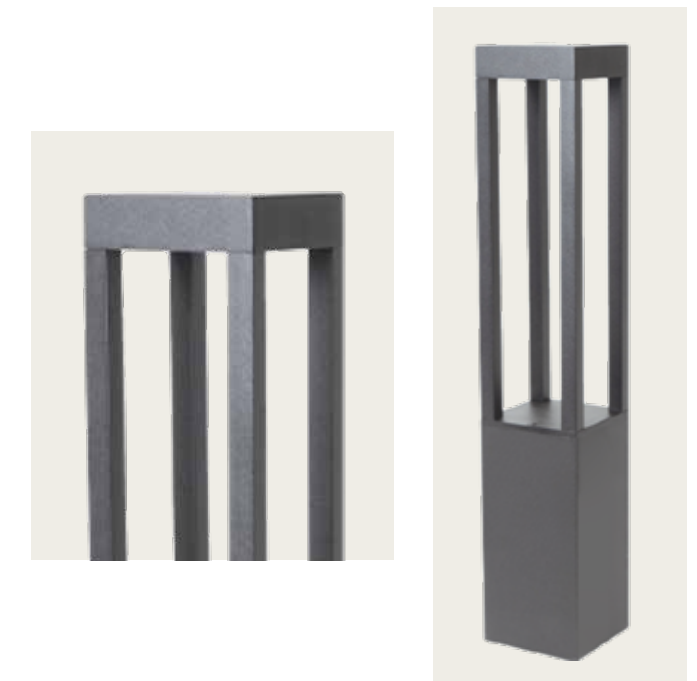


Power 7W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 533Lm  
 Cri 80  
 IP 54  
 Dimensions L: 10.2cm W: 10.2cm H: 50cm  
 Base Ø: 10.2cm H: 1cm  
 Beam Angle 120°  
 Material Aluminium - PC Diffuser  
 Color Graphite / **Code E355**



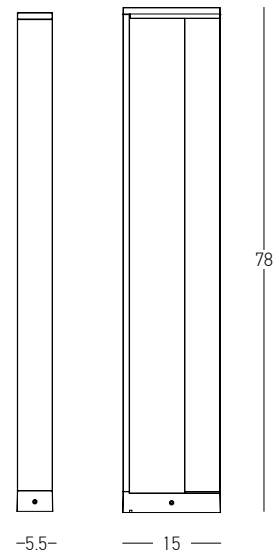


Power 9W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 653Lm  
Cri 80  
IP 54  
Dimensions L: 15cm W: 5.5cm H: 78cm  
Material Aluminium - PC Diffuser  
Color Graphite / **Code E208**



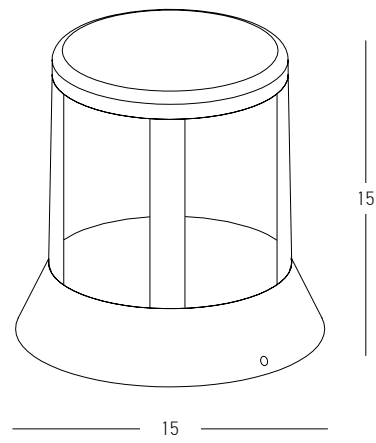

Power 8W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 557Lm  
Cri 80  
IP 65  
Dimensions Ø: 15cm H: 15cm  
Material Aluminium - Clear Diffuser  
Color Graphite / **Code E337**




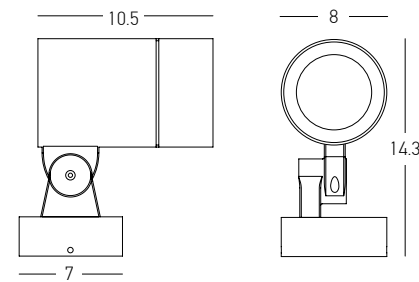


Bulb 1x GU10  
 Power 11W MAX  
 Input 220-240V, 50/60Hz  
 IP 65  
 Dimensions Ø: 8cm L: 14.3cm  
 Base Ø: 7cm  
 Material Aluminium - Tempered Glass  
 Special Feature Tilt Up-Down  
 Color Graphite / **Code E236**



Power 15W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 1243Lm  
 Cri 80  
 IP 65  
 Dimensions Ø: 8cm L: 16.2cm  
 Base Ø: 7cm  
 Beam Angle 32°  
 Material Aluminium - Tempered Glass  
 Special Feature Tilt Up-Down  
 Color Graphite / **Code E235**

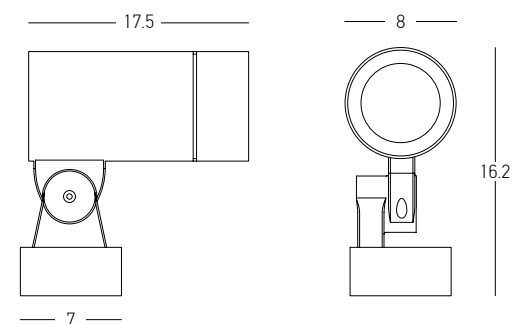


Power 15W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 1243Lm  
 Cri 80  
 IP 65  
 Dimensions Ø: 8cm L: 16.2cm  
 Base Ø: 7cm  
 Beam Angle 12°  
 Material Aluminium - Tempered Glass  
 Special Feature Tilt Up-Down  
 Color Graphite / **Code E235-12D**

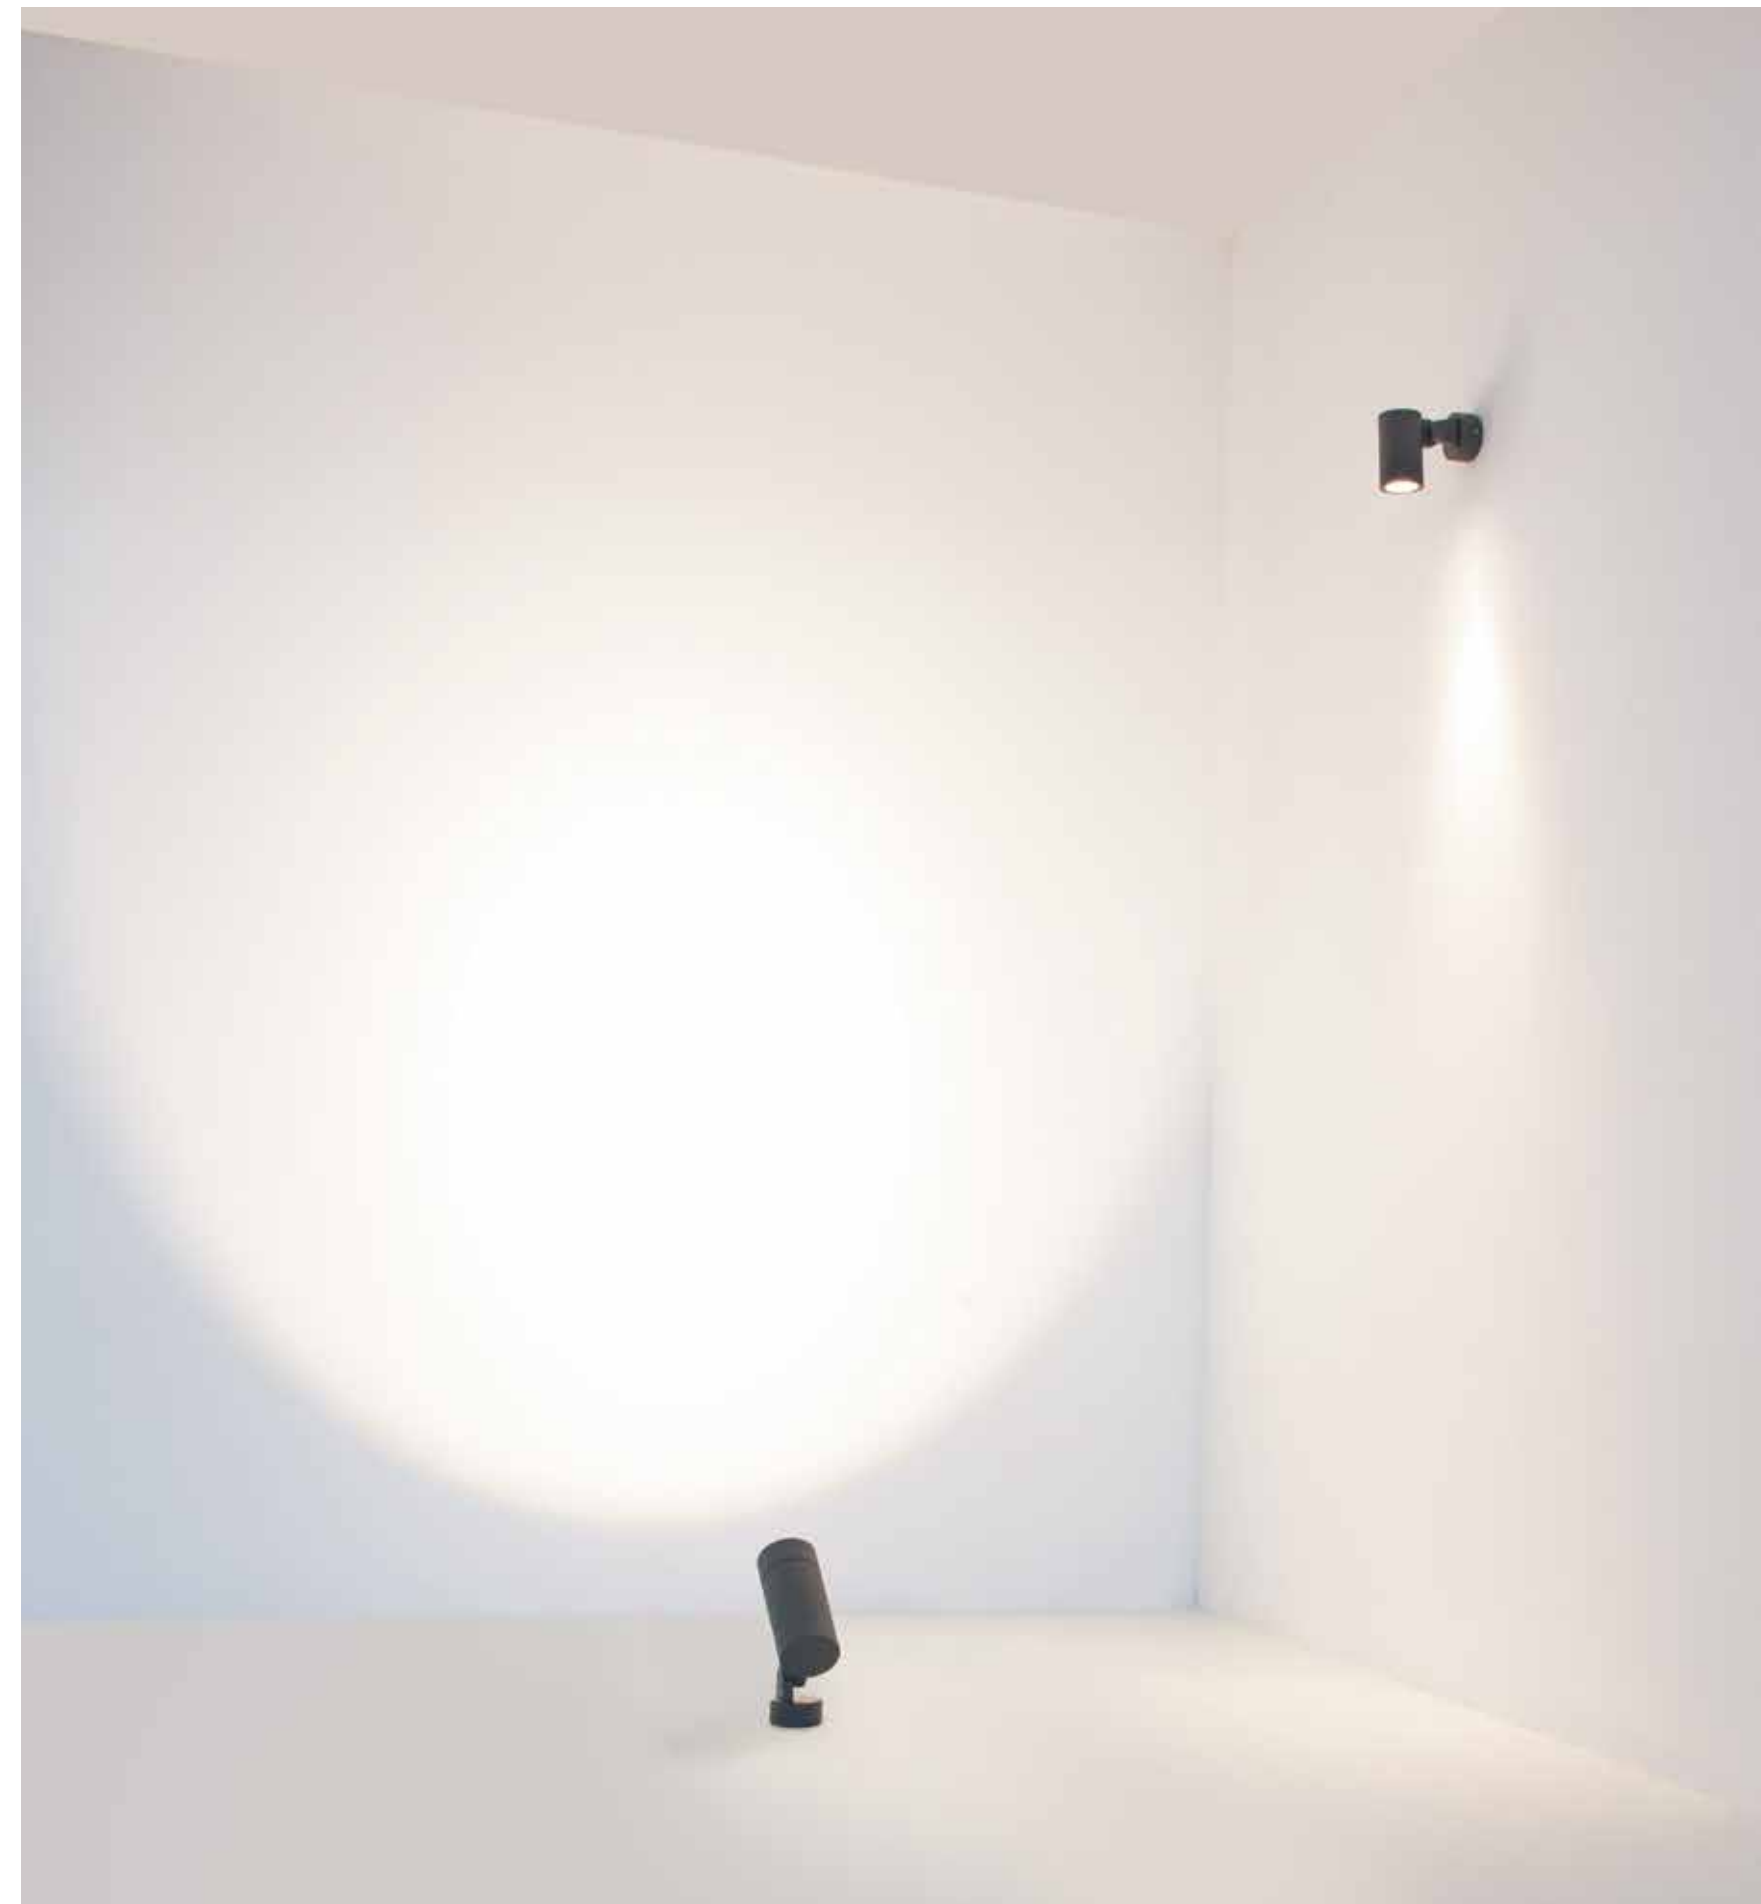


Light That Defines Walls  
Captivating outdoor wallscapes with style.




04. WALL

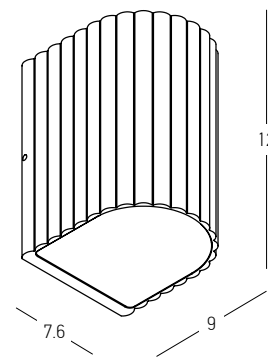


Power 3W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 191Lm  
 Cri 85  
 IP 54  
 Dimensions L: 9cm W: 7.6cm H: 12cm  
 Material Aluminium - Glass  
 Color Grey Beige / **Code E419**

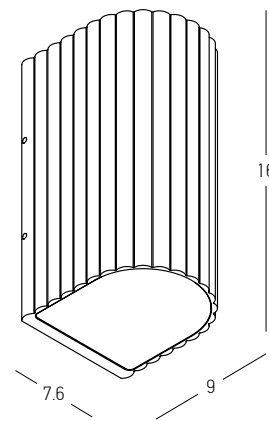


Power 2x 3W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 405Lm  
 Cri 85  
 IP 54  
 Dimensions L: 9cm W: 7.6cm H: 16cm  
 Material Aluminium - Glass  
 Special Feature Up-Down Lighting  
 Color Grey Beige / **Code E420**

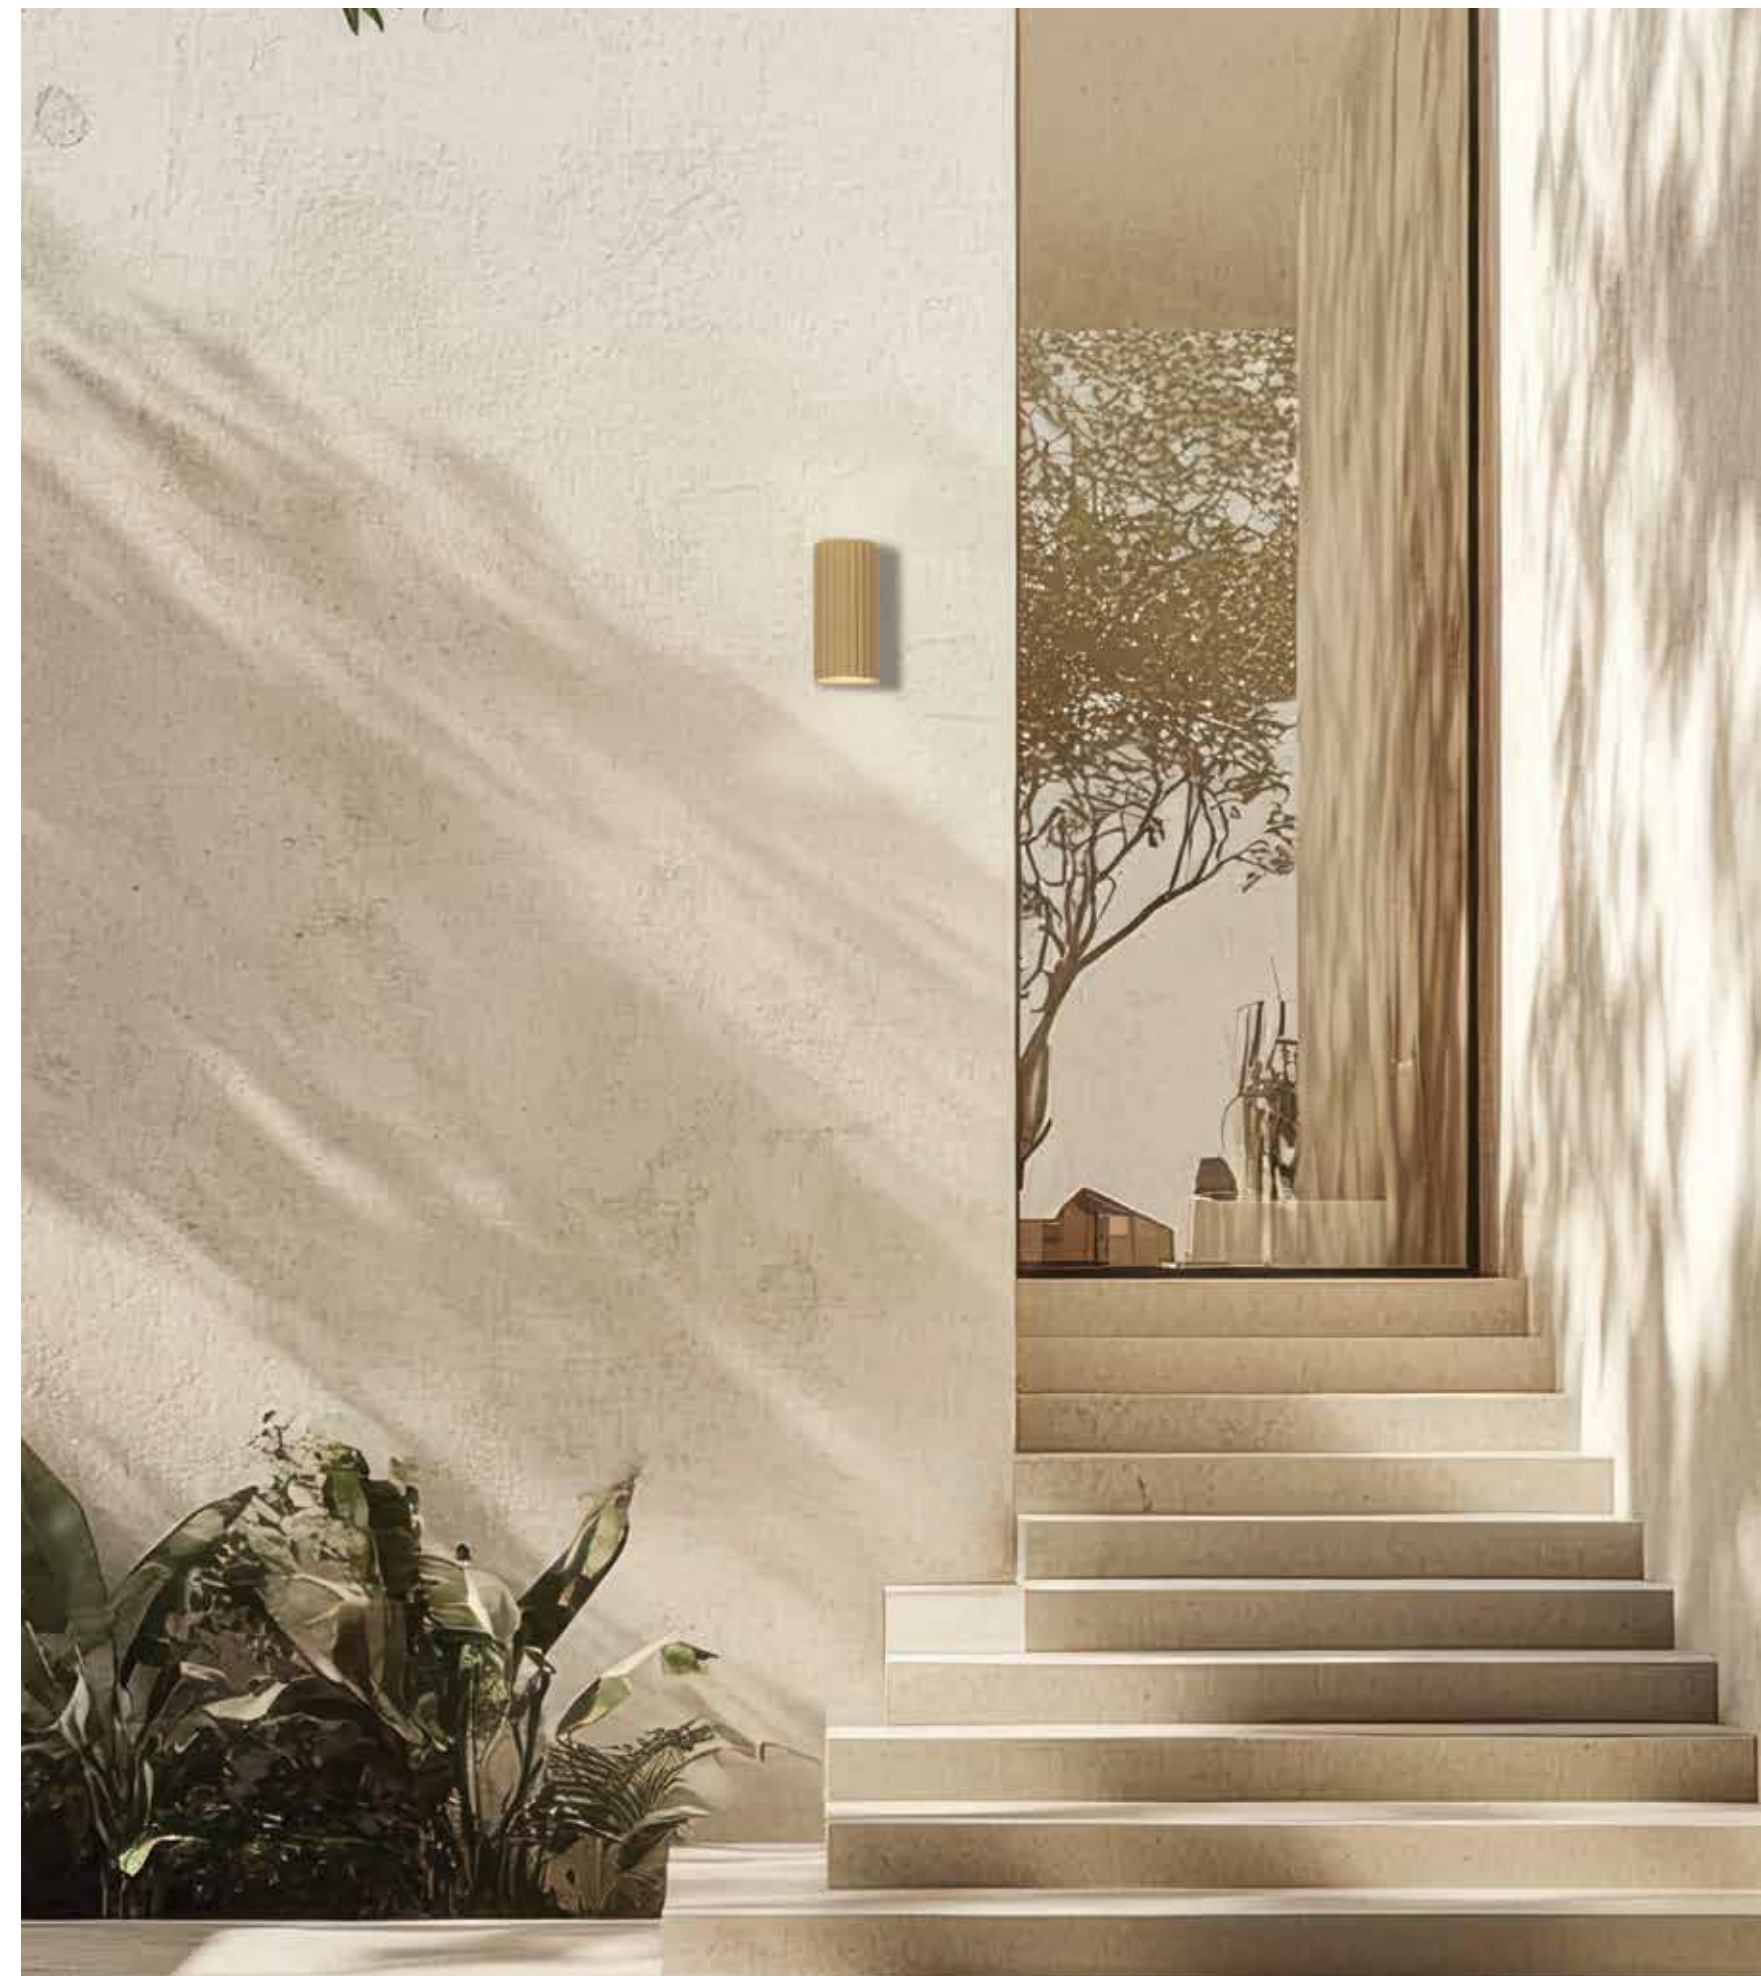


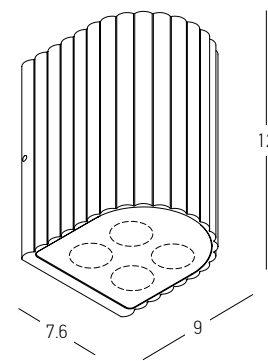


Power 4x 1W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 280Lm  
 Cri 85  
 IP 54  
 Dimensions L: 9cm W: 7.6cm H: 12cm  
 Beam Angle 10°  
 Material Aluminium - Glass  
 Color Graphite / **Code E421**

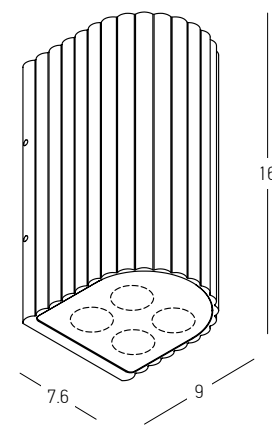


Power 8x 1W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 560Lm  
 Cri 85  
 IP 54  
 Dimensions L: 9cm W: 7.6cm H: 16cm  
 Beam Angle 10°  
 Material Aluminium - Glass  
 Special Feature Up-Down Lighting  
 Color Graphite / **Code E422**



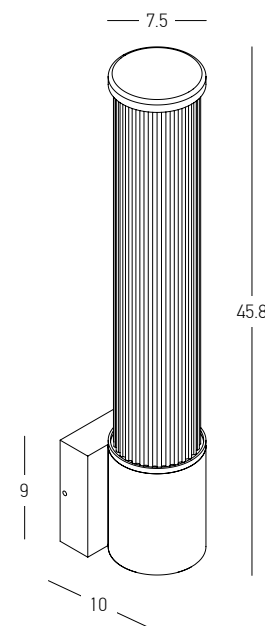


Power 12W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 832Lm  
 Cri 90  
 IP 54  
 Dimensions Ø: 7.5cm L: 10cm H: 45.8cm  
 Base L: 3cm W: 9cm H: 9cm  
 Material Aluminium - Glass - Acrylic  
 Color Graphite / **Code E428**



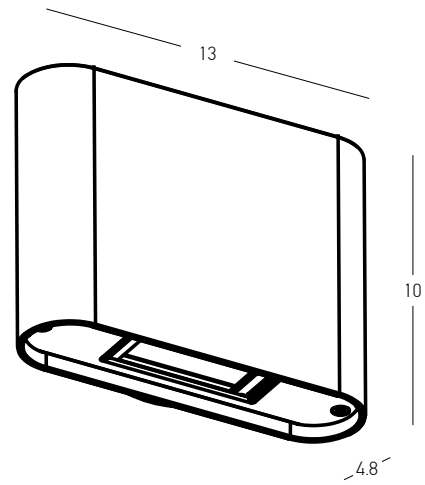


Power 6W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K, 4000K  
 Lumen 508Lm, 542Lm  
 Cri 80  
 IP 65  
 Dimensions L: 4,8cm W: 13cm H: 10cm  
 Base Ø: 8,8cm L: 1cm  
 Material Aluminium - Tempered Glass  
 Special Feature CCT Switch  
 Adjustable Dual Light Side Cover  
 Up-Down Lighting  
 Color Sandy Black / **Code E433**






Power 2x 3W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 480Lm  
 Cri 80  
 IP 65  
 Dimensions L: 3.1cm W: 11cm H: 9cm  
 Material Aluminium - Tempered Glass  
 Special Feature Up-Down Lighting  
 Color Graphite / **Code E238**  
 Color Sandy White / **Code E238-W**

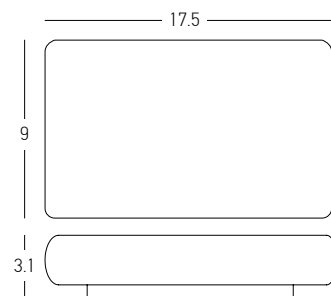


Power 2x 6W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 960Lm  
 Cri 80  
 IP 65  
 Dimensions L: 3.1cm W: 17.5cm H: 9cm  
 Material Aluminium - Tempered Glass  
 Special Feature Up-Down Lighting  
 Color Graphite / **Code E239**  
 Color Sandy White / **Code E239-W**

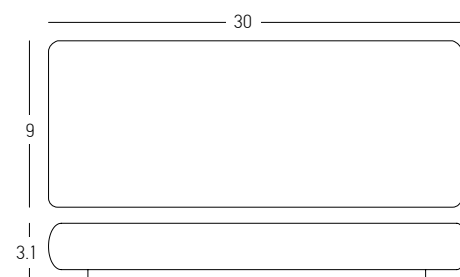


Power 2x 10W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 1600Lm  
 Cri 80  
 IP 65  
 Dimensions L: 3.1cm W: 30cm H: 9cm  
 Material Aluminium - Tempered Glass  
 Special Feature Up-Down Lighting  
 Color Graphite / **Code E240**  
 Color Sandy White / **Code E240-W**





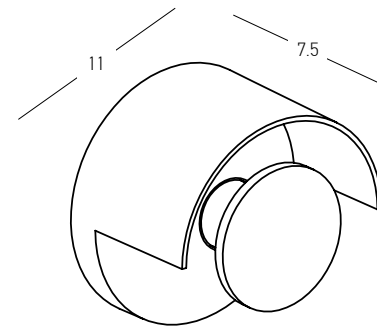



Bulb 1x G9  
 Power 12W MAX  
 Input 220-240V, 50/60Hz  
 IP 65  
 Dimensions Ø: 11cm L: 7.5cm  
 Material Aluminium - Clear PC Diffuser  
 Color Sandy White / **Code E440**

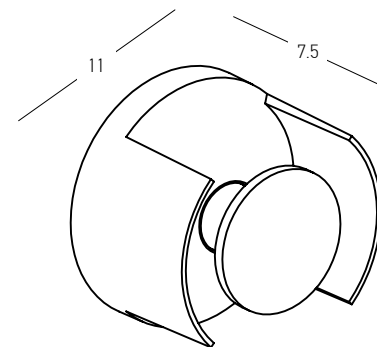

Bulb 1x G9  
 Power 12W MAX  
 Input 220-240V, 50/60Hz  
 IP 65  
 Dimensions Ø: 11cm L: 7.5cm  
 Material Aluminium - Clear PC Diffuser  
 Color Sandy White / **Code E439**



OUTDOOR LIGHTING | WALL

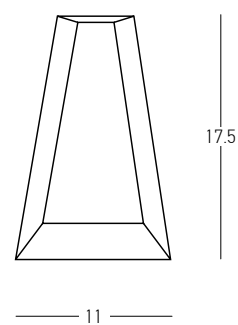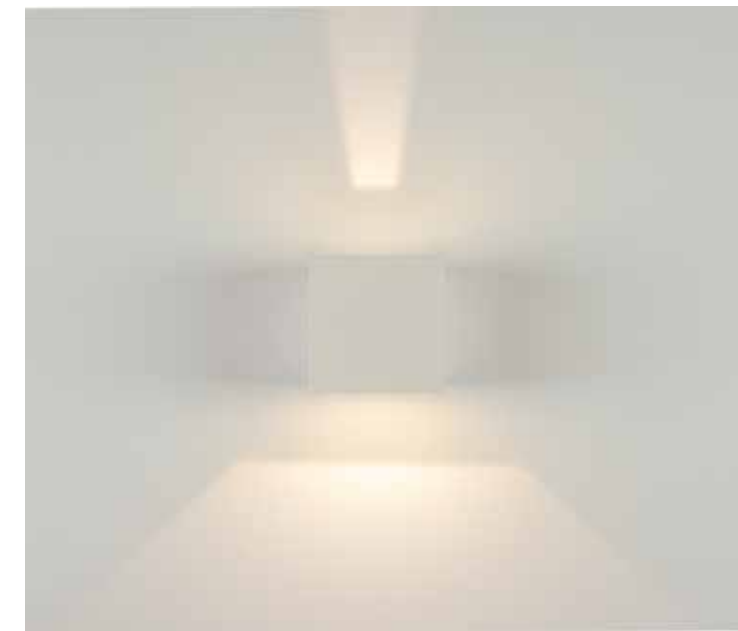




Power 2x 3W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 480Lm  
 Cri 80  
 IP 54  
 Dimensions L: 6.5cm W: 11cm H: 17.5cm  
 Material Aluminium - Tempered Glass  
 Special Feature Up-Down Lighting  
 Color Graphite / **Code E135**  
 Color Sandy White / **Code E156**



Power 2x 3W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 480Lm  
 Cri 80  
 IP 54  
 Dimensions L: 8.2cm W: 8cm H: 8cm  
 Material Aluminium - Tempered Glass  
 Special Feature Movable  
 Up-Down Lighting

Color Graphite / **Code E109**  
 Color Sandy White / **Code E159**



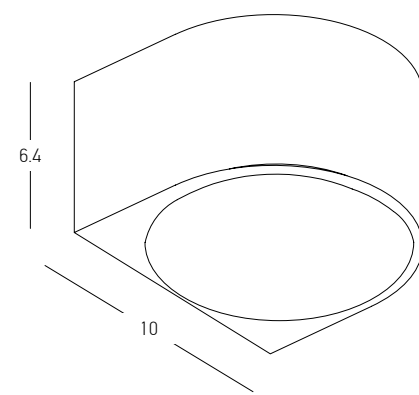
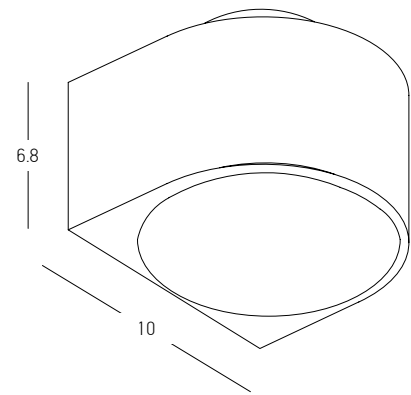


Power 2x 5W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 929Lm  
 Cri 90  
 IP 54  
 Dimensions L: 11cm W: 10cm H: 6.8cm  
 Material Aluminium - Tempered Glass  
 Special Feature Up-Down Lighting  
 Color Graphite / **Code E317**





Power 5W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 544Lm  
 Cri 90  
 IP 54  
 Dimensions L: 11cm W: 10cm H: 6.4cm  
 Material Aluminium - Tempered Glass  
 Color Graphite / **Code E316**



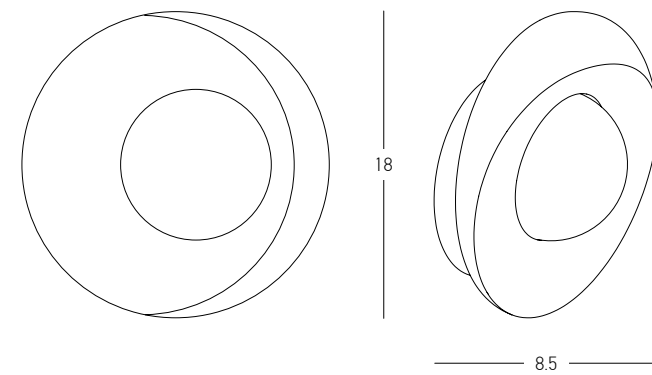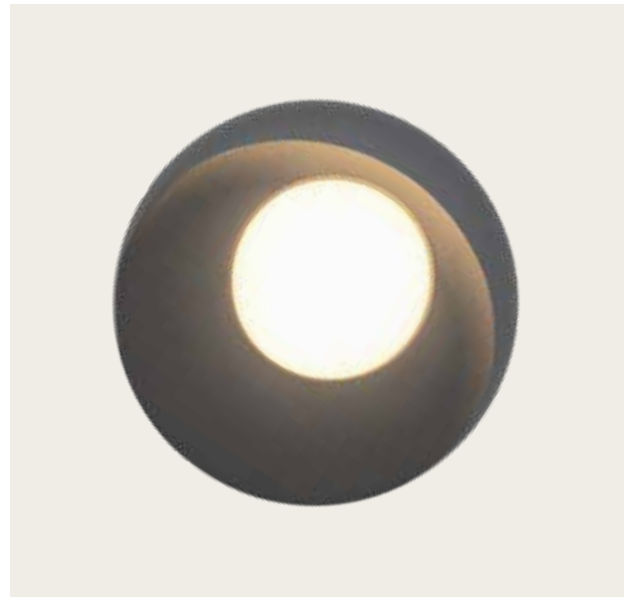



Power 6W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 490Lm  
 Cri 80  
 IP 54  
 Dimensions Ø: 18cm L: 8.5cm  
 Base Ø: 12cm L: 5.5cm  
 Material Aluminium - PC Diffuser  
 Special Feature Diffuser Ø: 8.5cm  
 Color Graphite / **Code E413**



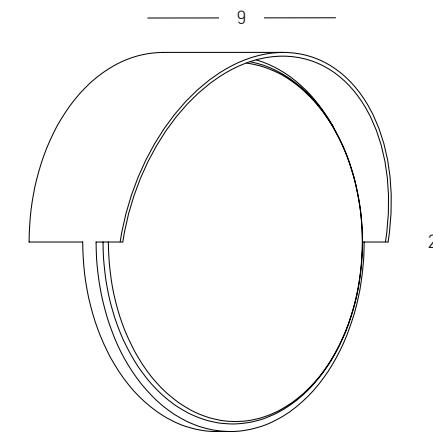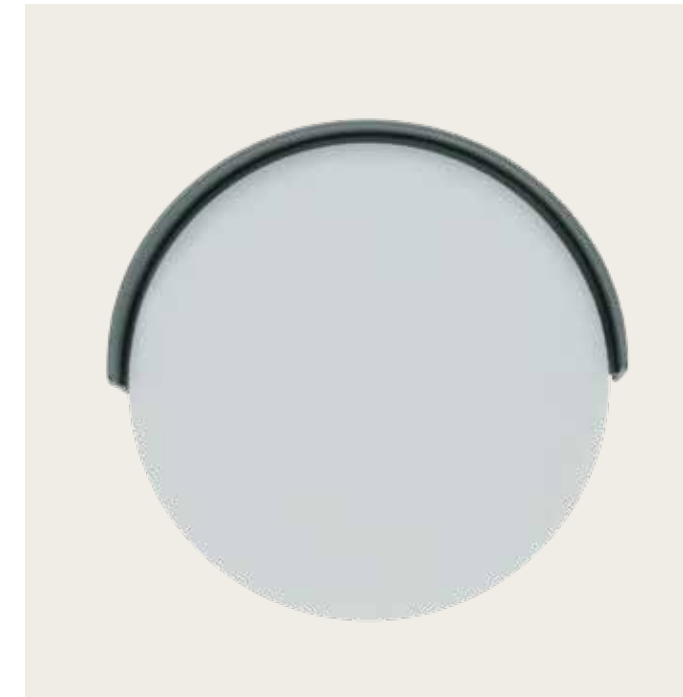



Power 10W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 875Lm  
Cri 85  
IP 54  
Dimensions Ø: 20cm L: 9cm  
Material Aluminium - PC Diffuser  
Color Graphite / **Code E414**



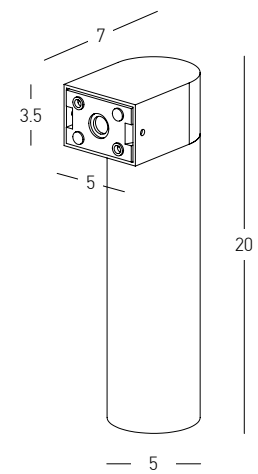



Power 5W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 300Lm  
 Cri 90  
 IP 65  
 Dimensions Ø: 5cm L: 7cm H: 20cm  
 Base L: 7cm W: 5cm H: 3.5cm  
 Beam Angle 34°  
 Material Aluminium - Glass  
 Color Graphite / **Code E415**

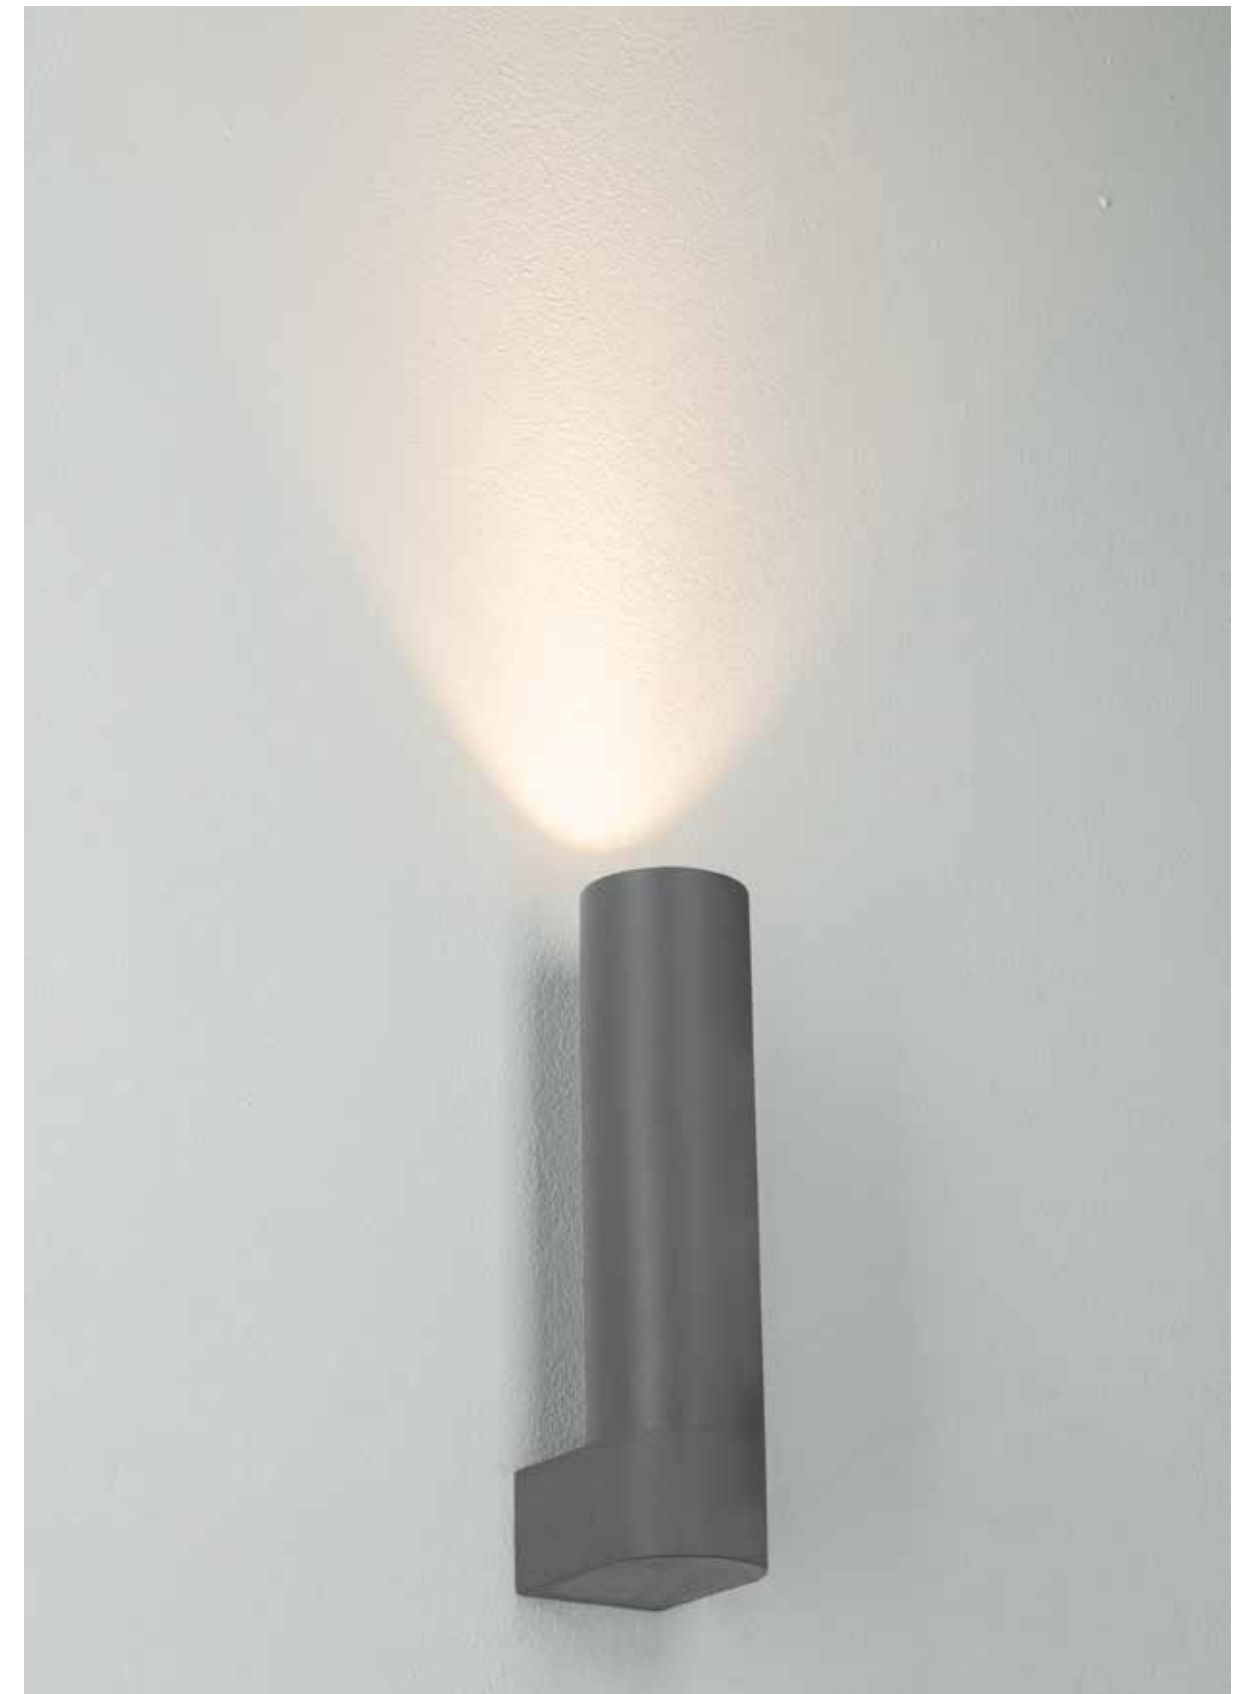

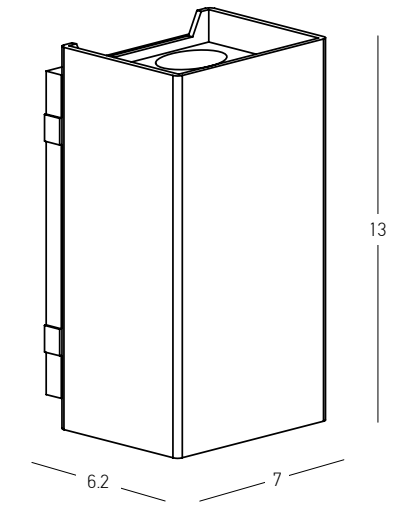

Power	2x 3W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	350Lm
Cri	90
IP	65
Dimensions	L: 6.2cm W: 7cm H: 13cm
Base	L: 1.7cm W: 7cm H: 11cm
Beam Angle	6.5°
Material	Aluminium - Glass
Special Feature	Up-Down Lighting
Color	Graphite / <b>Code E412</b>




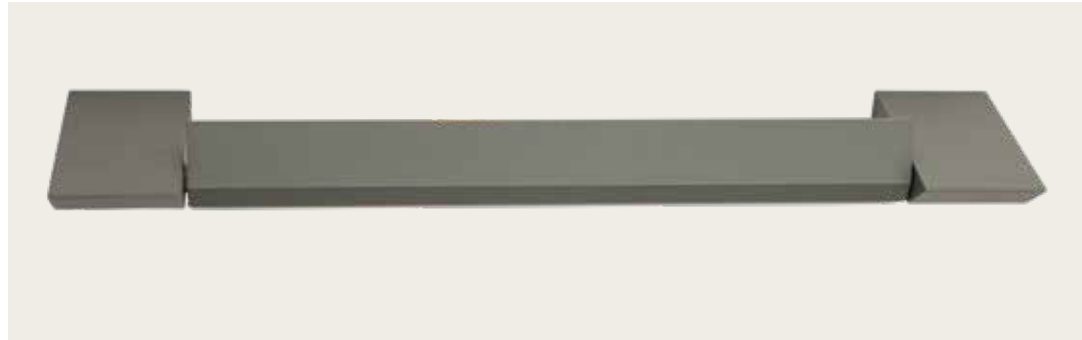

Power 12W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 617Lm  
 Cri 80  
 IP 54  
 Dimensions L: 12.5cm W: 4cm H: 55cm  
 Base 2x W: 4cm H: 7cm  
 Material Aluminium - Acrylic  
 Special Feature 350° Rotatable  
 Profile 7.2x2.5cm


Color Graphite / **Code E429**  
 Color Dark Brown / **Code E430**



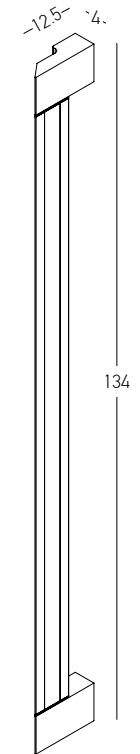


Power	36W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	2000Lm
Cri	80
IP	54
Dimensions	L: 12.5cm W: 4cm H: 134cm
Base	2x W: 4cm H: 7cm
Material	Aluminium - Acrylic
Special Feature	350° Rotatable Profile 7.2x2.5cm
Color	Graphite / <b>Code E431</b>
Color	Dark Brown / <b>Code E432</b>




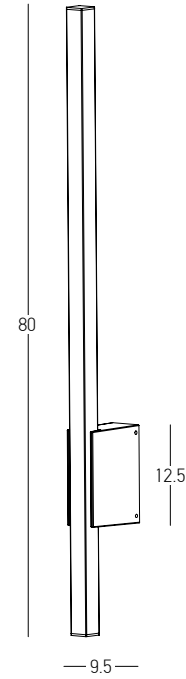

Power 12W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 1187Lm  
 Cri 80  
 IP 65  
 Dimensions L: 9.5cm W: 4.5cm H: 80cm  
 Base L: 9cm W: 4.5cm H: 12.5cm  
 Material Aluminium - PC Diffuser  
 Color Graphite / **Code E287**




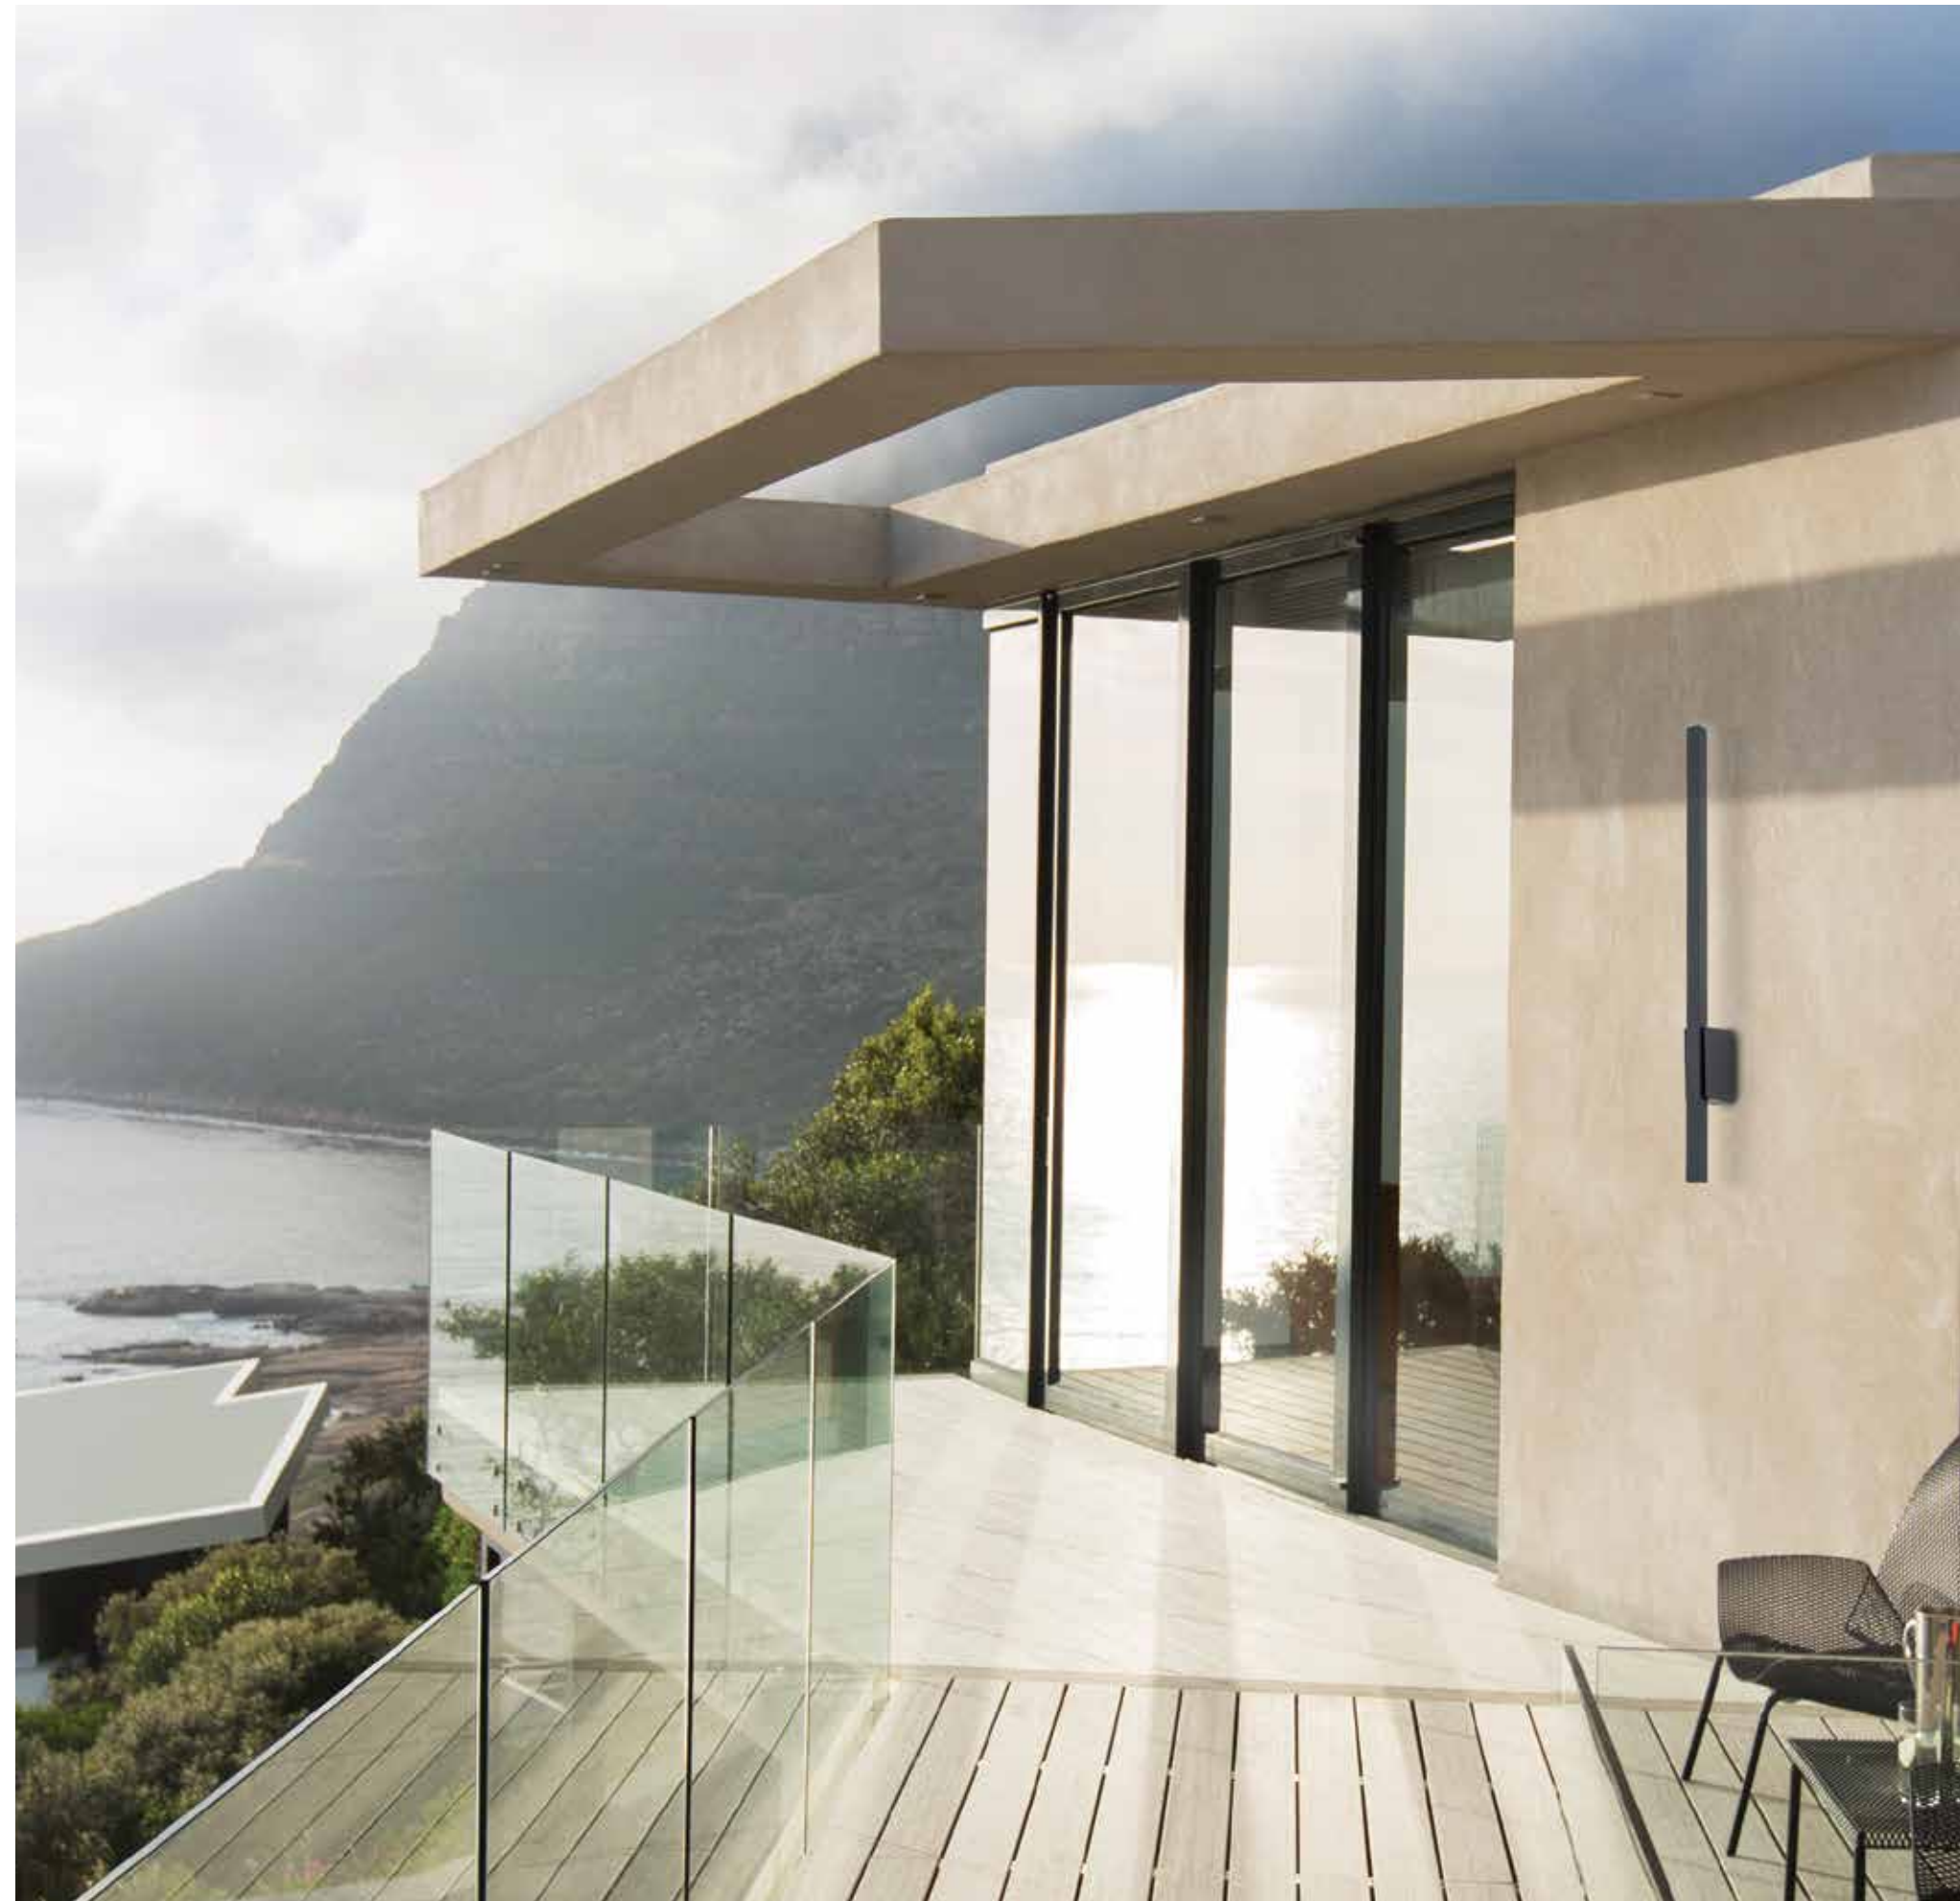

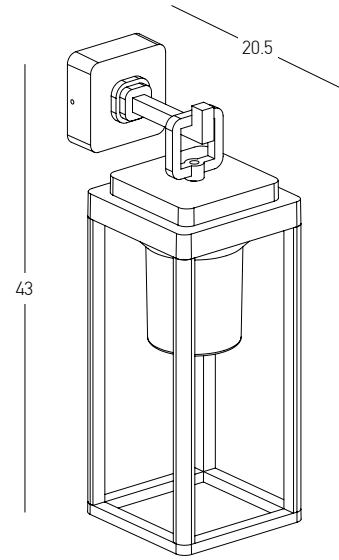
Bulb 1x E27  
Power 15W MAX  
Input 220-240V, 50/60Hz  
IP 65  
Dimensions L: 20.5cm W: 14.5cm H: 43cm  
Base L: 3.3cm W: 9cm H: 9cm  
Material Aluminium - Clear Diffuser  
Color Dark Brown / **Code E343**



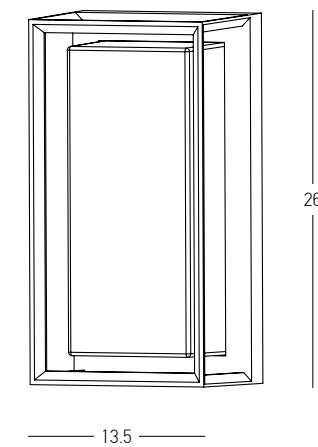


Bulb 1x E27  
Power 15W MAX  
Input 220-240V, 50/60Hz  
IP 54  
Dimensions L: 12cm W: 13.5cm H: 26cm  
Base L: 2.5cm W: 9.3cm H: 22cm  
Material Aluminium - PC Diffuser  
Color Graphite-Smoked Diffuser / **Code E434**




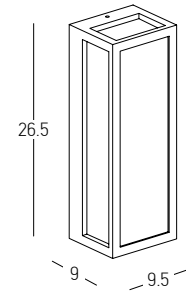

Power 10W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 810Lm  
 Cri 80  
 IP 65  
 Dimensions L: 9cm W: 9.5cm H: 26.5cm  
 Material Aluminium - PC Diffuser  
 Color Sandy Black / **Code E202**


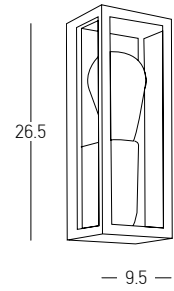


Bulb 1x E27  
 Power 15W MAX  
 Input 220-240V, 50/60Hz  
 IP 65  
 Dimensions L: 9cm W: 9.5cm H: 26.5cm  
 Material Aluminium - Clear Diffuser  
 Color Sandy Black / **Code E201**

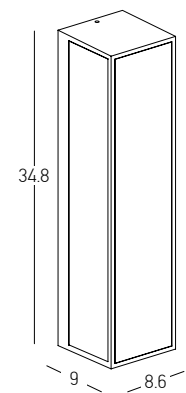


Bulb 2x E27  
 Power 15W MAX  
 Input 220-240V, 50/60Hz  
 IP 54  
 Dimensions L: 9cm W: 8.6cm H: 34.8cm  
 Material Aluminium - Tempered Glass  
 Color Graphite / **Code E296**



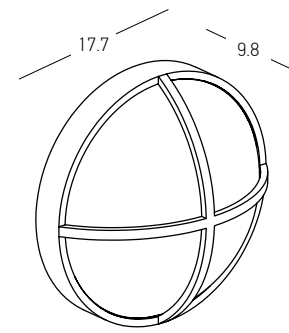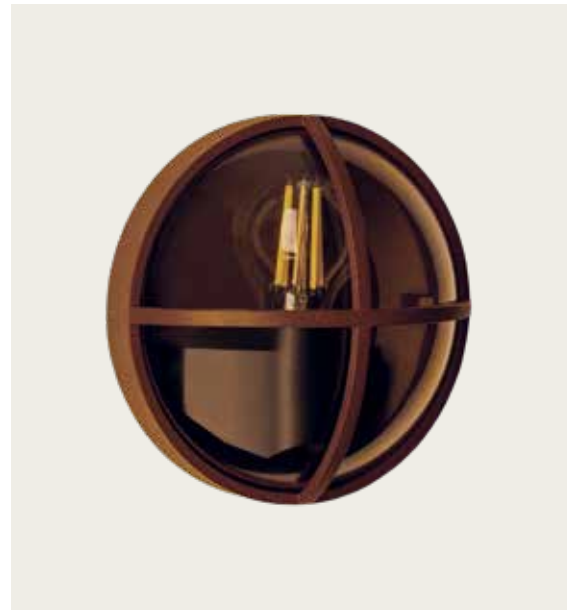


Bulb 1x E27  
 Power 15W MAX  
 Input 220-240V, 50/60Hz  
 IP 65  
 Dimensions Ø: 17.7cm L: 9.8cm  
 Material Aluminium - PC Diffuser  
 Color Dark Brown / **Code E437**

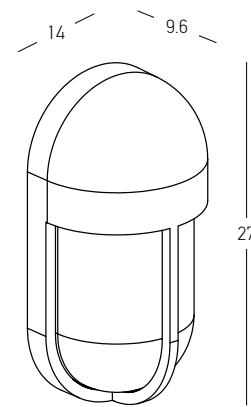


Bulb 1x E27  
 Power 15W MAX  
 Input 220-240V, 50/60Hz  
 IP 65  
 Dimensions L: 9.6cm W: 14cm H: 27cm  
 Material Aluminium - PC Diffuser  
 Color Dark Brown / **Code E438**



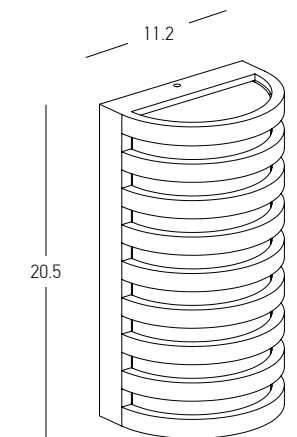


Power 10W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 929Lm  
 Cri 80  
 IP 65  
 Dimensions L: 8cm W: 11.2cm H: 20.5cm  
 Material Aluminium - PC Diffuser  
 Color Dark Brown / **Code E341**

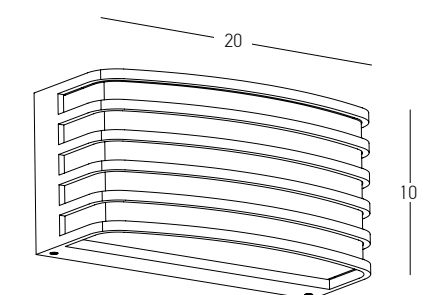


Bulb 1x E27  
 Power 20W MAX  
 Input 220-240V, 50/60Hz  
 IP 54  
 Dimensions L: 9cm W: 20cm H: 10cm  
 Material Aluminium - PC Diffuser  
 Color Dark Brown / **Code E275**



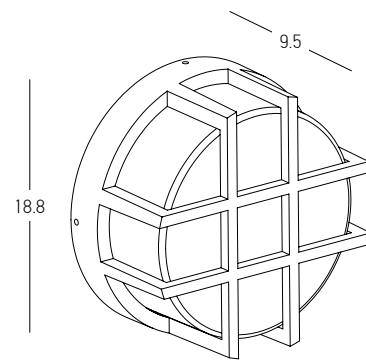


Power 10W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 880Lm  
Cri 80  
IP 65  
Dimensions Ø: 18.8cm L: 9.5cm  
Material Aluminium - PC Diffuser  
Color Dark Brown / **Code E342**





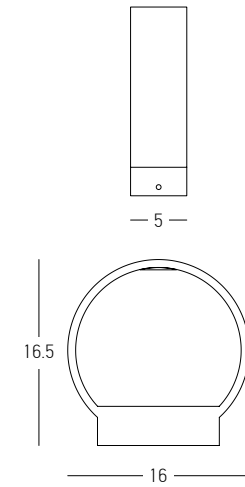


Power 7W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 530Lm  
 Cri 80  
 IP 65  
 Dimensions L: 16.5cm W: 16cm H: 5cm  
 Material Aluminium - Tempered Glass  
 Special Feature Up-Down Lighting  
 Color Dark Brown / **Code E268**

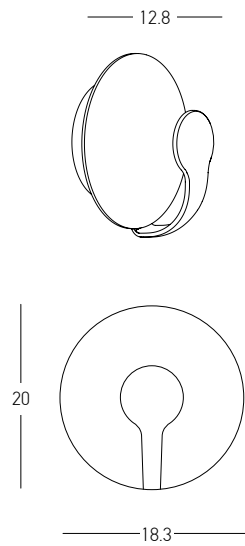


Power 12W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 880Lm  
 Cri 80  
 IP 65  
 Dimensions L: 12.8cm W: 18.3cm H: 20cm  
 Material Aluminium  
 Color Dark Brown - Sandy White / **Code E271**

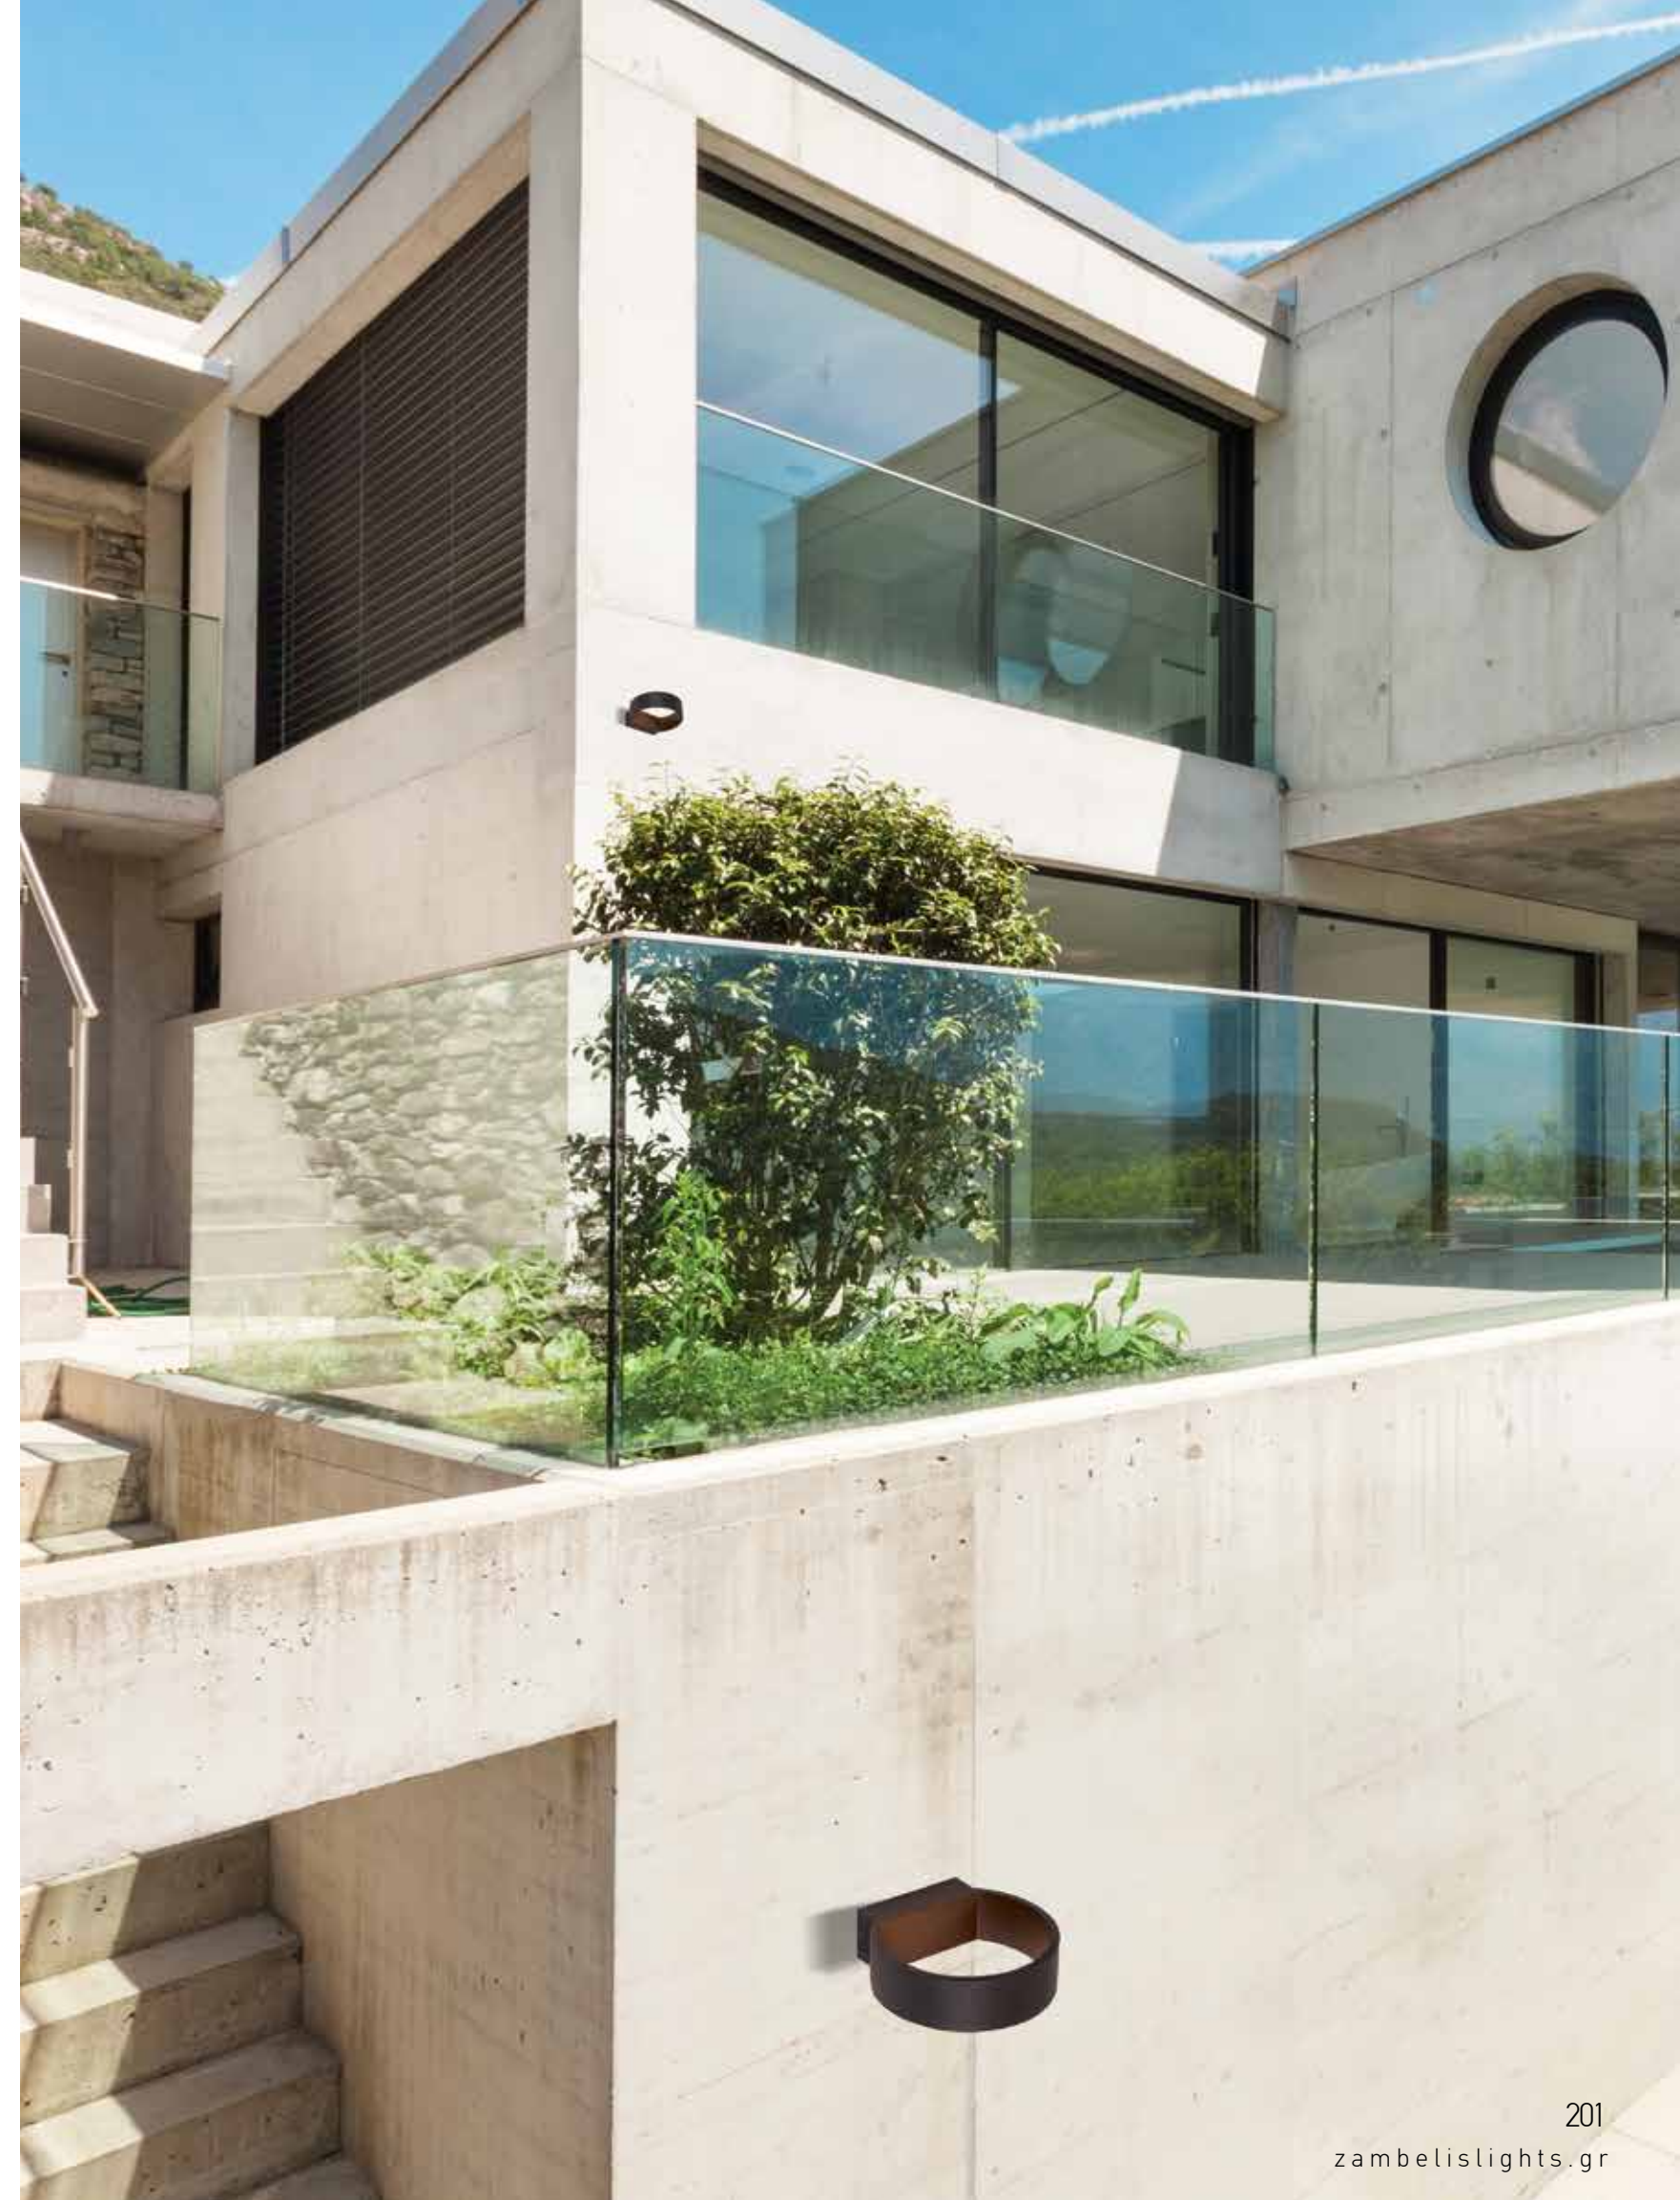

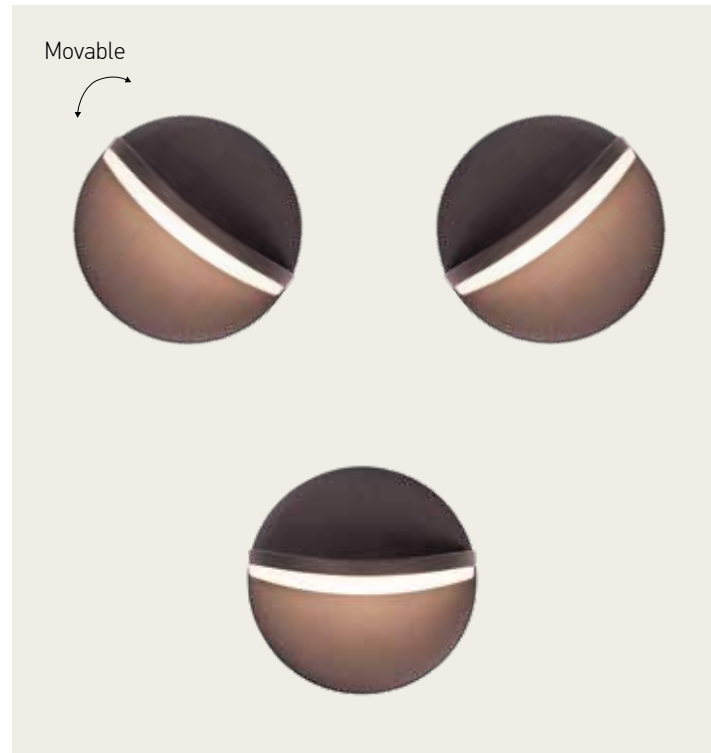


Power 16W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 1106Lm  
 Cri 80  
 IP 65  
 Dimensions Ø: 18.3cm L: 13cm  
 Material Aluminium - Opal PC Diffuser  
 Special Feature Movable Light  
 Color Dark Brown / **Code E267**



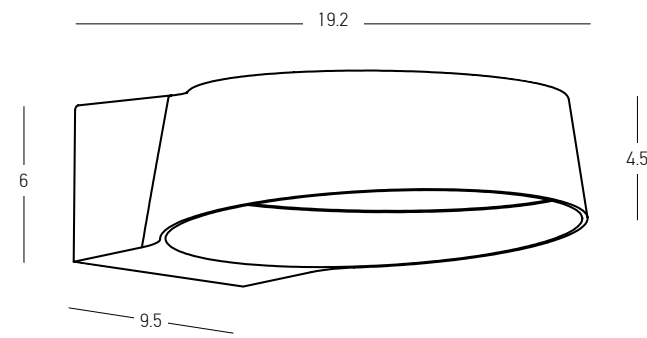


Power 12W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 1100Lm  
 Cri 80  
 IP 54  
 Dimensions L: 19.2cm W: 16.2cm H: 6cm  
 Beam Angle 120°  
 Material Aluminium - Clear Glass  
 Color Graphite / **Code E464**



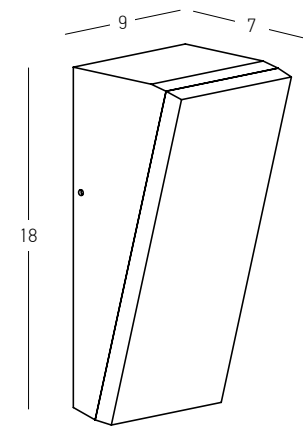


Power 10W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 1115Lm  
 Cri 80  
 IP 65  
 Dimensions L: 7cm W: 9cm H: 18cm  
 Material Aluminium - Opal PC Diffuser  
 Color Graphite / **Code E416**

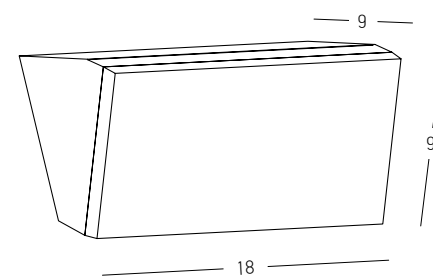


Power 10W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 1115Lm  
 Cri 80  
 IP 65  
 Dimensions L: 9cm W: 18cm H: 9cm  
 Material Aluminium - Opal PC Diffuser  
 Color Graphite / **Code E417**



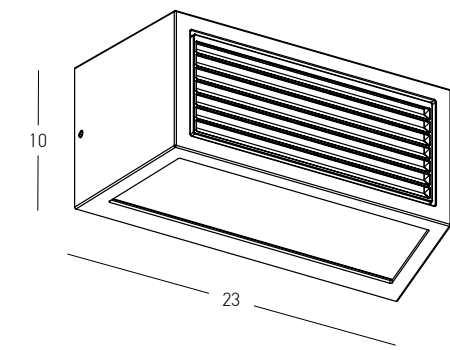


Bulb	1x E27
Power	15W MAX
Input	220-240V, 50/60Hz
IP	54
Dimensions	L: 9.5cm W: 23cm H: 10cm
Material	Aluminium - PC Diffuser
Special Feature	Up-Down Lighting
Color	Graphite / <b>Code E500</b>




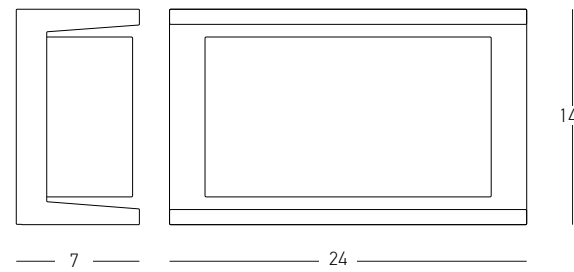


Bulb 1x E27  
 Power 18W MAX  
 Input 220-240V, 50/60Hz  
 IP 54  
 Dimensions L: 7cm W: 24cm H: 14cm  
 Material Aluminium - PC Diffuser  
 Color Graphite / **Code E149**

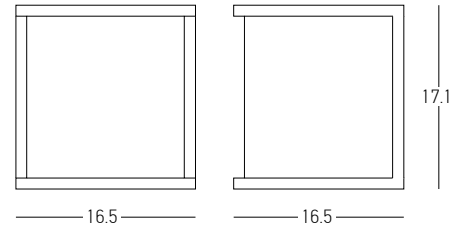


Bulb 1x E27  
 Power 18W MAX  
 Input 220-240V, 50/60Hz  
 IP 54  
 Dimensions L: 16.5cm W: 16.5cm H: 17.1cm  
 Material Aluminium - PC Diffuser  
 Color Graphite / **Code E127**

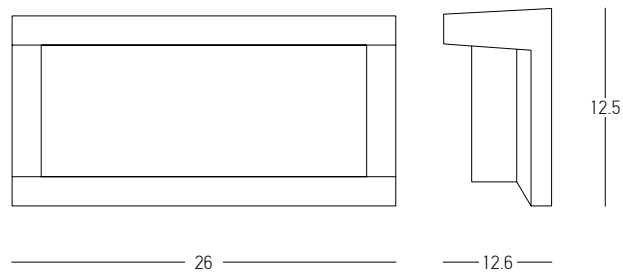




Bulb 1x E27  
 Power 18W MAX  
 Input 220-240V, 50/60Hz  
 IP 54  
 Dimensions L: 12.6cm W: 26cm H: 12.5cm  
 Material Aluminium - PC Diffuser  
 Color Graphite / **Code E128**

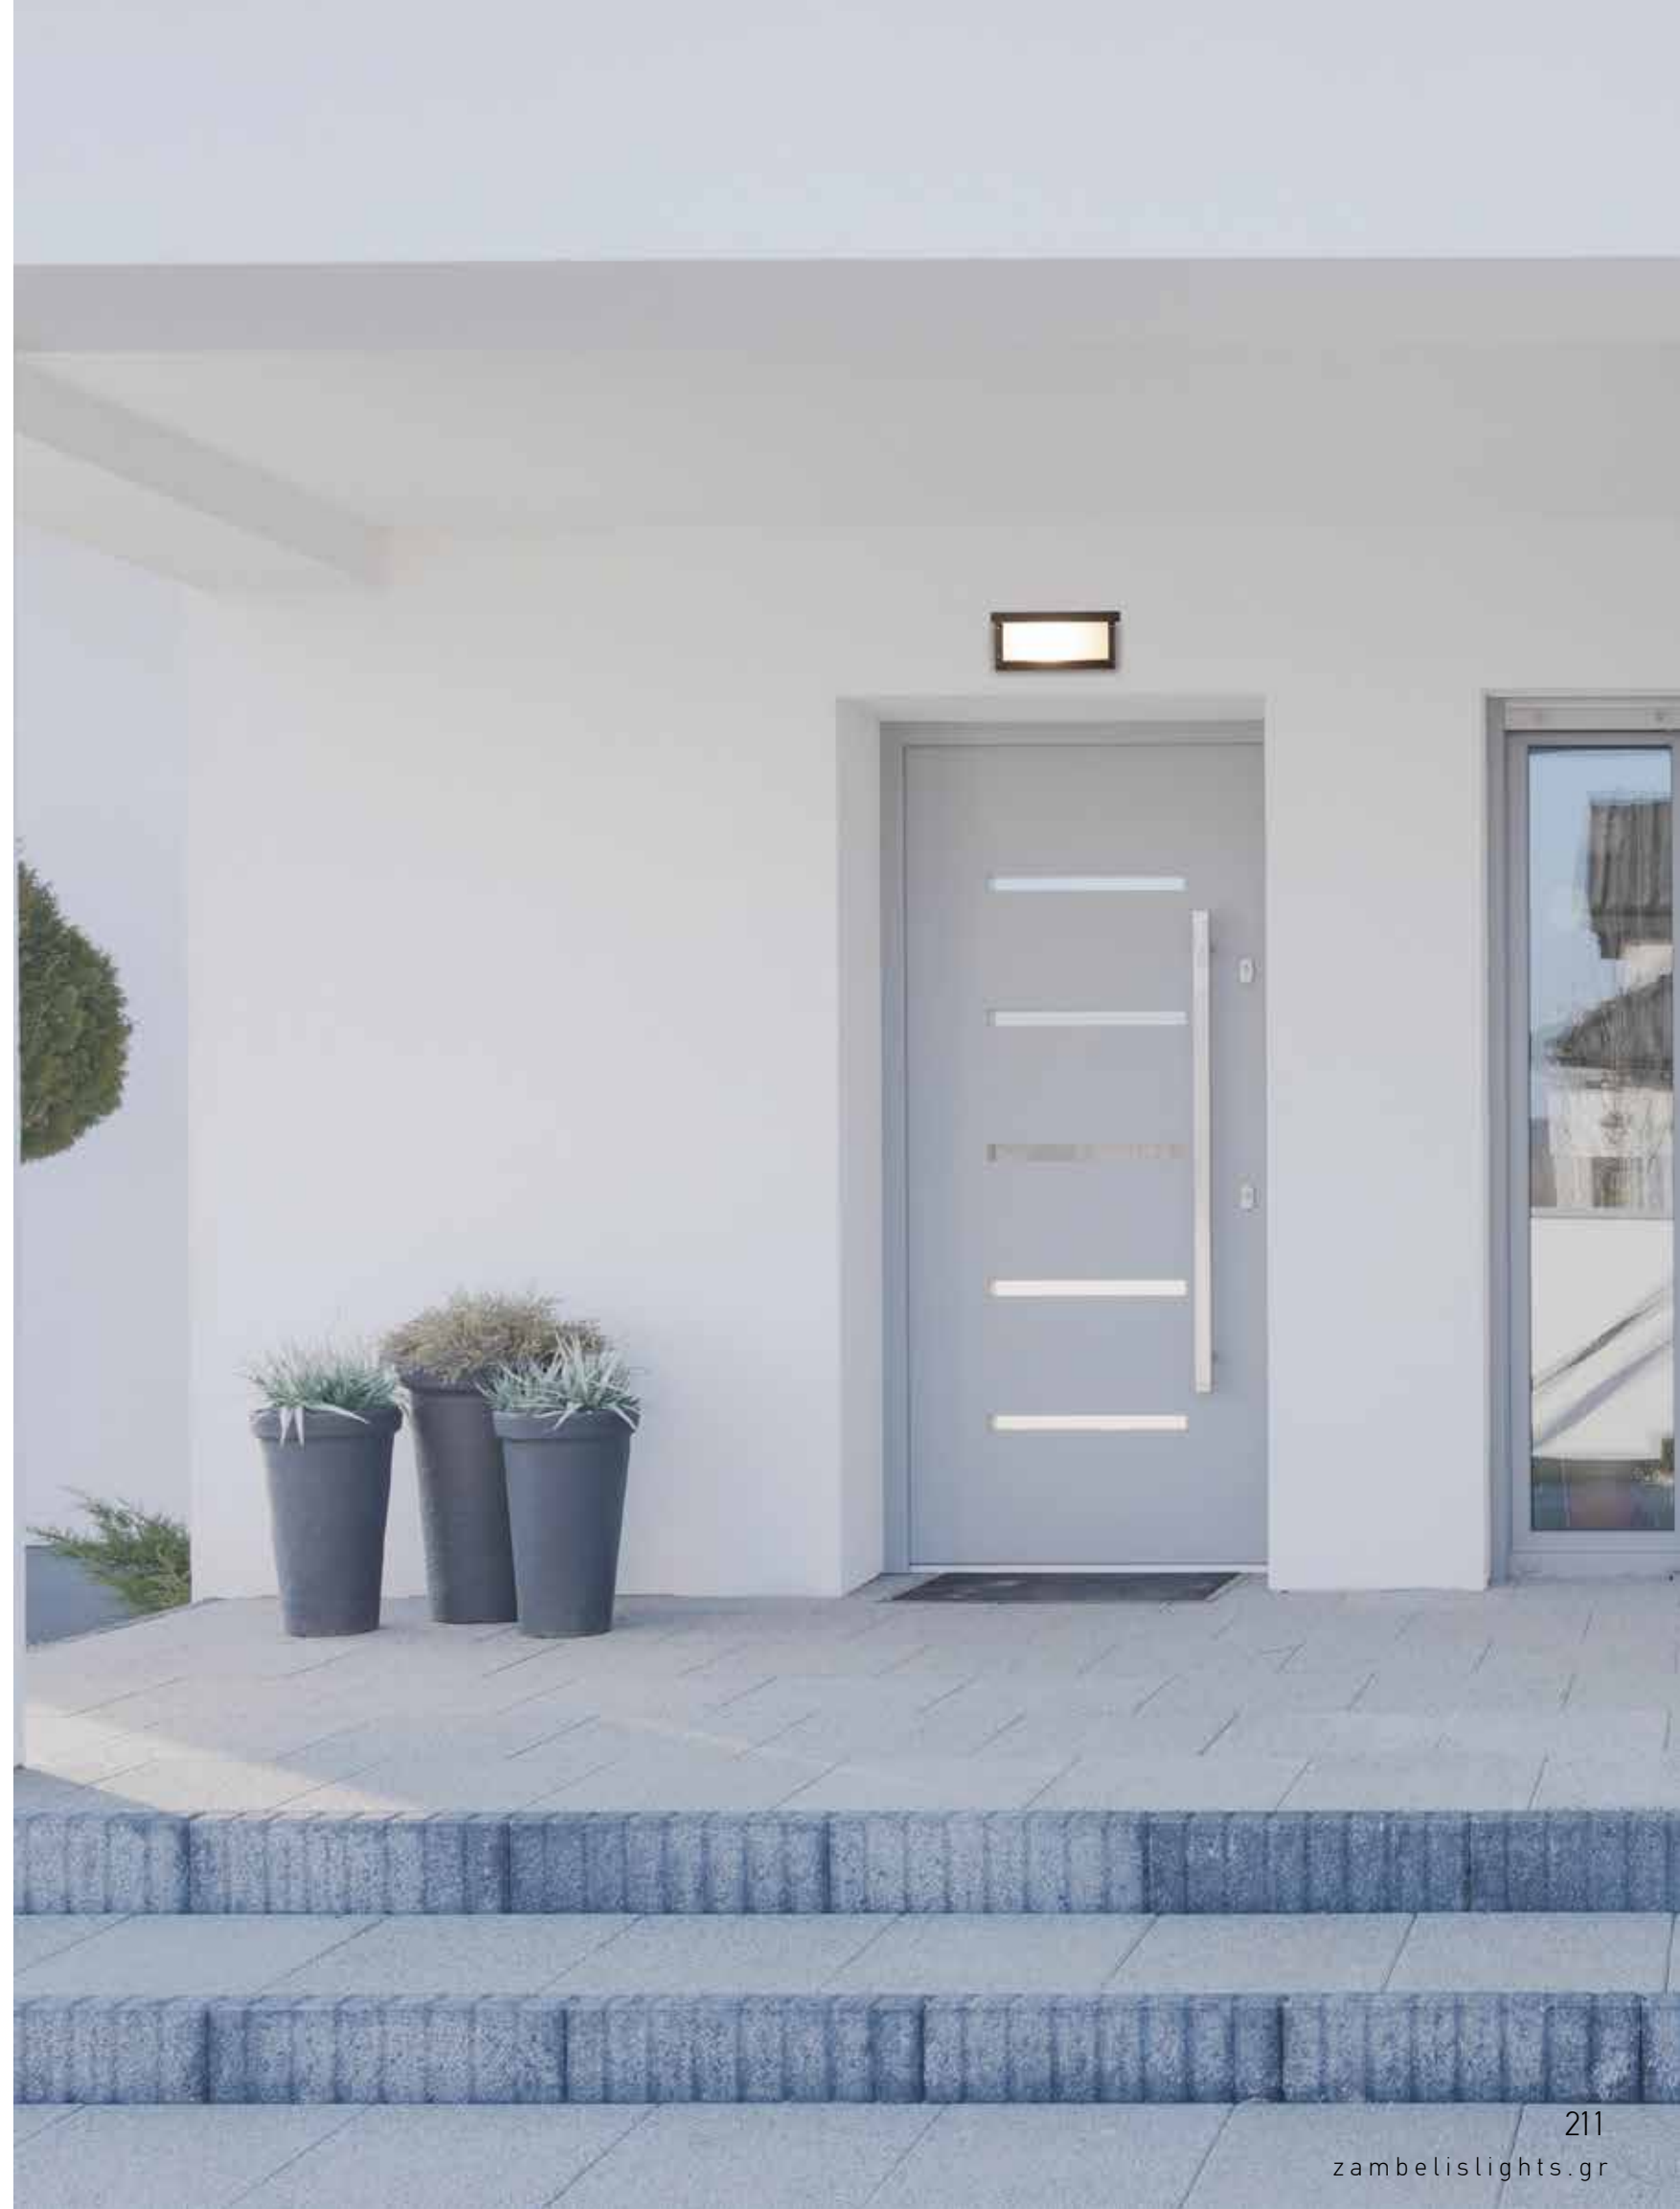

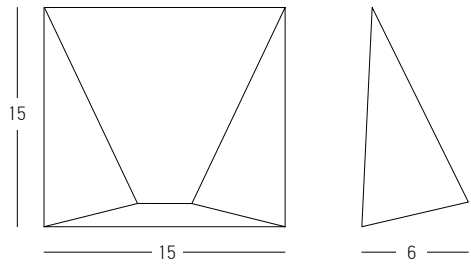


Power 7W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 480Lm  
Cri 80  
IP 54  
Dimensions L: 6cm W: 15cm H: 15cm  
Material Aluminium - Glass  
Color Graphite / **Code E243**

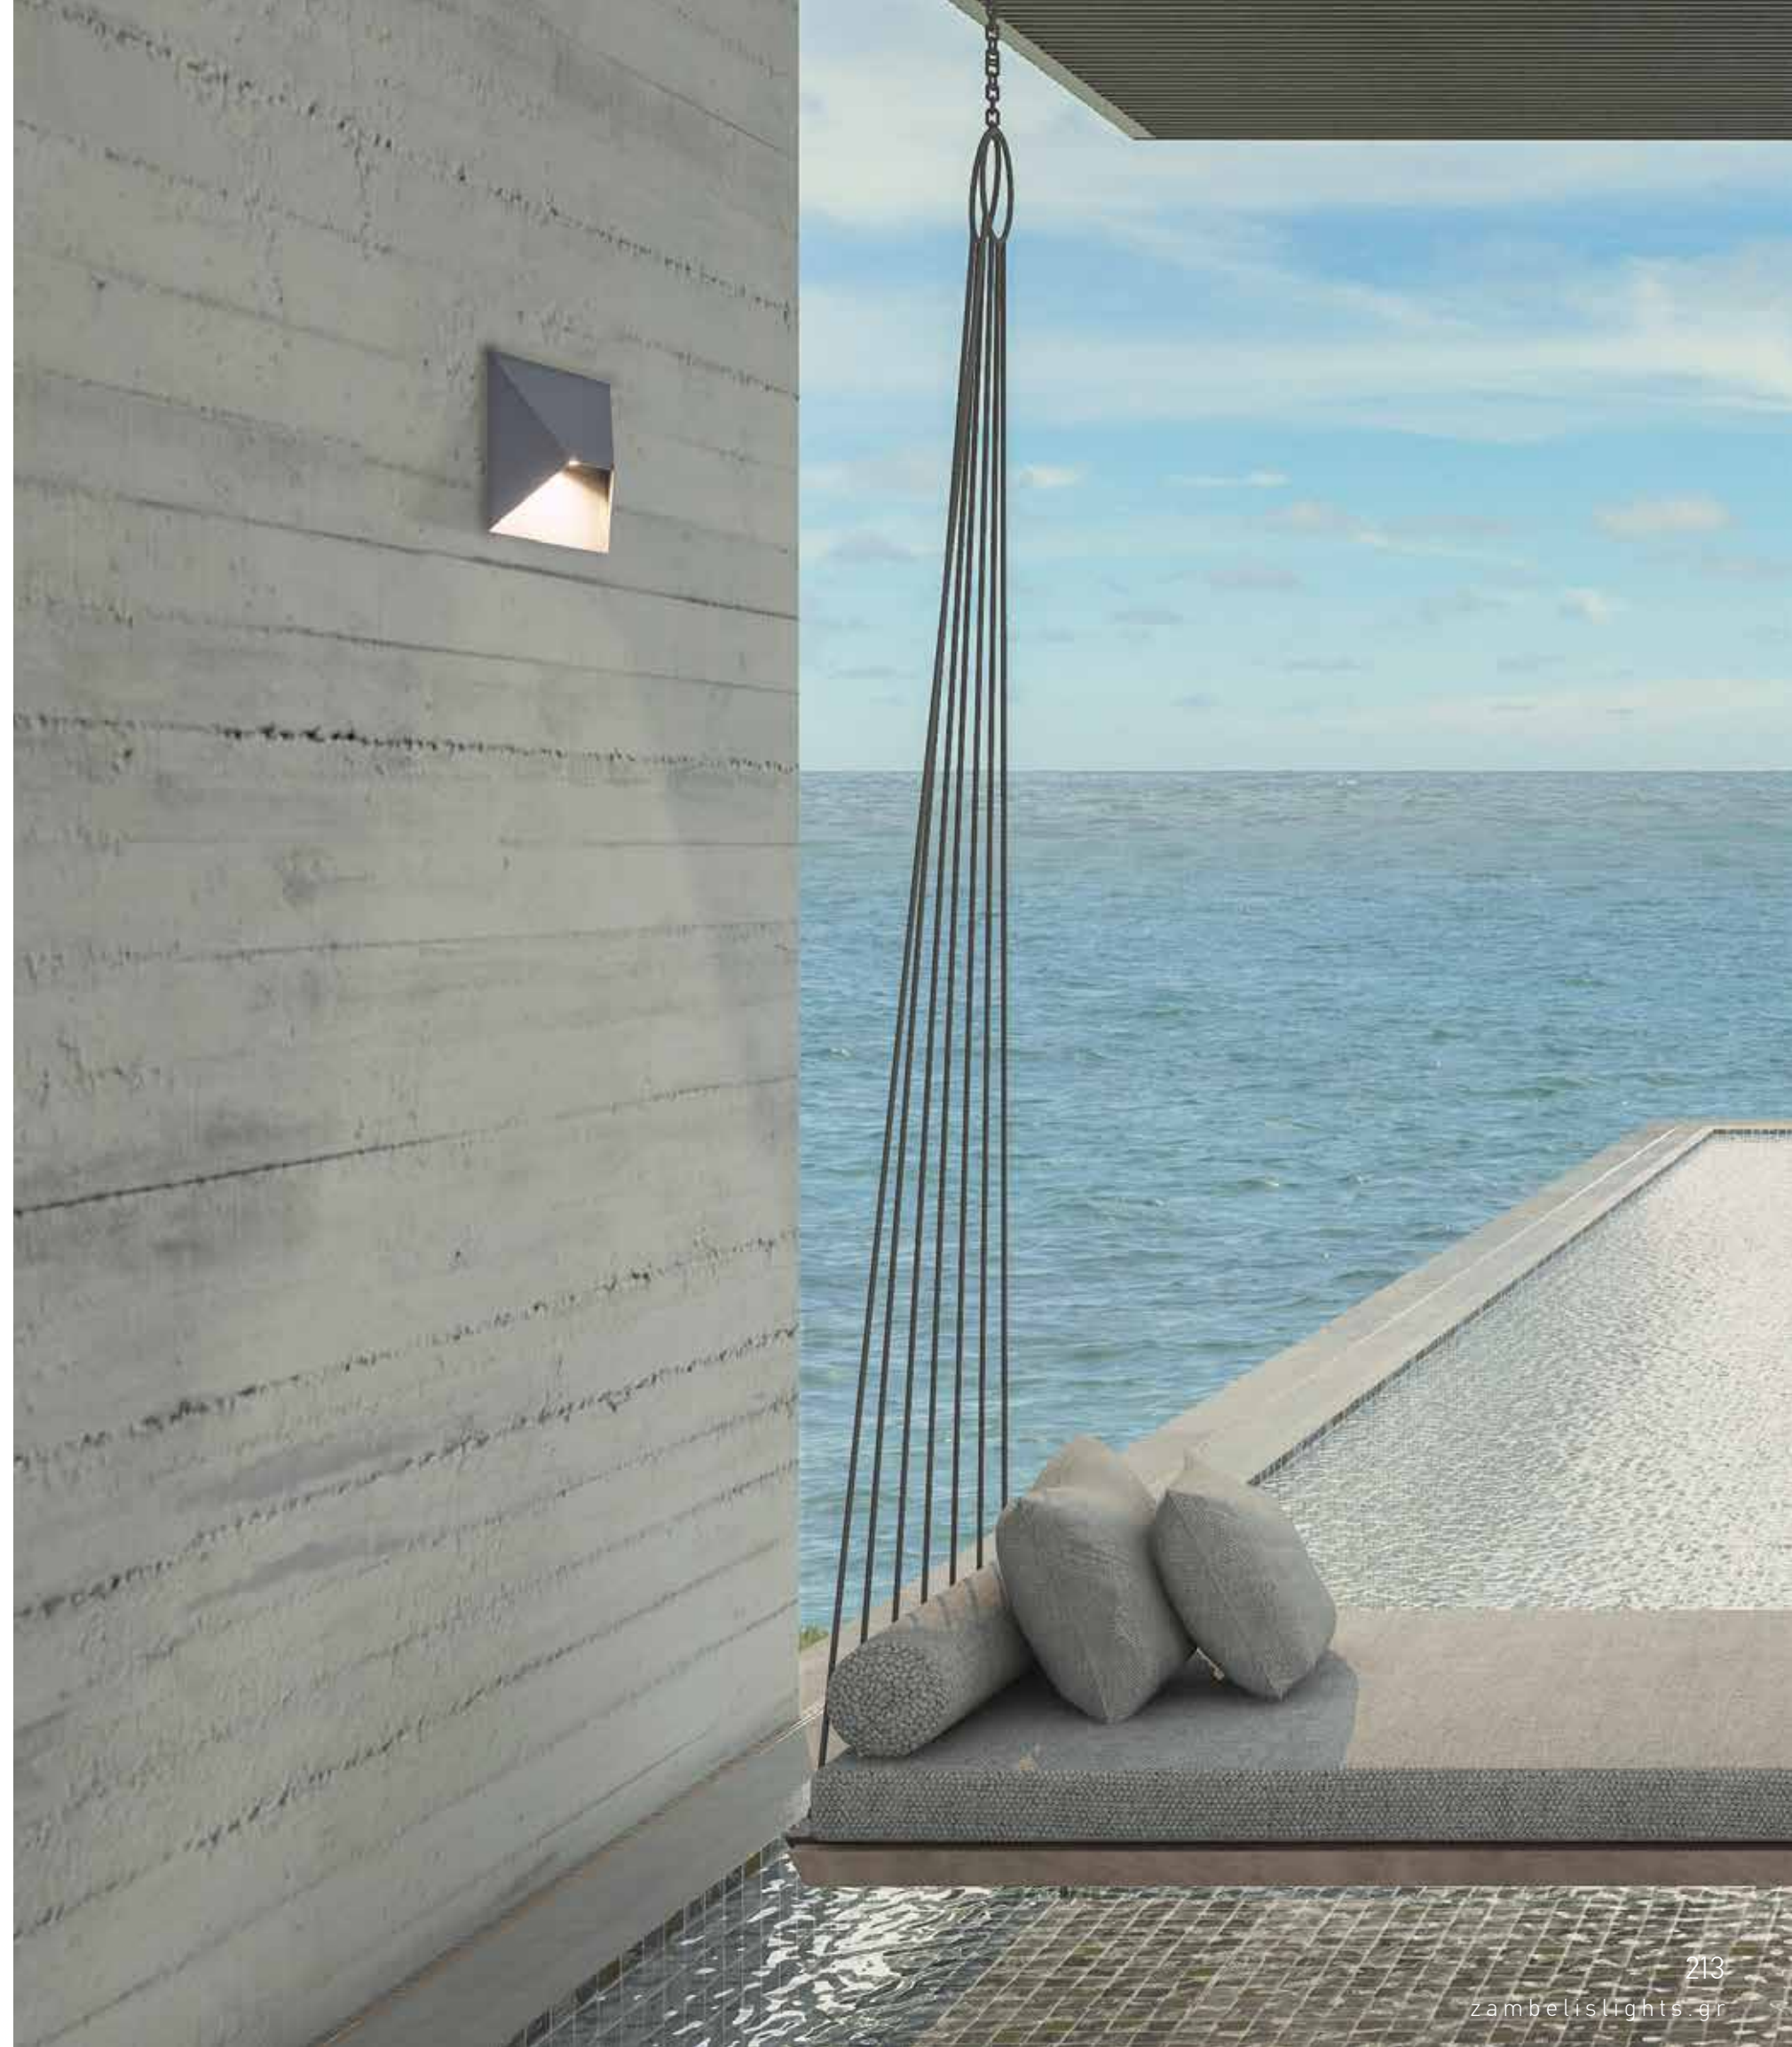

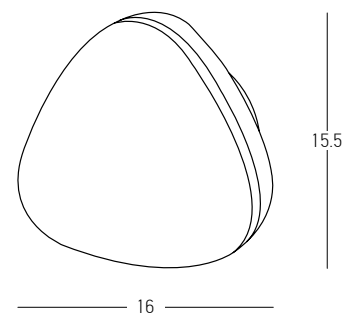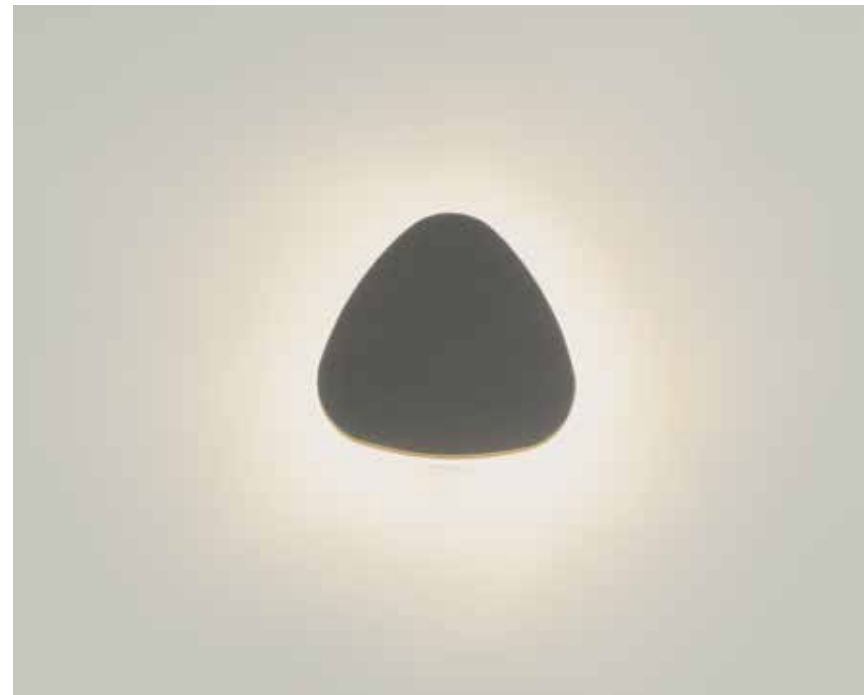


Power 10W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 810Lm  
 Cri 80  
 IP 65  
 Dimensions L: 7.2cm W: 16cm H: 15.5cm  
 Material Aluminium - PC Diffuser  
 Color Graphite / **Code E195**

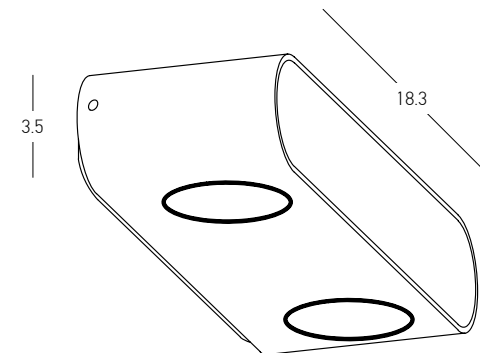


Power 10W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 775Lm  
 Cri 90  
 IP 54  
 Dimensions L: 6.5cm W: 18.3cm H: 3.5cm  
 Material Aluminium - Tempered Glass  
 Special Feature Up-Down Lighting  
 Color Graphite / **Code E315**








Power 8W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 336Lm  
 Cri 80  
 IP 65  
 Dimensions L: 6cm W: 11cm H: 11cm  
 Material Aluminium - Tempered Glass  
 Color Graphite / **Code E197**

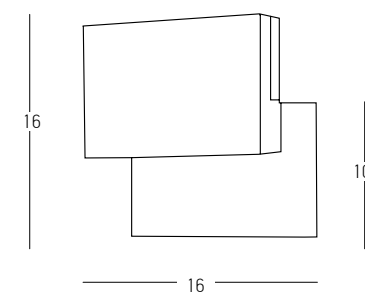


Power 10W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 810Lm  
 Cri 80  
 IP 65  
 Dimensions L: 7.8cm W: 16cm H: 10-16cm  
 Material Aluminium - PC Diffuser  
 Special Feature Movable  
 Color Graphite / **Code E199**

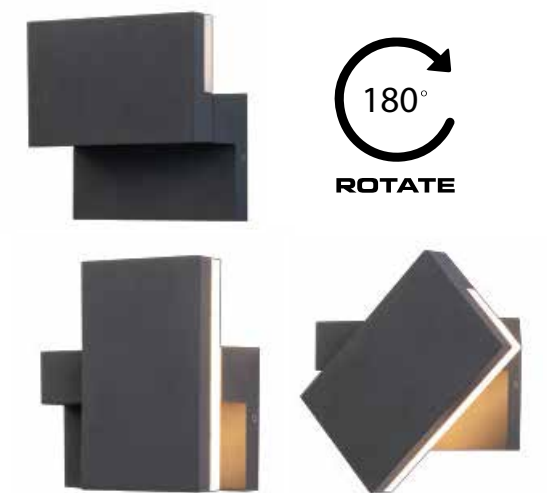


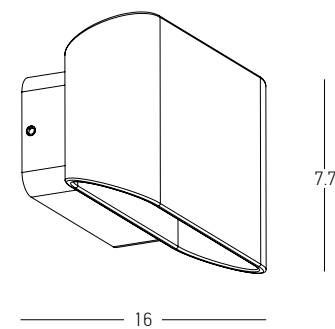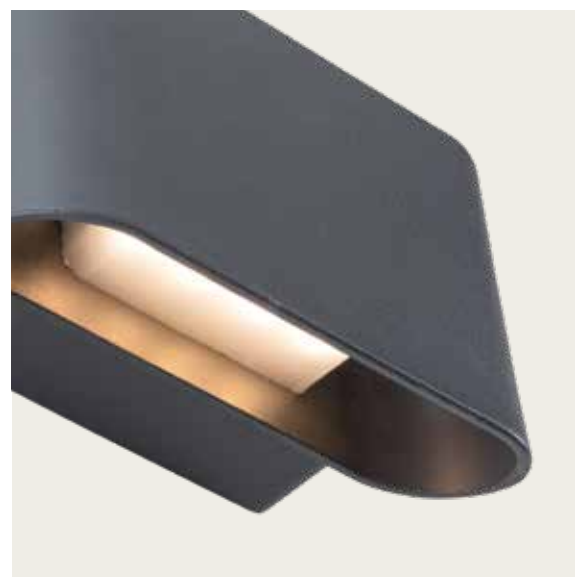


Power 11W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 900Lm  
 Cri 80  
 IP 54  
 Dimensions L: 10cm W: 16cm H: 7.7cm  
 Material Aluminium - PC Diffuser  
 Special Feature Up-Down Lighting  
 Color Graphite / **Code E274**


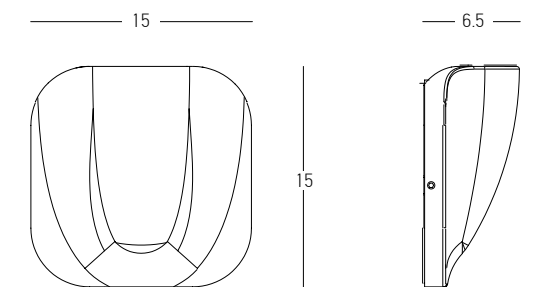


Power 9W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 572Lm  
 Cri 80  
 IP 54  
 Dimensions L: 6.5cm W: 15cm H: 15cm  
 Beam Angle 45°  
 Material Aluminium - Tempered Glass  
 Color Graphite / **Code E273**




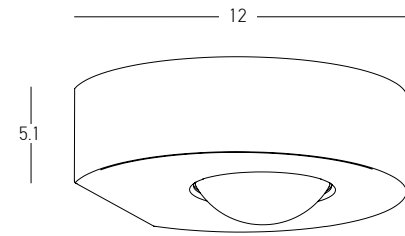


Power 9W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 752Lm  
 Cri 80  
 IP 54  
 Dimensions L: 12cm W: 13cm H: 5.1cm  
 Beam Angle 120°  
 Material Aluminium - PC Diffuser  
 Color Graphite / **Code E278**

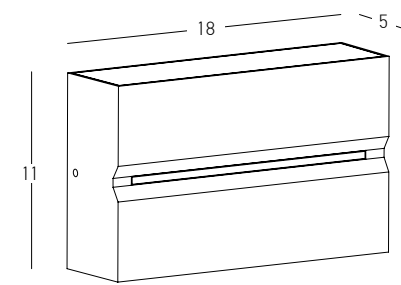

Power 15W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 796Lm  
 Cri 80  
 IP 54  
 Dimensions L: 5cm W: 18cm H: 11cm  
 Beam Angle 30°  
 Material Aluminium - Tempered Glass - PC Diffuser  
 Special Feature Up - Down - Front Lighting  
 12x SMD LED  
 Color Graphite / **Code E272**



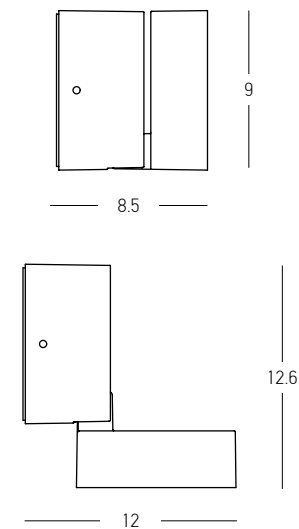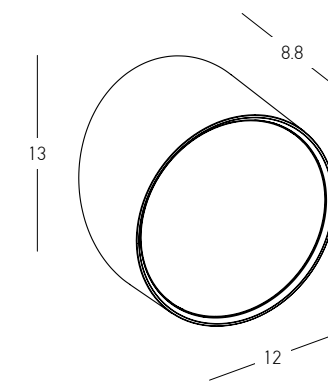


Power 7W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 518Lm  
 Cri 80  
 IP 65  
 Dimensions Ø: 12cm L: 8.8cm H: 13cm  
 Beam Angle 120°  
 Material Aluminium - Tempered Glass  
 Color Sandy Black / **Code E436**




Power 6W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 672Lm  
 Cri 80  
 IP 65  
 Dimensions Closed Ø: 9cm L: 8.5cm  
 Dimensions Open L: 12cm W: 9cm H: 12.6cm  
 Beam Angle 120°  
 Material Aluminium - PC Diffuser  
 Special Feature 90° Movable Head  
 Color Sandy Black / **Code E435**



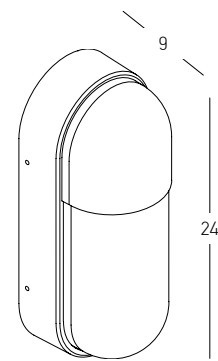



Power 10W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 498Lm  
Cri 80  
IP 54  
Dimensions L: 9cm W: 9.5cm H: 24cm  
Material Aluminium - PC Diffuser  
Color Black / Code E318



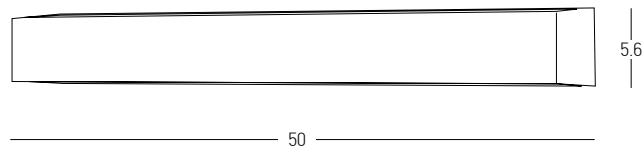


Power 30W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 2263Lm  
 Cri 80  
 IP 65  
 Dimensions L: 7.8cm W: 50cm H: 5.6cm  
 Material Aluminium - PC Diffuser  
 Special Feature Up-Down Lighting  
 Clear Microprismatic Diffuser  
 Color Graphite / **Code E227**

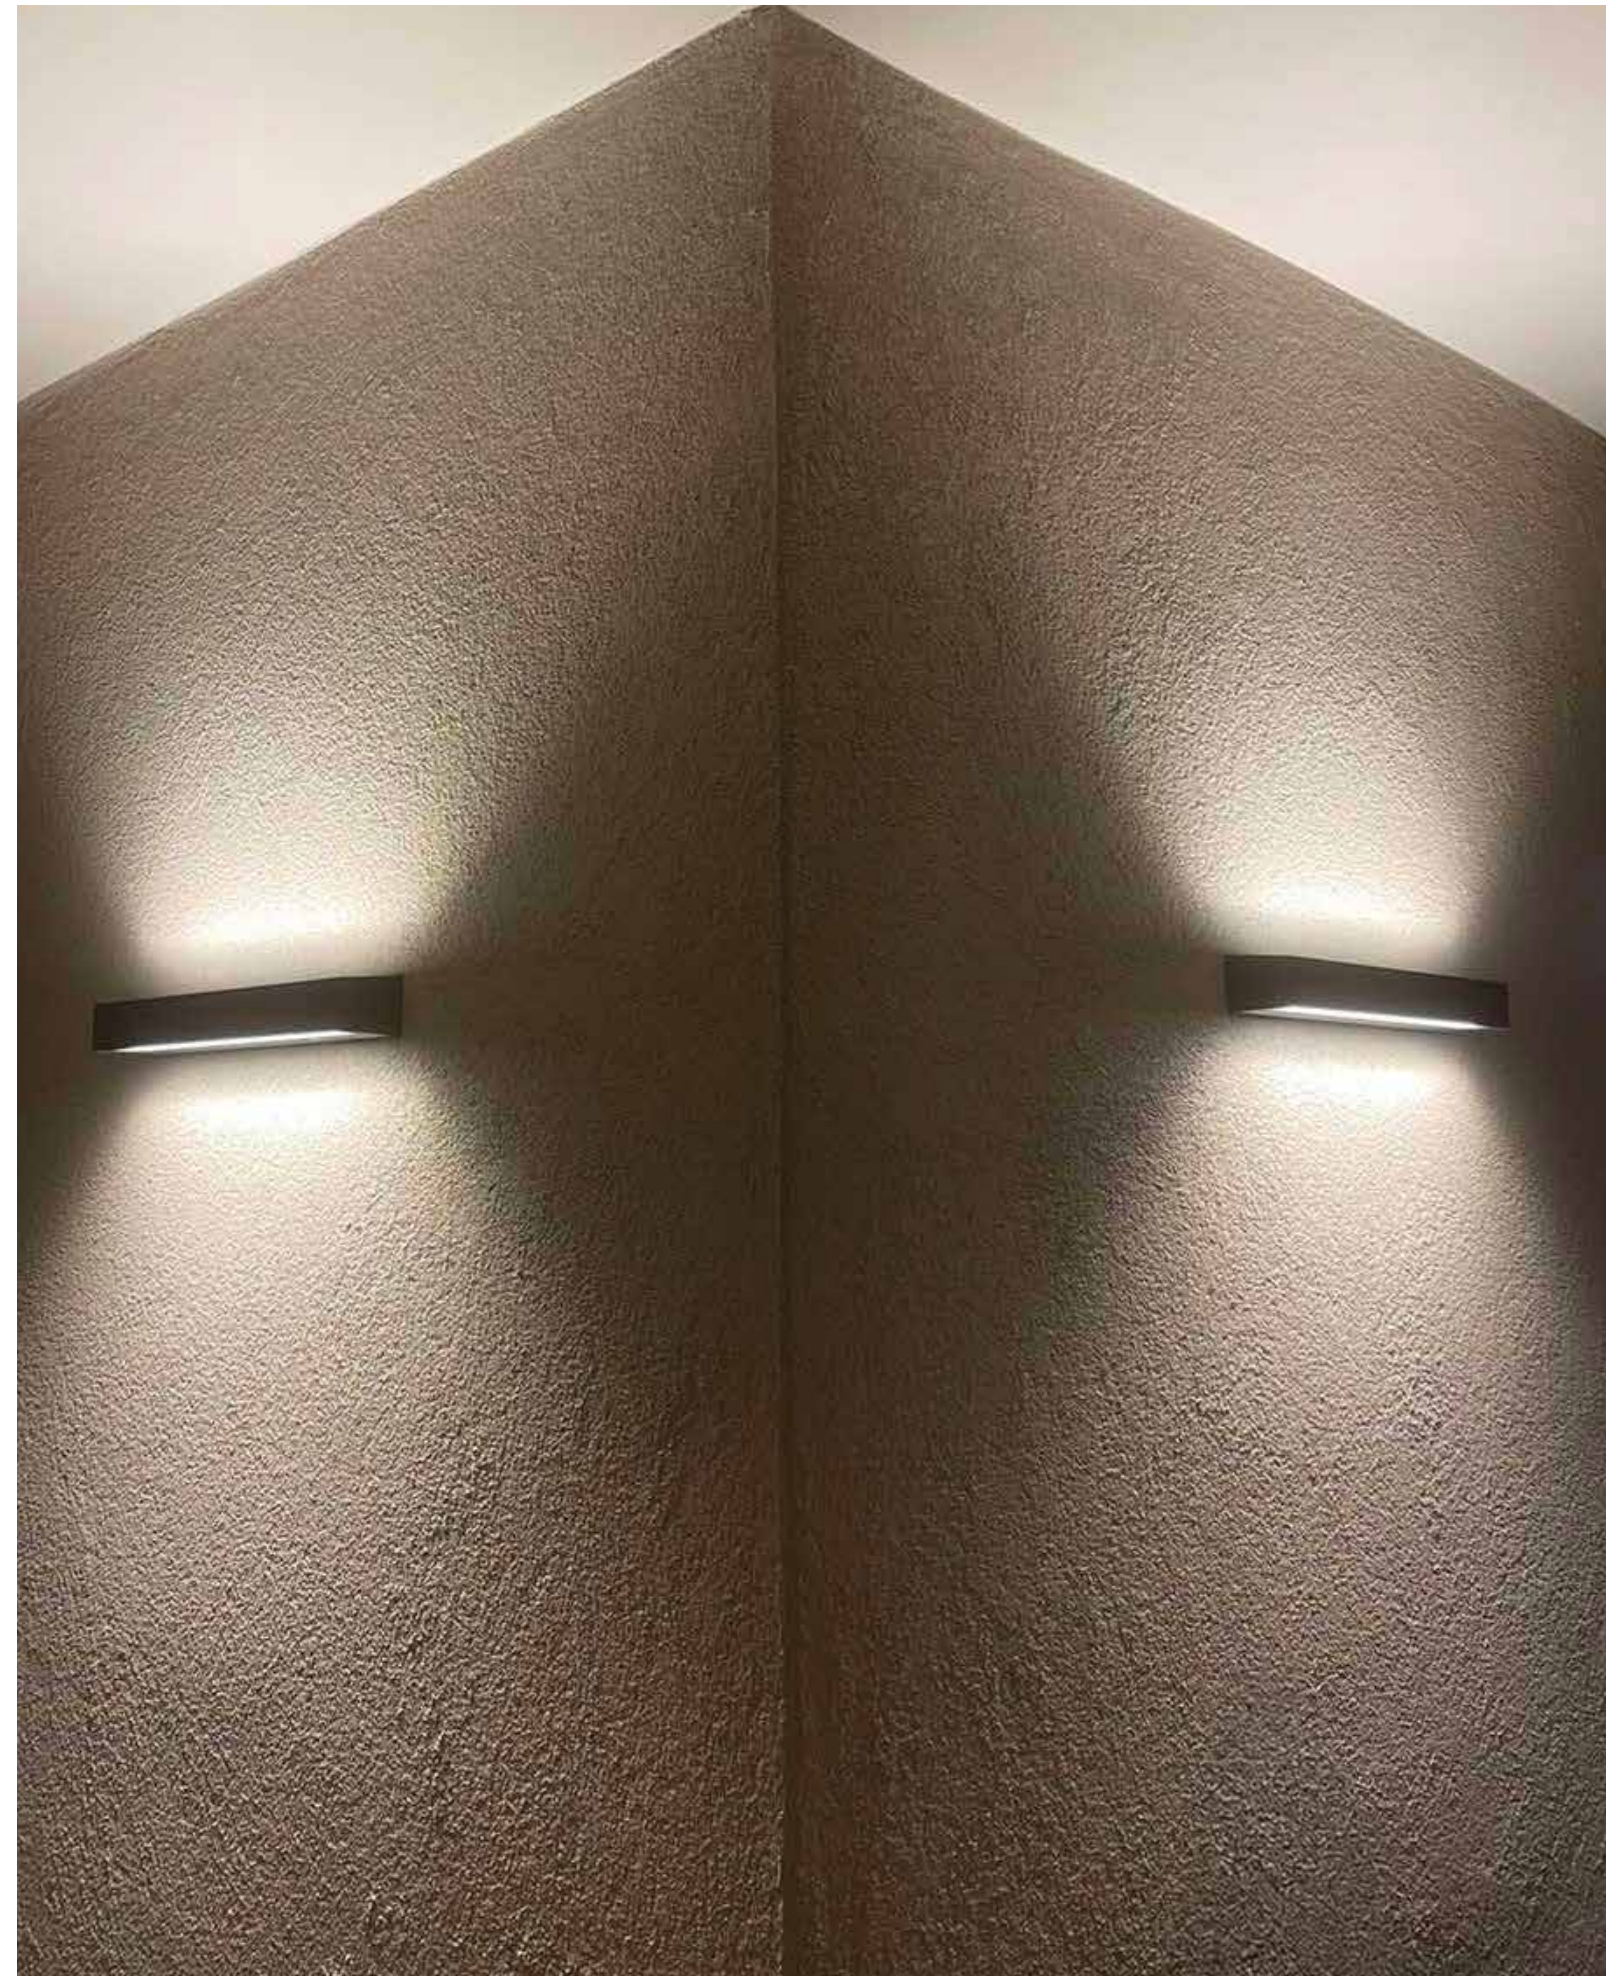


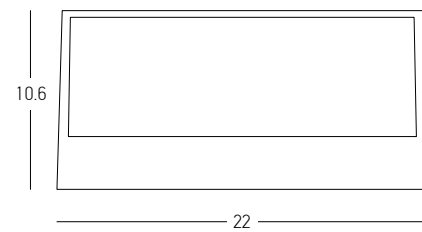


Power 2x 13.5W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 1359Lm  
 Cri 80  
 IP 65  
 Dimensions L: 10.6cm W: 22cm H: 9cm  
 Material Aluminium - Tempered Glass  
 Special Feature Up-Down Lighting  
 Color Dark Grey / **Code E261**  
 Color Dark Brown / **Code E262**

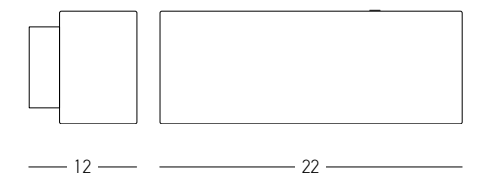


Bulb 1x E27  
 Power 18W MAX  
 Input 220-240V, 50/60Hz  
 IP 44  
 Dimensions L: 12cm W: 22cm H: 9cm  
 Material Aluminium - Tempered Glass  
 Special Feature Up-Down Lighting  
 Color Graphite / **Code E146**

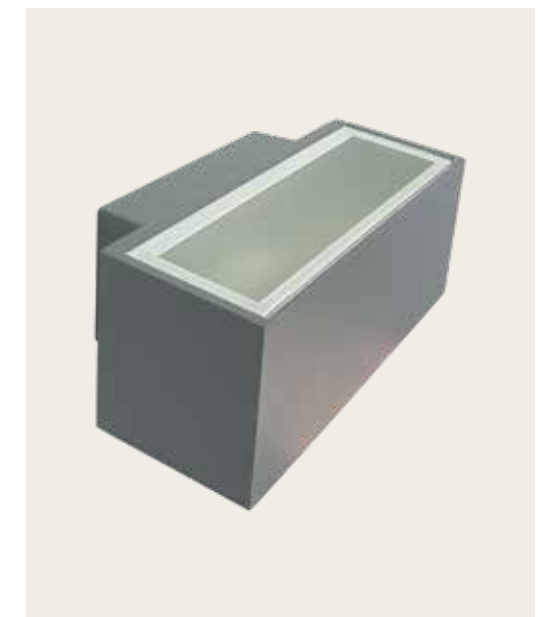

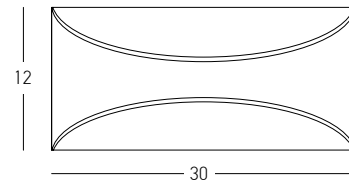


Power 11W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 640Lm  
 Cri 80  
 IP 65  
 Dimensions L: 9.6cm W: 30cm H: 12cm  
 Material Aluminium - Opal PC Diffuser  
 Special Feature Up-Down Lighting  
 Color Dark Grey / **Code E265**  
 Color Dark Brown / **Code E266**




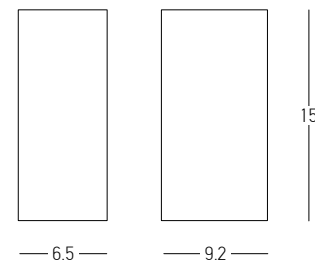


Bulb 2x GU10  
 Power 15W MAX  
 Input 220-240V, 50/60Hz  
 IP 54  
 Dimensions L: 9.2cm W: 6.5cm H: 15cm  
 Material Aluminium - Tempered Glass  
 Special Feature Up-Down Lighting  
 Color Graphite / **Code E124**

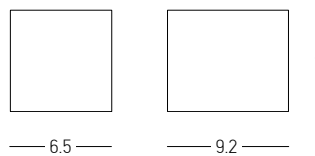


Bulb 1x GU10  
 Power 15W MAX  
 Input 220-240V, 50/60Hz  
 IP 54  
 Dimensions L: 9.2cm W: 6.5cm H: 9cm  
 Material Aluminium - Tempered Glass  
 Color Graphite / **Code E123**

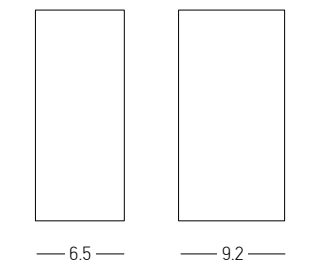


Bulb 2x GU10  
 Power 15W MAX  
 Input 220-240V, 50/60Hz  
 IP 54  
 Dimensions L: 9.2cm W: 6.5cm H: 15cm  
 Material Aluminium - Tempered Glass  
 Special Feature Up-Down Lighting  
 Color Graphite / **Code E122**

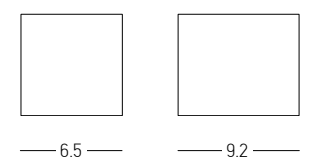


Bulb 1x GU10  
 Power 15W MAX  
 Input 220-240V, 50/60Hz  
 IP 54  
 Dimensions L: 9.2cm W: 6.5cm H: 9cm  
 Material Aluminium - Tempered Glass  
 Color Graphite / **Code E121**

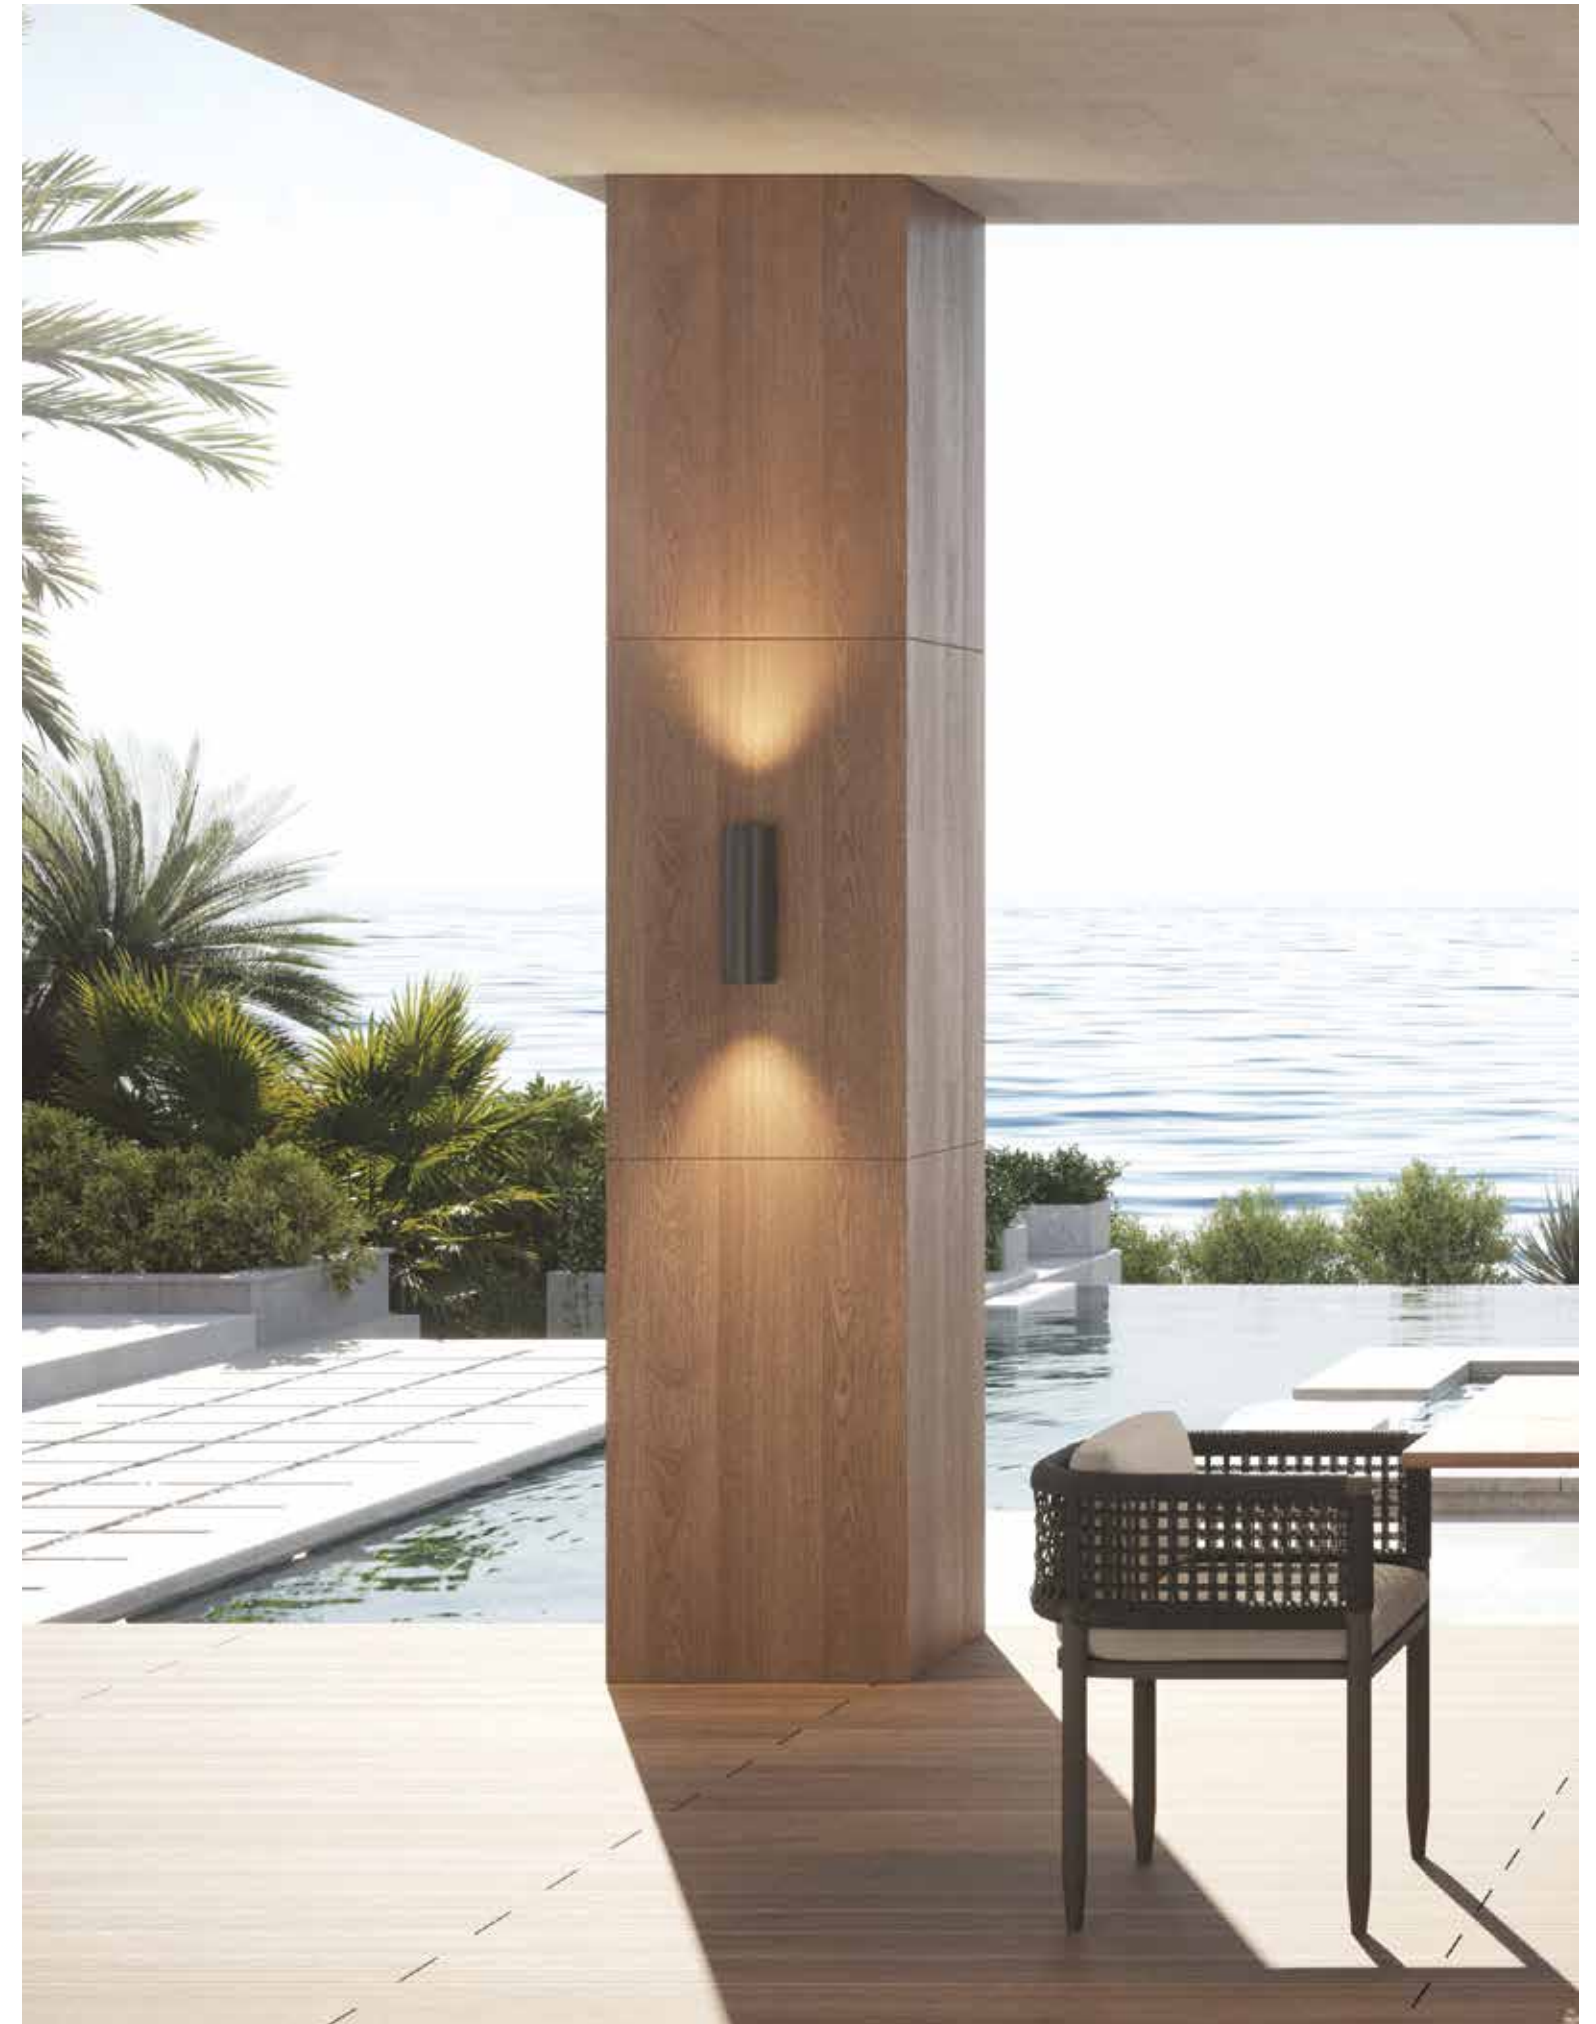


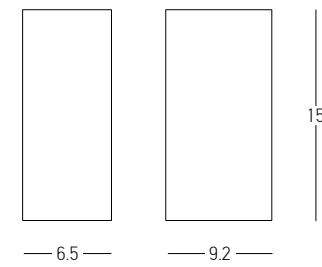


Bulb 2x GU10  
 Power 15W MAX  
 Input 220-240V, 50/60Hz  
 IP 54  
 Dimensions L: 9.2cm W: 6.5cm H: 15cm  
 Material Aluminium - Tempered Glass  
 Special Feature Up-Down Lighting  
 Color Sandy White / Code E151

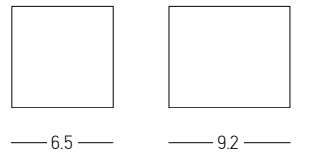


Bulb 1x GU10  
 Power 15W MAX  
 Input 220-240V, 50/60Hz  
 IP 54  
 Dimensions L: 9.2cm W: 6.5cm H: 9cm  
 Material Aluminium - Tempered Glass  
 Color Sandy White / Code E150

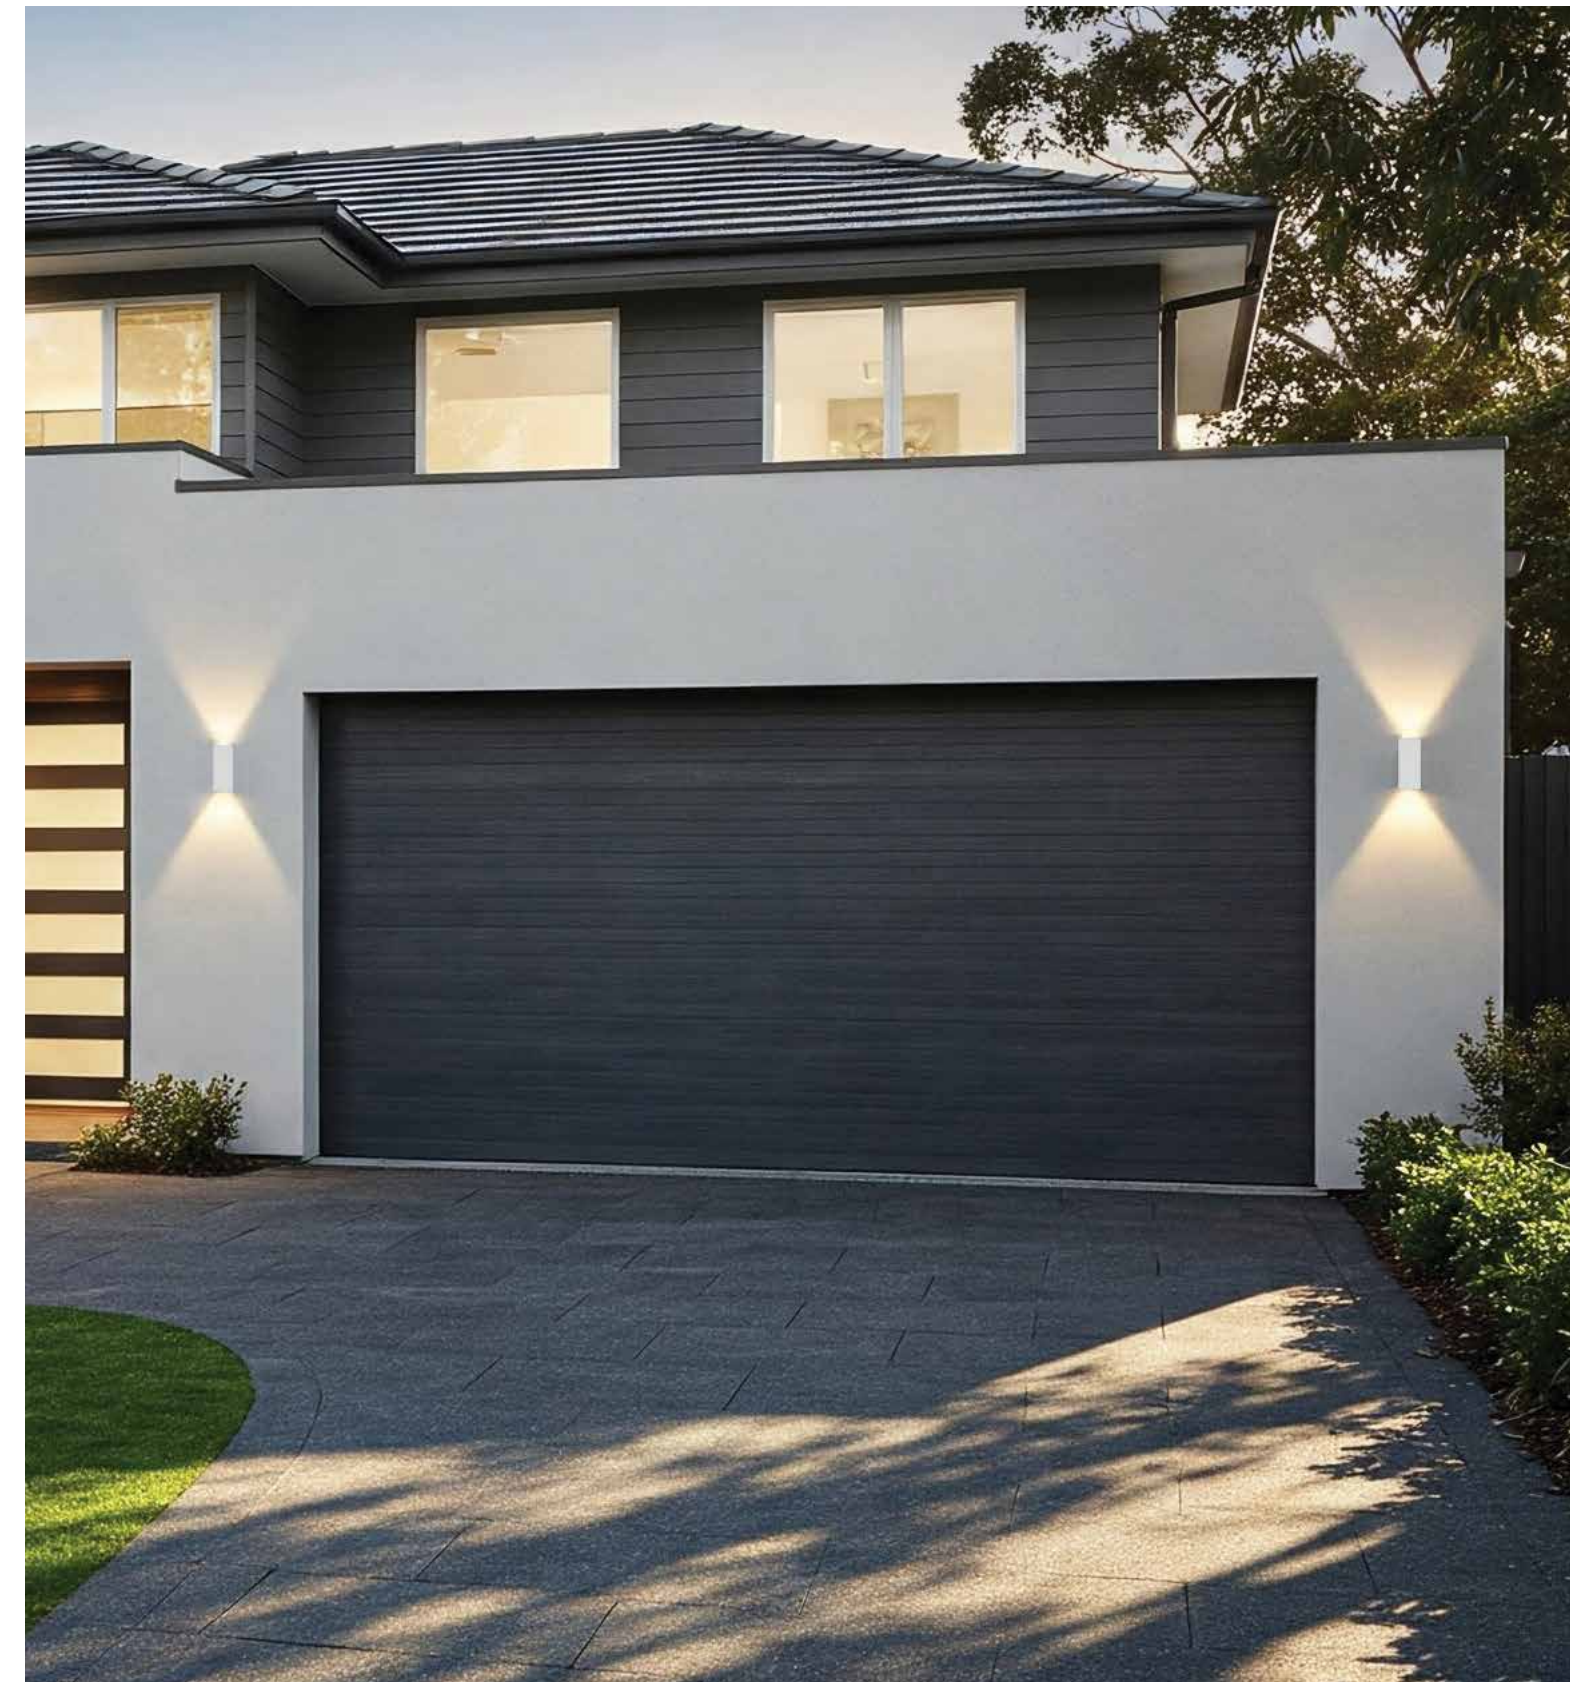

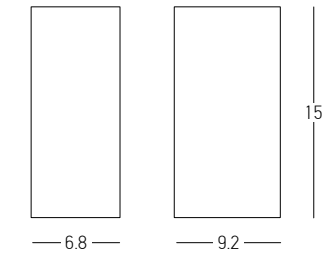


Bulb 2x GU10 LED  
 Power 7W MAX  
 Input 220-240V, 50/60Hz  
 IP 54  
 Dimensions L: 9.2cm W: 6.8cm H: 15cm  
 Material ABS - Acrylic  
 Special Feature Up-Down Lighting  
 Color Sandy Black / **Code E307**

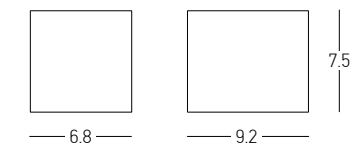


Bulb 1x GU10 LED  
 Power 7W MAX  
 Input 220-240V, 50/60Hz  
 IP 54  
 Dimensions L: 9.2cm W: 6.8cm H: 7.5cm  
 Material ABS - Acrylic  
 Color Sandy Black / **Code E306**



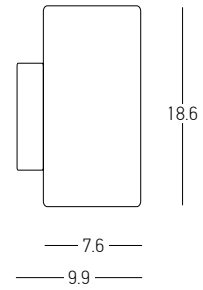


Bulb 2x GU10  
 Power 9W MAX  
 Input 220-240V, 50/60Hz  
 IP 54  
 Dimensions Ø: 7.6cm L: 9.9cm H: 18.6cm  
 Material ABS - PC Diffuser  
 Special Feature Up-Down Lighting  
 Color White / **Code E186**

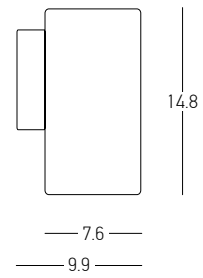


Bulb 1x GU10  
 Power 9W MAX  
 Input 220-240V, 50/60Hz  
 IP 54  
 Dimensions Ø: 7.6cm L: 9.9cm H: 14.8cm  
 Material ABS - PC Diffuser  
 Color White / **Code E185**




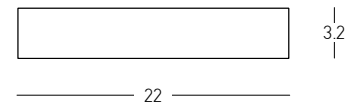


Power 11W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 653Lm  
 Cri 80  
 IP 54  
 Dimensions L: 7.5cm W: 22cm H: 3.2cm  
 Material Aluminium - Tempered Glass  
 Color Sandy White / **Code E168**



Power 2x 2W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 320Lm  
 Cri 80  
 IP 65  
 Dimensions L: 3cm W: 8.3cm H: 12.3cm  
 Material ABS - PC Diffuser  
 Special Feature Up-Down Lighting  
 Color White / **Code E216**

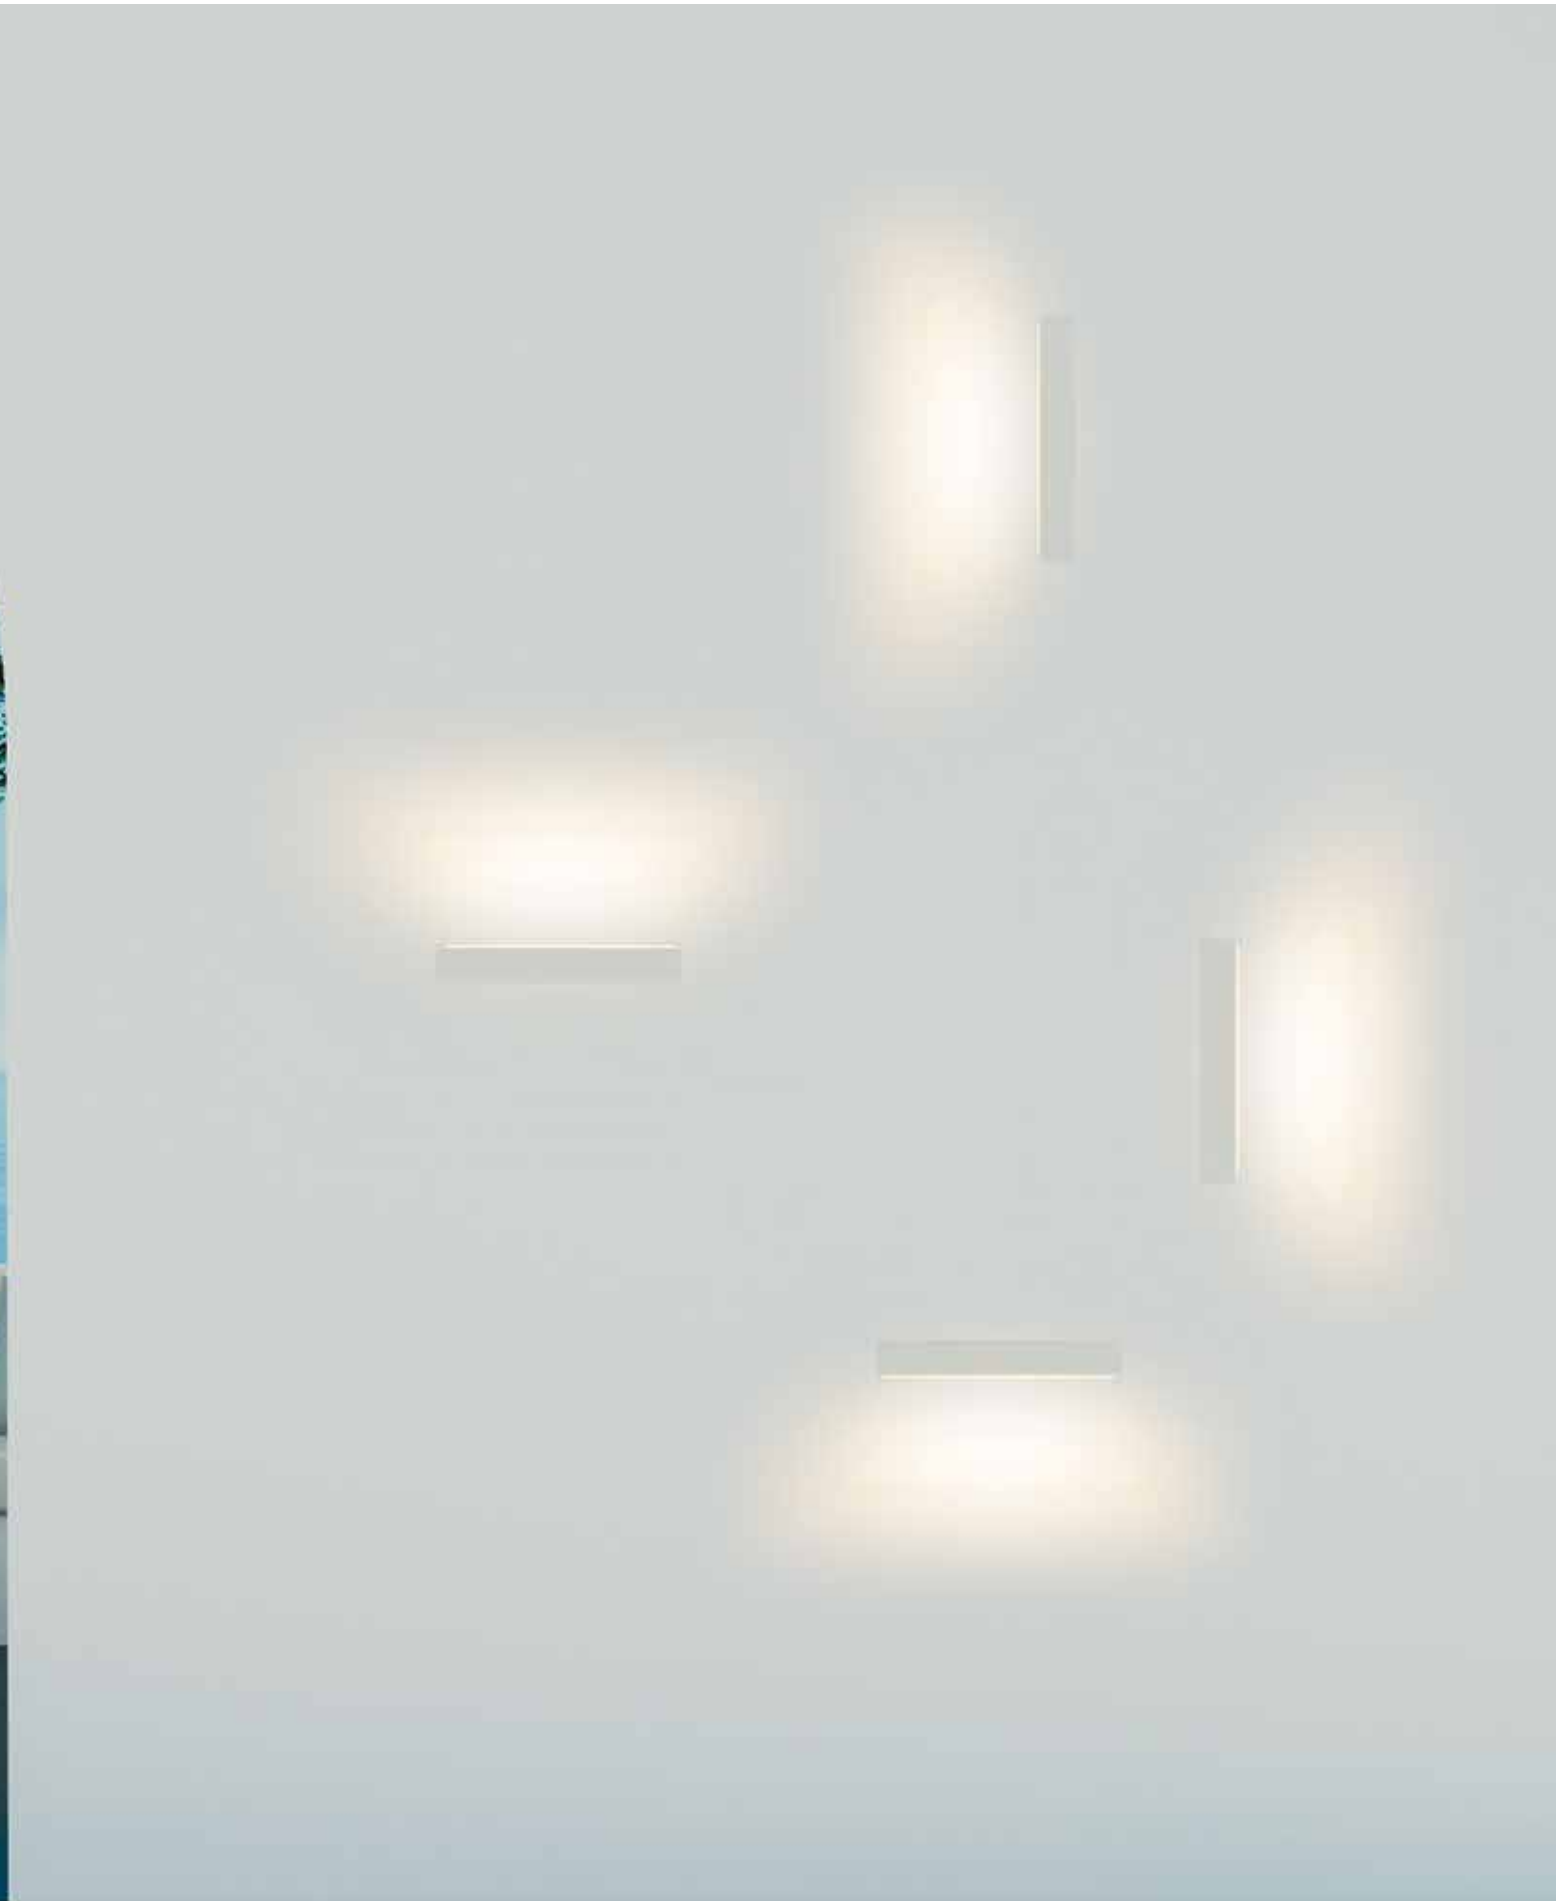


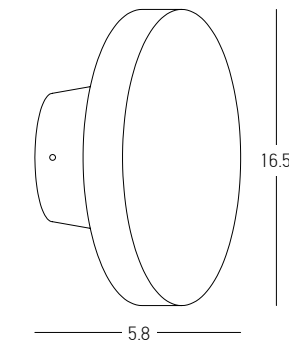

Power	8W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	720Lm
Cri	80
IP	65
Dimensions	Ø: 16.5cm L: 5.8cm
Material	ABS - PC Diffuser
Color	Sandy Black / <b>Code E305</b>
Color	Sandy White / <b>Code E304</b>




Precision Light. Grounded Installation  
Spike lights for targeted garden illumination.

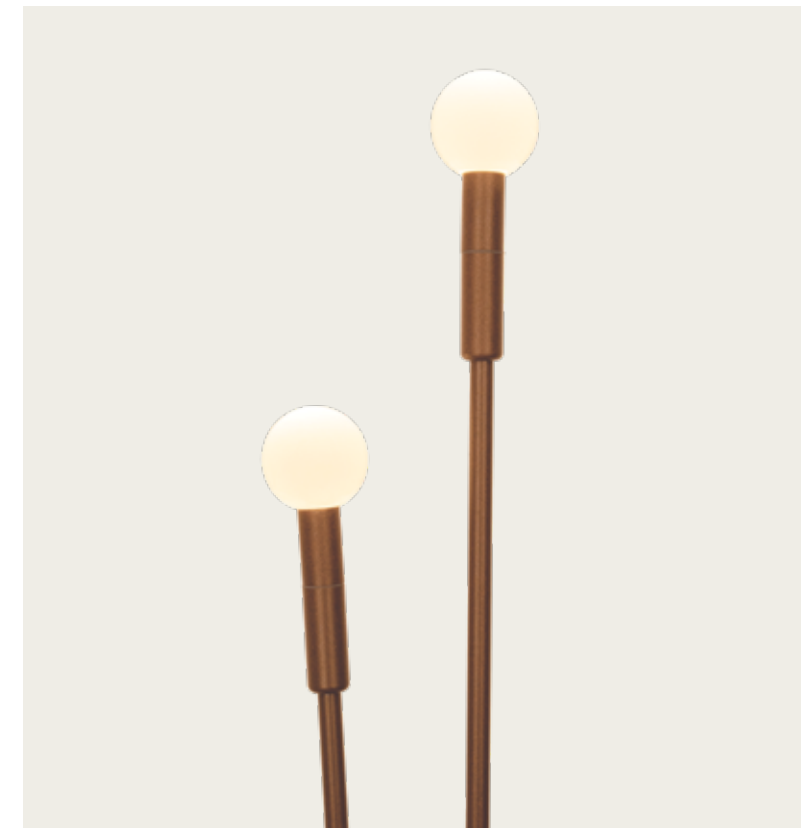


## 05. SPIKES






Power 1.5W  
 Input 24V  
 Color Temperature 3000K  
 Lumen 90Lm  
 Cri 80  
 IP 65  
 Dimensions Ø: 1.8cm H: 60cm  
 Material Aluminium - Frosted Acrylic  
 Special Feature 200cm Cable Available  
 Spike Included  
 Waterproof Connector Included  
 Recommended Driver LPH-18-24 (Not Included)  
 In Parallel Connection 1-11 pcs  
 Color Brown / **Code E457**

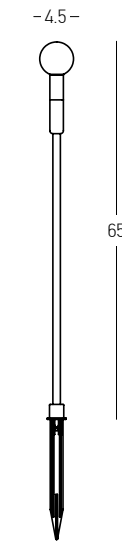

Power 1.5W  
 Input 24V  
 Color Temperature 3000K  
 Lumen 90Lm  
 Cri 80  
 IP 65  
 Dimensions Ø: 4.5cm H: 65cm  
 Material Aluminium - Frosted Acrylic  
 Special Feature 200cm Cable Available  
 Spike Included  
 Waterproof Connector Included  
 Recommended Driver LPH-18-24 (Not Included)  
 In Parallel Connection 1-11 pcs  
 Color Brown / **Code E459**





Power 1.5W  
 Input 24V  
 Color Temperature 3000K  
 Lumen 90Lm  
 Cri 80  
 IP 65  
 Dimensions Ø: 1.8cm H: 99cm  
 Material Aluminium - Frosted Acrylic  
 Special Feature 200cm Cable Available  
 Spike Included  
 Waterproof Connector Included  
 Recommended Driver LPH-18-24 (Not Included)  
 In Parallel Connection 1-11 pcs  
 Color Brown / **Code E458**

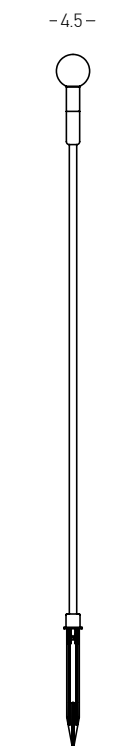

Power 1.5W  
 Input 24V  
 Color Temperature 3000K  
 Lumen 90Lm  
 Cri 80  
 IP 65  
 Dimensions Ø: 4.5cm H: 90cm  
 Material Aluminium - Frosted Acrylic  
 Special Feature 200cm Cable Available  
 Spike Included  
 Waterproof Connector Included  
 Recommended Driver LPH-18-24 (Not Included)  
 In Parallel Connection 1-11 pcs  
 Color Brown / **Code E460**



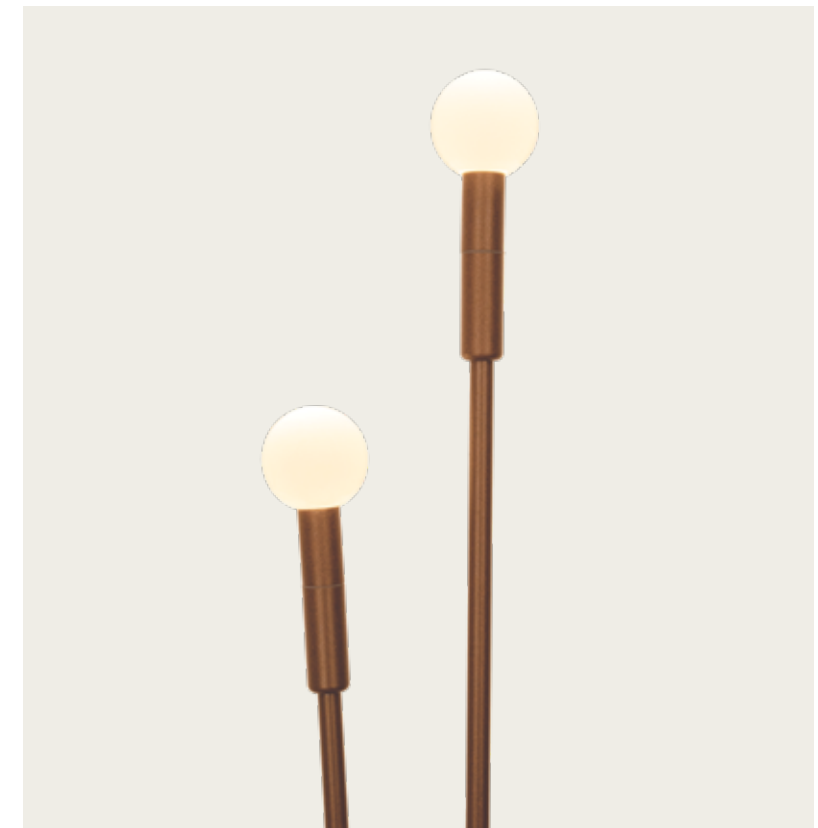

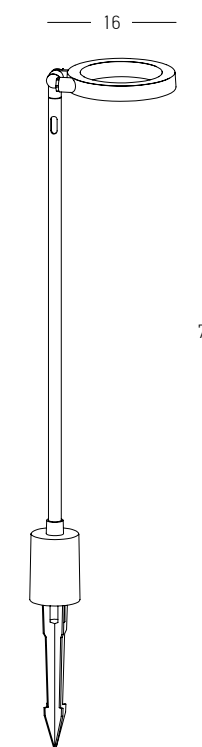



Power	7W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	245Lm
Cri	80
IP	65
Dimensions	L: 16cm W: 12cm H: 70cm
Ring	Ø: 12cm H: 1.5cm
Material	Aluminium - PC Diffuser
Special Feature	50cm Cable Available Driver Included Spike Included Tilt Up-Down Waterproof Connector Included
Color	Brown / <b>Code E494</b>






Power	12W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	595Lm
Cri	80
IP	65
Dimensions	Ø: 11cm H: 90cm
Material	Aluminium - PC Diffuser
Special Feature	100cm Cable Available Driver Included Spike Included Movable Head Waterproof Connector Included
Color	Green / <b>Code E456</b>



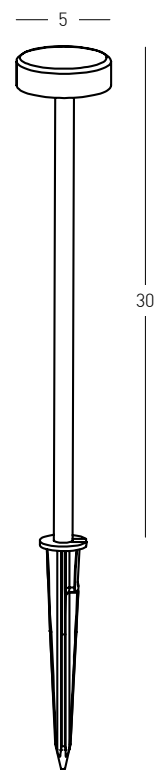
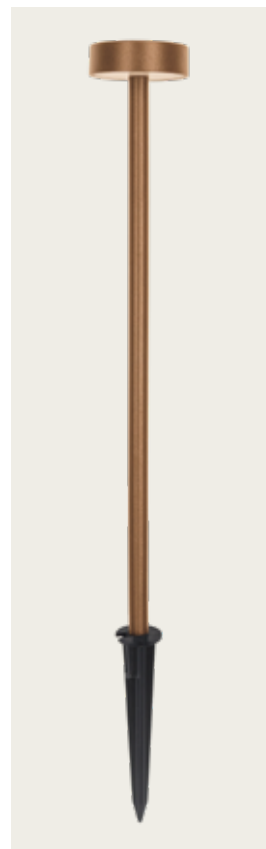


Power	1.5W
Input	24V
Color Temperature	3000K
Lumen	80Lm
Cri	80
IP	65
Dimensions	Ø: 5cm H: 30cm
Material	Stainless Steel - PC Diffuser
Special Feature	50cm Cable Available Spike Included Waterproof Connector Included
Recommended Driver	LPH-18-24 (Not Included) In Parallel Connection 1-10 pcs
Color	Brown / <b>Code E465</b>





Power 0.5W  
 Input 24V  
 Color Temperature 2700K  
 Lumen 50Lm  
 Cri 80  
 IP 65  
 Dimensions Ø: 1cm H: 80cm  
 Material Stainless Steel - PC Diffuser  
 Special Feature 100cm Cable Available  
 Spike Included  
 Recommended Driver LPH-18-24 (Not Included)  
 In Parallel Connection 1-17 pcs  
 Color Dark Brown / **Code E330**  
 Color Dark Green / **Code E331**

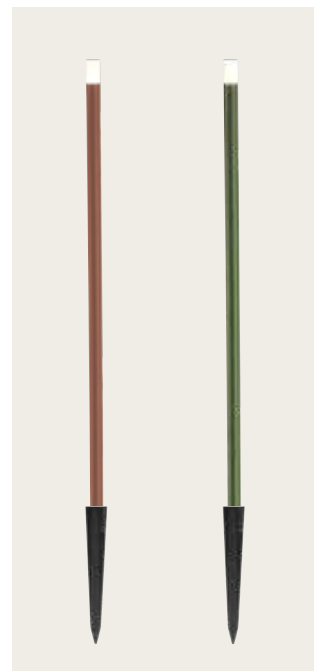


Power 0.5W  
 Input 24V  
 Color Temperature 2700K  
 Lumen 50Lm  
 Cri 80  
 IP 65  
 Dimensions Ø: 1cm H: 30cm  
 Material Stainless Steel - PC Diffuser  
 Special Feature 100cm Cable Available  
 Spike Included  
 Recommended Driver LPH-18-24 (Not Included)  
 In Parallel Connection 1-17 pcs  
 Color Dark Brown / **Code E328**  
 Color Dark Green / **Code E329**



**Driver**  
 Power 18W  
 Input 220-240V, 50/60Hz  
 Output 24V  
 Dimensions L: 14cm W: 3cm H: 2.2cm  
 IP 67

**Waterproof Connection Box 1in / 1out , 16A , 450V**  
 IP 67  
 Color Black / **Code Z0800-BA**

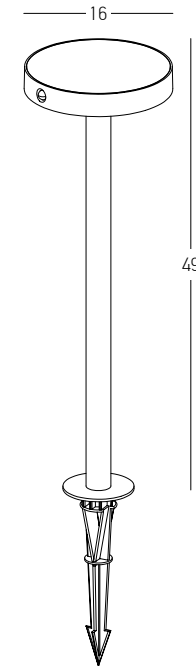

Power	2W
Input	3.7V
Battery	2200 MAH
Color Temperature	3000K
Lumen	85Lm
Cri	80
IP	54
Dimensions	Ø: 16cm H: 49cm
Material	Aluminium - PC Diffuser
Special Feature	Solar Panel 3 Lighting Modes Sense Distance 3 - 5m Base & Spike Included
Color	Graphite / <b>Code E449</b>



LIGHTING MODES OVERVIEW

**Mode 1 • Dim + Motion Sensor**

LED operates at 10% brightness when ambient light <20 lux. Upon Motion detection, brightness increases to 100% during movement. After 5 hours, standby dims to 5%, and motion-triggered output drops to 70%. Turns off when ambient light >20 lux.


**Mode 2 • Constant Light**

Motion sensor disabled. LED runs at 50% when ambient light <20 lux, reduces to 30% after 2 hours, and 20% after 5 hours. Turns off when ambient light >20 lux.

**Mode 3 • Motion Only**


No light at standby. LED activates at 100% upon motion detection and stays on for 25 seconds after movement stops. After 5 hours, motion-triggered output reduces to 70%. Turns off automatically when ambient light >20 lux.



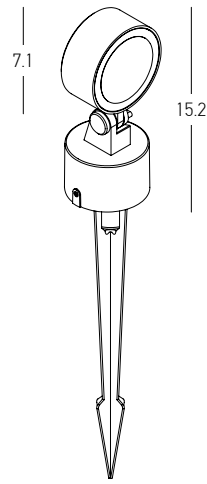


Power 10W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 779Lm  
 Cri 90  
 IP 65  
 Dimensions Ø: 7.1cm H: 15.2cm  
 Base Ø: 6.3cm H: 4cm  
 Beam Angle 36°  
 Material Aluminium - Glass  
 Special Feature 30cm Cable Available  
 Movable Spot  
 Aluminium Spike Included  
 Driver Included


Color Green / **Code E472**

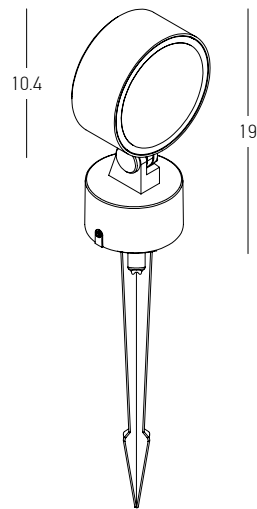

Power 25W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 1860Lm  
 Cri 90  
 IP 65  
 Dimensions Ø: 10.4cm H: 19cm  
 Base Ø: 7.5cm H: 4cm  
 Beam Angle 24°  
 Material Aluminium - Glass  
 Special Feature 30cm Cable Available  
 Movable Spot  
 Aluminium Spike Included  
 Driver Included

Color Green / **Code E473**

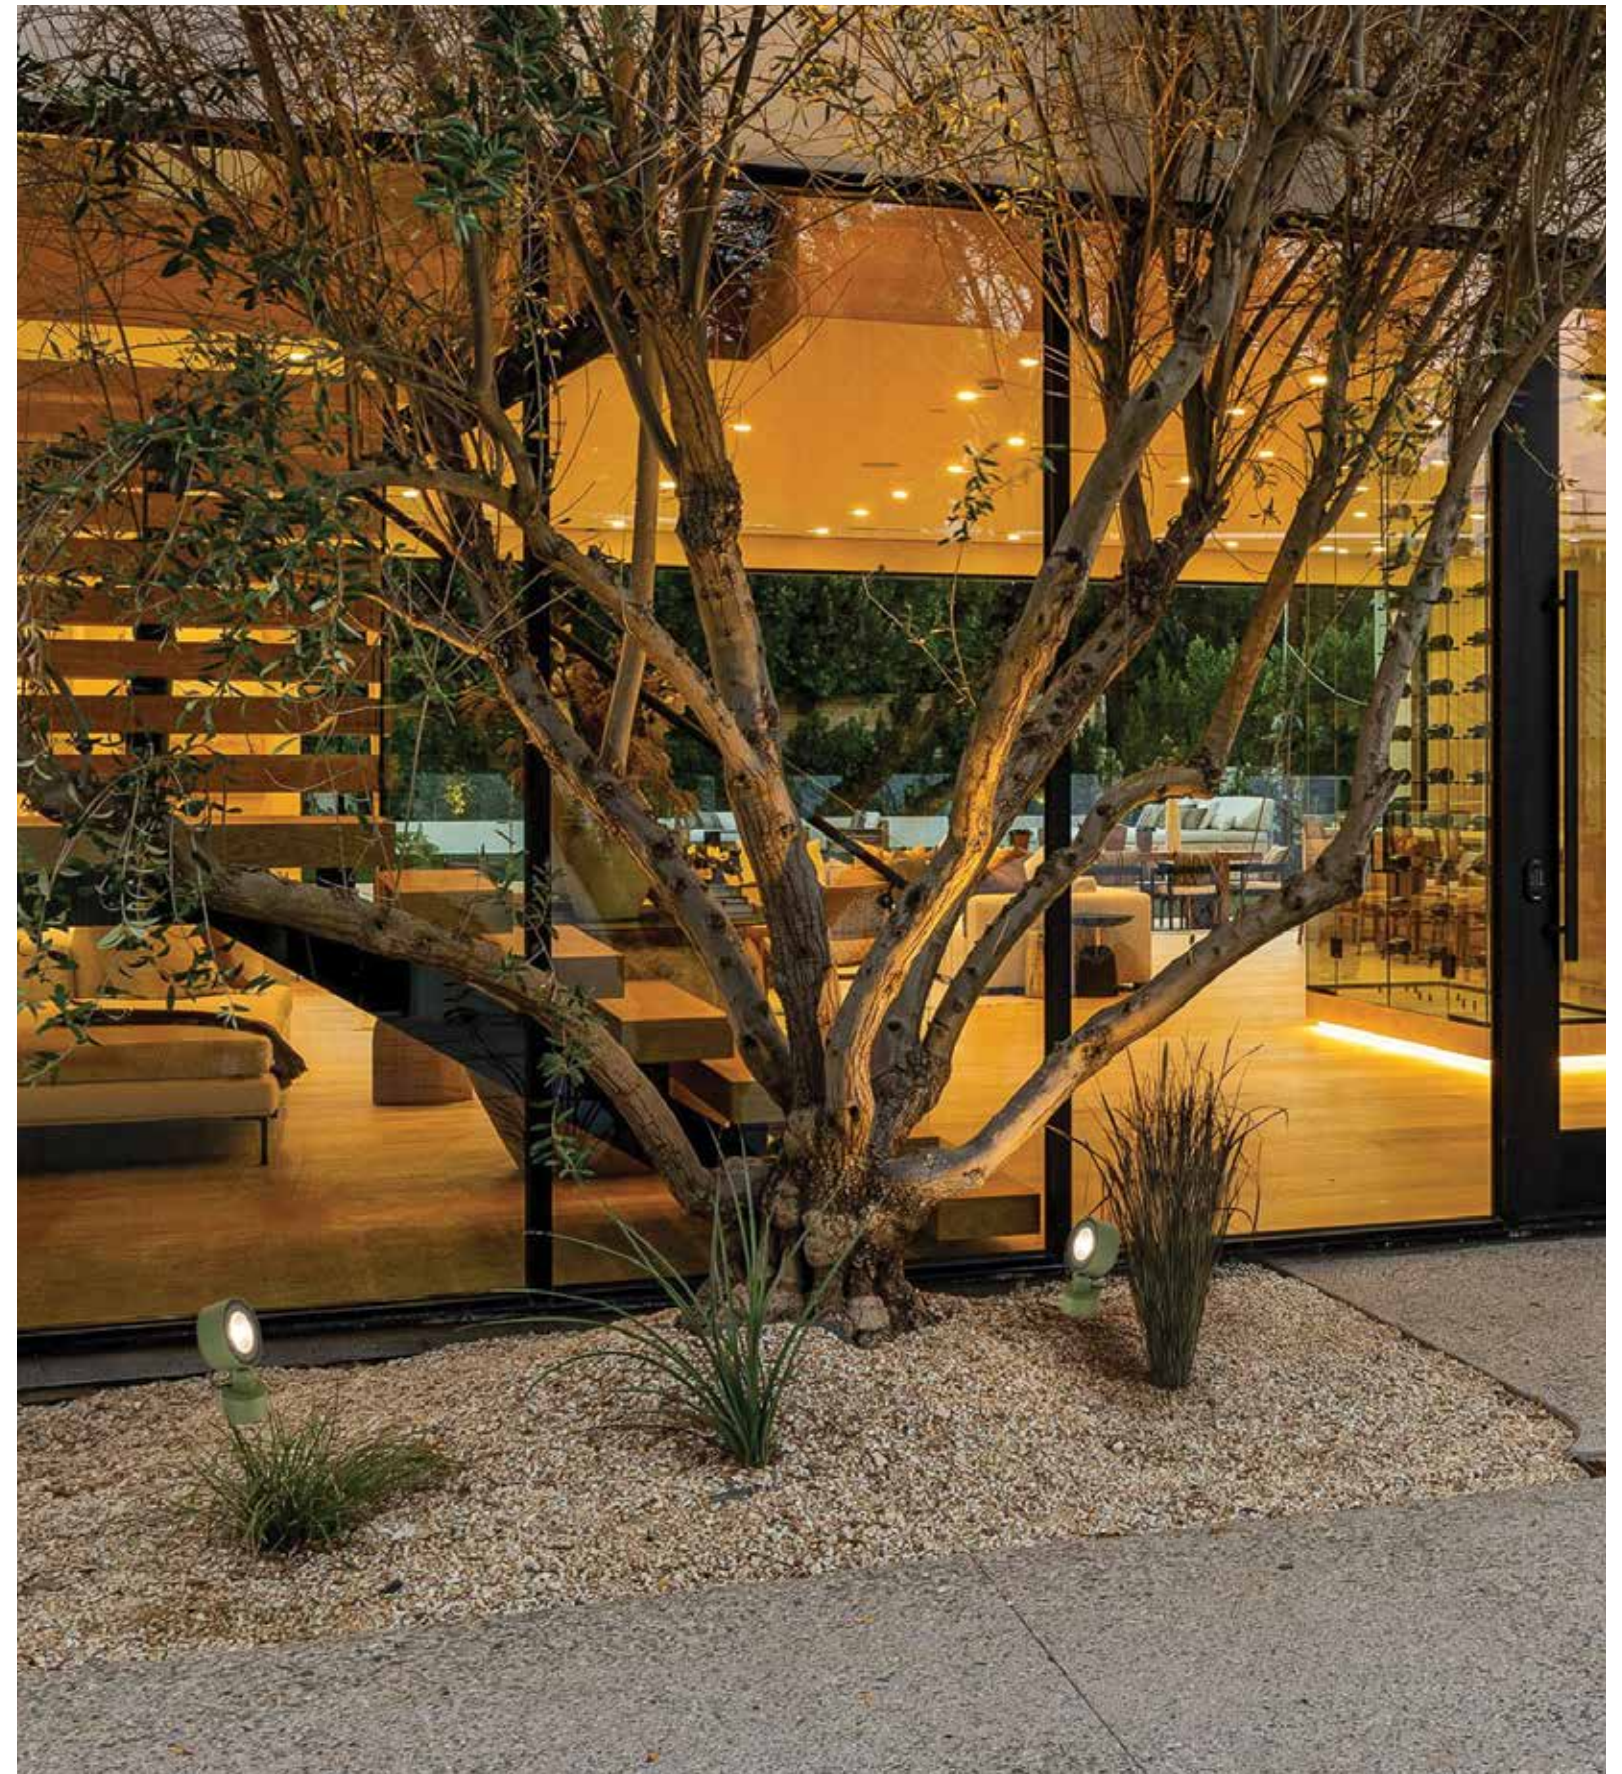


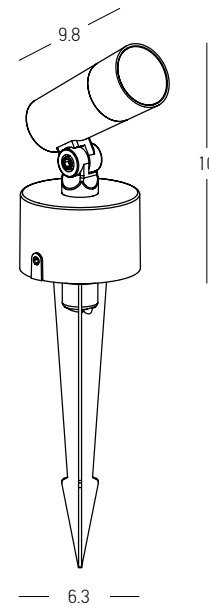

Power 10W  
 Input 24V  
 Color Temperature 3000K  
 Lumen 534Lm  
 Cri 90  
 IP 65  
 Dimensions Ø: 6.2cm H: 10cm  
 Spot Dimensions Ø: 3.5cm L: 9.8cm  
 Base Ø: 6.3cm H: 4cm  
 Beam Angle 24°  
 Material Aluminium - Glass  
 Special Feature 30cm Cable Available  
 Movable Spot  
 Aluminium Spike Included  
 Recommended Driver LPH-18-24 (Not Included)  
 Color Graphite / **Code E468**



Lens for 10W Spot / Beam Angle 15° / **Code E469**

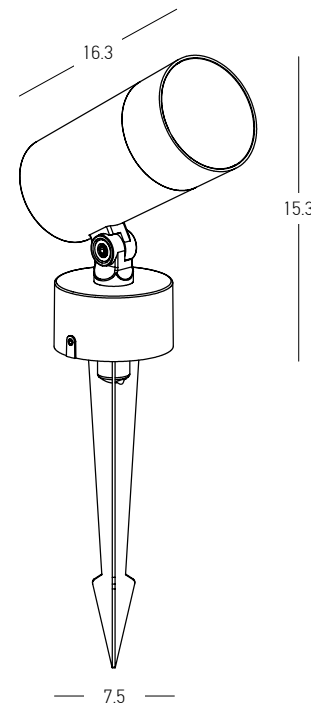

Power 28W  
 Input 24V  
 Color Temperature 3000K  
 Lumen 1615Lm  
 Cri 90  
 IP 65  
 Dimensions Ø: 7.6cm H: 15.3cm  
 Spot Dimensions Ø: 7.8cm L: 16.3cm  
 Base Ø: 7.5cm H: 4cm  
 Beam Angle 24°  
 Material Aluminium - Glass  
 Special Feature 30cm Cable Available  
 Movable Spot  
 Aluminium Spike Included  
 Recommended Driver LPV-35-24 (Not Included)  
 Color Graphite / **Code E471**



Lens for 28W Spot / Beam Angle 15° / **Code E471**





**Driver**  
 Power 18W  
 Input 220-240V, 50/60Hz  
 Output 24V  
 Dimensions L: 14cm W: 3cm H: 2.2cm  
 IP 67

**LPH-18-24**



**Driver**  
 Power 35W  
 Input 220-240V, 50/60Hz  
 Output 24V  
 Dimensions L: 14.8cm W: 4cm H: 3cm  
 IP 67

**LPV-35-24**

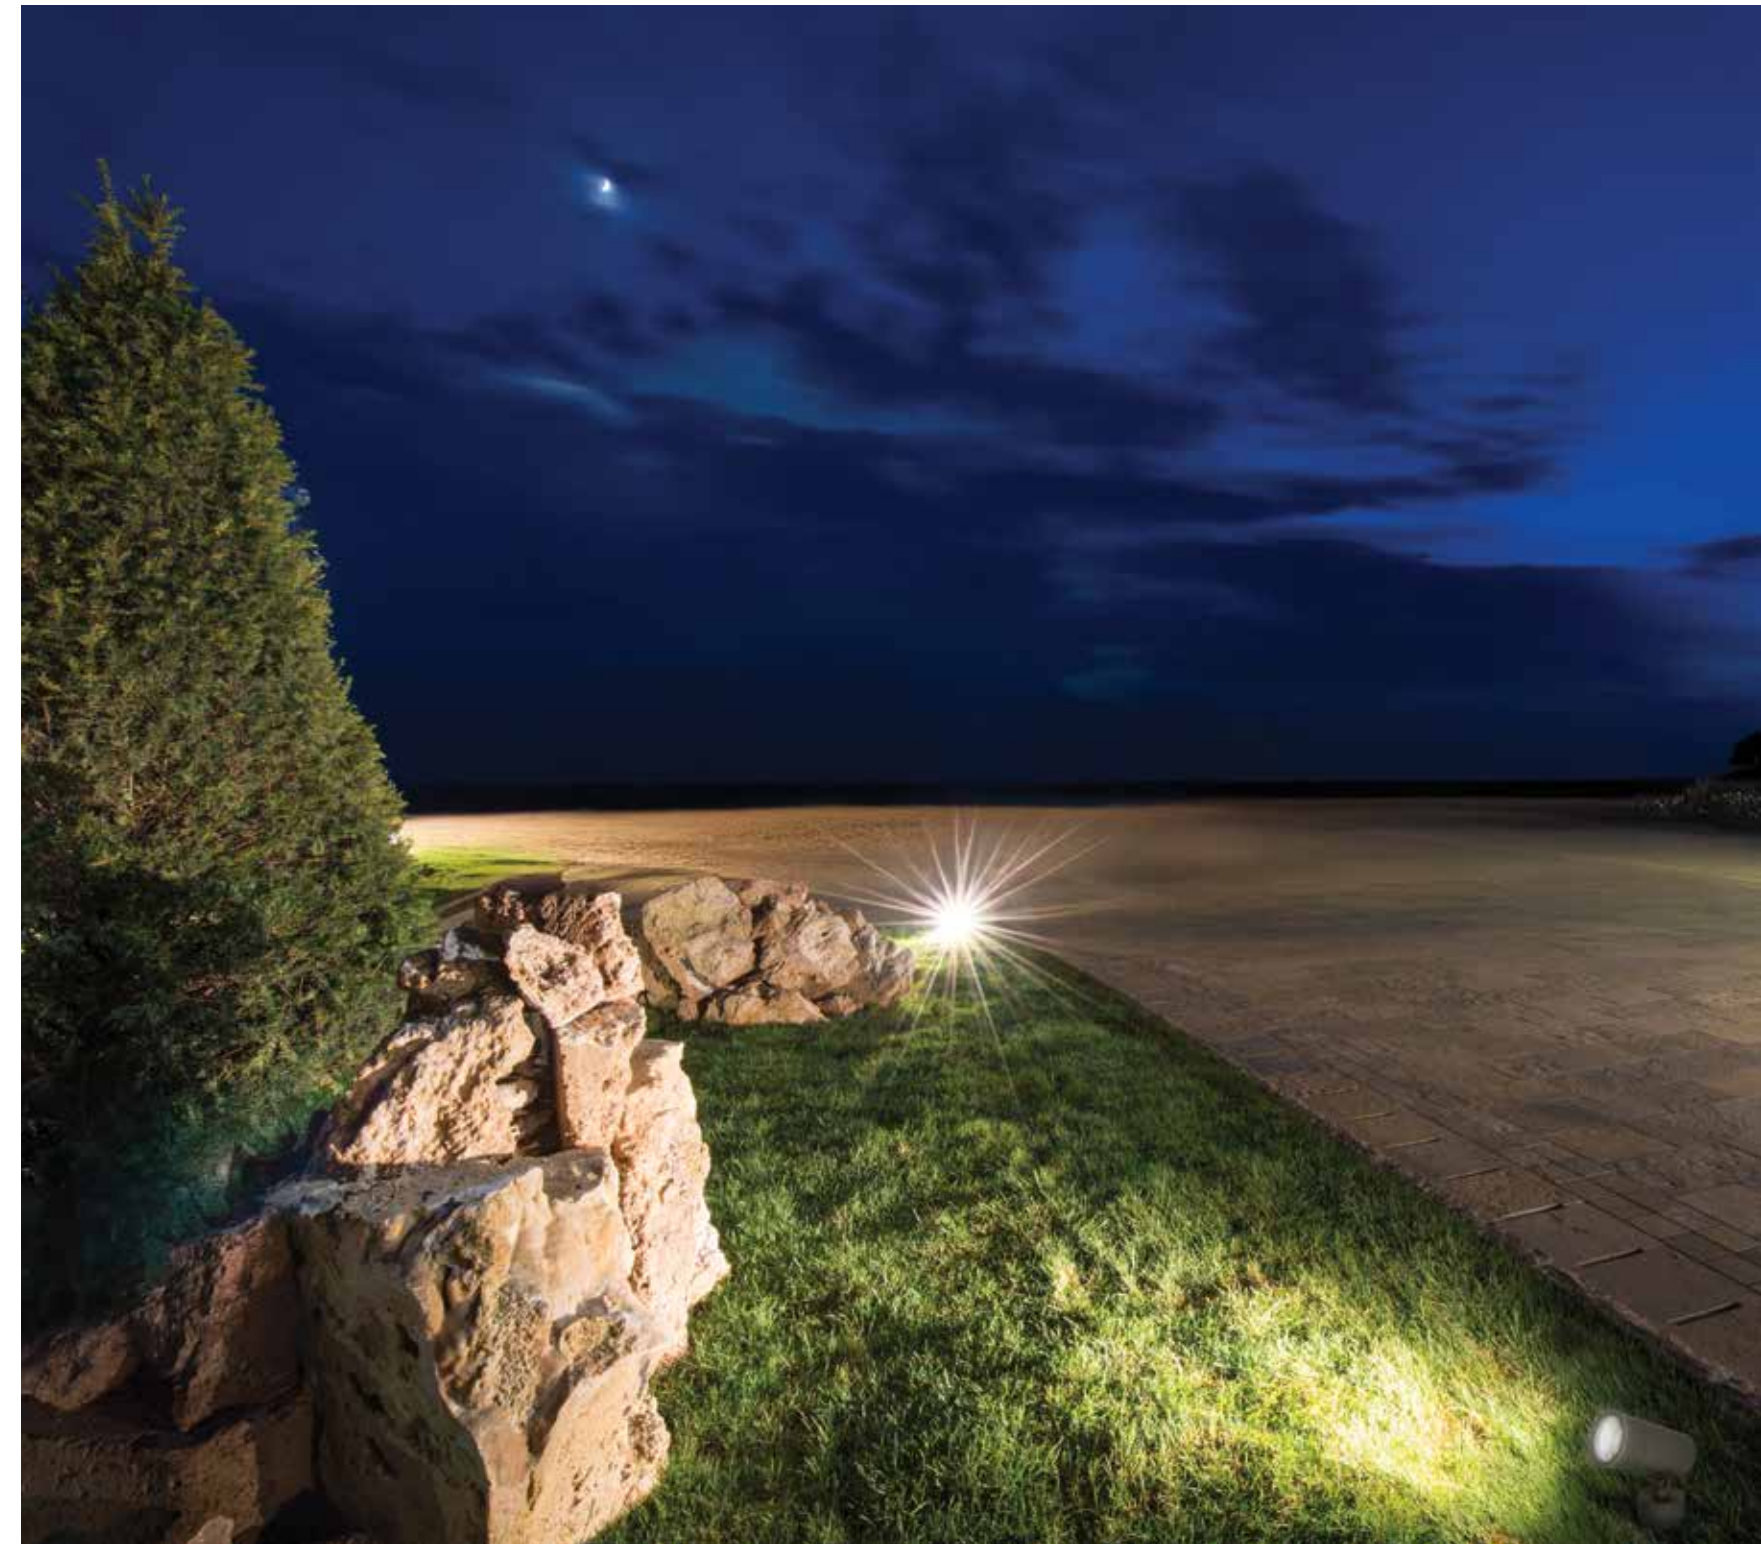

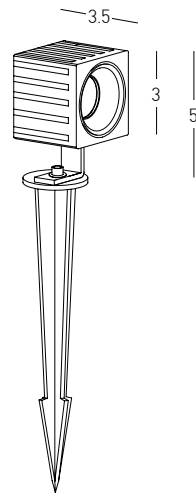

Power 3W  
 Input 24V  
 Color Temperature 3000K  
 Lumen 228Lm  
 Cri 90  
 IP 65  
 Dimensions L: 3cm W: 3.5cm H: 5cm  
 Beam Angle 36°  
 Material Aluminium - Tempered Glass  
 Special Feature 30cm Cable Available  
 Movable Spot  
 Spike Included  
 Recommended Driver LPH-18-24 (Not Included)  
 In Parallel Connection 1-5 pcs  
 Color Graphite / **Code E350**

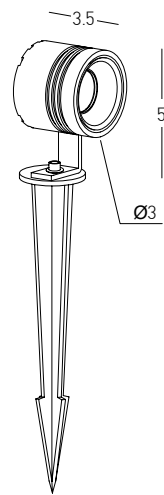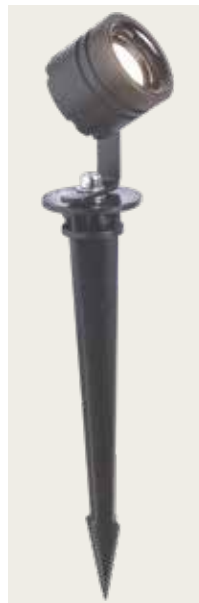


Power 3W  
 Input 24V  
 Color Temperature 3000K  
 Lumen 228Lm  
 Cri 90  
 IP 65  
 Dimensions Ø: 3cm W: 3.5cm H: 5cm  
 Beam Angle 36°  
 Material Aluminium - Tempered Glass  
 Special Feature 30cm Cable Available  
 Movable Spot  
 Spike Included  
 Recommended Driver LPH-18-24 (Not Included)  
 In Parallel Connection 1-5 pcs  
 Color Graphite / **Code E349**




**Driver**  
 Power 18W  
 Input 220-240V, 50/60Hz  
 Output 24V  
 Dimensions L: 14cm W: 3cm H: 2.2cm  
 IP 67





**Waterproof Connection Box 1in / 1out , 16A , 450V**  
 IP 67  
 Color Black / **Code Z0800-BA**

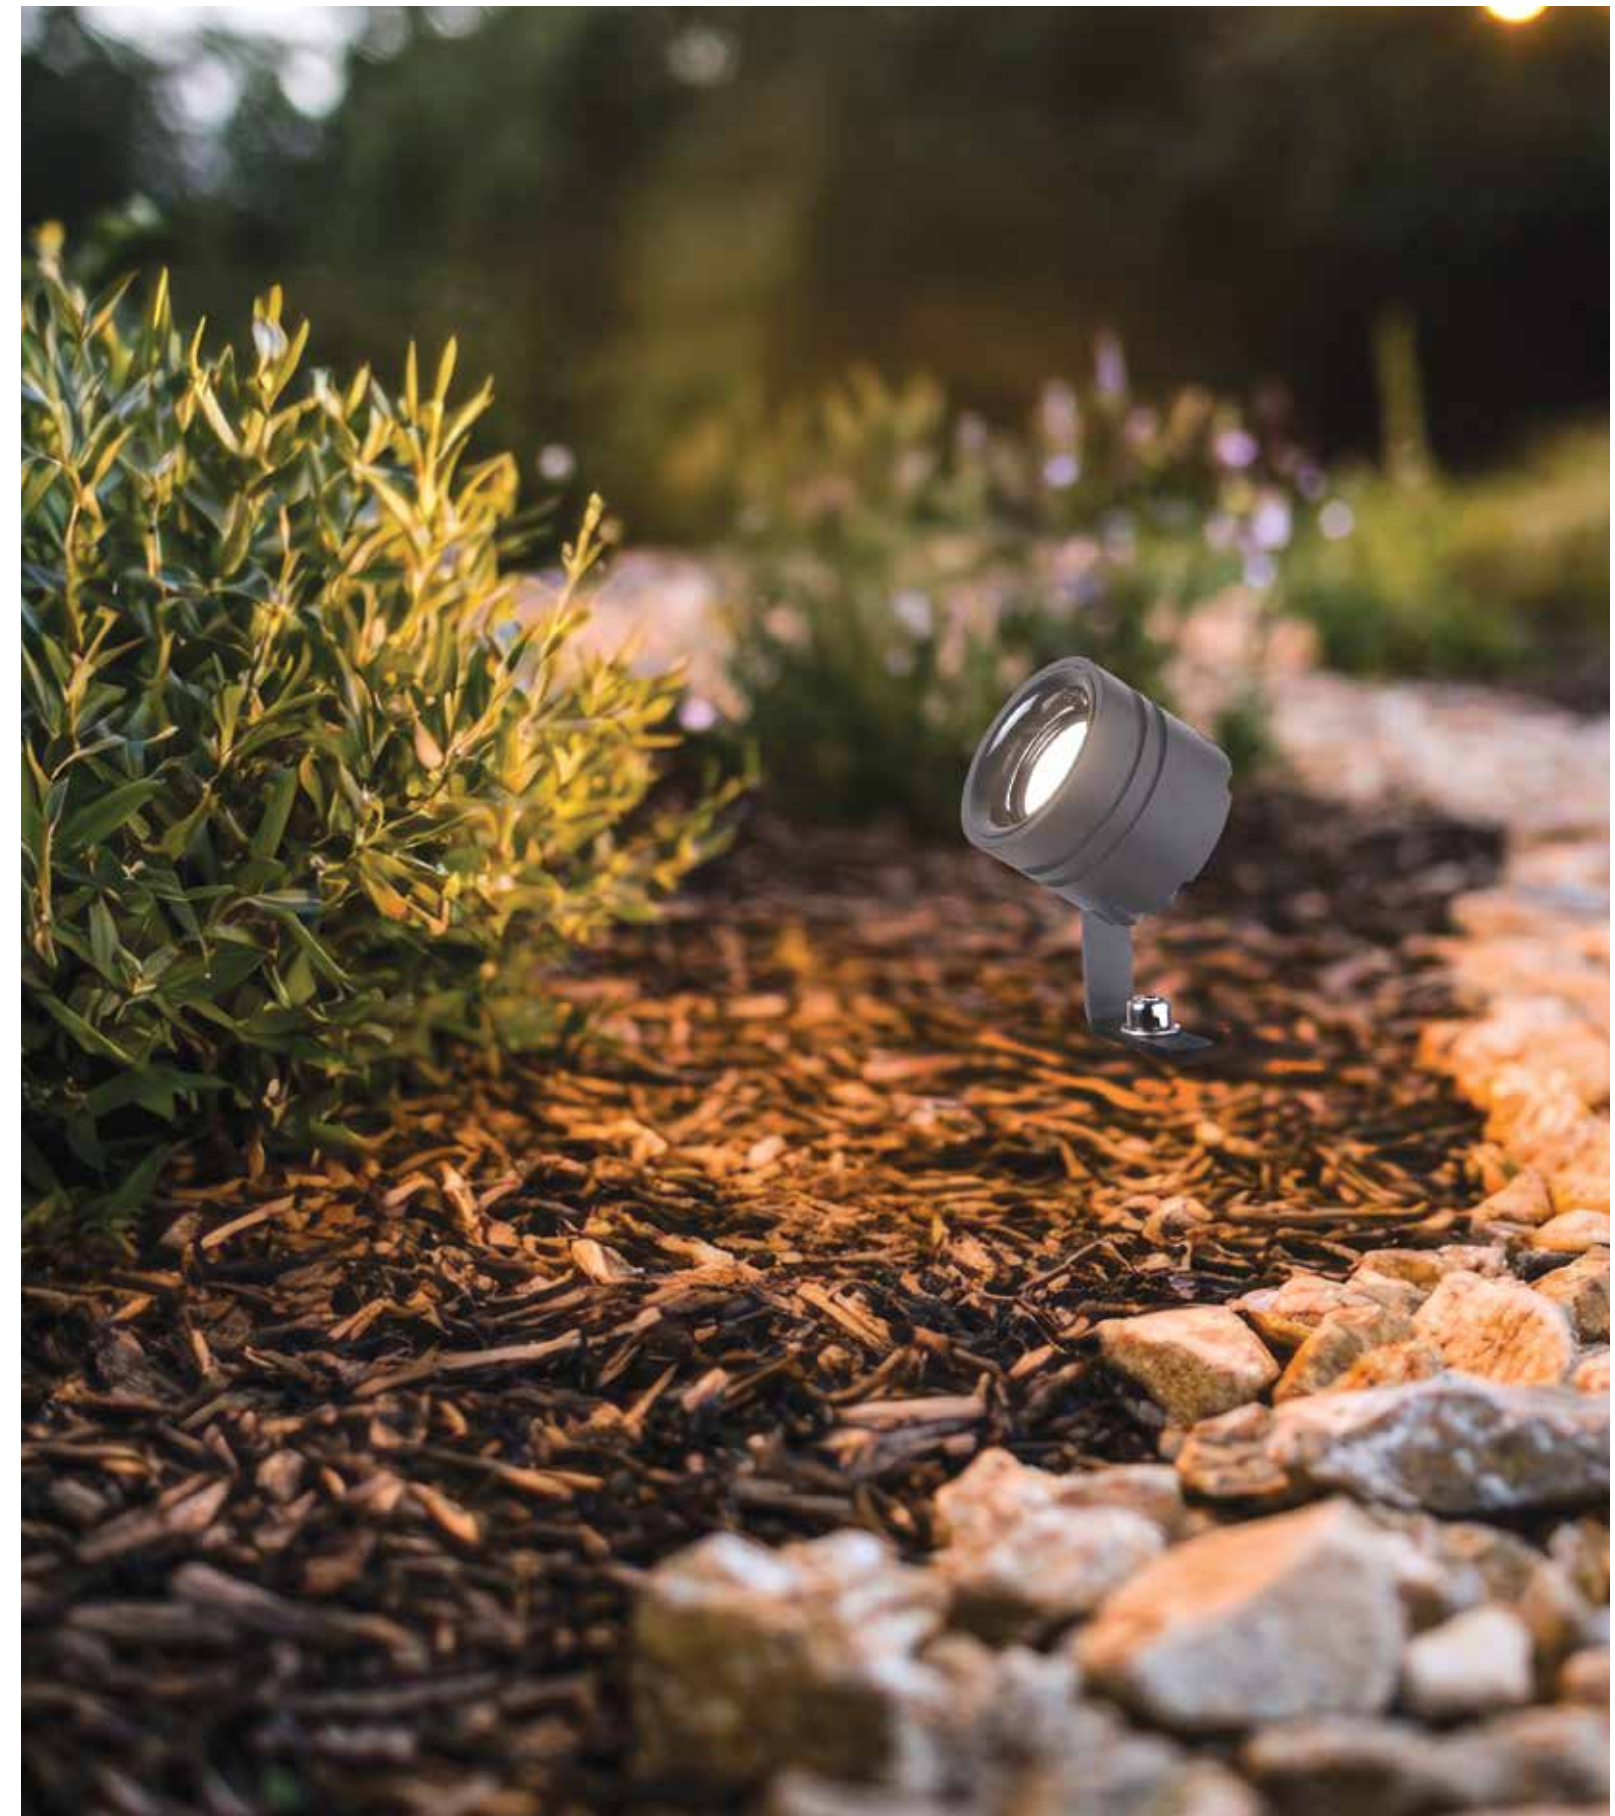

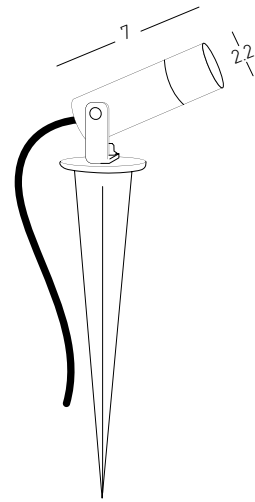


Power 2.3W  
 Input 3.2V, 700mA  
 Color Temperature 2700K  
 Lumen 130Lm  
 Cri 80  
 IP 54  
 Dimensions Ø: 2.2cm L: 7cm H: 3.2cm  
 Beam Angle 40°  
 Material Brush  
 Special Feature 60cm Cable Available  
 Movable Spot  
 Spike Included  
 Recommended Driver V350-1050 (Not Included)  
 In Series Connection 1-9 pcs  
 Color Natural Brush / **Code E403**

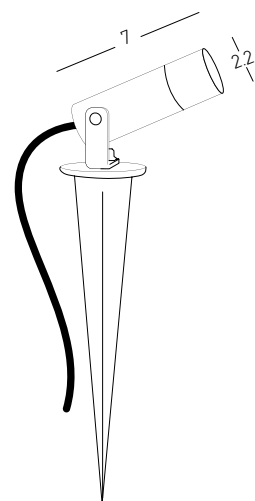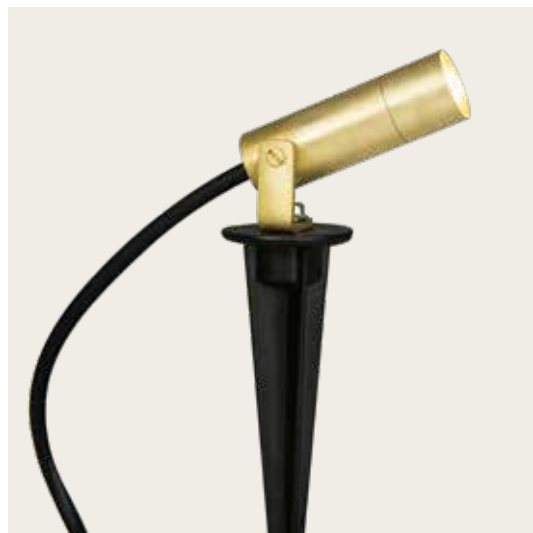


Power 2.3W  
 Input 3.2V, 700mA  
 Color Temperature 3000K  
 Lumen 130Lm  
 Cri 80  
 IP 54  
 Dimensions Ø: 2.2cm L: 7cm H: 3.2cm  
 Beam Angle 40°  
 Material Brush  
 Special Feature 60cm Cable Available  
 Movable Spot  
 Spike Included  
 Recommended Driver V350-1050 (Not Included)  
 In Series Connection 1-9 pcs  
 Color Natural Brush / **Code E404**




**Driver**  
 Power 34W  
 Input 220-240V, 50/60Hz  
 Output 2 - 32V  
 Dimensions L: 15cm W: 4cm H: 3cm  
 IP 20

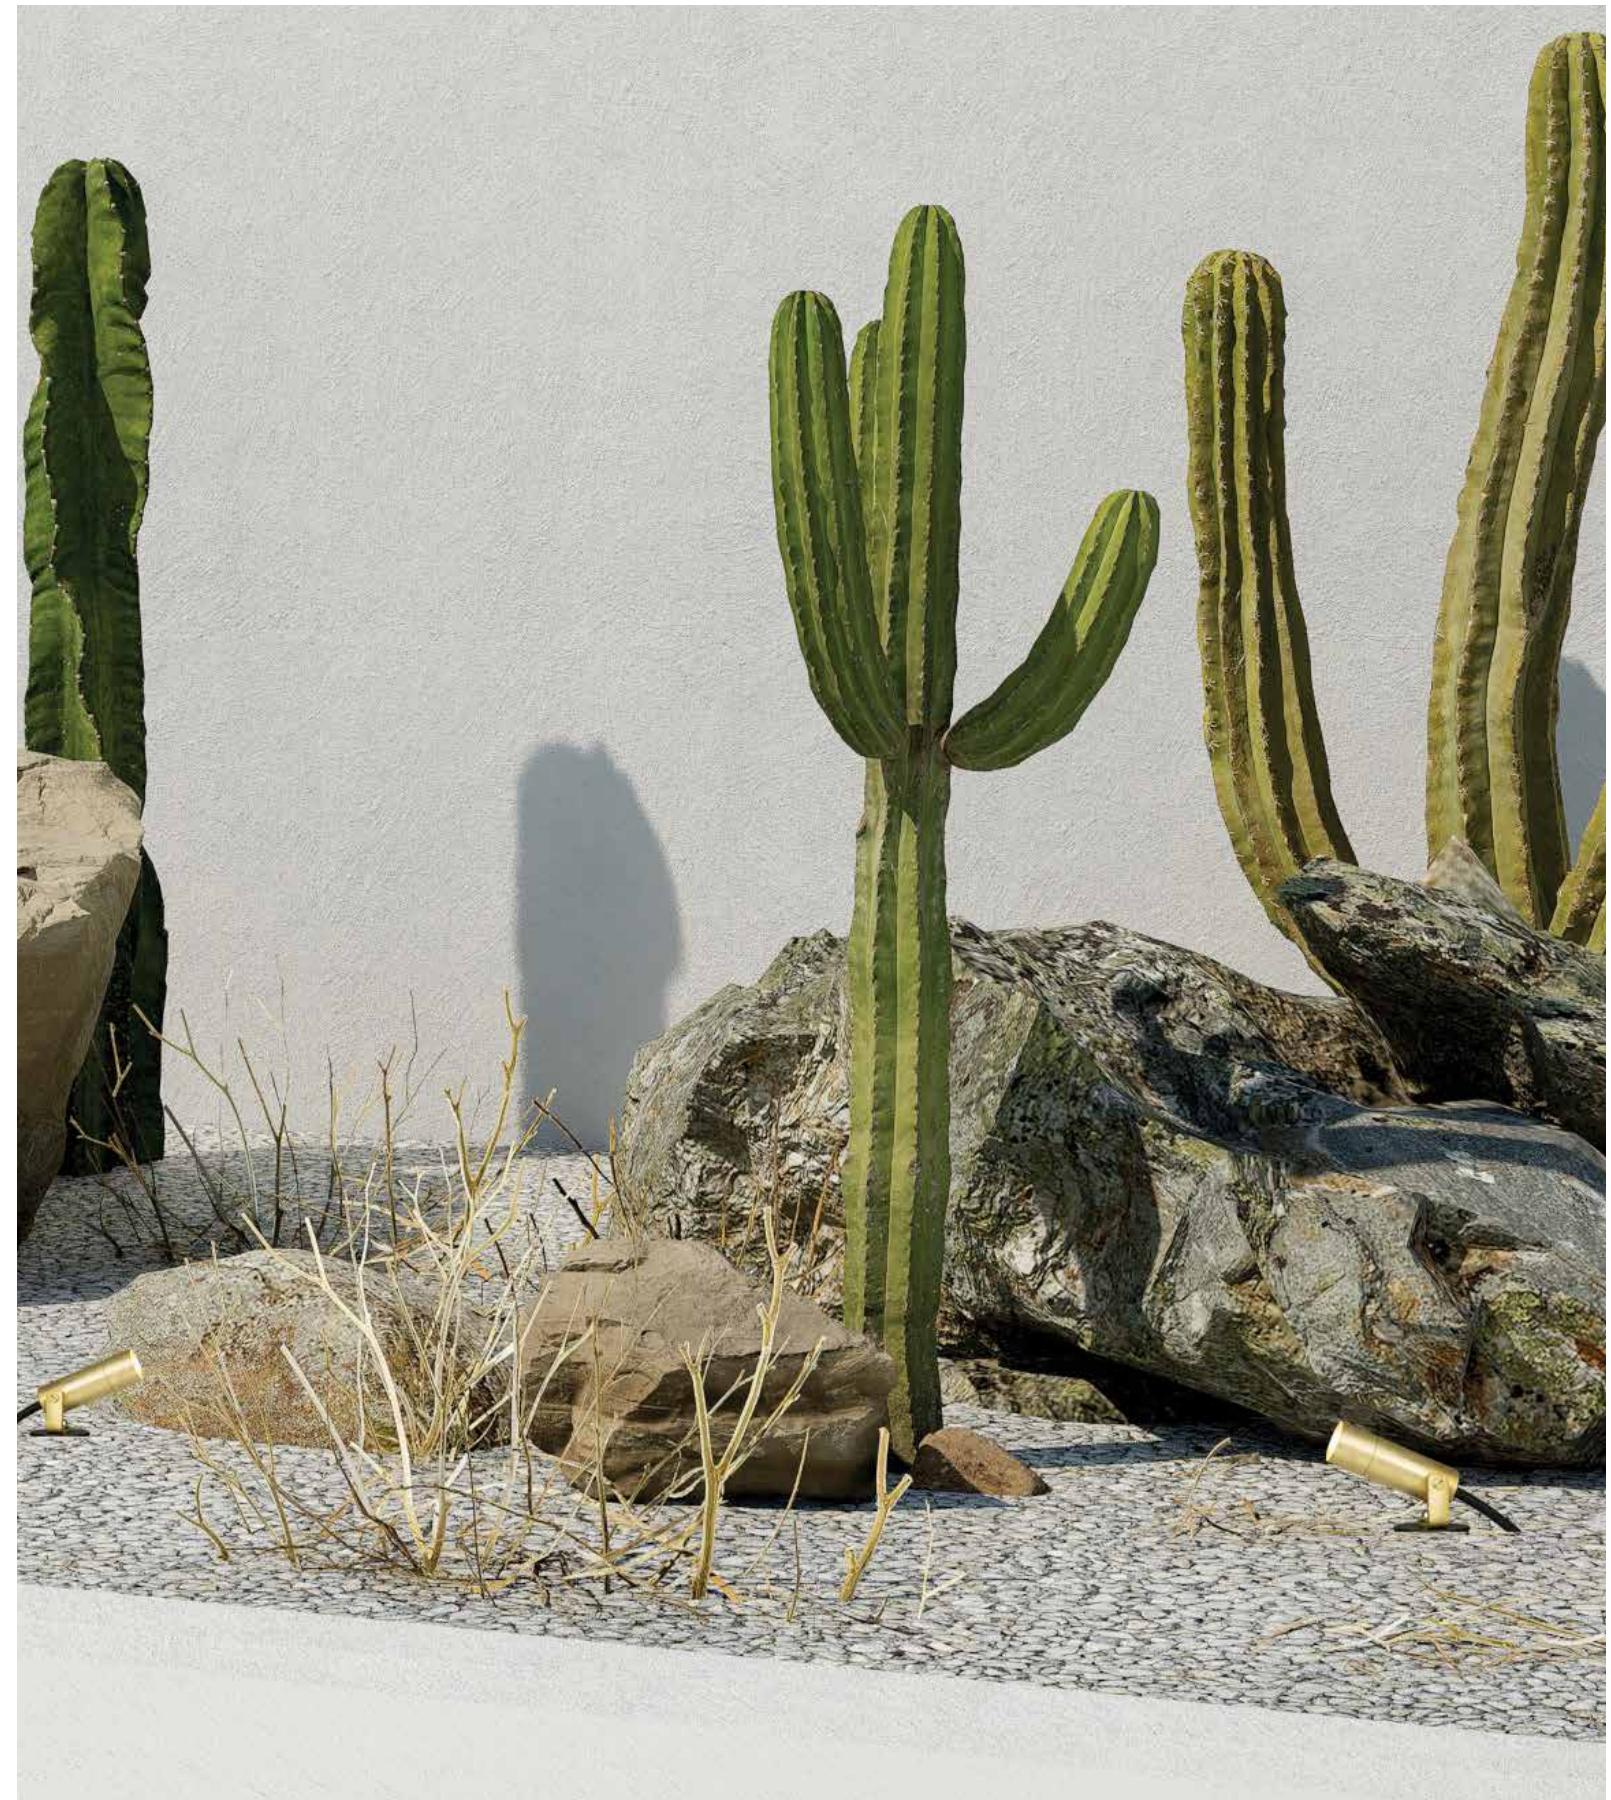

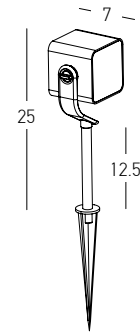

Power 12W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 740Lm  
 Cri 80  
 IP 65  
 Dimensions L: 7cm W: 7cm H: 12.5-25cm  
 Base Ø: 6cm H: 0.5cm  
 Beam Angle 40°  
 Material Aluminium - Tempered Glass  
 Special Feature 40cm Cable Available  
 Movable Spot  
 Spike & Base Included  
 Waterproof Connector Included


Color Graphite / **Code E286**

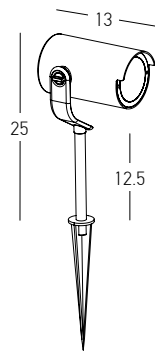

Power 12W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 740Lm  
 Cri 80  
 IP 65  
 Dimensions Ø: 7.5cm L: 13cm H: 12.5-25cm  
 Base Ø: 6cm H: 0.5cm  
 Beam Angle 40°  
 Material Aluminium - Tempered Glass  
 Special Feature 40cm Cable Available  
 Movable Spot  
 Spike & Base Included  
 Waterproof Connector Included


Color Graphite / **Code E285**



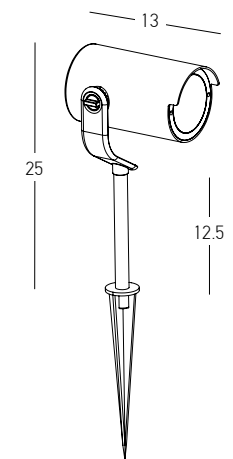


Bulb 1x GU10  
 Power 20W MAX  
 Input 220-240V, 50/60Hz  
 IP 65  
 Dimensions Ø: 7.5cm L: 13cm H: 25cm  
 Base Ø: 6cm H: 0.5cm  
 Material Aluminium - Tempered Glass  
 Special Feature 40cm Cable Available  
 Movable Spot  
 Spike & Base Included  
 Waterproof Connector Included  
  
 Color Brown / **Code E284**



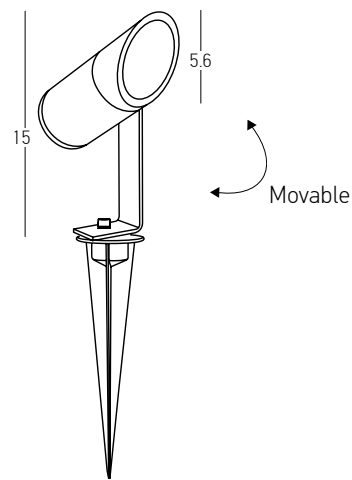


Power 7W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 516Lm  
 Cri 80  
 IP 65  
 Dimensions Ø: 5.6cm H: 15cm  
 Beam Angle 36°  
 Material Aluminium - Tempered Glass  
 Special Feature 20cm Cable Available  
 Movable Spot  
 Spike Included  
 Color Graphite / **Code E152**

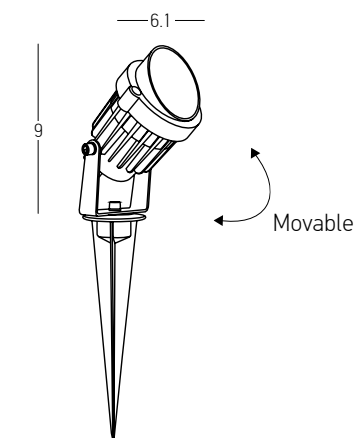


Power 5W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 380Lm  
 Cri 80  
 IP 65  
 Dimensions Ø: 6.1 cm H: 9cm  
 Beam Angle 36°  
 Material Aluminium - Tempered Glass  
 Special Feature 20cm Cable Available  
 Movable Spot  
 Spike Included  
 Color Graphite / **Code E153**



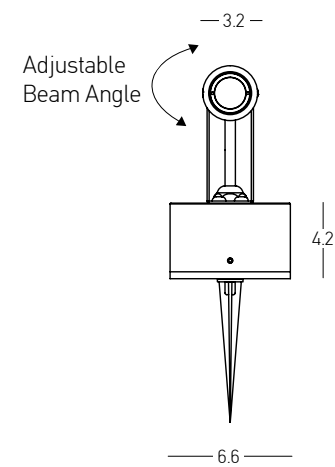

Power 2.1W  
 Input 220-240V, 50/60Hz  
 Color Temperature 2700K  
 Lumen 168Lm  
 Cri 80  
 IP 54  
 Dimensions L: 8cm H: 8.5cm  
 Base Ø: 6.6cm H: 4.2cm  
 Beam Angle 10°-60°  
 Material Aluminium - Stainless Steel  
 Special Feature 60cm Cable Available  
 Stick Ø: 3.2cm H: 8cm  
 Spike Included

Color Sandy Black / **Code E177-B**

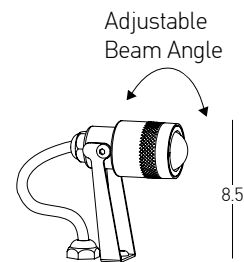

Power 2.1W  
 Input 3V, 700mA  
 Color Temperature 2700K  
 Lumen 168Lm  
 Cri 80  
 IP 54  
 Dimensions L: 8cm H: 8.5cm  
 Beam Angle 10-60°  
 Material Aluminium - Stainless Steel  
 Special Feature 60cm Cable Available  
 Stick Ø: 3.2cm H: 8cm  
 Spike Included


Recommended Driver V350-1050 (Not Included)  
 In Series Connection 1-10 pcs


Color Sandy Black / **Code E177-A**




**Driver**  
 Power  
 Input  
 Output  
 Dimensions  
 IP

**V350-1050**  
 34W  
 220-240V, 50/60Hz  
 2 - 32V  
 L: 15cm W: 4cm H: 3cm  
 20

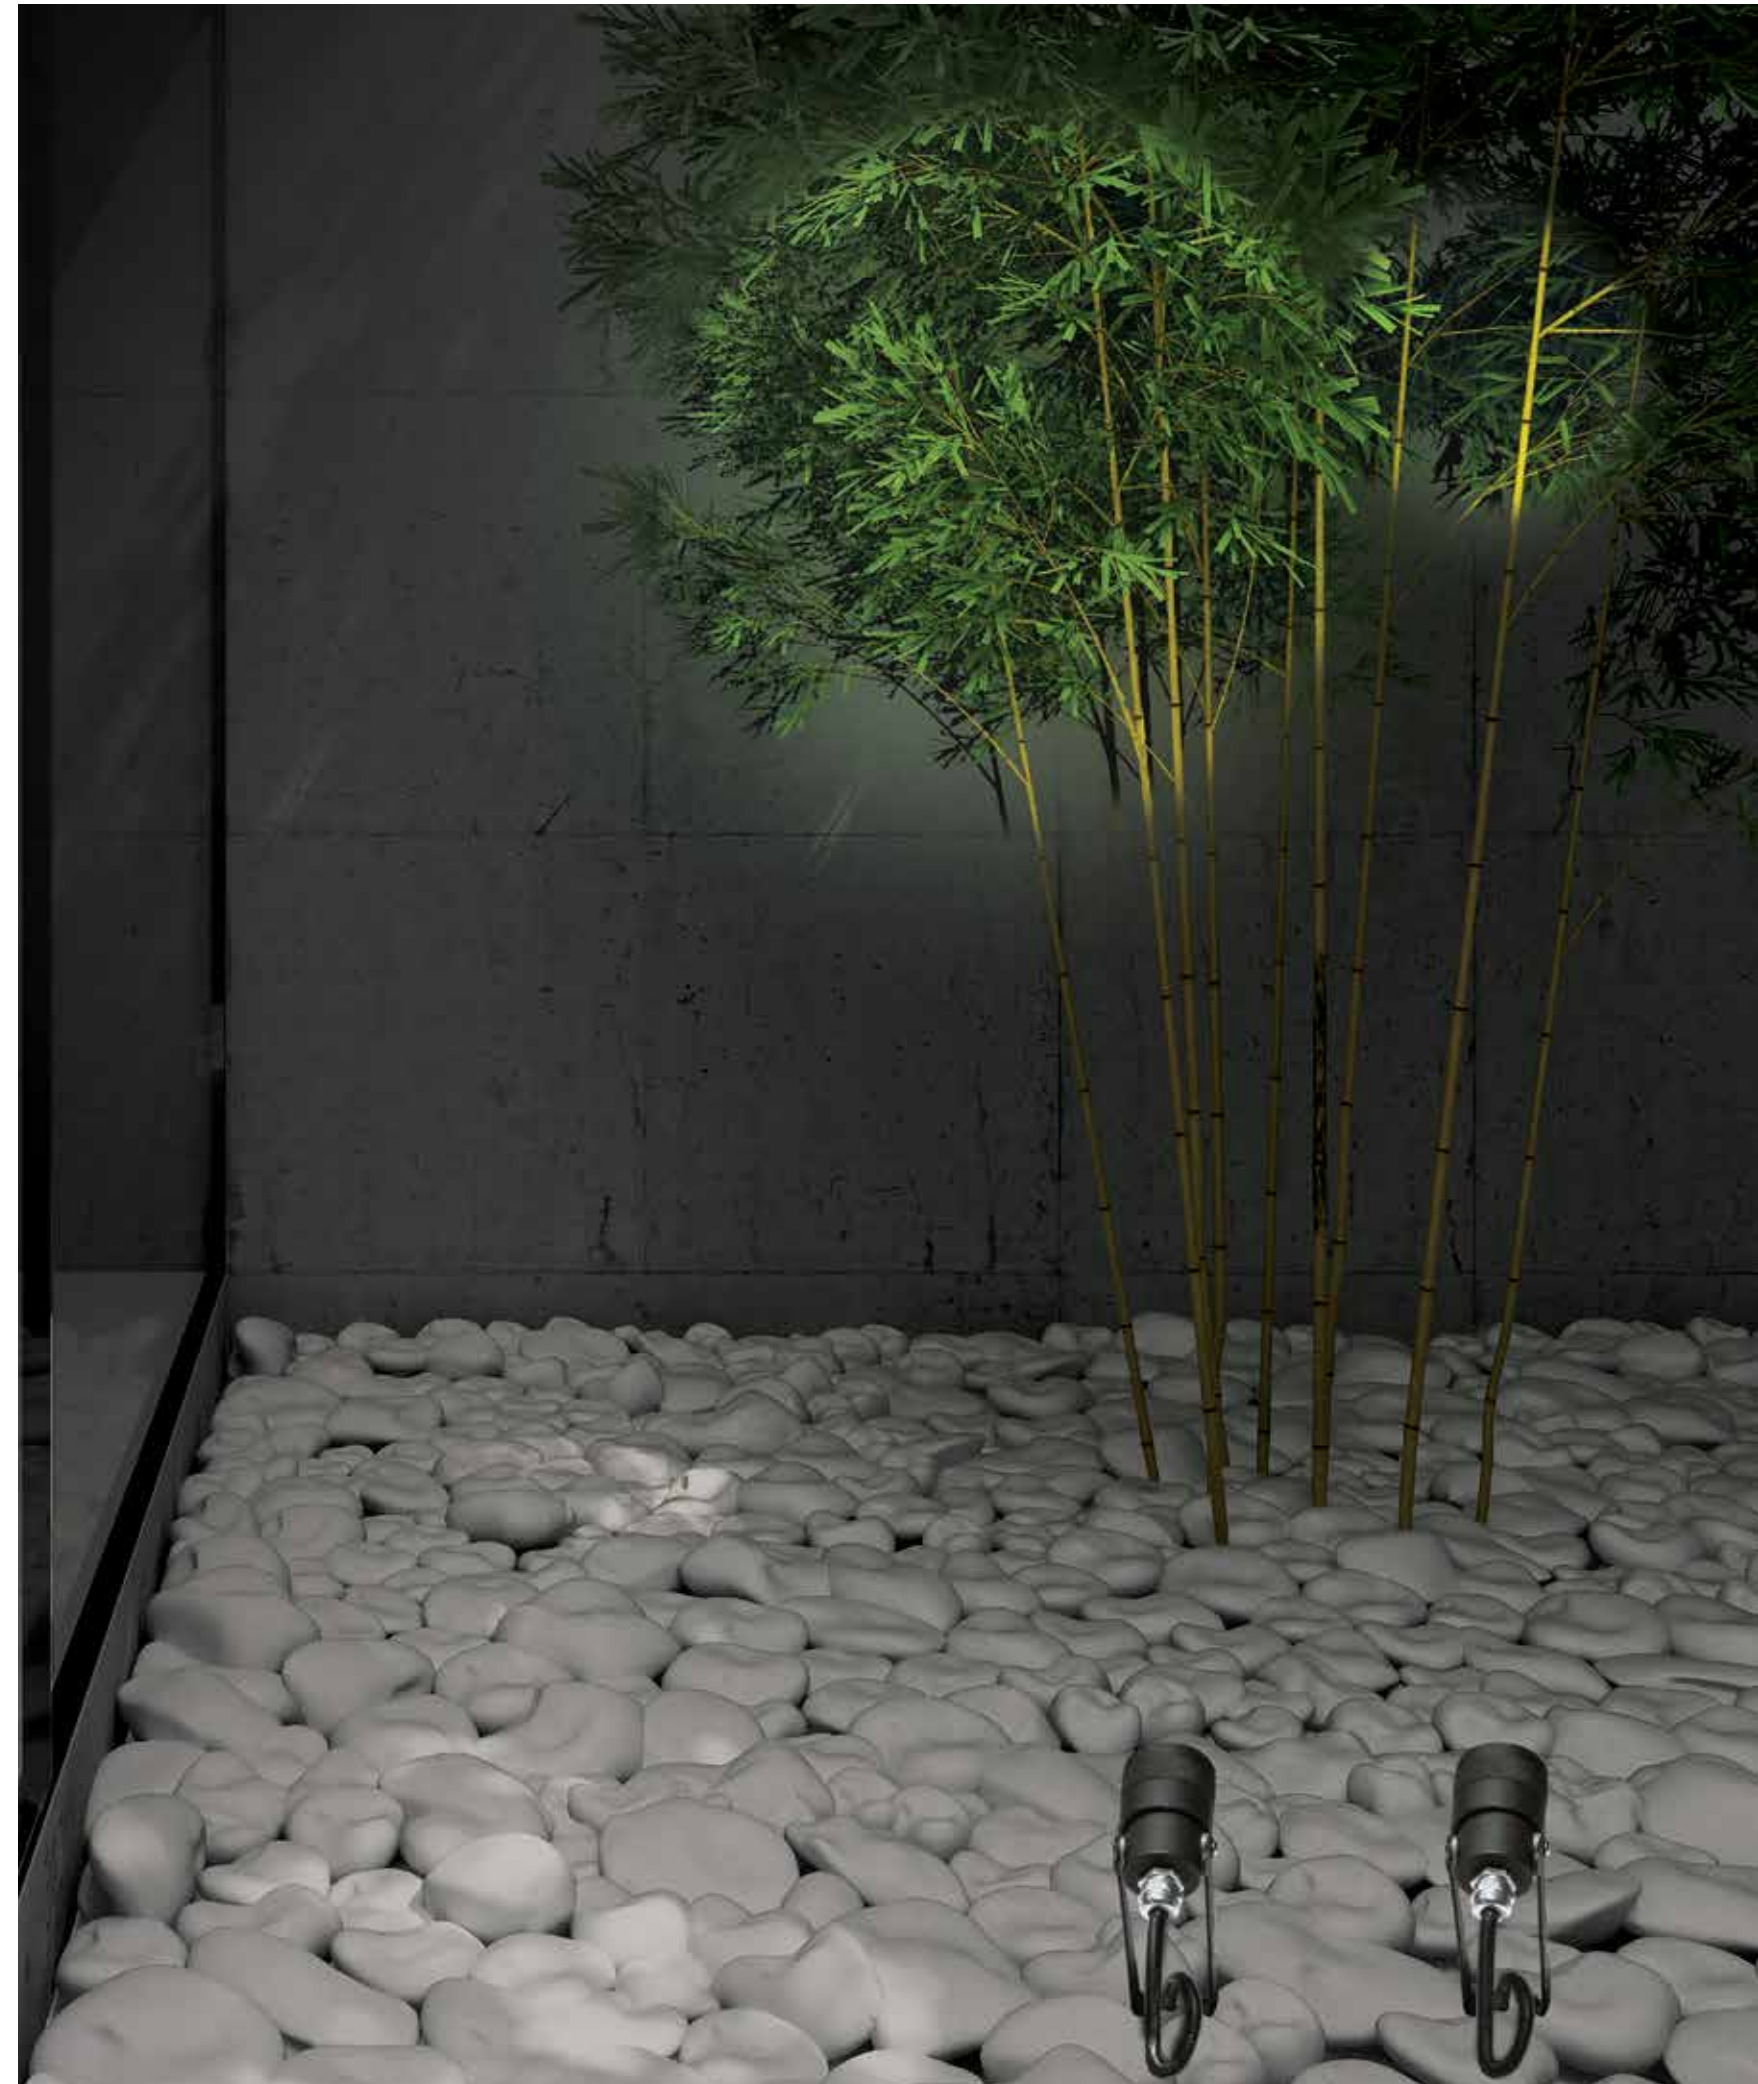

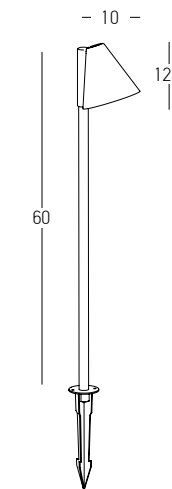


Bulb 1x GU10  
 Power 20W MAX  
 Input 220-240V, 50/60Hz  
 IP 65  
 Dimensions L: 10cm W: 10cm H: 60cm  
 Material Aluminium - Tempered Glass  
 Special Feature 50cm Cable Available  
 Spike Included  
 Recommended Base E282-SP / Not Included  
 Color Graphite / **Code E281**

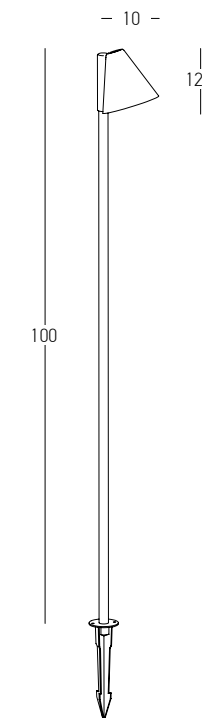

Bulb 1x GU10  
 Power 20W MAX  
 Input 220-240V, 50/60Hz  
 IP 65  
 Dimensions L: 10cm W: 10cm H: 100cm  
 Material Aluminium - Tempered Glass  
 Special Feature 40cm Cable Available  
 Spike Included  
 Recommended Base E282-SP / Not Included  
 Color Graphite / **Code E282**





**Base for E281 - E282**  
 Dimensions Ø: 9.5cm H: 2cm  
 Material Aluminium  
 Color Graphite / **Code E282-SP**

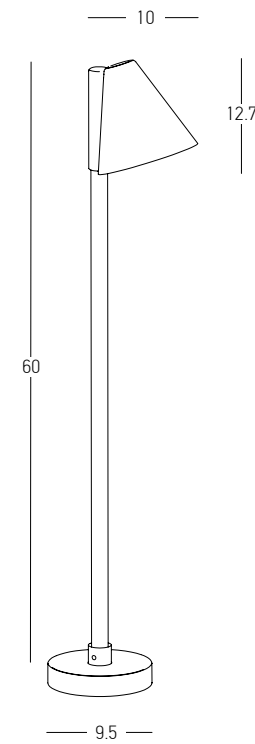

Power 6W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 522Lm  
 Cri 80  
 IP 65  
 Dimensions L: 10cm W: 10cm H: 60cm  
 Base Ø: 9.5cm H: 2cm  
 Beam Angle 40°  
 Material Aluminium - Tempered Glass  
 Special Feature 50cm Cable Available  
 Spike & Base Included  
 Color Graphite / **Code E283**




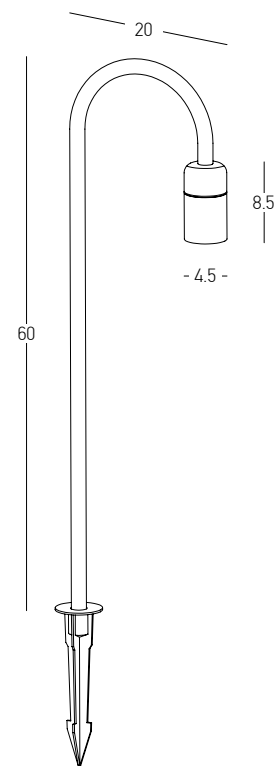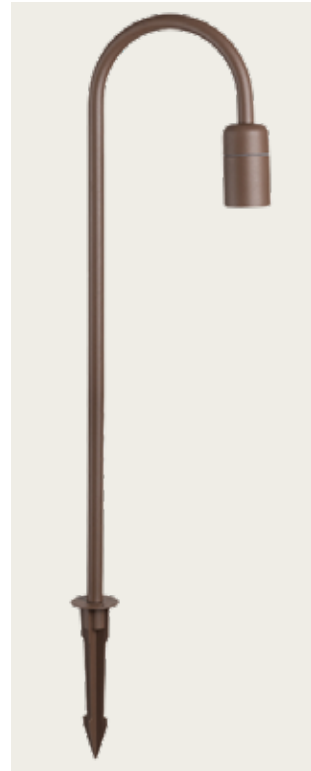

Power 6W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 500Lm  
 Cri 80  
 IP 65  
 Dimensions L: 20cm W: 4.5cm H: 60cm  
 Beam Angle 40°  
 Material Aluminium - Tempered Glass  
 Special Feature 40cm Cable Available  
 Spike Included


Color Dark Brown / **Code E279**




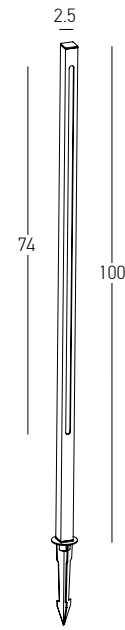


Power 15W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 1550Lm  
Cri 80  
IP 65  
Dimensions L: 2.5cm W: 2.5cm H: 100cm  
Base Ø: 9.5cm H: 2cm  
Material Aluminium - Opal PC Diffuser  
Special Feature 40cm Cable Available  
Spike & Base Included  
Profile 2.5 x 2.5cm

Color Dark Brown / **Code E280**

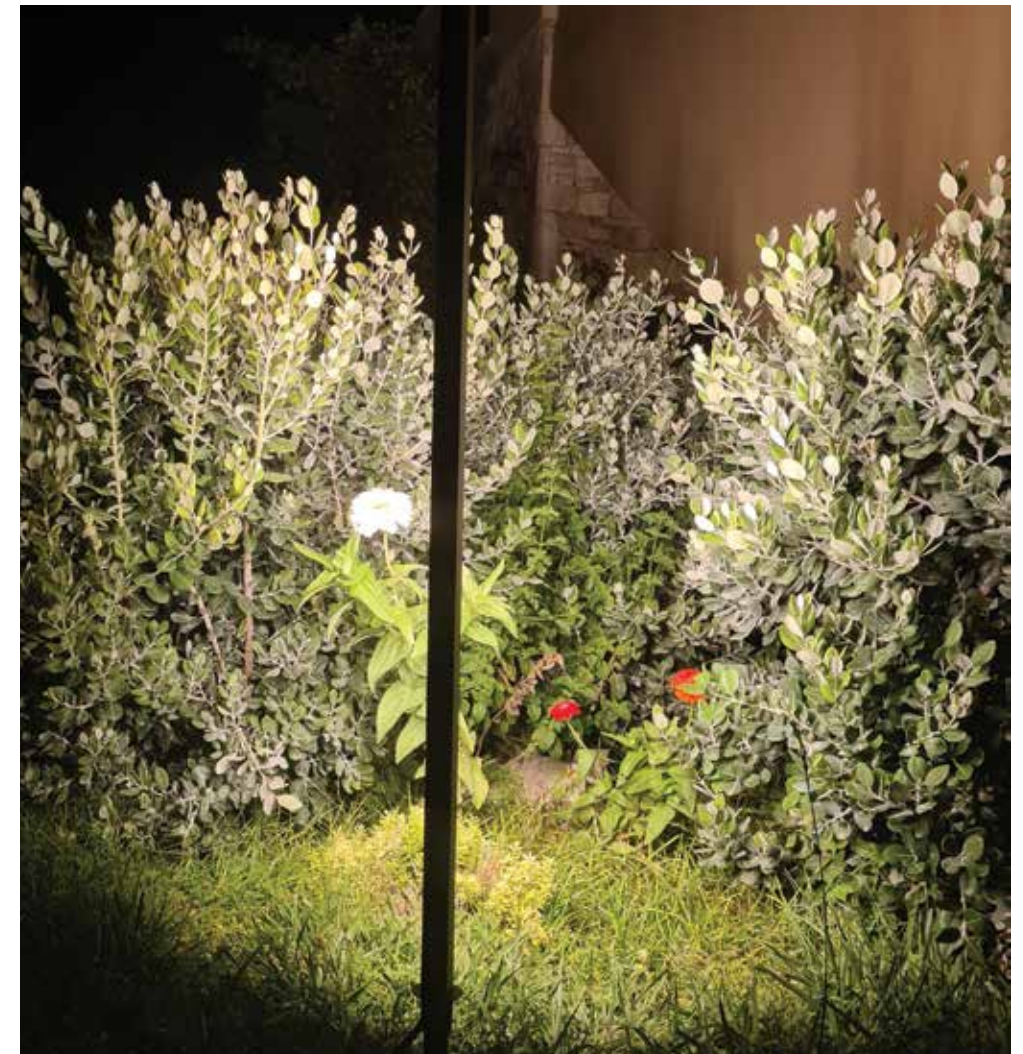

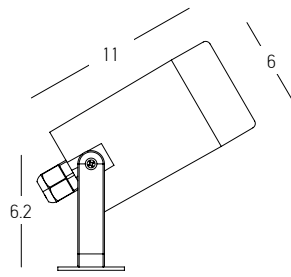


Bulb 1x GU10 LED  
 Power 7W MAX  
 Input 220-240V, 50/60Hz  
 IP 54  
 Dimensions Ø: 6cm L: 11cm H: 6.2cm  
 Material ABS - PC Diffuser  
 Special Feature 30cm Cable Available  
 Movable Spot  
 Without Spike  
 Color Black / **Code E311**

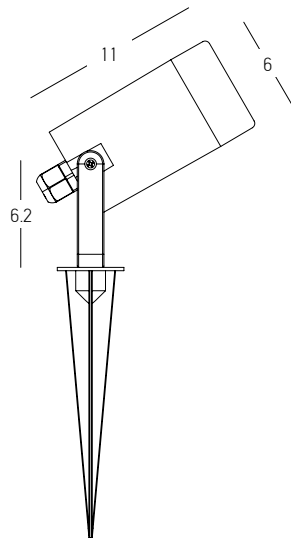


Bulb 1x GU10 LED  
 Power 7W MAX  
 Input 220-240V, 50/60Hz  
 IP 54  
 Dimensions Ø: 6cm L: 11cm H: 6.2cm  
 Material ABS - PC Diffuser  
 Special Feature 30cm Cable Available  
 Movable Spot  
 Spike Included  
 Color Black / **Code E312**



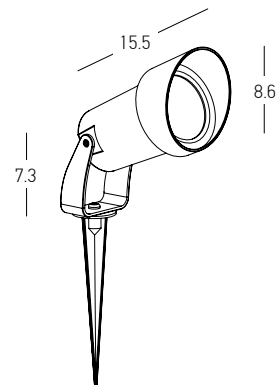

Bulb 1x GU10 LED  
 Power 7W MAX  
 Input 220-240V, 50/60Hz  
 IP 54  
 Dimensions Ø: 8.6cm L: 15.5cm H: 7.3cm  
 Material ABS - Tempered Glass  
 Special Feature 30cm Cable Available  
 Movable Spot  
 Spike Included  
 Color Black / **Code E310**

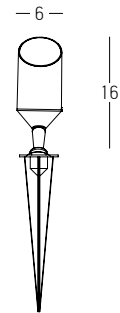


Bulb 1x GU10 LED  
 Power 5W MAX  
 Input 220-240V, 50/60Hz  
 IP 65  
 Dimensions Ø: 6cm H: 16cm  
 Material ABS - PC Diffuser  
 Special Feature 30cm Cable Available  
 Movable Spot  
 Spike Included  
 Color Black / **Code E217**




Step by Step Safety and Visibility  
Guiding your path with confidence.




06. STEP

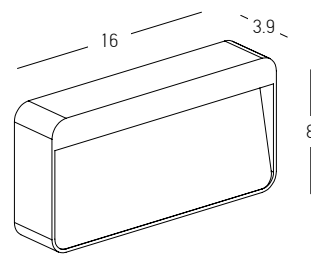


Power 6W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 200Lm  
 Cri 80  
 IP 65  
 Dimensions L: 3.9cm W: 16cm H: 8cm  
 Material Aluminium - Glass  
 Color Brown / **Code E442**

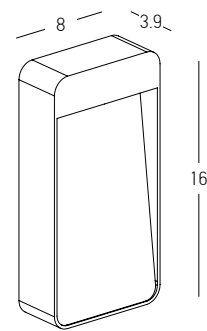


Power 6W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 200Lm  
 Cri 80  
 IP 65  
 Dimensions L: 3.9cm W: 8cm H: 16cm  
 Material Aluminium - Glass  
 Color Brown / **Code E441**

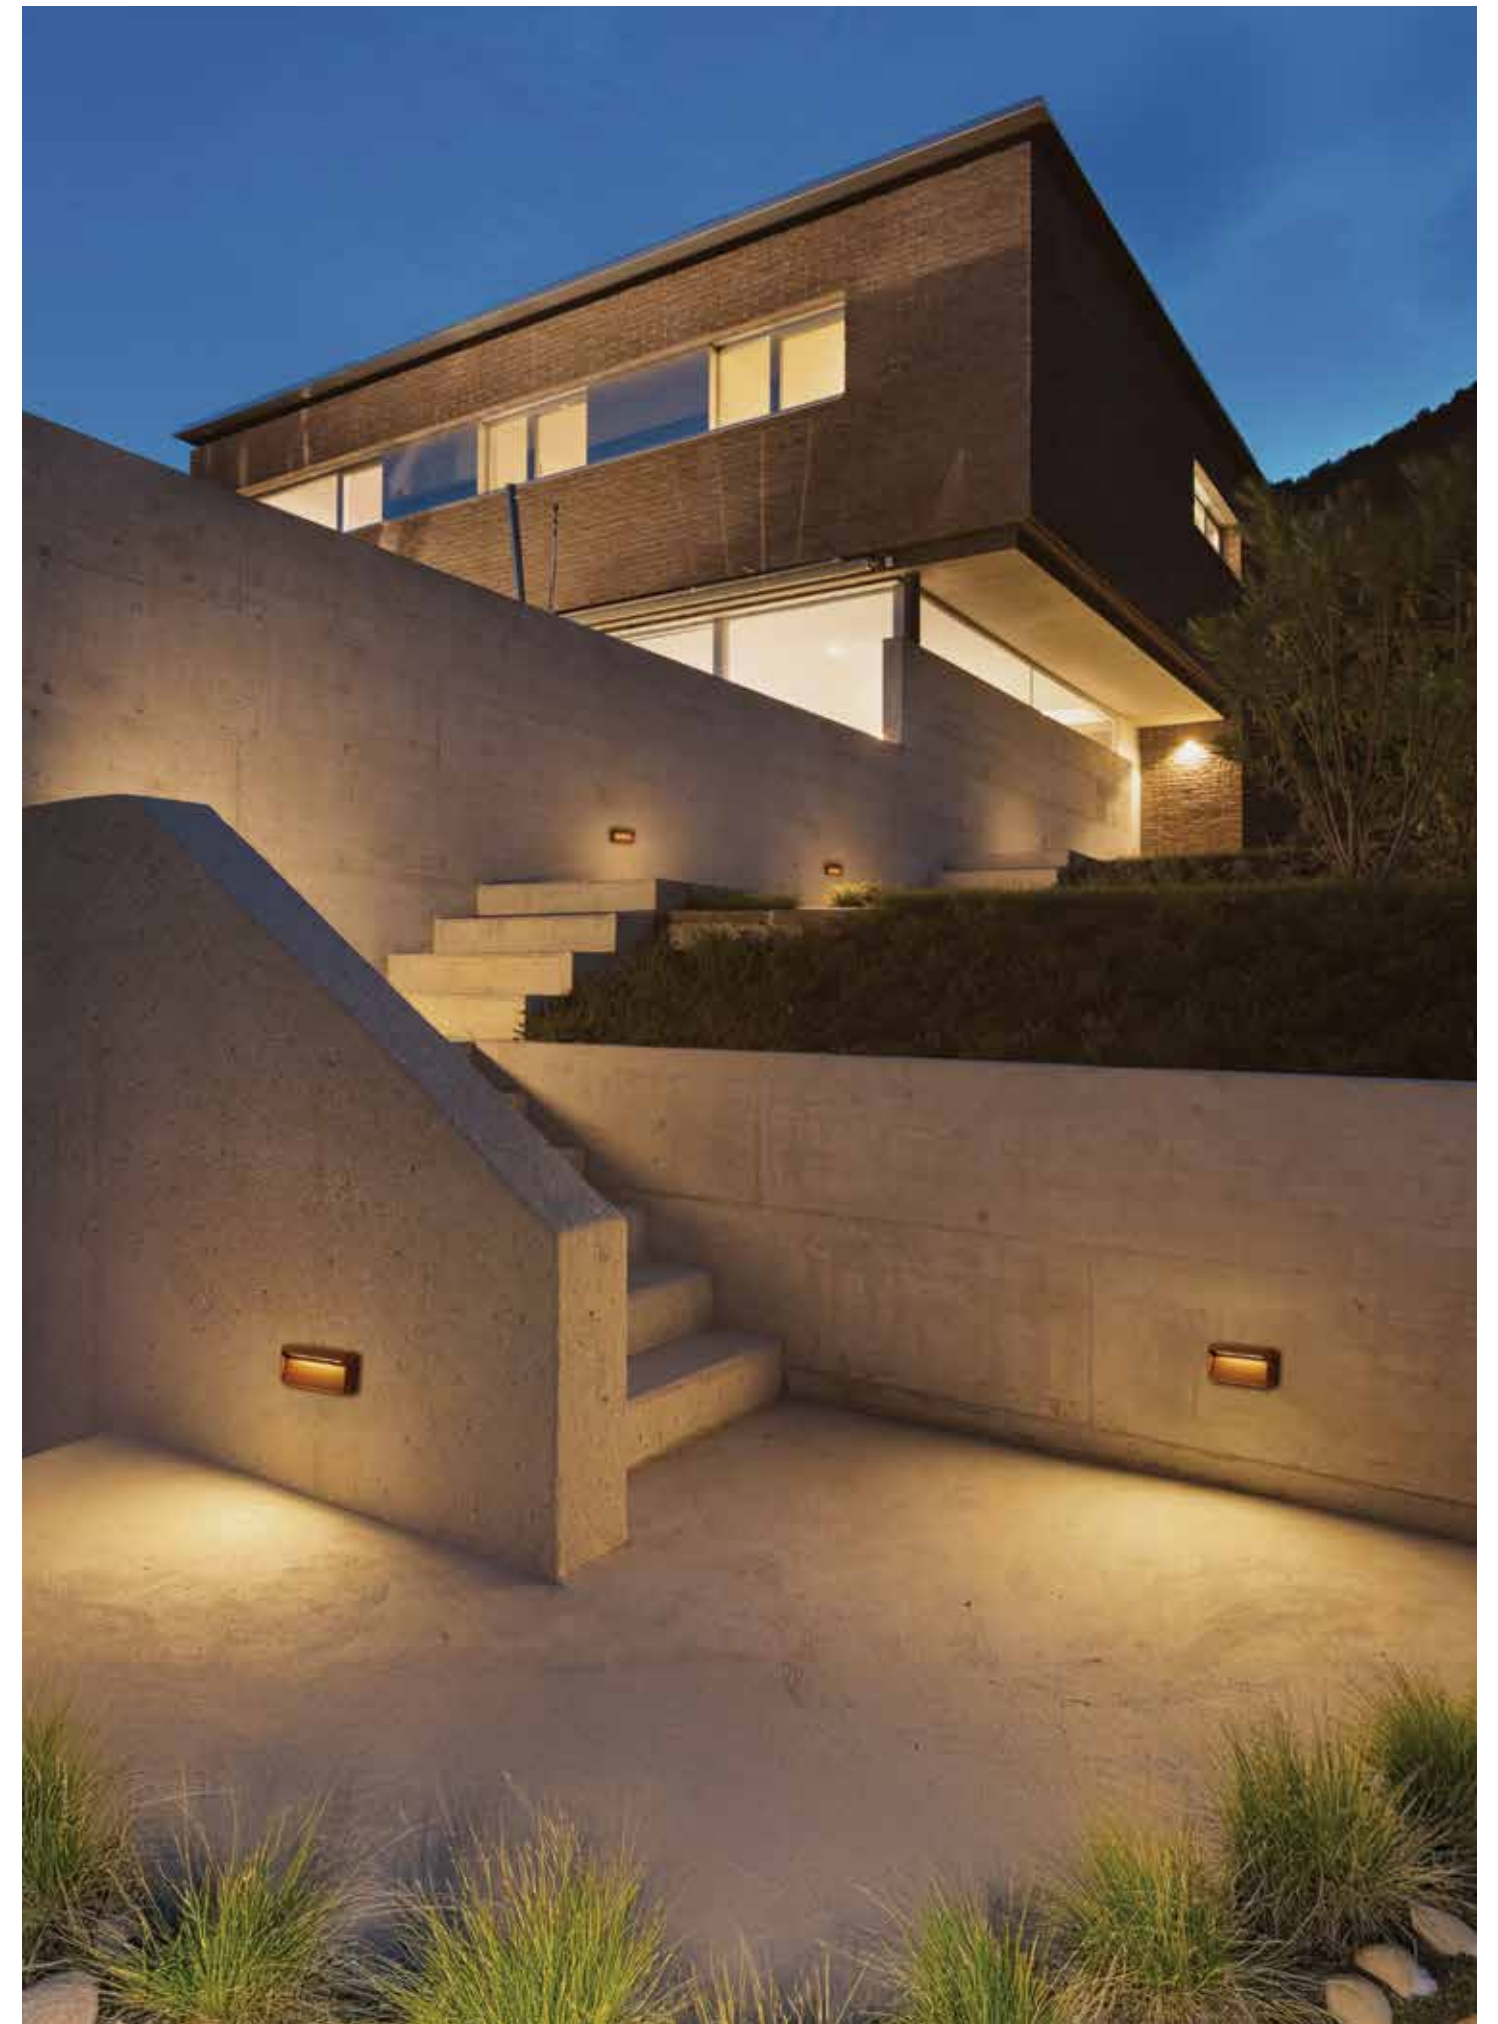

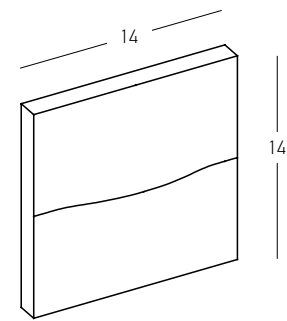


Power 3W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 185Lm  
 Cri 80  
 IP 65  
 Dimensions L: 2.6cm W: 14cm H: 14cm  
 Material Aluminium - PC Diffuser  
 Color Graphite / **Code E450**  
 Color Sandy White / **Code E451**  
 Color Brown / **Code E452**



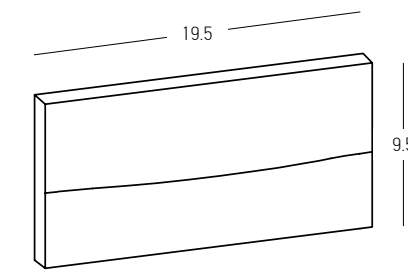


Power	4W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	285Lm
Cri	80
IP	65
Dimensions	L: 1.5cm W: 19.5cm H: 9.5cm
Material	Aluminium - PC Diffuser
Color	Graphite / <b>Code E453</b>
Color	Sandy White / <b>Code E454</b>
Color	Brown / <b>Code E455</b>



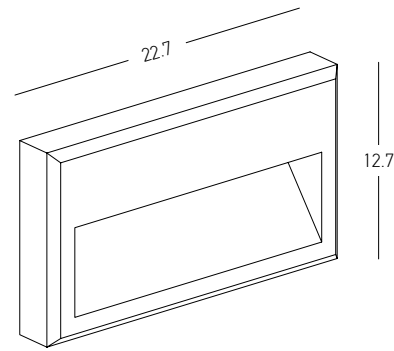


Power 6W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 420Lm  
 Cri 80  
 IP 65  
 Dimensions L: 3.5cm W: 22.7cm H: 12.7cm  
 Material Aluminium - Tempered Glass  
 Color Graphite / **Code E347**


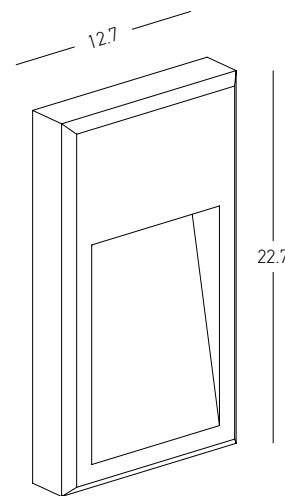


Power 6W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 420Lm  
 Cri 80  
 IP 65  
 Dimensions L: 3.5cm W: 12.7cm H: 22.7cm  
 Material Aluminium - Tempered Glass  
 Color Graphite / **Code E346**



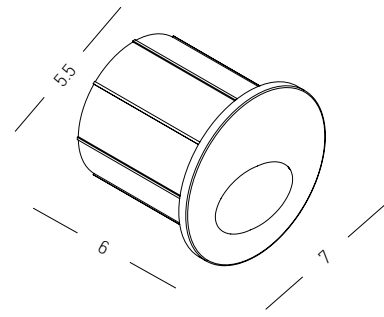


Power 3W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 133Lm  
 Cri 90  
 IP 65  
 Dimensions Ø: 7cm L: 6.5cm  
 Material Aluminium - Tempered Glass  
 Depth Required 5.5 : 6cm  
 Recessed Mounting Box Ø: 5.5cm L: 6cm (Included)  
 Color Sandy White / **Code E320**

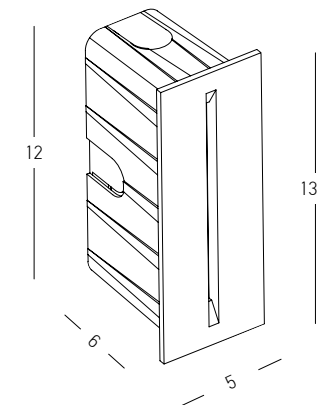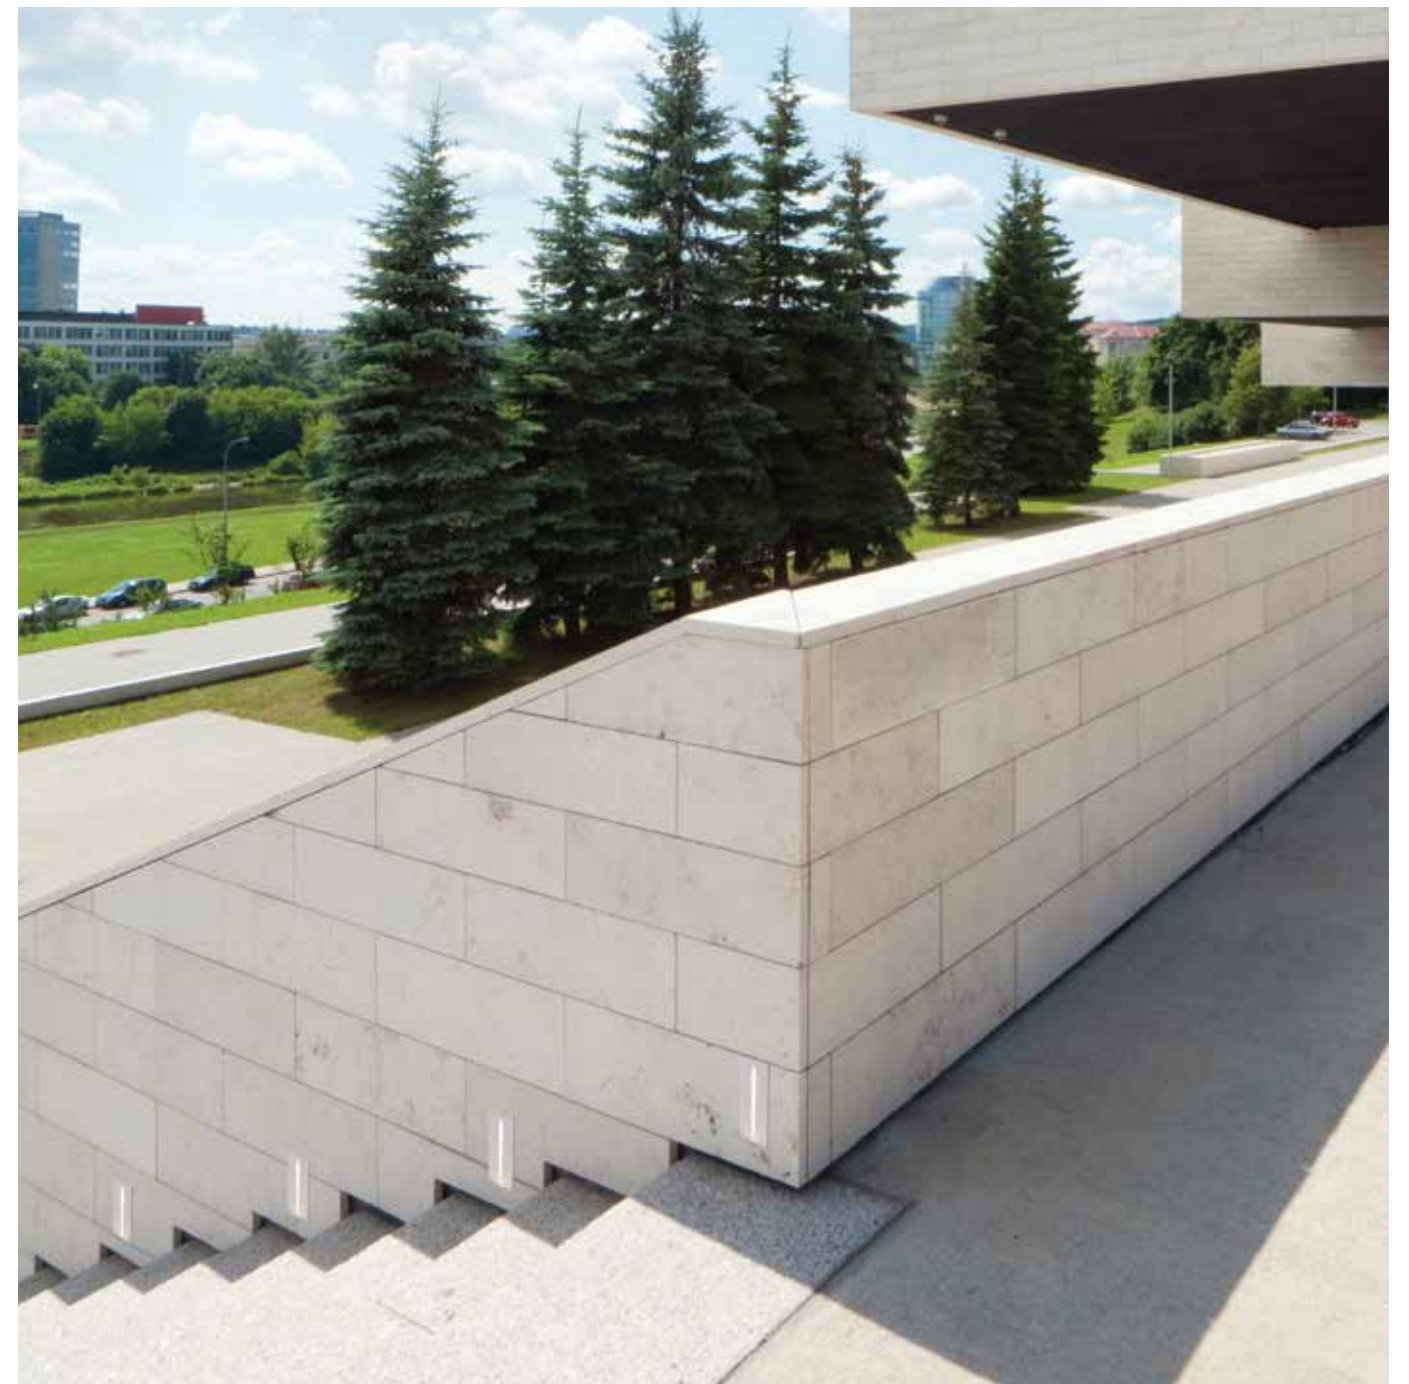


Power 3W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 92Lm  
 Cri 90  
 IP 65  
 Dimensions L: 6.5cm W: 5cm H: 13.5cm  
 Material Aluminium - Tempered Glass  
 Depth Required 5.5 : 6cm  
 Recessed Mounting Box L: 6cm W: 4.3cm H: 12.6cm (Included)  
 Color Sandy White / **Code E322**



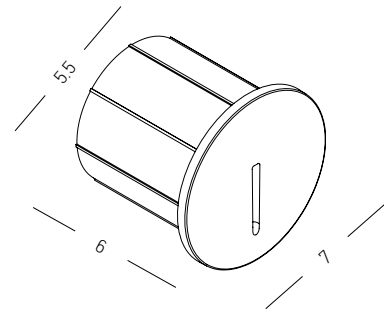


Power 3W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 92Lm  
 Cri 90  
 IP 65  
 Dimensions Ø: 7cm L: 6.5cm  
 Material Aluminium - Tempered Glass  
 Depth Required 6cm  
 Recessed Mounting Box Ø: 5.5cm L: 6cm (Included)  
 Color Sandy White / **Code E321**




Power 3W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 133Lm  
 Cri 90  
 IP 65  
 Dimensions L: 7.5cm W: 7cm H: 7cm  
 Material Aluminium - Tempered Glass  
 Depth Required 7cm  
 Recessed Mounting Box Ø: 5.5cm L: 7cm (Included)  
 Color Sandy White / **Code E319**




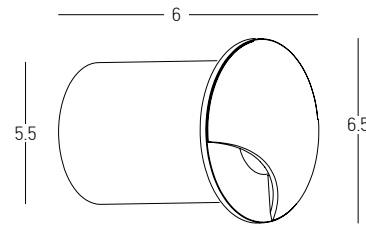


Power 3W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 230Lm  
 Cri 90  
 IP 65  
 Dimensions Ø: 6.5cm L: 6cm  
 Material Aluminium - PC Diffuser  
 Depth Required 6cm  
 Recessed Mounting Box Ø: 5.5cm L: 6cm (Included)  
 Color Sandy Black / **Code E300**

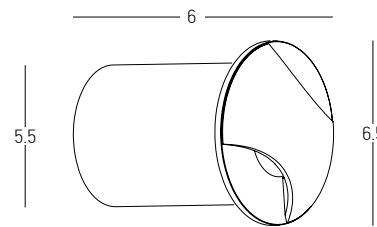


Power 3W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 290Lm  
 Cri 90  
 IP 65  
 Dimensions Ø: 6.5cm L: 6cm  
 Material Aluminium - PC Diffuser  
 Depth Required 6cm  
 Recessed Mounting Box Ø: 5.5cm L: 6cm (Included)  
 Color Sandy Black / **Code E301**

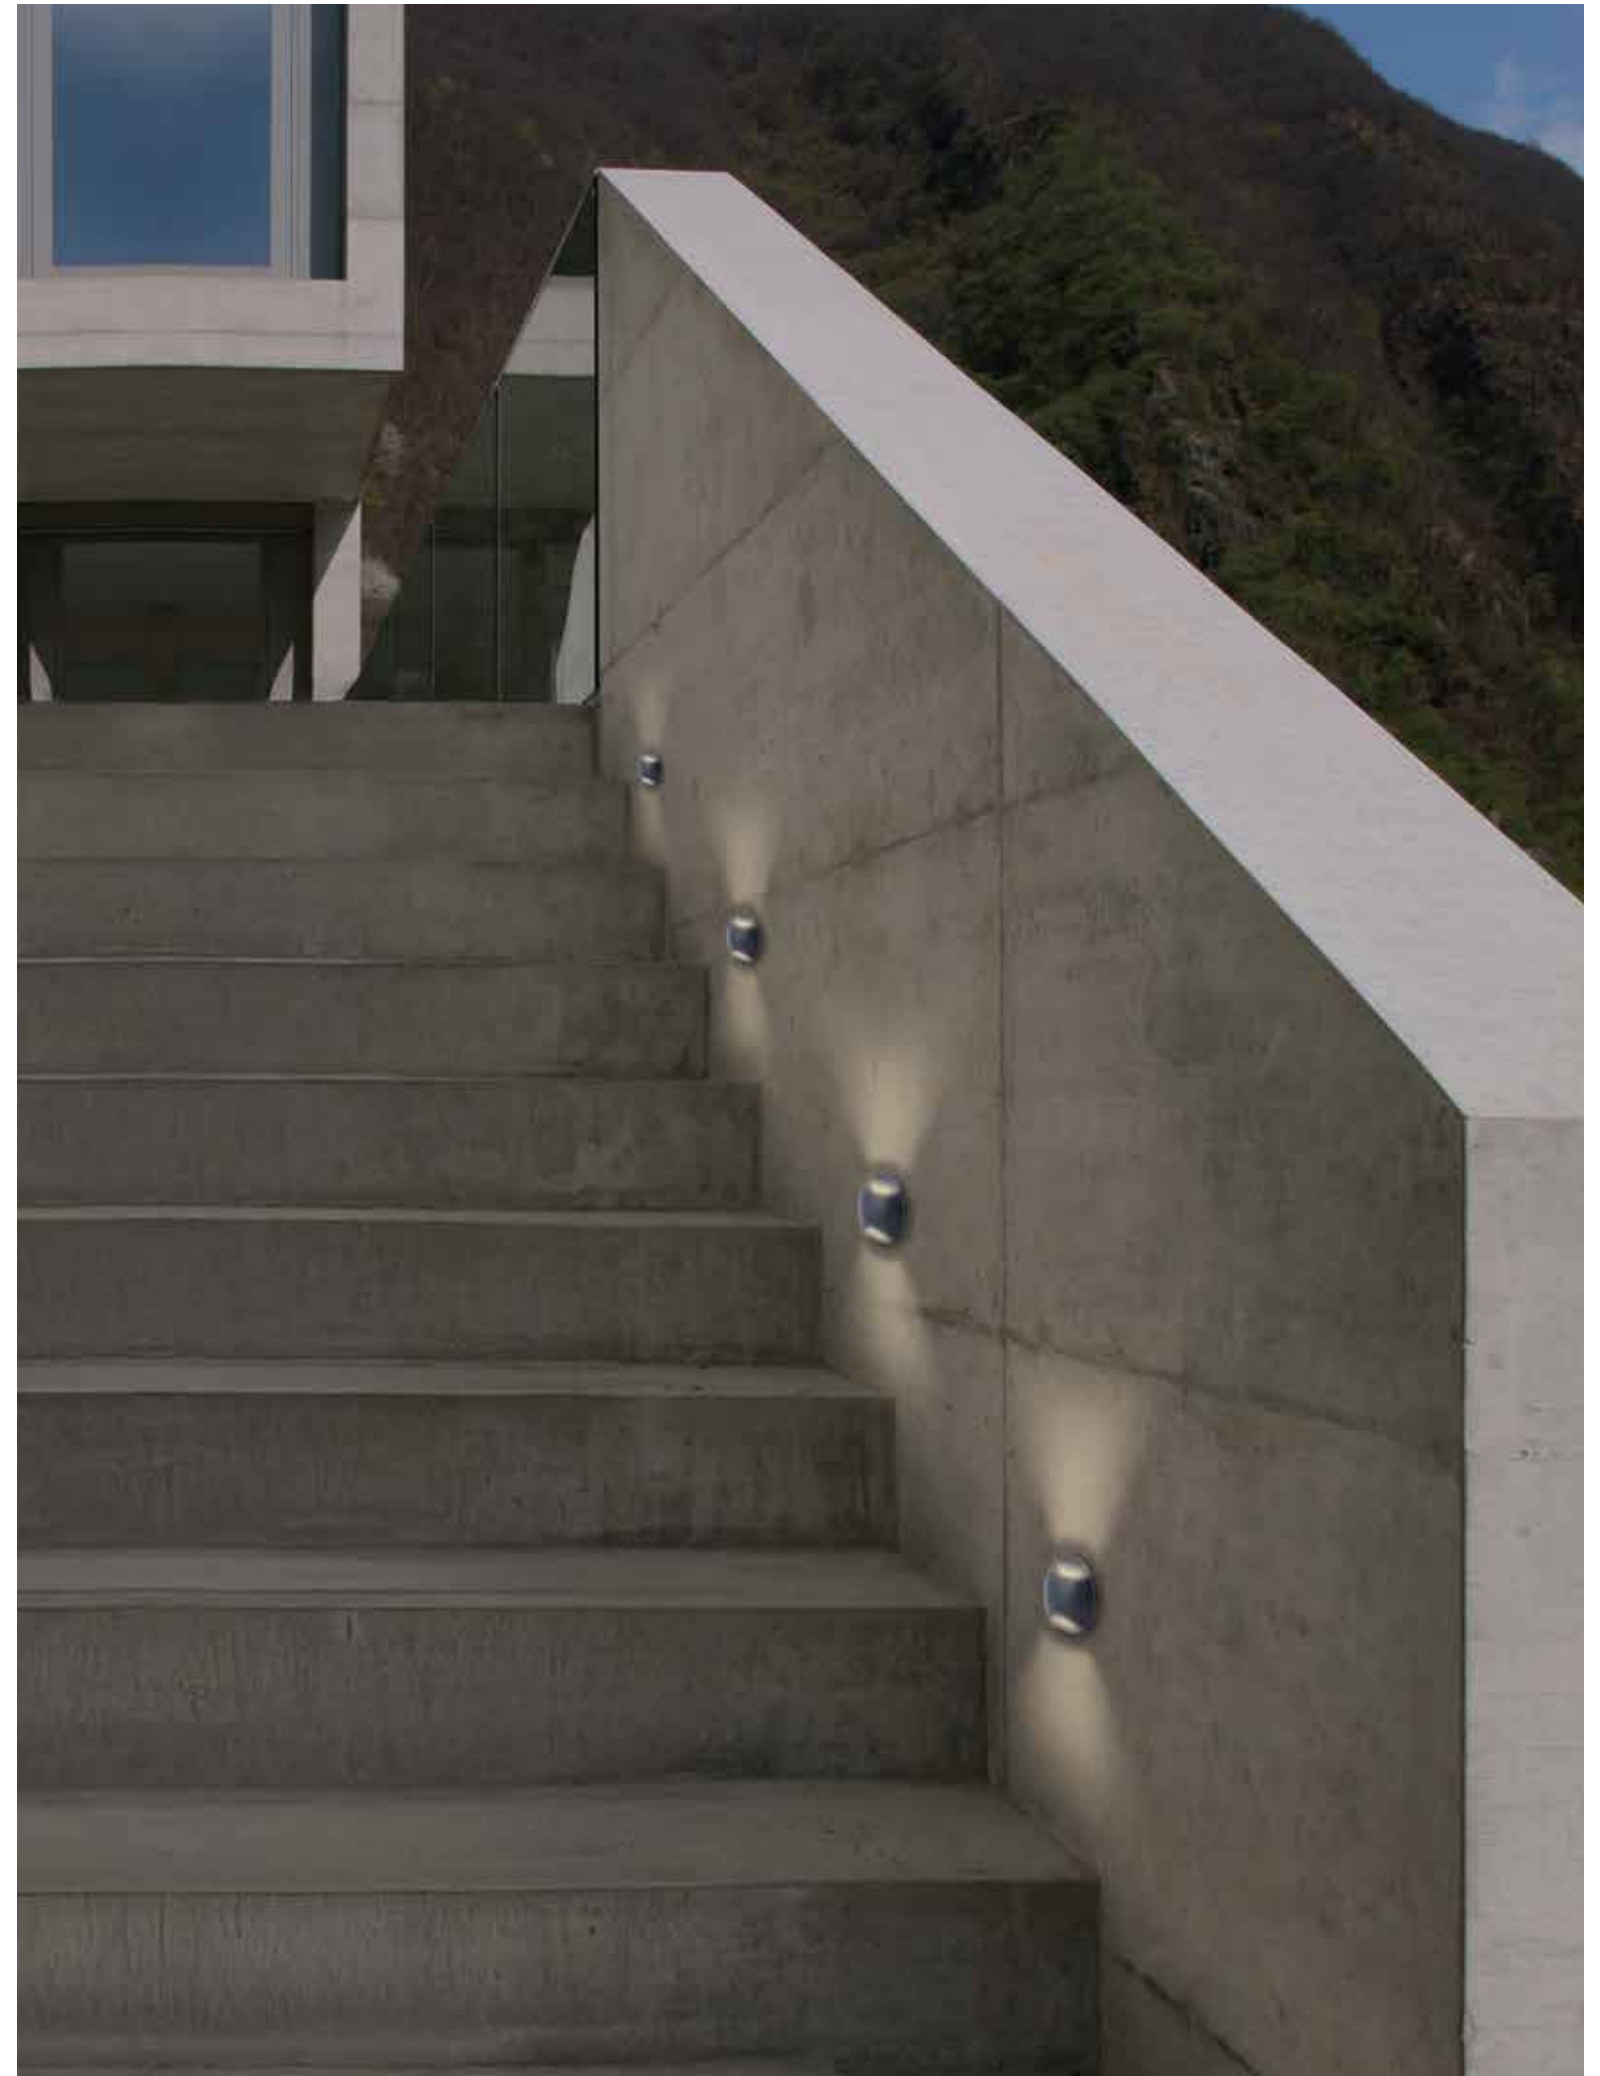

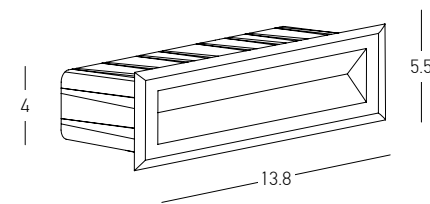


Power 5W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 302Lm  
 Cri 80  
 IP 65  
 Dimensions L: 6.5cm W: 13.8cm H: 5.5cm  
 Material Aluminium - Tempered Glass  
 Depth Required 6cm  
 Recessed Mounting Box L: 6cm W: 13cm H: 4cm (Included)  
 Color Graphite / **Code E324**

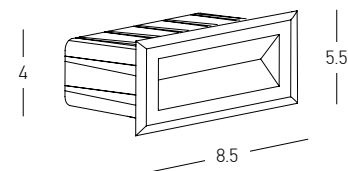

Power 3W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 195Lm  
 Cri 80  
 IP 65  
 Dimensions L: 6.5cm W: 8.5cm H: 5.5cm  
 Material Aluminium - Tempered Glass  
 Depth Required 6cm  
 Recessed Mounting Box L: 6cm W: 8cm H: 4cm (Included)


Color Graphite / **Code E323**



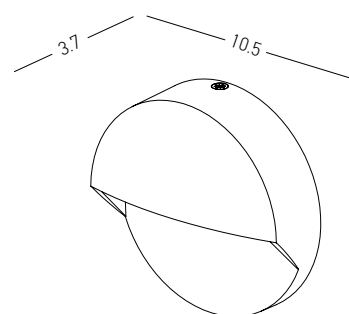


Power 2W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 190Lm  
Cri 80  
IP 65  
Dimensions Ø: 10.5cm L: 3.7cm  
Material Aluminium - PC Diffuser  
Color Graphite / **Code E294**



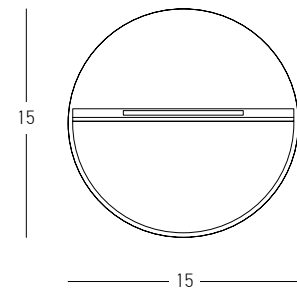



Power 7W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 480Lm  
 Cri 80  
 IP 65  
 Dimensions Ø: 15cm L: 3.7cm  
 Material Aluminium - PC Diffuser  
 Color Graphite / **Code E242-G**  
 Color Sandy White / **Code E242-W**

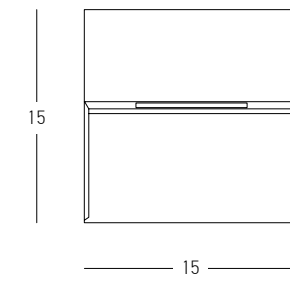



Power 7W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 480Lm  
 Cri 80  
 IP 65  
 Dimensions L: 3.7cm W: 15cm H: 15cm  
 Material Aluminium - PC Diffuser  
 Color Graphite / **Code E241-G**  
 Color Sandy White / **Code E241-W**



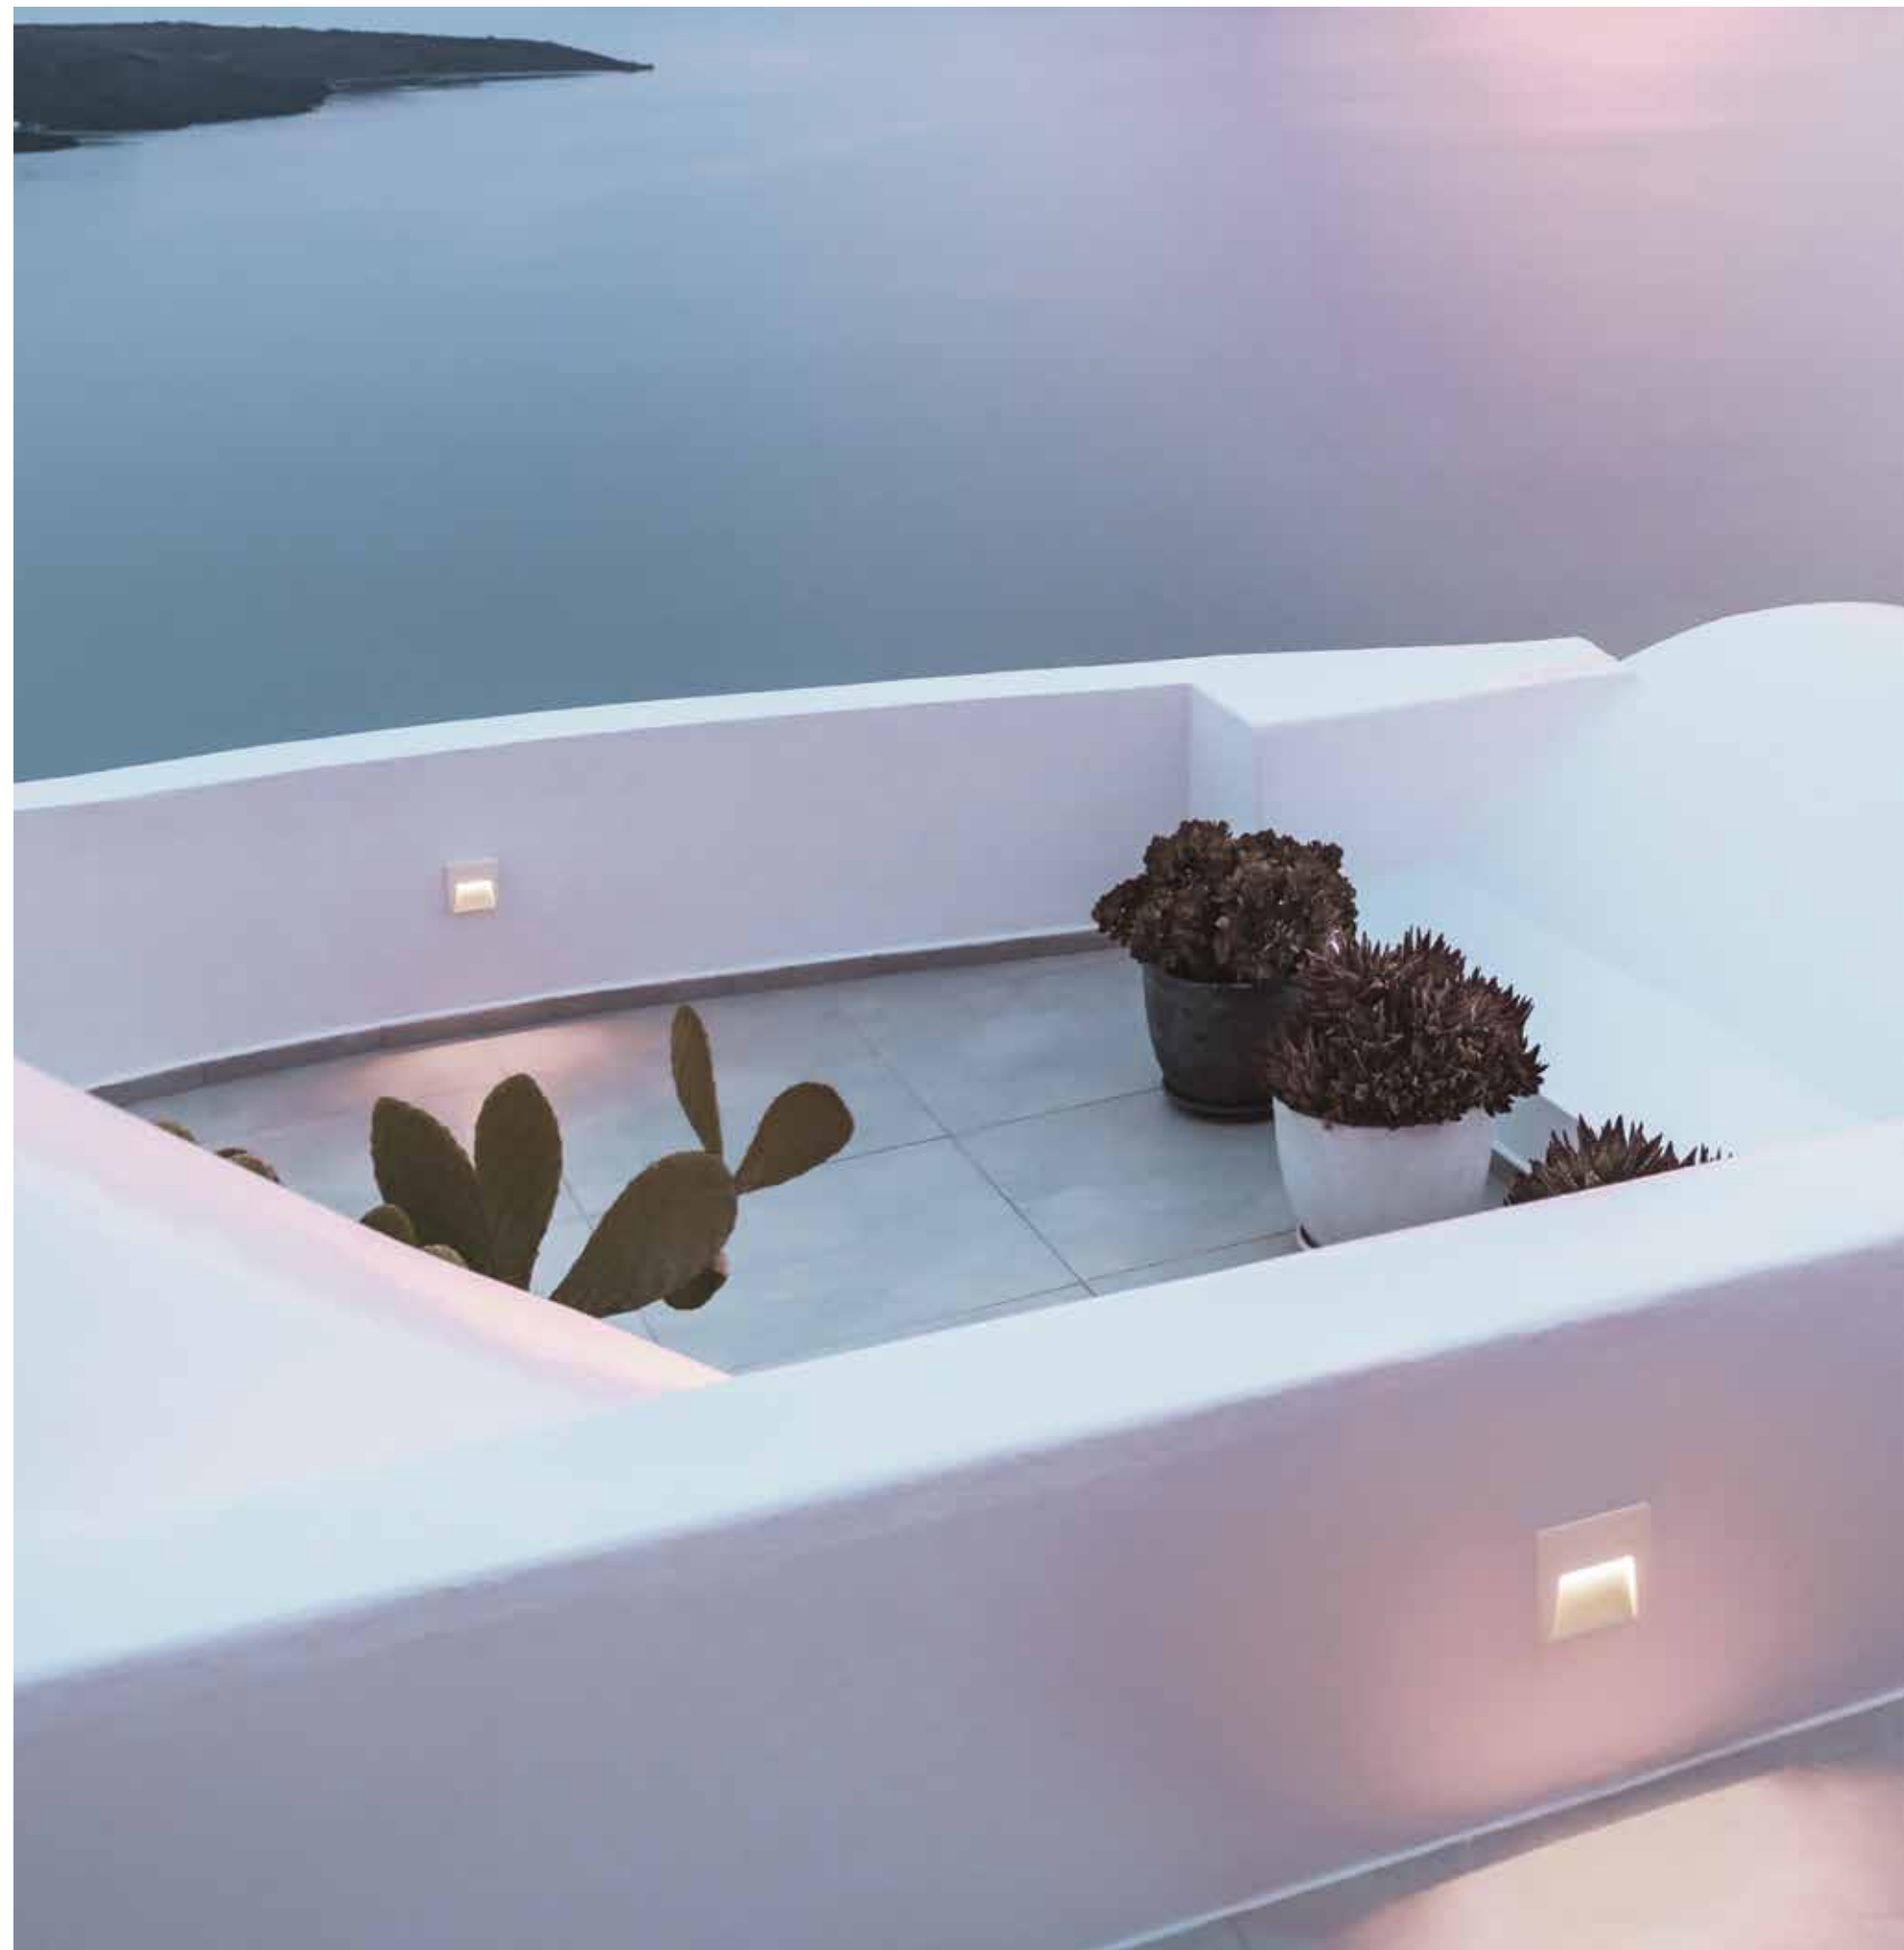


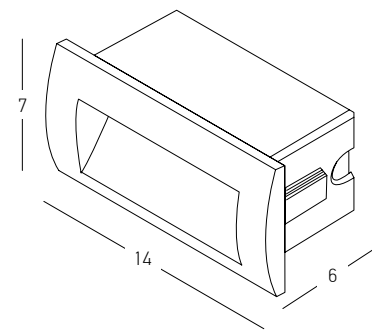


Power 4W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 188Lm  
 Cri 80  
 IP 65  
 Dimensions L: 6cm W: 14cm H: 7cm  
 Depth Required 6cm  
 Material Aluminium - PC Diffuser  
 Recessed Mounting Box L: 6cm W: 13cm H: 6cm (Included)  
 Color Graphite / **Code E247-G**  
 Color Sandy White / **Code E247-W**

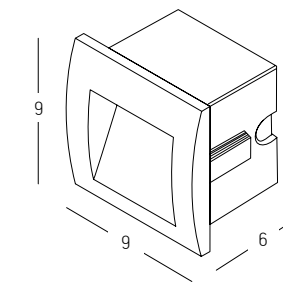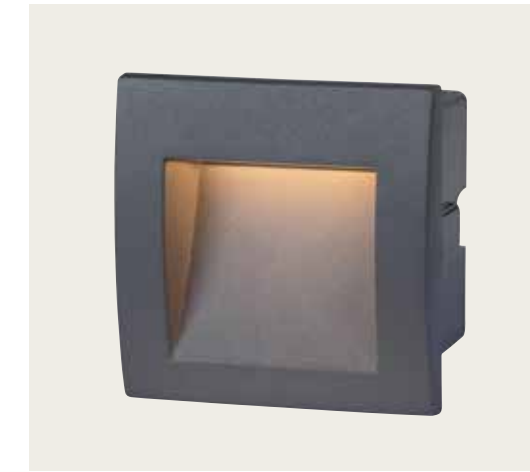


Power 2W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 65Lm  
 Cri 80  
 IP 65  
 Dimensions L: 6cm W: 9cm H: 9cm  
 Depth Required 6cm  
 Material Aluminium - PC Diffuser  
 Recessed Mounting Box L: 6cm W: 6cm H: 8cm (Included)  
 Color Graphite / **Code E246-G**  
 Color Sandy White / **Code E246-W**



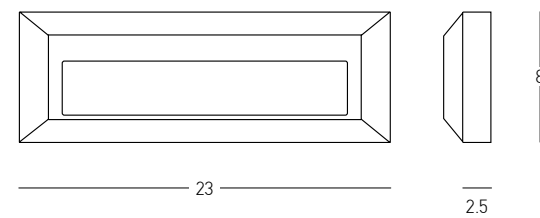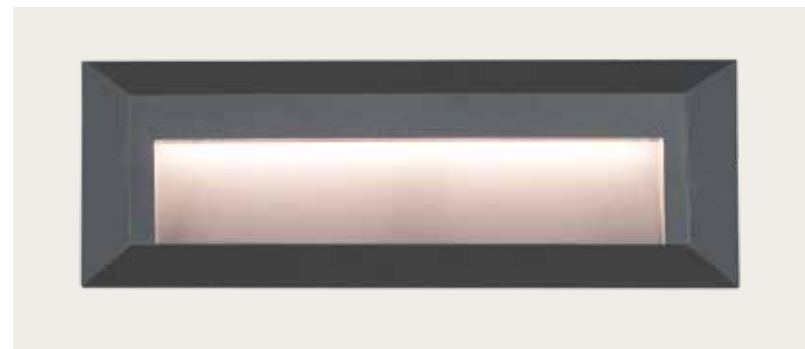


Power 3W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 132Lm  
 Cri 80  
 IP 65  
 Dimensions L: 2.5cm W: 23cm H: 8cm  
 Material ABS  
 Color Graphite / **Code E229**

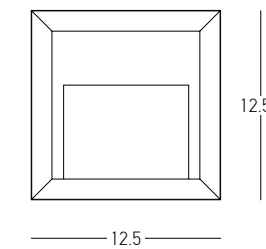


Power 2W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 69Lm  
 Cri 80  
 IP 65  
 Dimensions L: 2.5cm W: 12.5cm H: 12.5cm  
 Material ABS  
 Color Graphite / **Code E230**



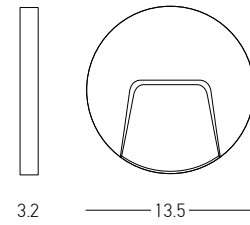


Power 3W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 92Lm  
 Cri 80  
 IP 54  
 Dimensions Ø: 13.5cm L: 3.2cm  
 Material ABS  
 Color Graphite / **Code E183**  
 Color White / **Code E184**

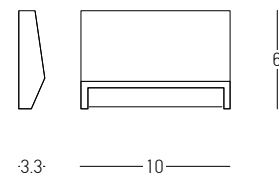

Power 2W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 88Lm  
 Cri 80  
 IP 54  
 Dimensions L: 3.3cm W: 10cm H: 6cm  
 Material ABS  
 Color Graphite / **Code E181**  
 Color White / **Code E182**



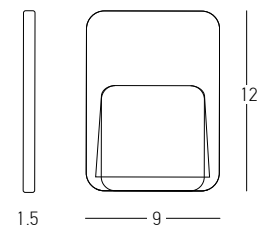



Power 1.5W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 90Lm  
Cri 80  
IP 65  
Dimensions L: 1.5cm W: 9cm H: 12cm  
Material ABS - PC Diffuser  
Color White / Code E187



IP-Rated Ceiling Lighting  
All-weather performance.




07. CEILING

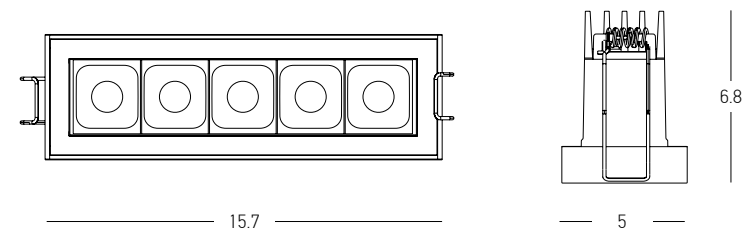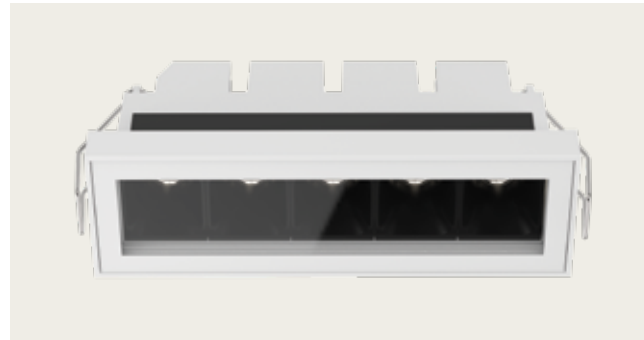


Power 12W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 757Lm  
 Cri 90  
 IP 65  
 Dimensions L: 15.7cm W: 5cm H: 6.8cm  
 Cutting Hole 14.2 x 3.5cm  
 Beam Angle 40°  
 Non Dimmable   
 Material Stainless Steel - Aluminium - Tempered Glass  
 Depth Required  $\Uparrow$ : 6cm  
 Driver Included  
 Color Sandy Black / **Code E332**  
 Color Sandy White / **Code E333**






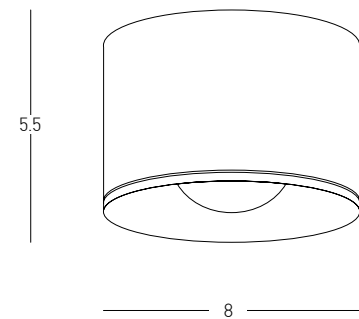

Power 12W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 561Lm  
 Cri 90  
 IP 54  
 Dimensions Ø: 8cm H: 5.5cm  
 Beam Angle 120°  
 Material Aluminium  
 Color Sandy Black / **Code S131**  
 Color Sandy White / **Code S132**

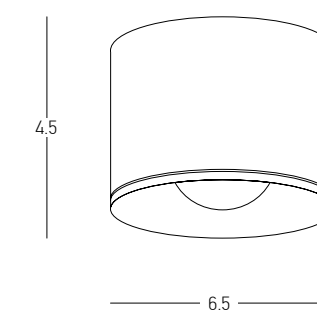


Power 8W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 454Lm  
 Cri 80  
 IP 54  
 Dimensions Ø: 6.5cm H: 4.5cm  
 Beam Angle 120°  
 Material Aluminium  
 Color Sandy Black / **Code S133**  
 Color Sandy White / **Code S134**

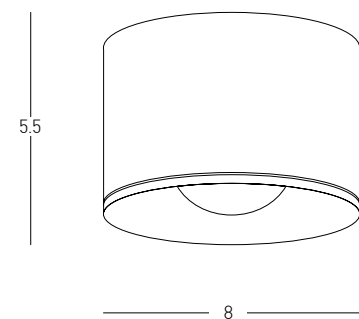


Power 12W  
 Input 220-240V, 50/60Hz  
 Color Temperature 4000K  
 Lumen 593Lm  
 Cri 90  
 IP 54  
 Dimensions Ø: 8cm H: 5.5cm  
 Beam Angle 120°  
 Material Aluminium  
 Color Sandy Black / **Code S131-4K**  
 Color Sandy White / **Code S132-4K**



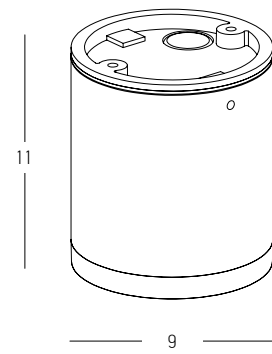


Power 8W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 597Lm  
 Cri 80  
 IP 65  
 Dimensions Ø: 9cm H: 11cm  
 Beam Angle 120°  
 Material Aluminium - Tempered Glass  
 Color Graphite / **Code E340**

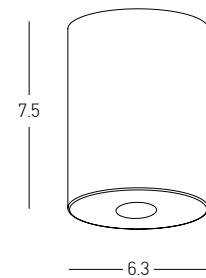


Power 6W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 500Lm  
 Cri 90  
 IP 54  
 Dimensions Ø: 6.3cm H: 7.5cm  
 Beam Angle 20°  
 Material Aluminium - Glass  
 Special Feature Driver Included  
 Color Sandy Black / **Code S112**  
 Color Sandy White / **Code S113**




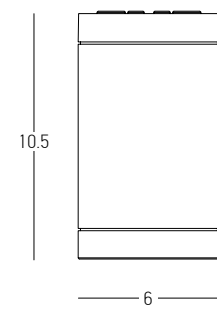


Bulb 1x GU10 LED  
 Power 7W MAX  
 Input 220-240V, 50/60Hz  
 IP 54  
 Dimensions Ø: 6cm H: 10.5cm  
 Material Aluminium - Glass Diffuser  
 Color Sandy Black / **Code E219**  
 Color Sandy White / **Code E220**

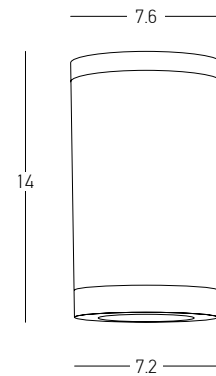



Bulb 1x GU10 LED  
 Power 7W MAX  
 Input 220-240V, 50/60Hz  
 IP 54  
 Dimensions Ø: 7.2-7.6cm H: 14cm  
 Material ABS - Acrylic  
 Color White Matt / **Code E308**  
 Color Black Matt / **Code E309**

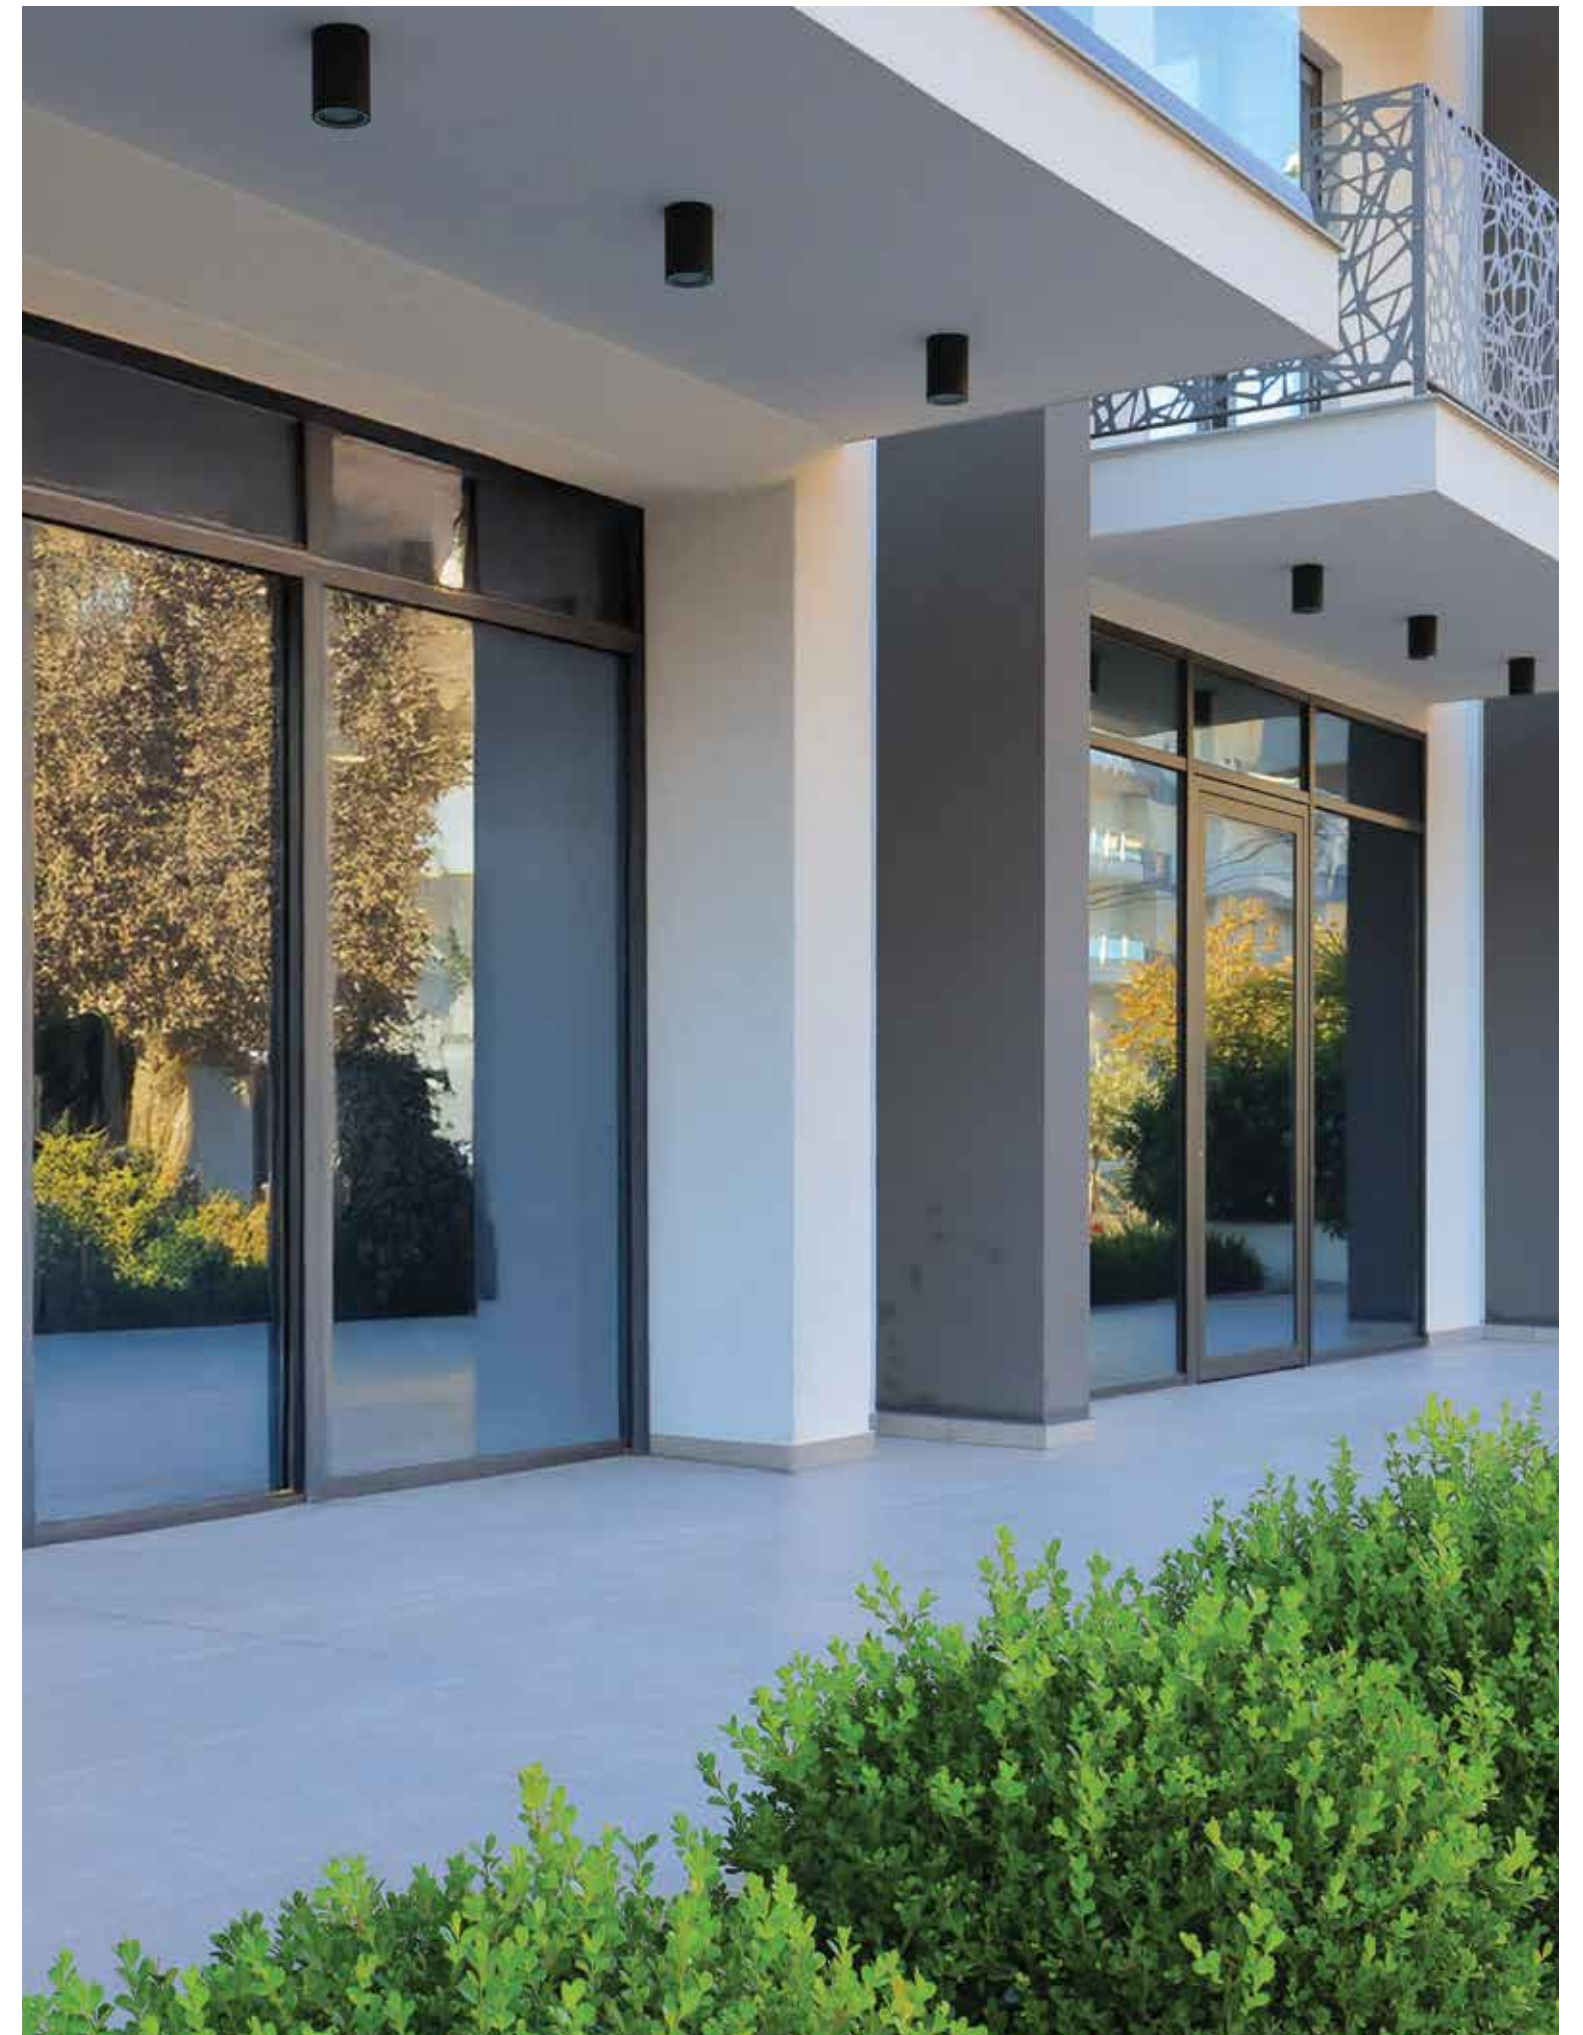

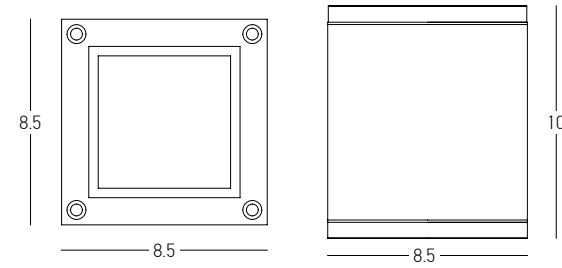


Bulb 1x GU10  
 Power 35W MAX  
 Input 220-240V, 50/60Hz  
 IP 65  
 Dimensions L: 8.5cm W: 8.5cm H: 10cm  
 Material Aluminium - Glass  
 Color Graphite / **Code E269**  
 Color Sandy White / **Code E270**

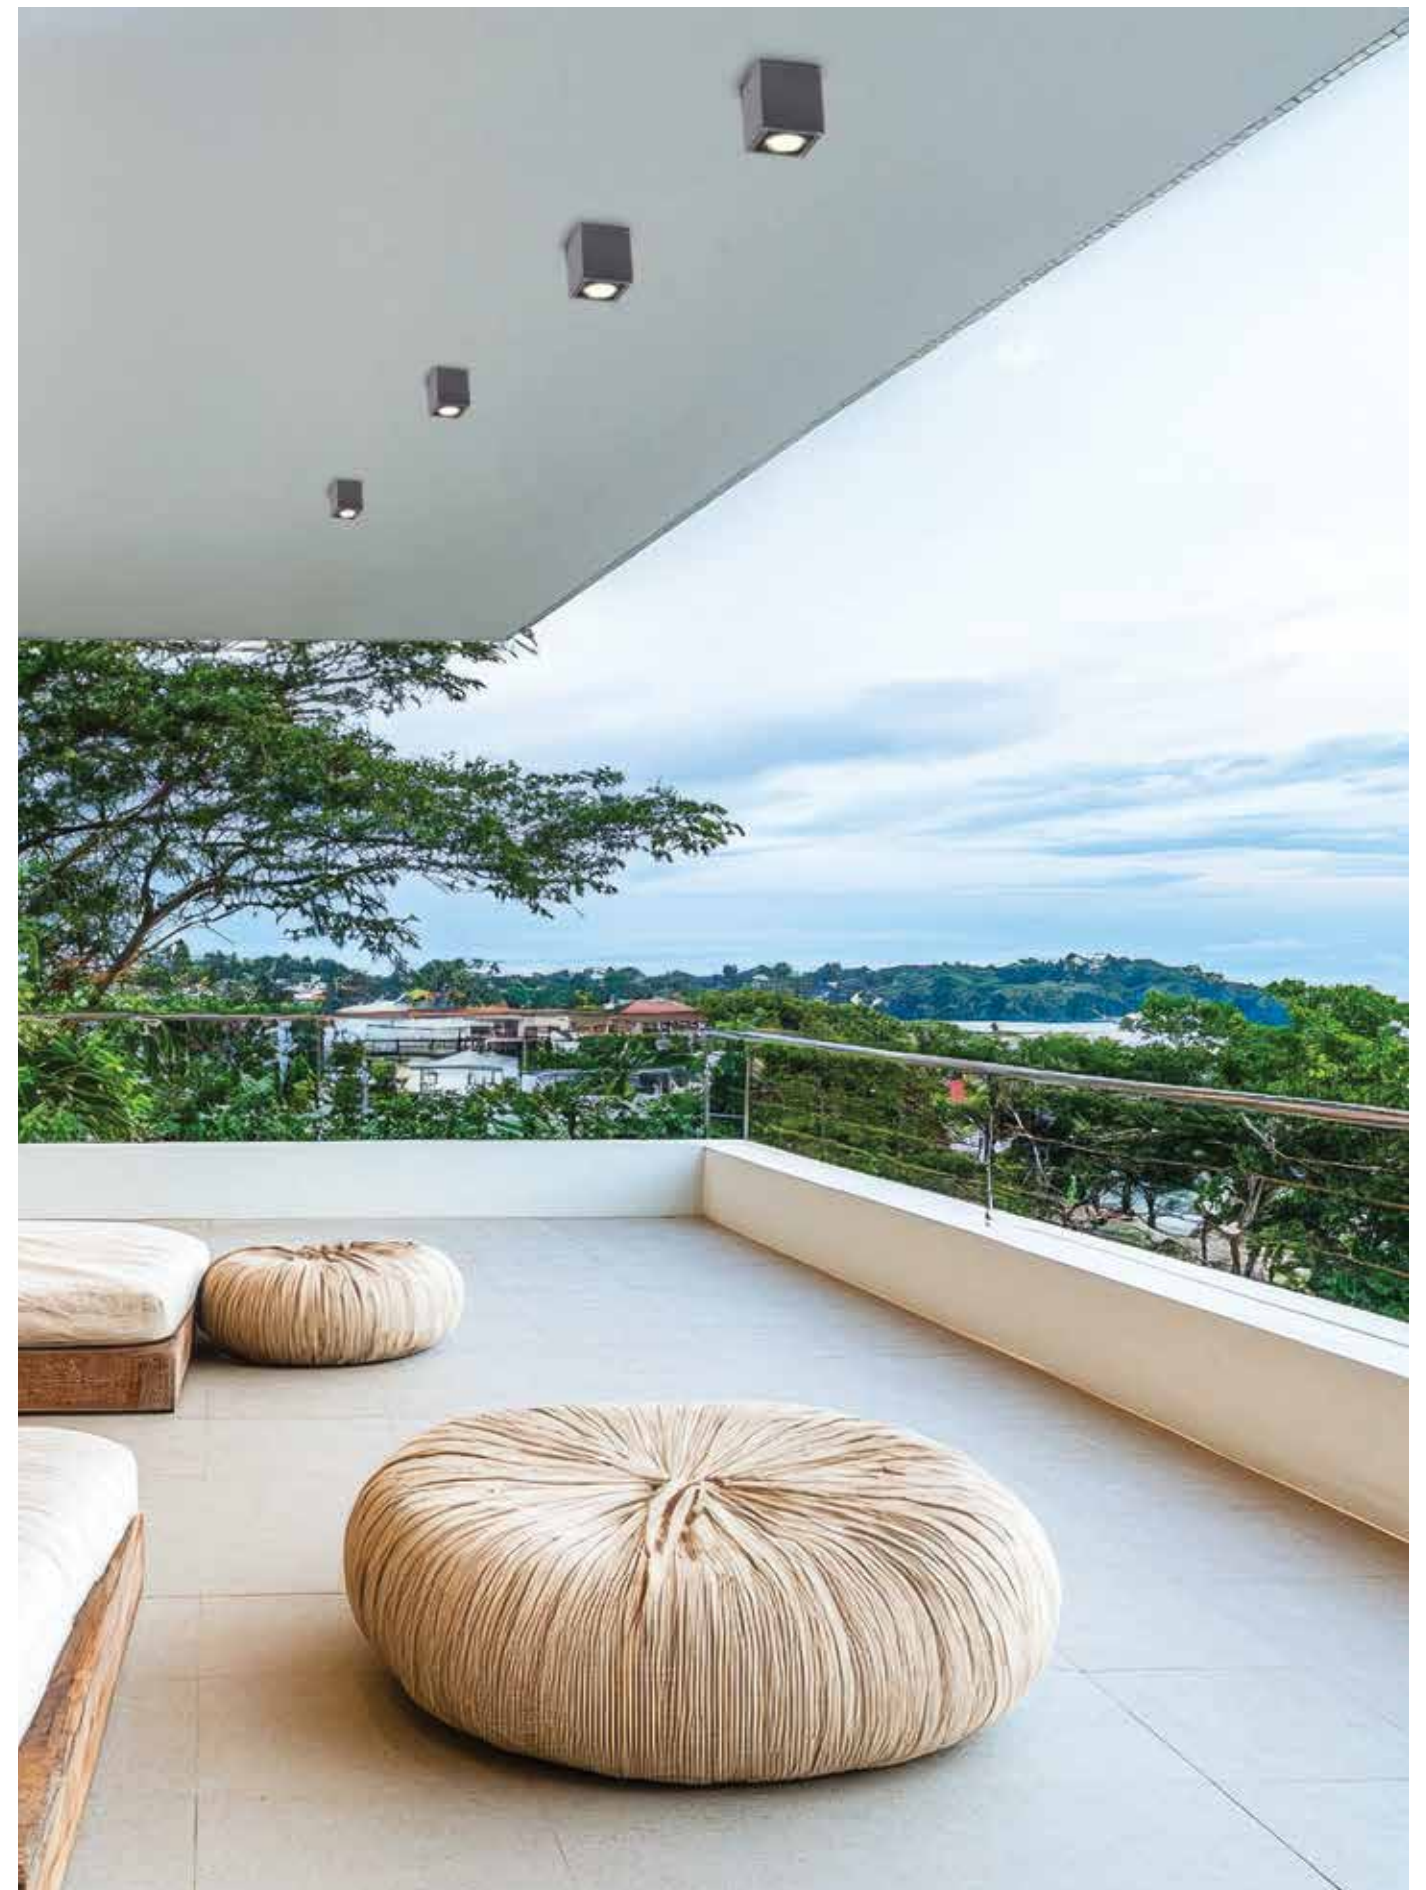

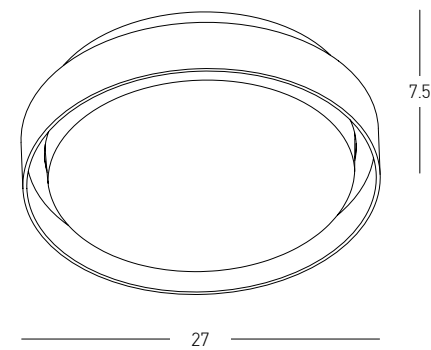

Power 20W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 2041Lm  
 Cri 80  
 IP 65  
 Dimensions Ø: 27cm H: 7.5cm  
 Material Aluminium - PC Diffuser  
 Special Feature Driver Included  
 Color Sandy White / **Code E326**  
 Color Graphite / **Code E327**

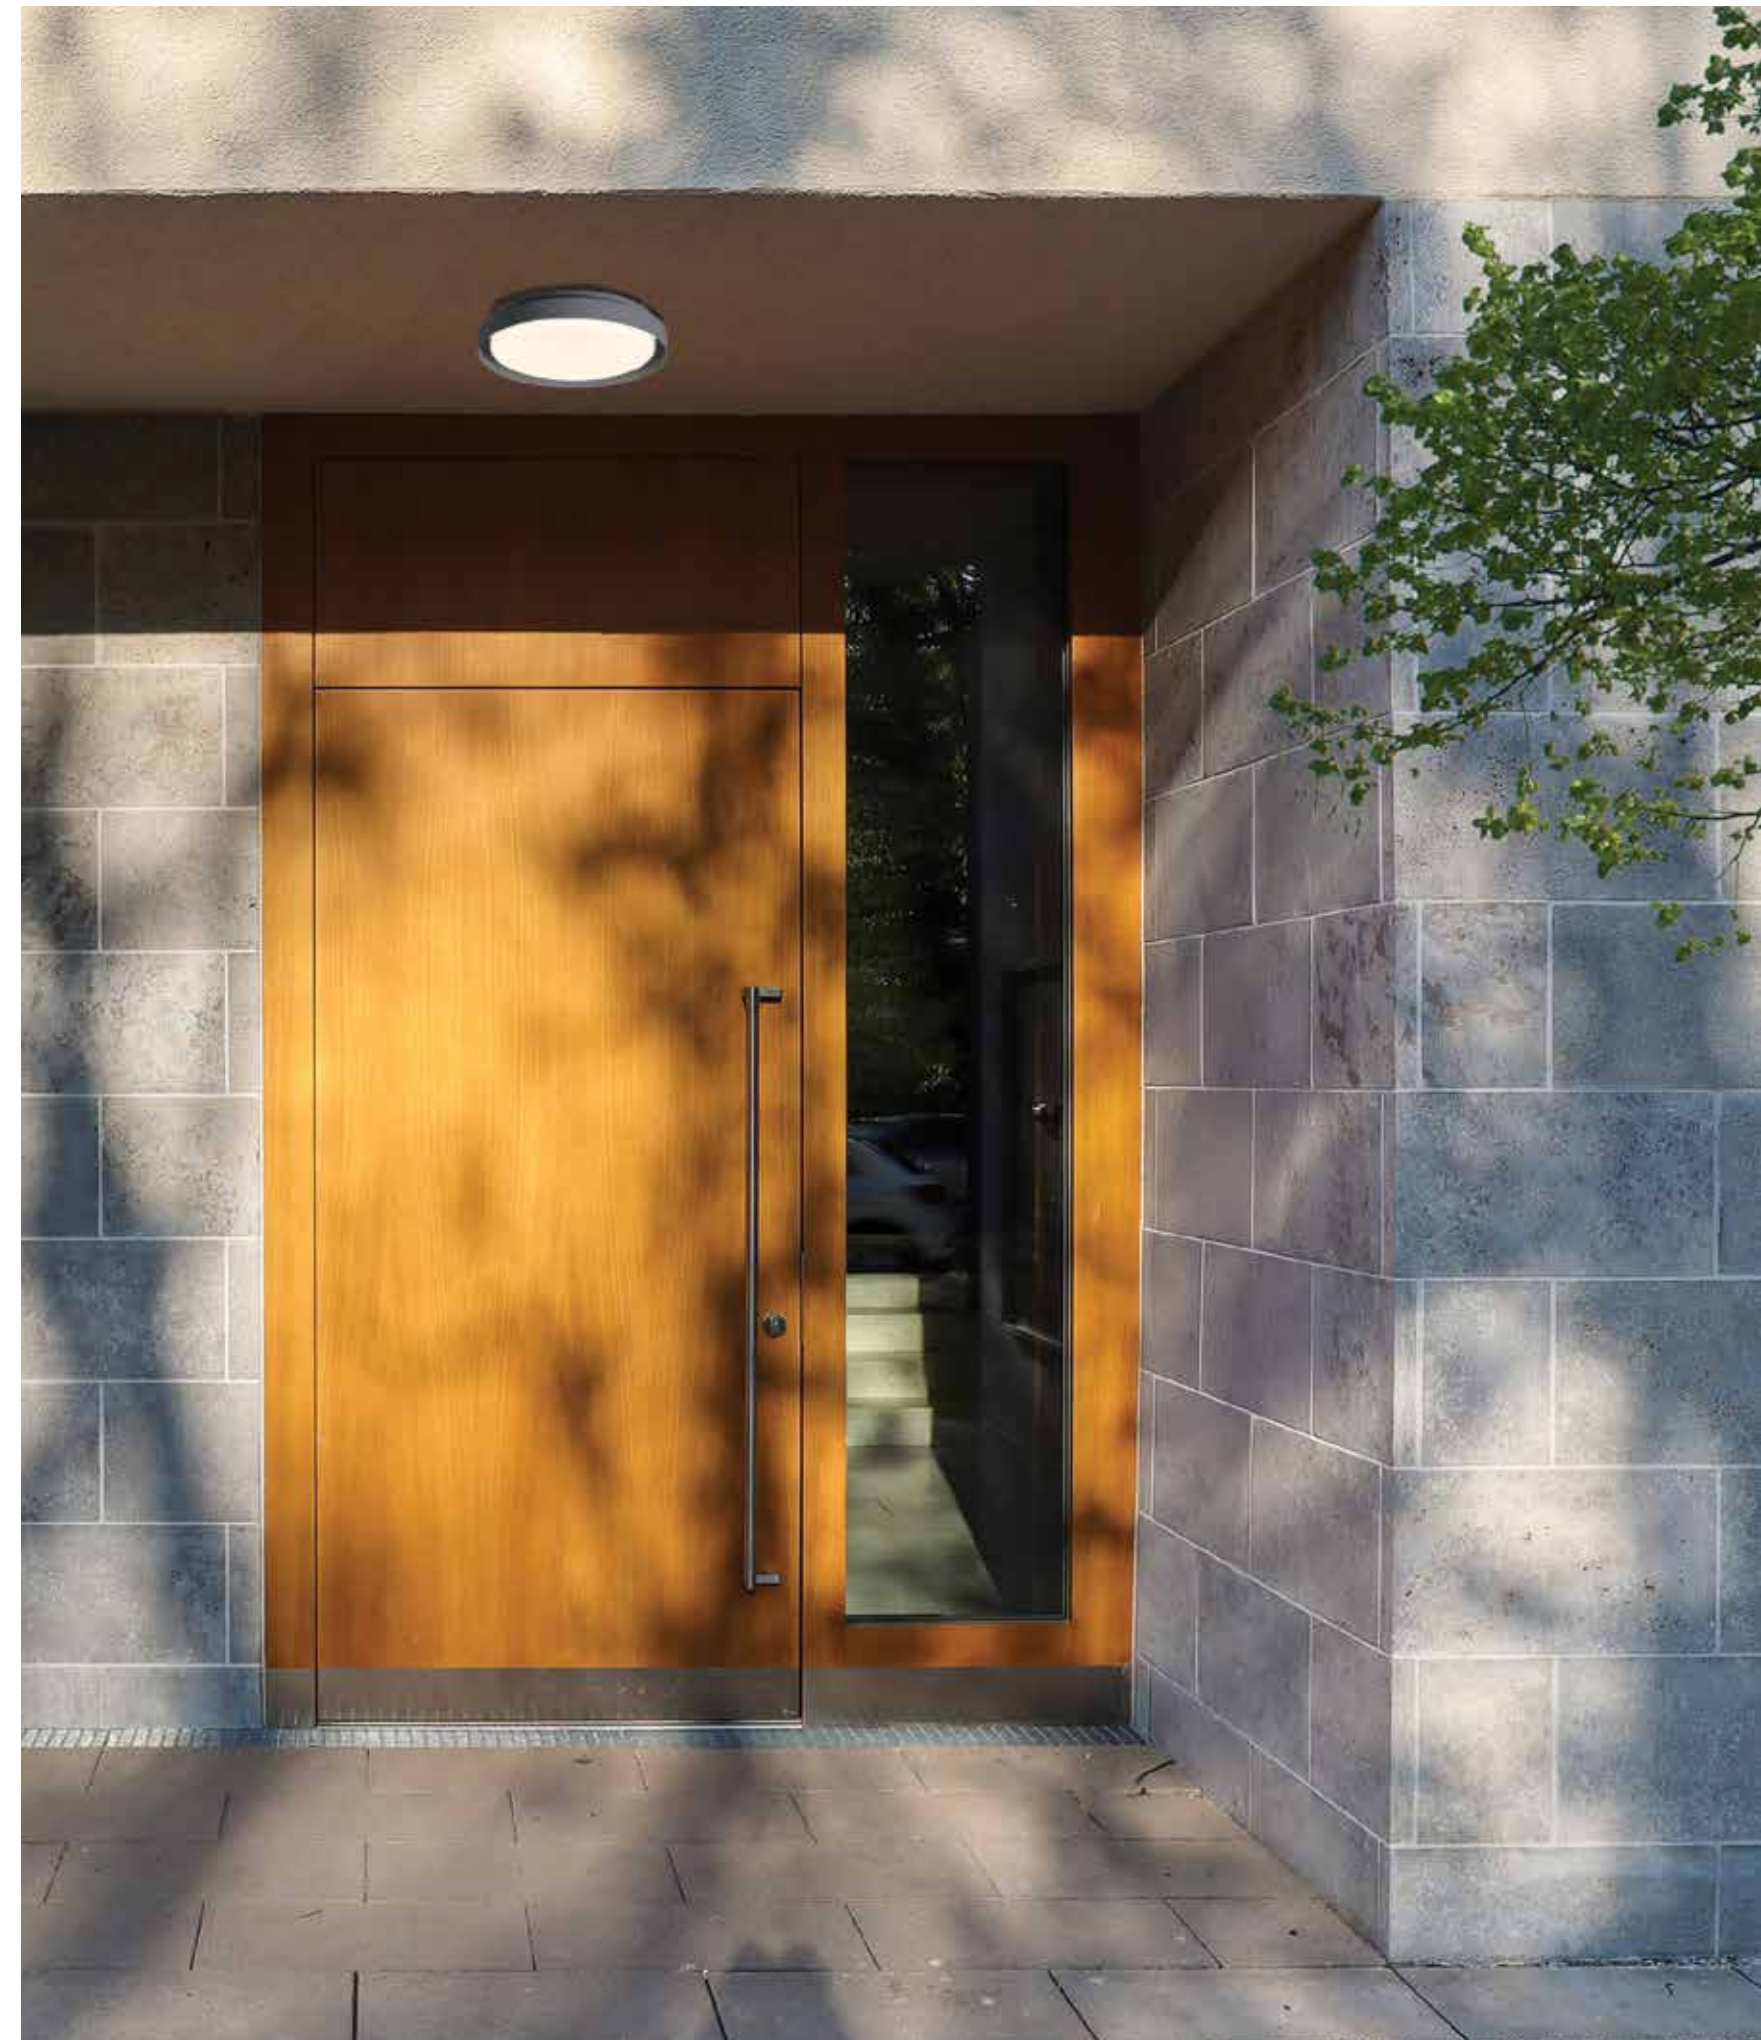


Discreet Integration  
Inground lights with focused beam control.



08. INGROUND



Power 1W  
 Input 24V  
 Color Temperature 3000K  
 Lumen 57Lm  
 Cri 80  
 IP 65  
 IK 08  
 Dimensions Ø: 3.5cm H: 5.2cm  
 Beam Angle 15°  
 Material Aluminium - Stainless Steel - Tempered Glass  
 Depth Required 7cm  
 Recessed Mounting Box Aluminium (Included)  
 Recommended Driver LPH-18-24 (Not Included)  
 In Parallel Connection 1-17 pcs  
 Special Feature Honeycomb Included  
 Color Stainless Steel / **Code E502**

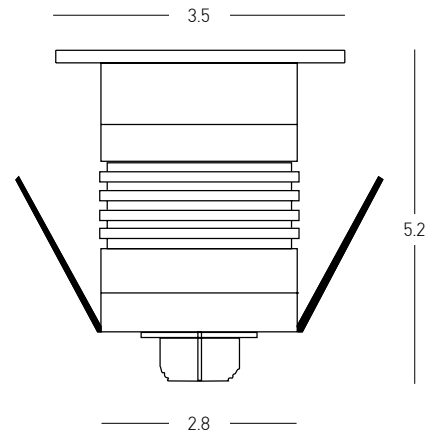

Power 1W  
 Input 24V  
 Color Temperature 2700K  
 Lumen 51Lm  
 Cri 80  
 IP 65  
 IK 08  
 Dimensions Ø: 3.5cm H: 5.2cm  
 Beam Angle 15°  
 Material Aluminium - Stainless Steel - Tempered Glass  
 Depth Required 7cm  
 Recessed Mounting Box Aluminium (Included)  
 Recommended Driver LPH-18-24 (Not Included)  
 In Parallel Connection 1-17 pcs  
 Special Feature Honeycomb Included  
 Color Stainless Steel / **Code E503**




**Driver**  
 Power 18W  
 Input 220-240V, 50/60Hz  
 Output 24V  
 Dimensions L: 14cm W: 3cm H: 2.2cm  
 IP 67






Power 3W  
 Input 24V  
 Color Temperature 3000K  
 Lumen 230Lm  
 Cri 80  
 IP 65  
 IK 08  
 Dimensions Ø: 4.5cm H: 5.6cm  
 Beam Angle 24°  
 Material Aluminium - Stainless Steel - Tempered Glass  
 Depth Required 7.5cm  
 Recessed Mounting Box Aluminium (Included)  
 Recommended Driver LPH-18-24 (Not Included)  
 In Parallel Connection 1-5 pcs  
 Special Feature Honeycomb Included  
 Color Stainless Steel / **Code E504**

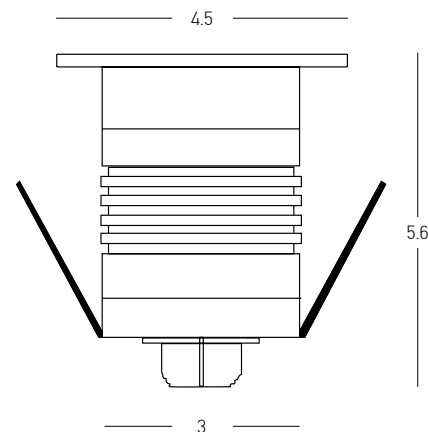

Power 3W  
 Input 24V  
 Color Temperature 3000K  
 Lumen 230Lm  
 Cri 80  
 IP 65  
 IK 08  
 Dimensions Ø: 4.5cm H: 5.6cm  
 Beam Angle 10°  
 Material Aluminium - Stainless Steel - Tempered Glass  
 Depth Required 7.5cm  
 Recessed Mounting Box Aluminium (Included)  
 Recommended Driver LPH-18-24 (Not Included)  
 In Parallel Connection 1-5 pcs  
 Special Feature Honeycomb Included  
 Color Stainless Steel / **Code E506**

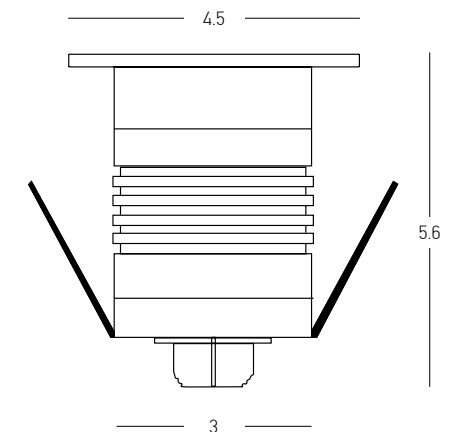

Power 3W  
 Input 24V  
 Color Temperature 2700K  
 Lumen 218Lm  
 Cri 80  
 IP 65  
 IK 08  
 Dimensions Ø: 4.5cm H: 5.6cm  
 Beam Angle 24°  
 Material Aluminium - Stainless Steel - Tempered Glass  
 Depth Required 7.5cm  
 Recessed Mounting Box Aluminium (Included)  
 Recommended Driver LPH-18-24 (Not Included)  
 In Parallel Connection 1-5 pcs  
 Special Feature Honeycomb Included  
 Color Stainless Steel / **Code E505**



**Driver LPH-18-24**  
 Power 18W  
 Input 220-240V, 50/60Hz  
 Output 24V  
 Dimensions L: 14cm W: 3cm H: 2.2cm  
 IP 67




Power 3W  
 Input 24V  
 Color Temperature 2700K  
 Lumen 218Lm  
 Cri 80  
 IP 65  
 IK 08  
 Dimensions Ø: 4.5cm H: 5.6cm  
 Beam Angle 10°  
 Material Aluminium - Stainless Steel - Tempered Glass  
 Depth Required 7.5cm  
 Recessed Mounting Box Aluminium (Included)  
 Recommended Driver LPH-18-24 (Not Included)  
 In Parallel Connection 1-5 pcs  
 Special Feature Honeycomb Included  
 Color Stainless Steel / **Code E507**




**Driver LPH-18-24**  
 Power 18W  
 Input 220-240V, 50/60Hz  
 Output 24V  
 Dimensions L: 14cm W: 3cm H: 2.2cm  
 IP 67



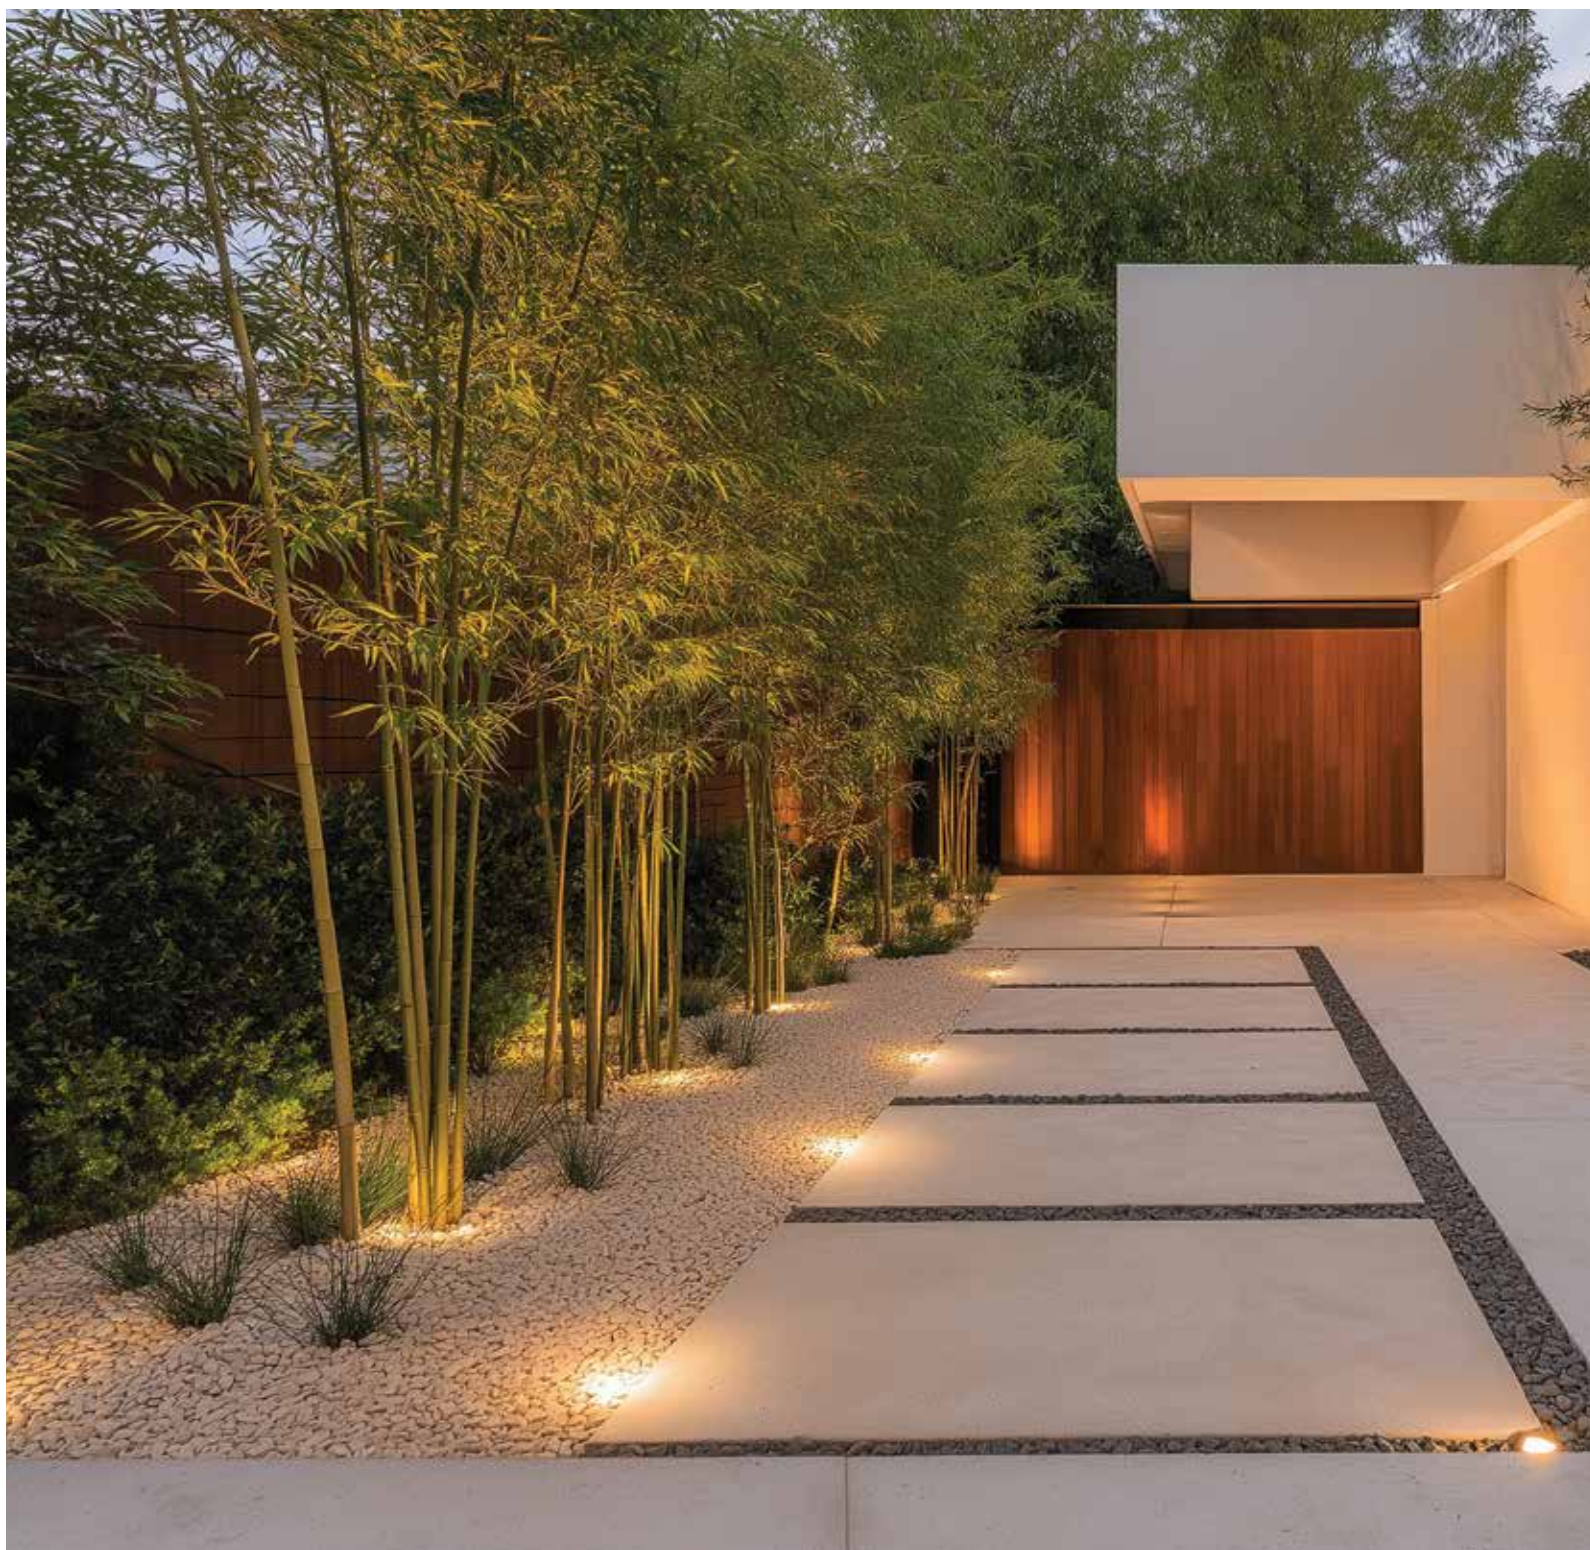

Power 5W  
 Input 24V  
 Color Temperature 3000K  
 Lumen 345Lm  
 Cri 80  
 IP 65  
 IK 08  
 Dimensions Ø: 4.5cm H: 5.6cm  
 Beam Angle 24°  
 Material Aluminium - Stainless Steel - Tempered Glass  
 Depth Required 7.5cm  
 Recessed Mounting Box Aluminium (Included)  
 Recommended Driver LPH-18-24 (Not Included)  
 In Parallel Connection 1-3 pcs  
 Honeycomb Included

Special Feature  
 Color Stainless Steel / **Code E510**

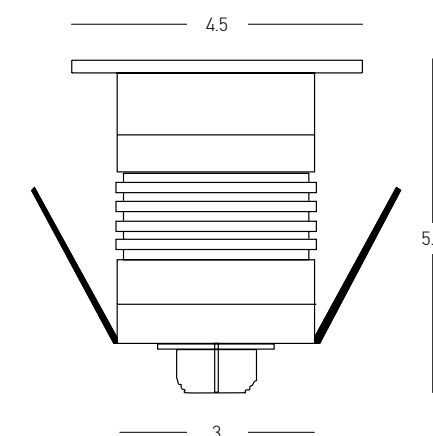

Power 5W  
 Input 24V  
 Color Temperature 2700K  
 Lumen 324Lm  
 Cri 80  
 IP 65  
 IK 08  
 Dimensions Ø: 4.5cm H: 5.2cm  
 Beam Angle 24°  
 Material Aluminium - Stainless Steel - Tempered Glass  
 Depth Required 7.5cm  
 Recessed Mounting Box Aluminium (Included)  
 Recommended Driver LPH-18-24 (Not Included)  
 In Parallel Connection 1-3 pcs  
 Honeycomb Included


Special Feature  
 Color Stainless Steel / **Code E511**



**Driver** **LPH-18-24**  
 Power 18W  
 Input 220-240V, 50/60Hz  
 Output 24V  
 Dimensions L: 14cm W: 3cm H: 2.2cm  
 IP 67




Power 3W  
 Input 24V  
 Color Temperature 3000K  
 Lumen 230Lm  
 Cri 80  
 IP 65  
 IK 08  
 Dimensions Ø: 6.5cm H: 7.5cm  
 Beam Angle 10x60°  
 Material Aluminium - Stainless Steel - Tempered Glass  
 Depth Required 11: 8cm  
 Recessed Mounting Box Aluminium (Included)  
 Recommended Driver LPH-18-24 (Not Included)  
 In Parallel Connection 1-5 pcs  
 Special Feature Honeycomb Striated Included  
 Color Stainless Steel / **Code E508**

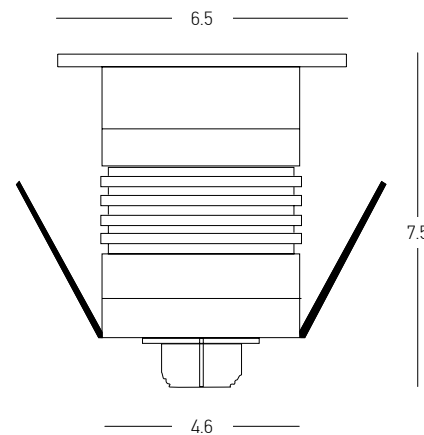


Power 3W  
 Input 24V  
 Color Temperature 2700K  
 Lumen 218Lm  
 Cri 80  
 IP 65  
 IK 08  
 Dimensions Ø: 6.5cm H: 7.5cm  
 Beam Angle 10x60°  
 Material Aluminium - Stainless Steel - Tempered Glass  
 Depth Required 11: 8cm  
 Recessed Mounting Box Aluminium (Included)  
 Recommended Driver LPH-18-24 (Not Included)  
 In Parallel Connection 1-5 pcs  
 Special Feature Honeycomb Striated Included  
 Color Stainless Steel / **Code E509**




**Driver**  
 Power 18W  
 Input 220-240V, 50/60Hz  
 Output 24V  
 Dimensions L: 14cm W: 3cm H: 2.2cm  
 IP 67

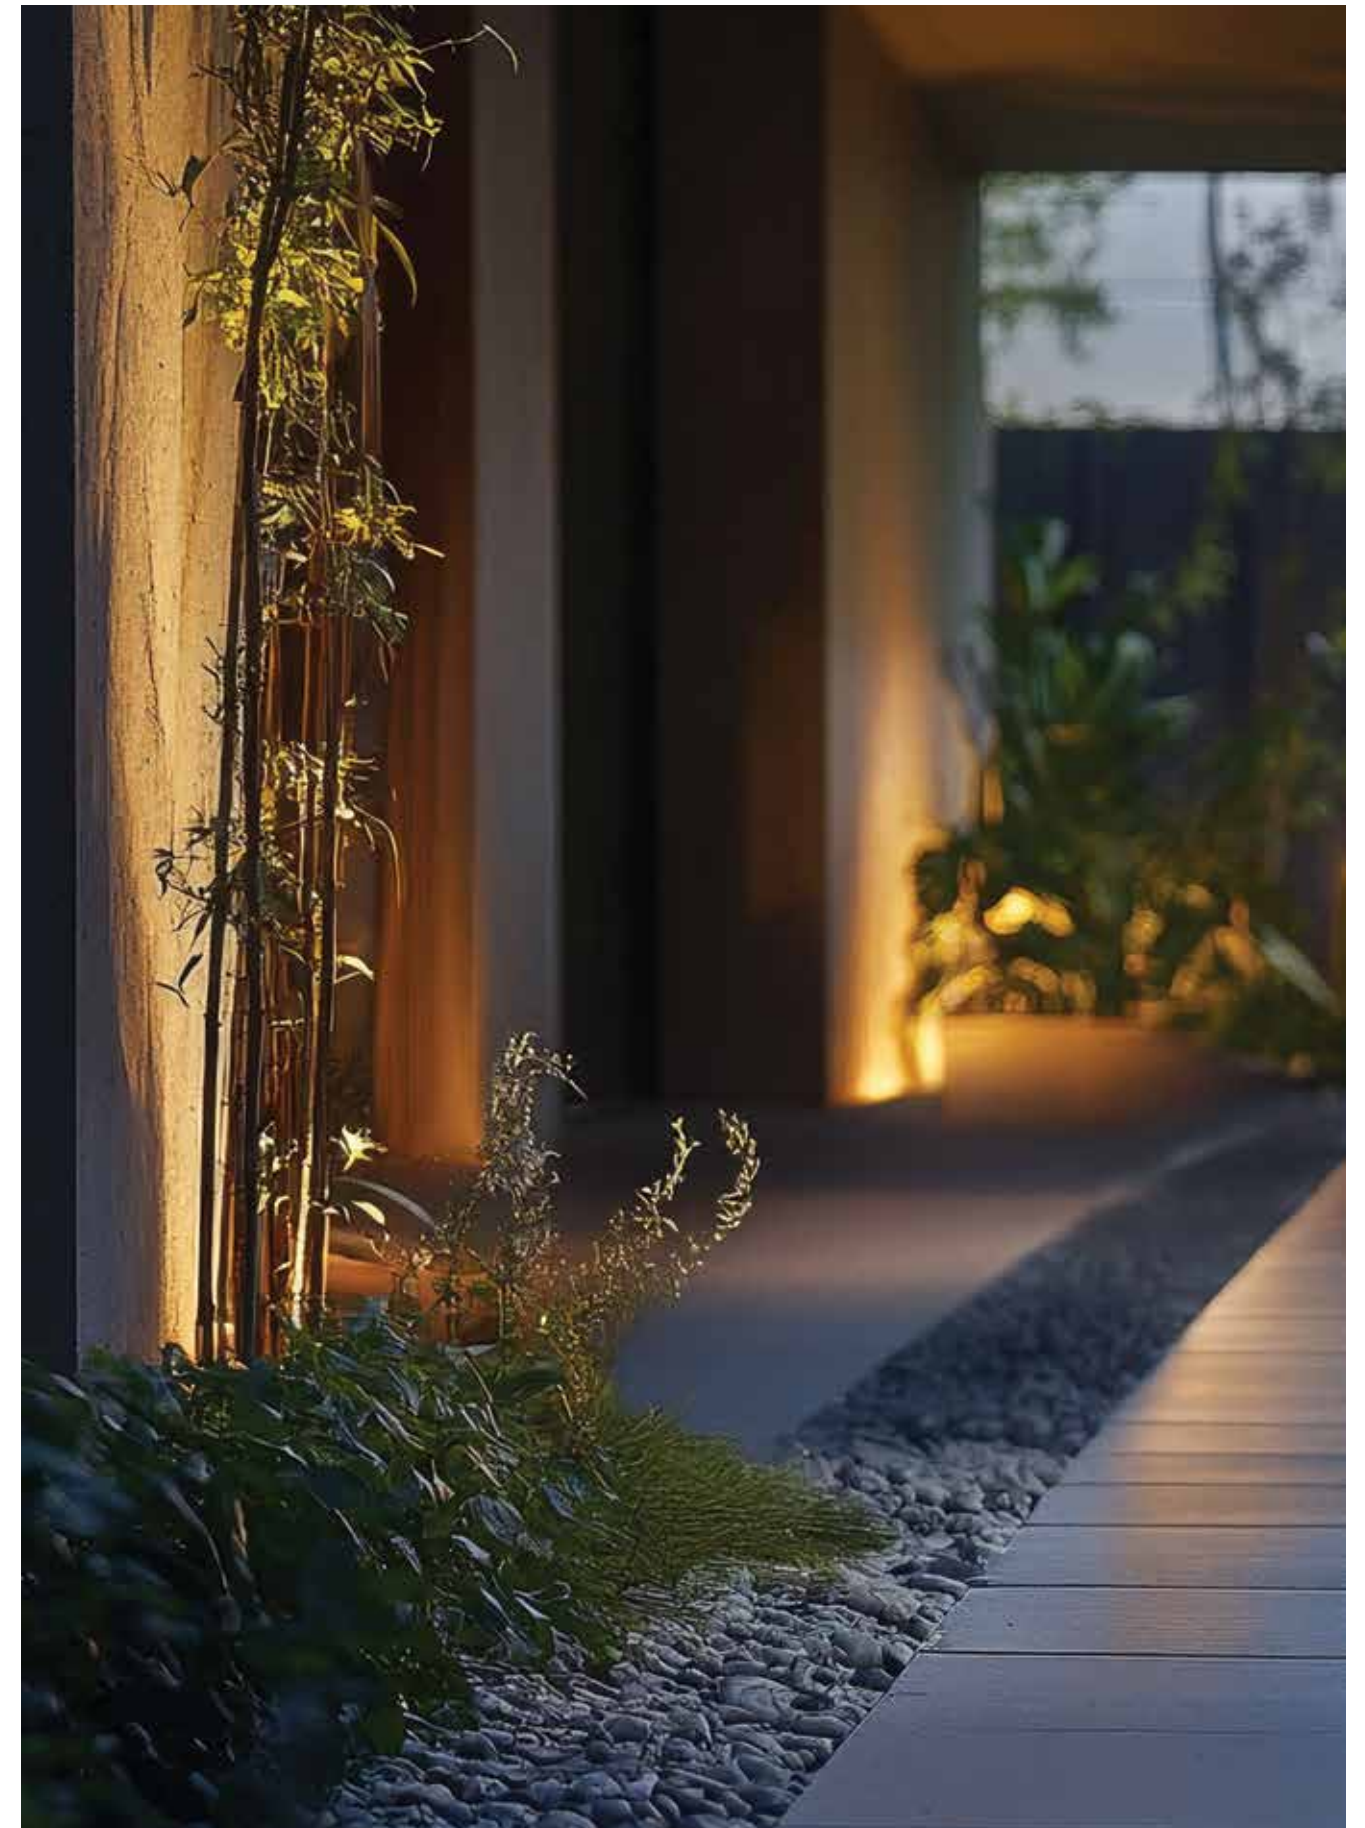




Power 3W  
 Input 24V  
 Color Temperature 3000K  
 Lumen 150Lm  
 Cri 80  
 IP 65  
 IK 10  
 Dimensions Ø: 4.8cm H: 10cm  
 Material Aluminium - Stainless Steel - PC Diffuser  
 Depth Required 111: 13cm  
 Recessed Mounting Box Included  
 Recommended Driver LPH-18-24 (Not Included)  
 In Parallel Connection 1-5 pcs

Color Aluminium / **Code E180**



Power 3W  
 Input 24V  
 Color Temperature 3000K  
 Lumen 95Lm  
 Cri 80  
 IP 65  
 IK 10  
 Dimensions Ø: 4.8cm H: 10cm  
 Material Aluminium - Stainless Steel - PC Diffuser  
 Depth Required 111: 13cm  
 Recessed Mounting Box Included  
 Recommended Driver LPH-18-24 (Not Included)  
 In Parallel Connection 1-5 pcs



Color Aluminium / **Code E179**



Power 3W  
 Input 24V  
 Color Temperature 3000K  
 Lumen 232Lm  
 Cri 80  
 IP 65  
 IK 8  
 Dimensions Ø: 4.5cm H: 9.3cm  
 Material Aluminium - Stainless Steel - PC Diffuser  
 Depth Required 111: 12cm  
 Recessed Mounting Box Included  
 Recommended Driver LPH-18-24 (Not Included)  
 In Parallel Connection 1-5 pcs



Color Aluminium / **Code E178**



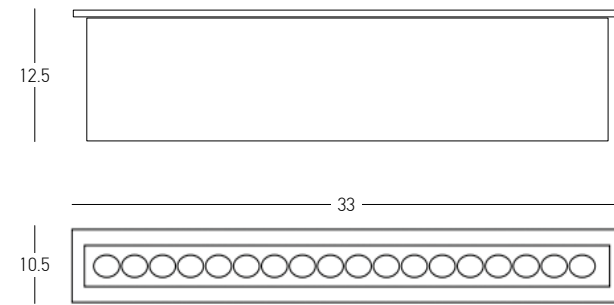


Power	9W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	720Lm
Cri	80
IP	67
IK	10
Dimensions	L: 33cm W: 10.5cm H: 12.5cm
Beam Angle	45°
Material	Aluminium - Stainless Steel - Tempered Glass
Depth Required	11j: 14.5cm
Recessed Mounting Box	Included
Special Feature	Light Angle can be adjusted externally through screw on the frame. 50cm Cable Available Driver Included
Color	Stainless Steel / <b>Code E365</b>



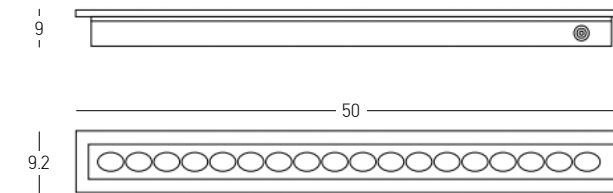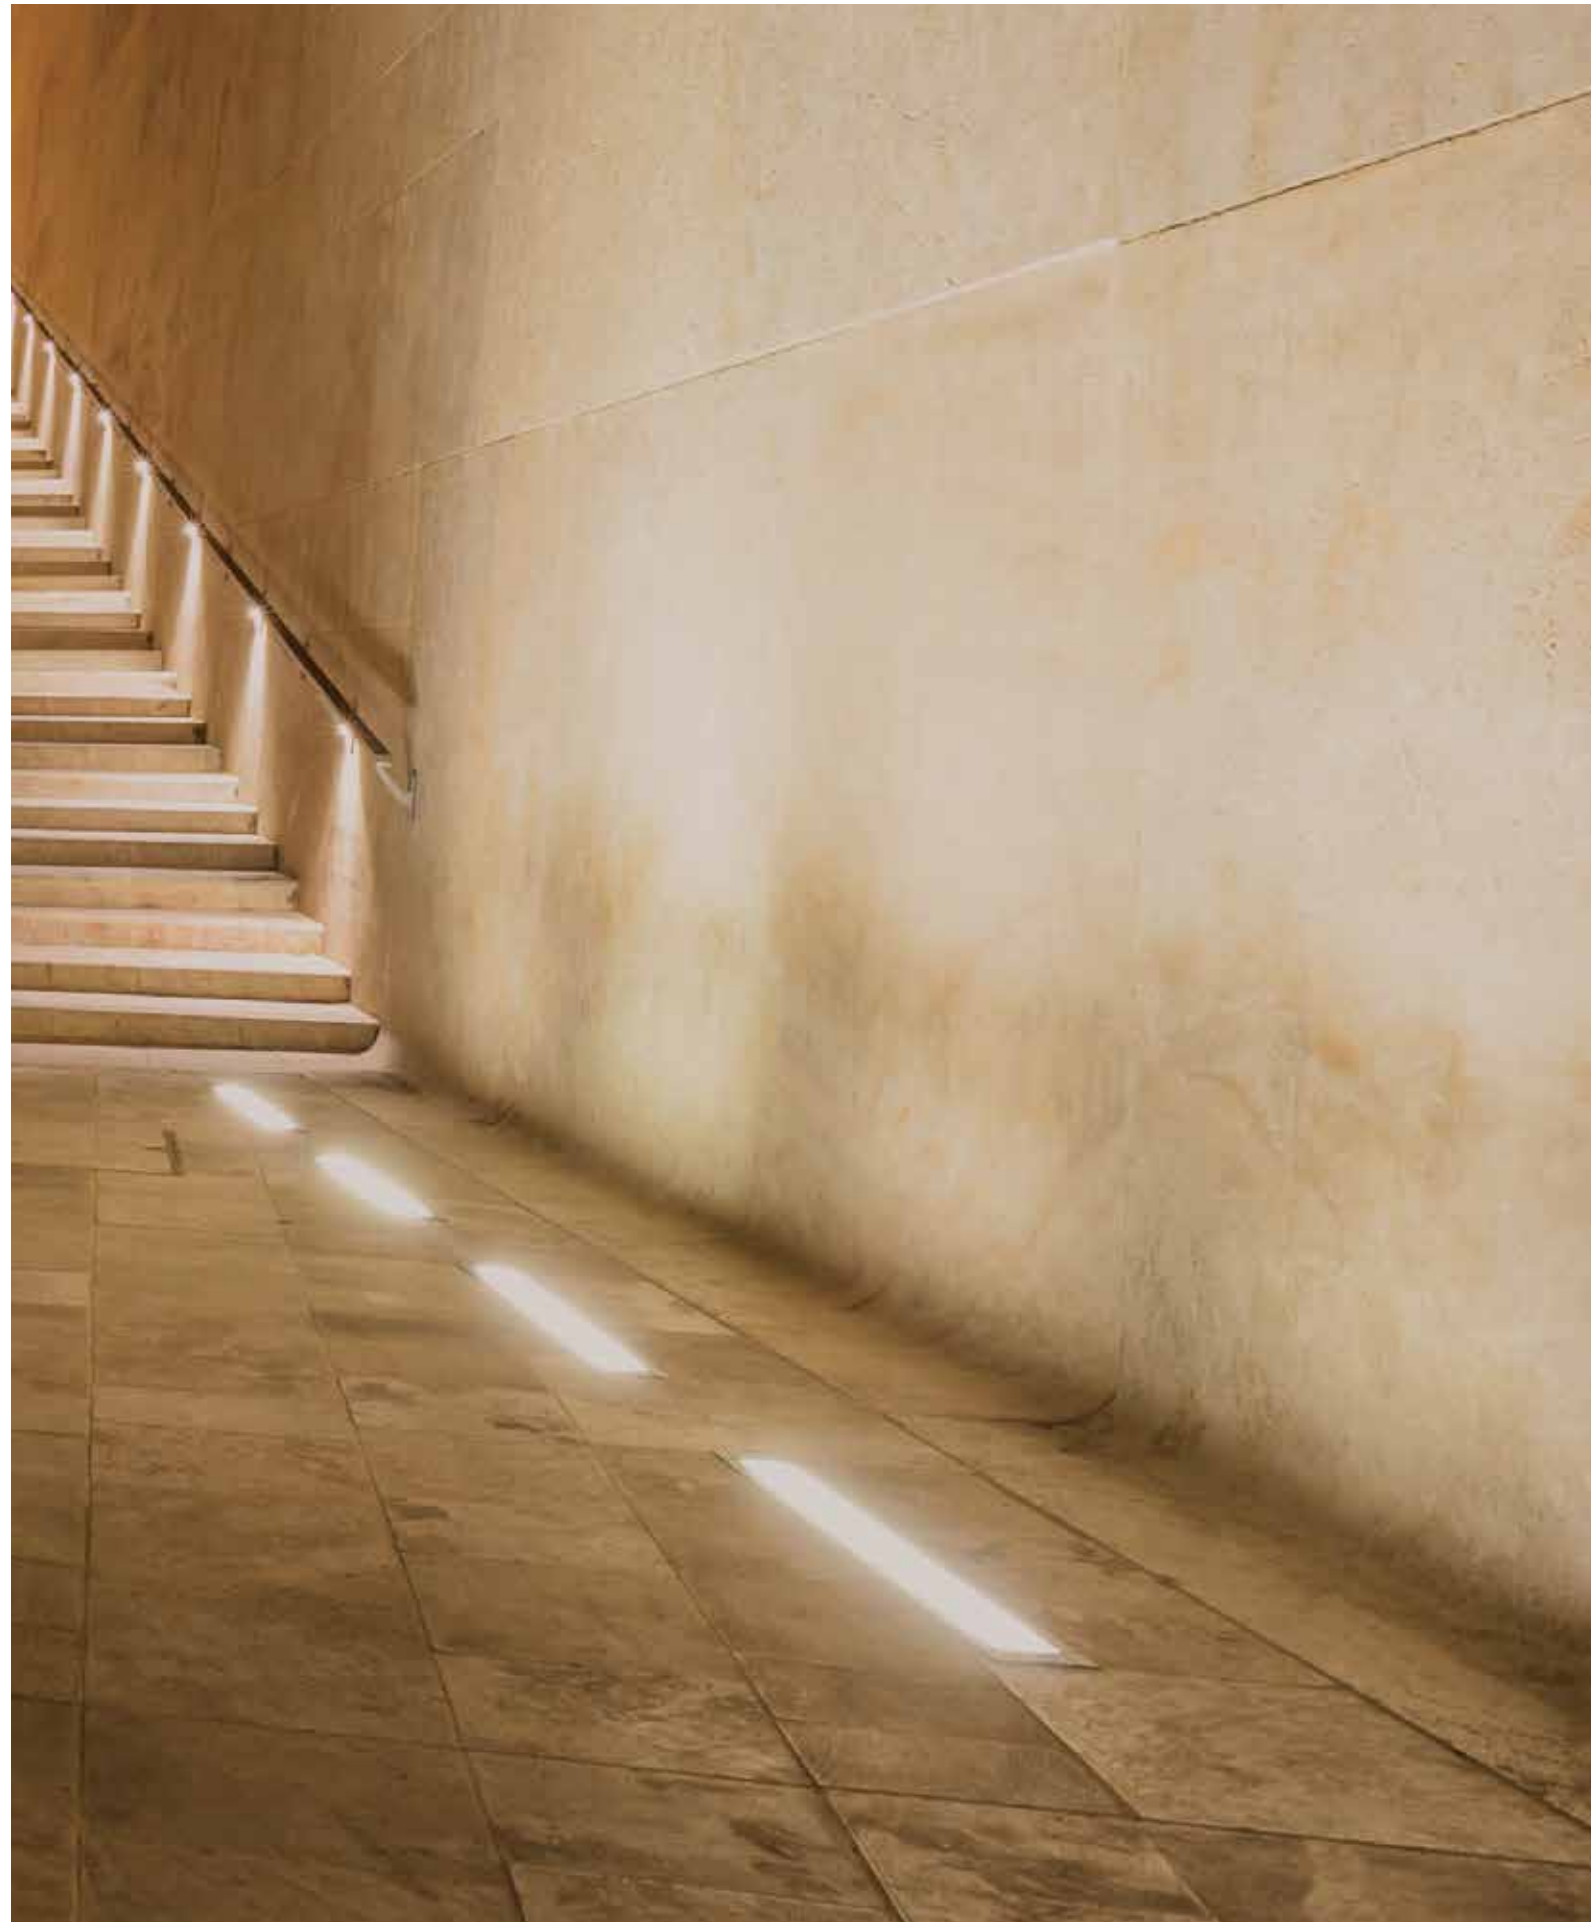


Power	9W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	720Lm
Cri	80
IP	67
IK	10
Dimensions	L: 50cm W: 9.2cm H: 9cm
Beam Angle	45°
Material	Aluminium - Stainless Steel - Tempered Glass
Depth Required	11 cm
Recessed Mounting Box	Included
Special Feature	50cm Cable Available Driver Included
Color	Stainless Steel / <b>Code E366</b>



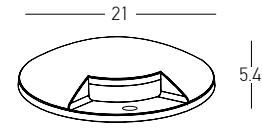


Power 3W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 130Lm  
 Cri 80  
 IP 67  
 IK 10  
 Dimensions Ø: 21cm H: 5.4cm  
 Material Aluminium - Clear PC Diffuser  
 Special Feature Surface Ground  
 Driver Included

Color Grey / **Code E461**

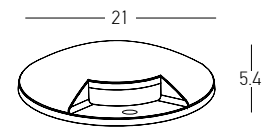

Power 5W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 228Lm  
 Cri 80  
 IP 67  
 IK 10  
 Dimensions Ø: 21cm H: 5.4cm  
 Material Aluminium - Clear PC Diffuser  
 Special Feature Surface Ground  
 Driver Included


Color Grey / **Code E462**



Power 0.2W  
 Input 24V  
 Color Temperature 3000K  
 Lumen 23Lm  
 Cri 80  
 IP 68  
 IK 10  
 Dimensions Ø: 1.5cm H: 3.5cm  
 Beam Angle 45°  
 Material Stainless Steel - Tempered Glass  
 Depth Required 11: 5cm  
 Special Feature 50cm Cable Available  
 Recommended Driver LPH-18-24 (Not Included)  
 In Parallel Connection 1-10 pcs


Color Stainless Steel / **Code E364**



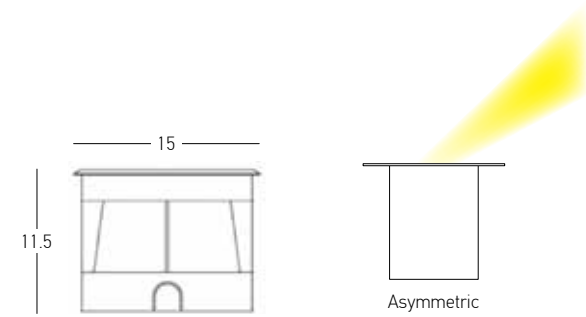


Power 7W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 560Lm  
 Cri 80  
 IP 66  
 IK 8  
 Dimensions Ø: 15cm H: 11.5cm  
 Beam Angle 45°  
 Material Aluminium - Stainless Steel - Glass  
 Depth Required 12.5cm  
 Recessed Mounting Box Included  
 Special Feature Asymmetric  
 50cm Cable Available  
 Driver Included



Color Stainless Steel / **Code E363**

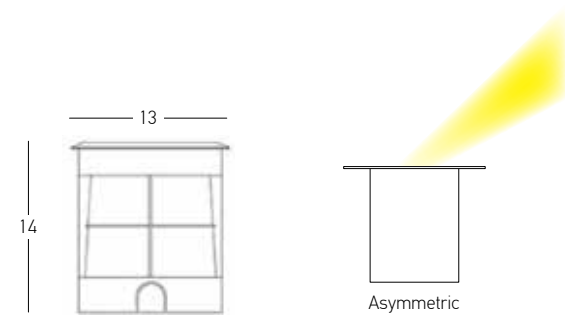

Power 7W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 560Lm  
 Cri 80  
 IP 66  
 IK 8  
 Dimensions Ø: 13cm H: 14cm  
 Beam Angle 45°  
 Material Aluminium - Stainless Steel - Glass  
 Depth Required 15cm  
 Recessed Mounting Box Included  
 Special Feature Asymmetric  
 50cm Cable Available  
 Driver Included



Color Stainless Steel / **Code E362**

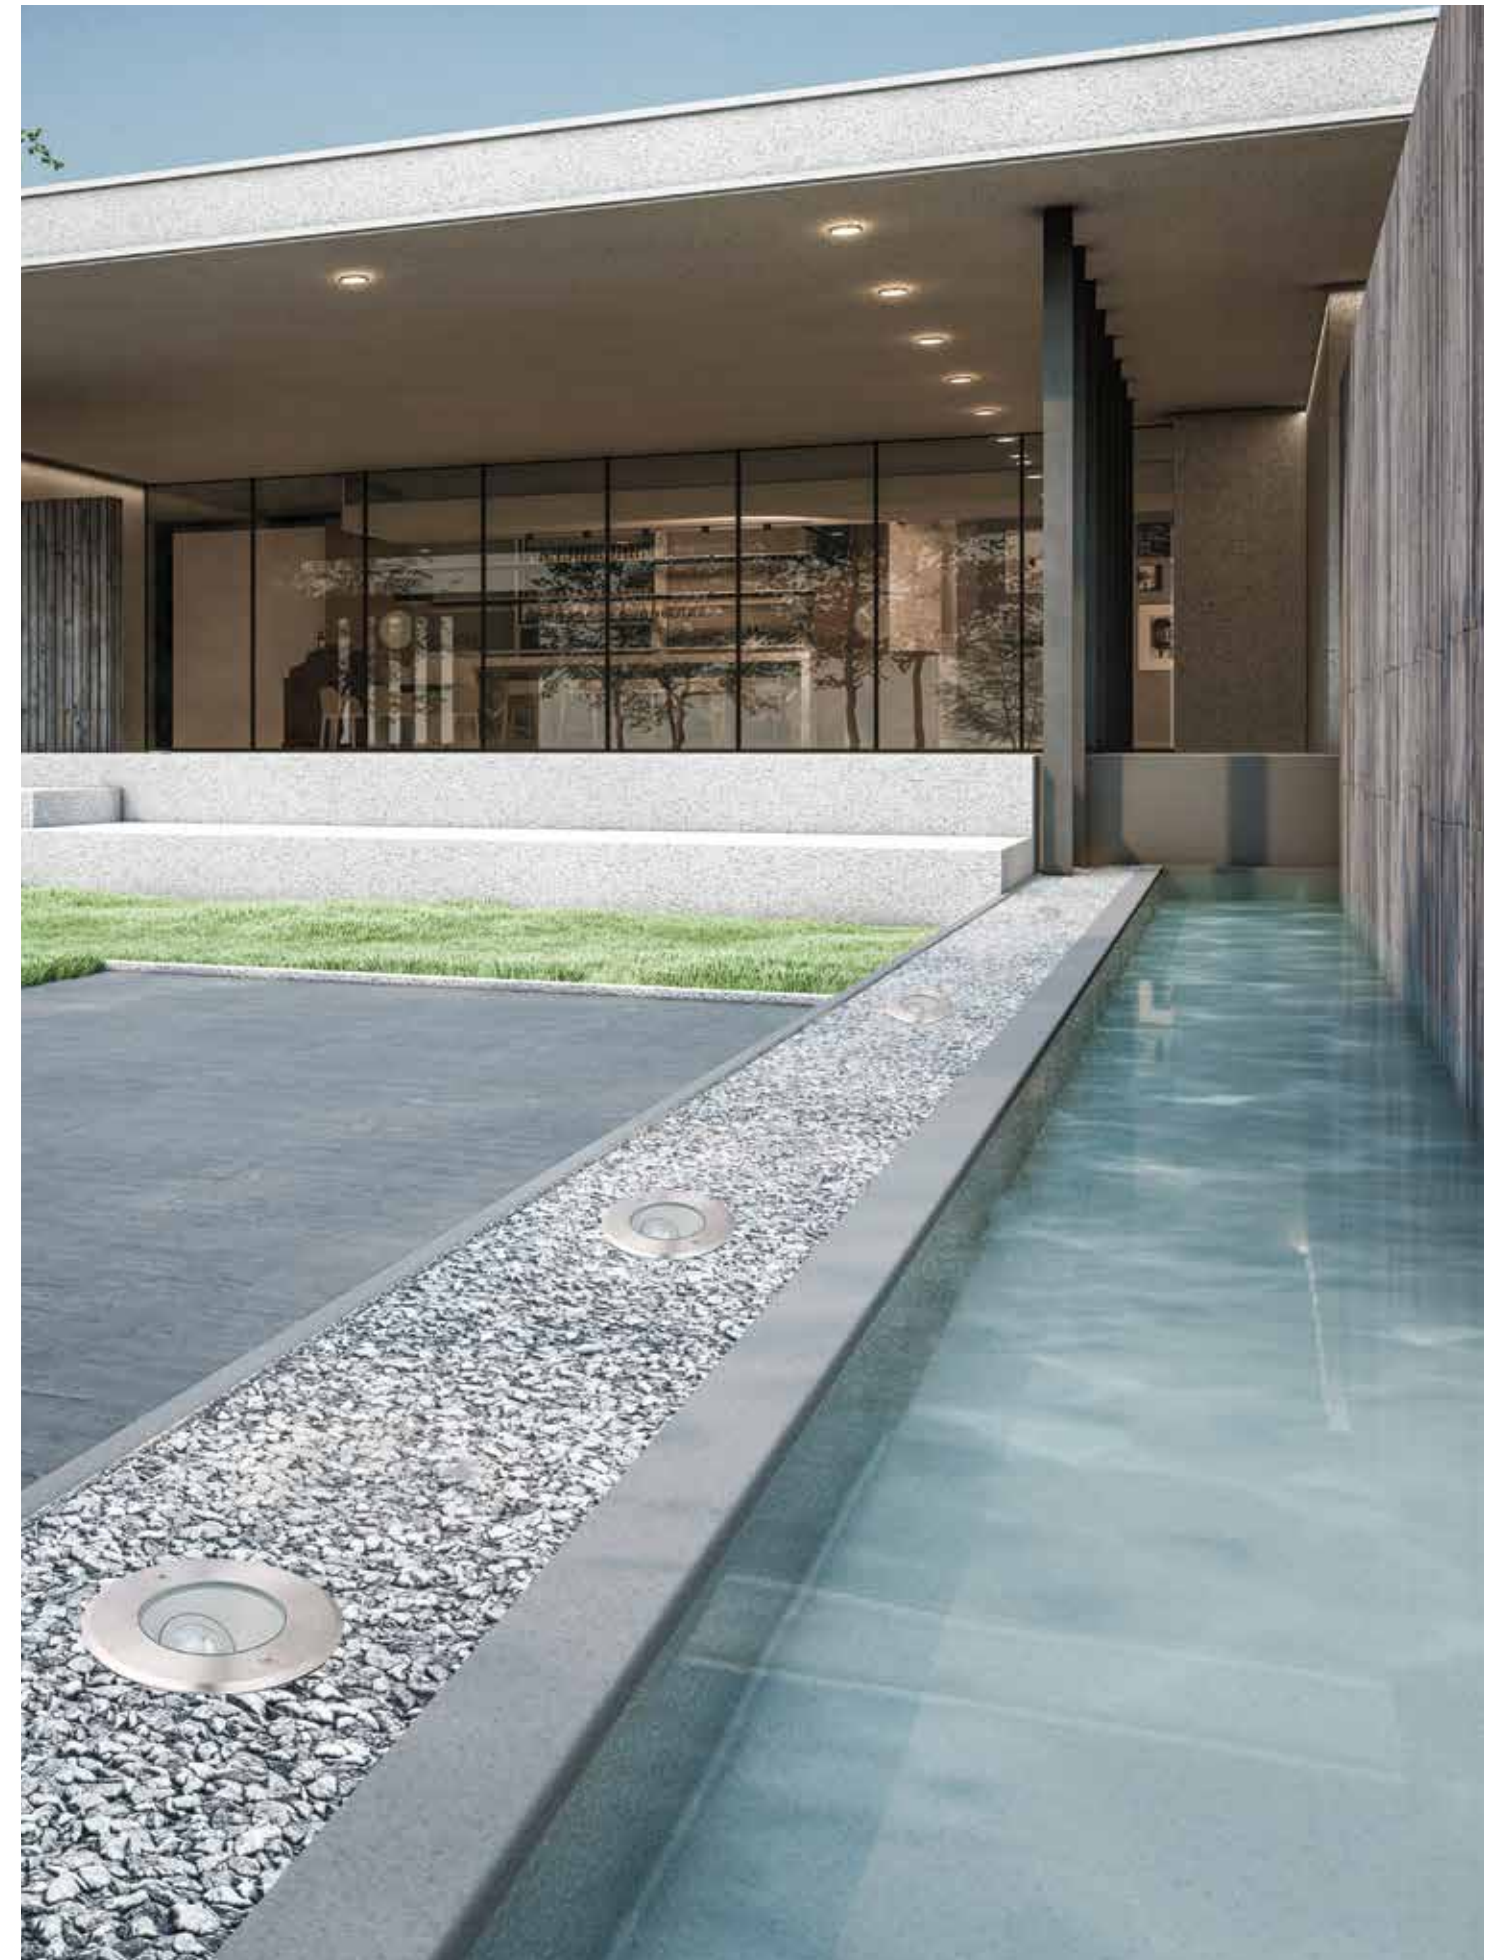

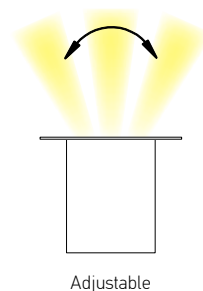

Power 15W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 1200Lm  
 Cri 80  
 IP 66  
 IK 8  
 Dimensions Ø: 18cm H: 16cm  
 Beam Angle 45°  
 Material Aluminium - Stainless Steel - Glass  
 Depth Required 17cm  
 Recessed Mounting Box Included  
 Special Feature Light Angle can be adjusted externally through screw on the frame.  
 50cm Cable Available  
 Driver Included


Color Stainless Steel / **Code E361**

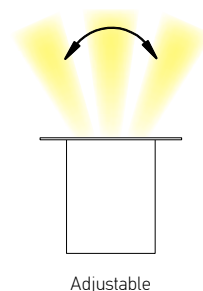

Power 7W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 560Lm  
 Cri 80  
 IP 66  
 IK 8  
 Dimensions Ø: 13cm H: 14cm  
 Beam Angle 45°  
 Material Aluminium - Stainless Steel - Glass  
 Depth Required 15cm  
 Recessed Mounting Box Included  
 Special Feature Internal Adjustable Light Angle  
 50cm Cable Available  
 Driver Included


Color Stainless Steel / **Code E360**





Bulb 1x GU10 LED  
 Power 10W MAX  
 Input 220-240V, 50/60Hz  
 IP 65  
 IK 8  
 Dimensions Ø: 10cm H: 10cm  
 Material Stainless Steel - Tempered Glass  
 Depth Required 11cm  
 Recessed Mounting Box Included  
 Special Feature 50cm Cable Available  
 GU10 Lampholder Included

Color Stainless Steel / **Code E359**



Power 6W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 618Lm  
 Cri 80  
 IP 67  
 IK 8  
 Dimensions Ø: 10cm H: 9.5cm  
 Beam Angle 36°  
 Material Stainless Steel - Tempered Glass  
 Depth Required 12cm  
 Recessed Mounting Box Included  
 Special Feature Driver Included




Color Stainless Steel / **Code E189**




Power. Precision. Presence.  
Wall washers for uniform illumination and  
architectural impact.



## 09. WALL WASHER

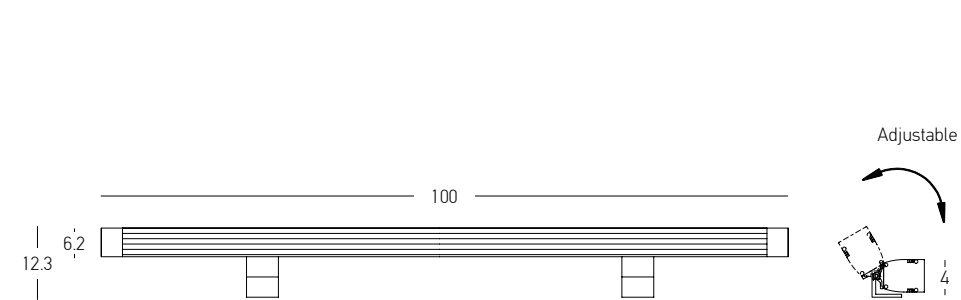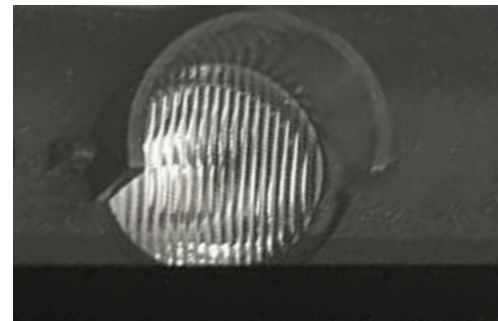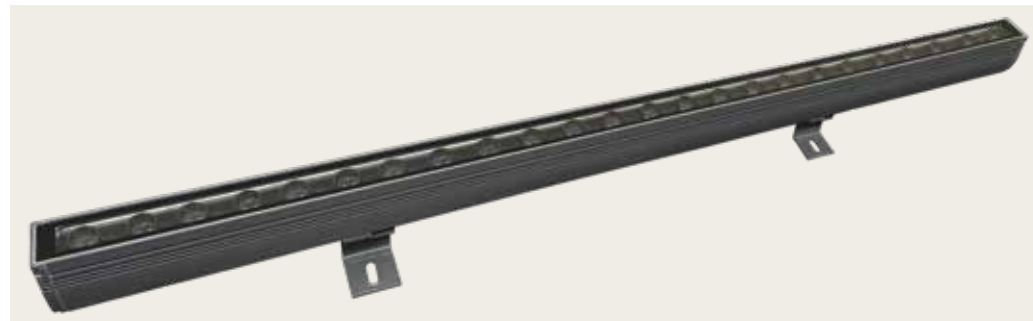


Power 36W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 2200Lm  
 Cri 80  
 IP 65  
 Dimensions L: 100cm W: 4cm H: 12.3cm  
 Beam Angle 60° x 10°  
 Material Aluminium - Glass  
 Special Feature Half Circular Anti-Glare  
 Driver Included  
 Connect 8pcs MAX  
 Color Graphite / **Code E496**

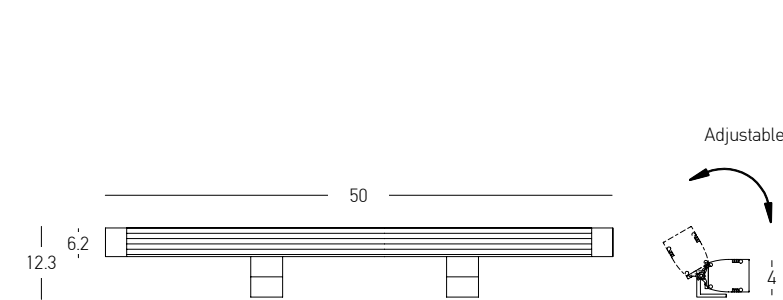


Power 18W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 1160Lm  
 Cri 80  
 IP 65  
 Dimensions L: 50cm W: 4cm H: 12.3cm  
 Beam Angle 60° x 10°  
 Material Aluminium - Glass  
 Special Feature Half Circular Anti-Glare  
 Driver Included  
 Connect 8pcs MAX  
 Color Graphite / **Code E497**



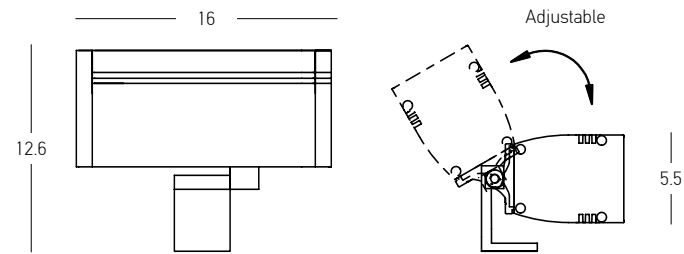



Power 9W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 420Lm  
 Cri 80  
 IP 65  
 Dimensions L: 16cm W: 5.5cm H: 12.6cm  
 Beam Angle 15°  
 Material Aluminium - Glass  
 Special Feature Honeycomb Included  
 Driver Included  
 120° Adjustable Angle  
 Connect 8pcs MAX  
 Color Graphite / **Code E495**



**Connectors Male & Female for E495, E496 & E497**

Cable 25cm  
 Input 220-240V  
 IP 66  
 Color Black / **Code CNCTR 6**



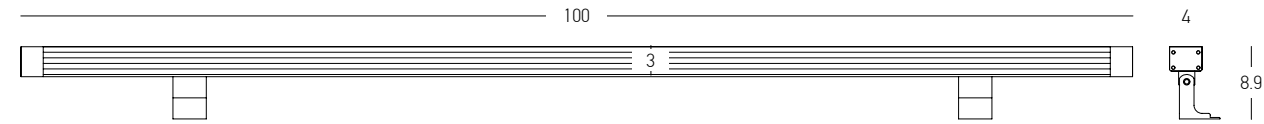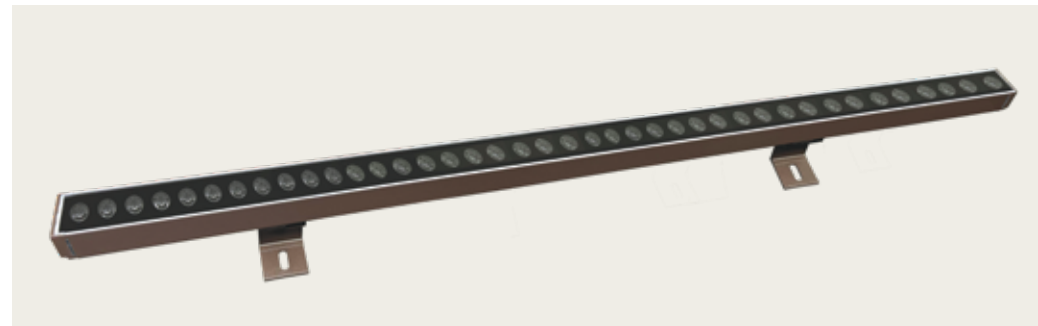

Power 36W  
 Input 24V  
 Color Temperature 2700K  
 Lumen 1530Lm  
 Cri 80  
 IP 65  
 Dimensions L: 100cm W: 4cm H: 8.9cm  
 Beam Angle 60° x 10°  
 Material Aluminium - Glass  
 Special Feature Anti-Glare  
 Driver Not Included  
 Connect 5pcs MAX

Color Dark Brown / **Code E498**





Power 18W  
 Input 24V  
 Color Temperature 2700K  
 Lumen 775Lm  
 Cri 80  
 IP 65  
 Dimensions L: 50cm W: 4cm H: 8.9cm  
 Beam Angle 60° x 10°  
 Material Aluminium - Glass  
 Special Feature Anti-Glare  
 Driver Not Included  
 Connect 5pcs MAX

Color Dark Brown / **Code E499**



**Dimming Options**

1. DALI Dimming : Dali Driver 24V Channel 1+Switch Dali MCU (Page 396-397)
2. 1-10 Dimming : 1-10V Driver 24V (Page 396-397)
3. PUSH BUTTON Dimming : Dali Driver 24V Channel 1(Page 396-397)
4. ON-OFF Dimming : ON-OFF Driver 24V (Page 396-397)

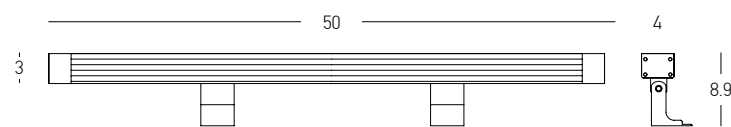


**Connectors Male & Female for E498 & E499**

Cable 25cm  
 Input 24V  
 IP 66  
 Color Black / **Code CNCTR 7**



WALL WASHER TUNABLE WHITE

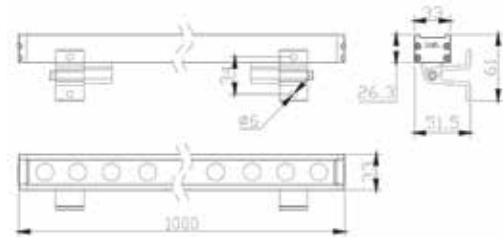

Power 24W  
 Input 24V  
 Color Temperature 2700K-6500K  
 Lumen 1580-1770Lm  
 Cri 80  
 IP 66  
 Dimensions L: 100cm W: 3.3cm H: 2.6cm  
 Beam Angle 60° x 10°  
 Material Aluminium  
 Special Feature Honeycomb Included  
 Driver Not Included  
 Connect 6pcs MAX  
 Color Grey / **Code E382**



Dimming Options


1. DALI Dimming : OTi DALI Driver 4CH (Page 396-397)
2. BLUETOOTH Dimming : On-Off Driver 24V + OT Wi DIM 5CH CA (CASAMBI App) (Page 396-397)





Connectors Male & Female for E382

Cable 25cm  
 Input 24V  
 IP 66  
 Color Black / **Code CNCTR 3**




Power 288W @ 24V  
 Input 220-240V, 50/60Hz  
 Dimensions W: 2.9cm H: 2.2cm L: 18.6cm  
 Bluetooth Dimming  OT Wi DIM 5CH CA , RGB, RGBW and RGBTW  
 Material Plastic  
 Special Feature IP 20  
 Color White / **Code 6937186115232**

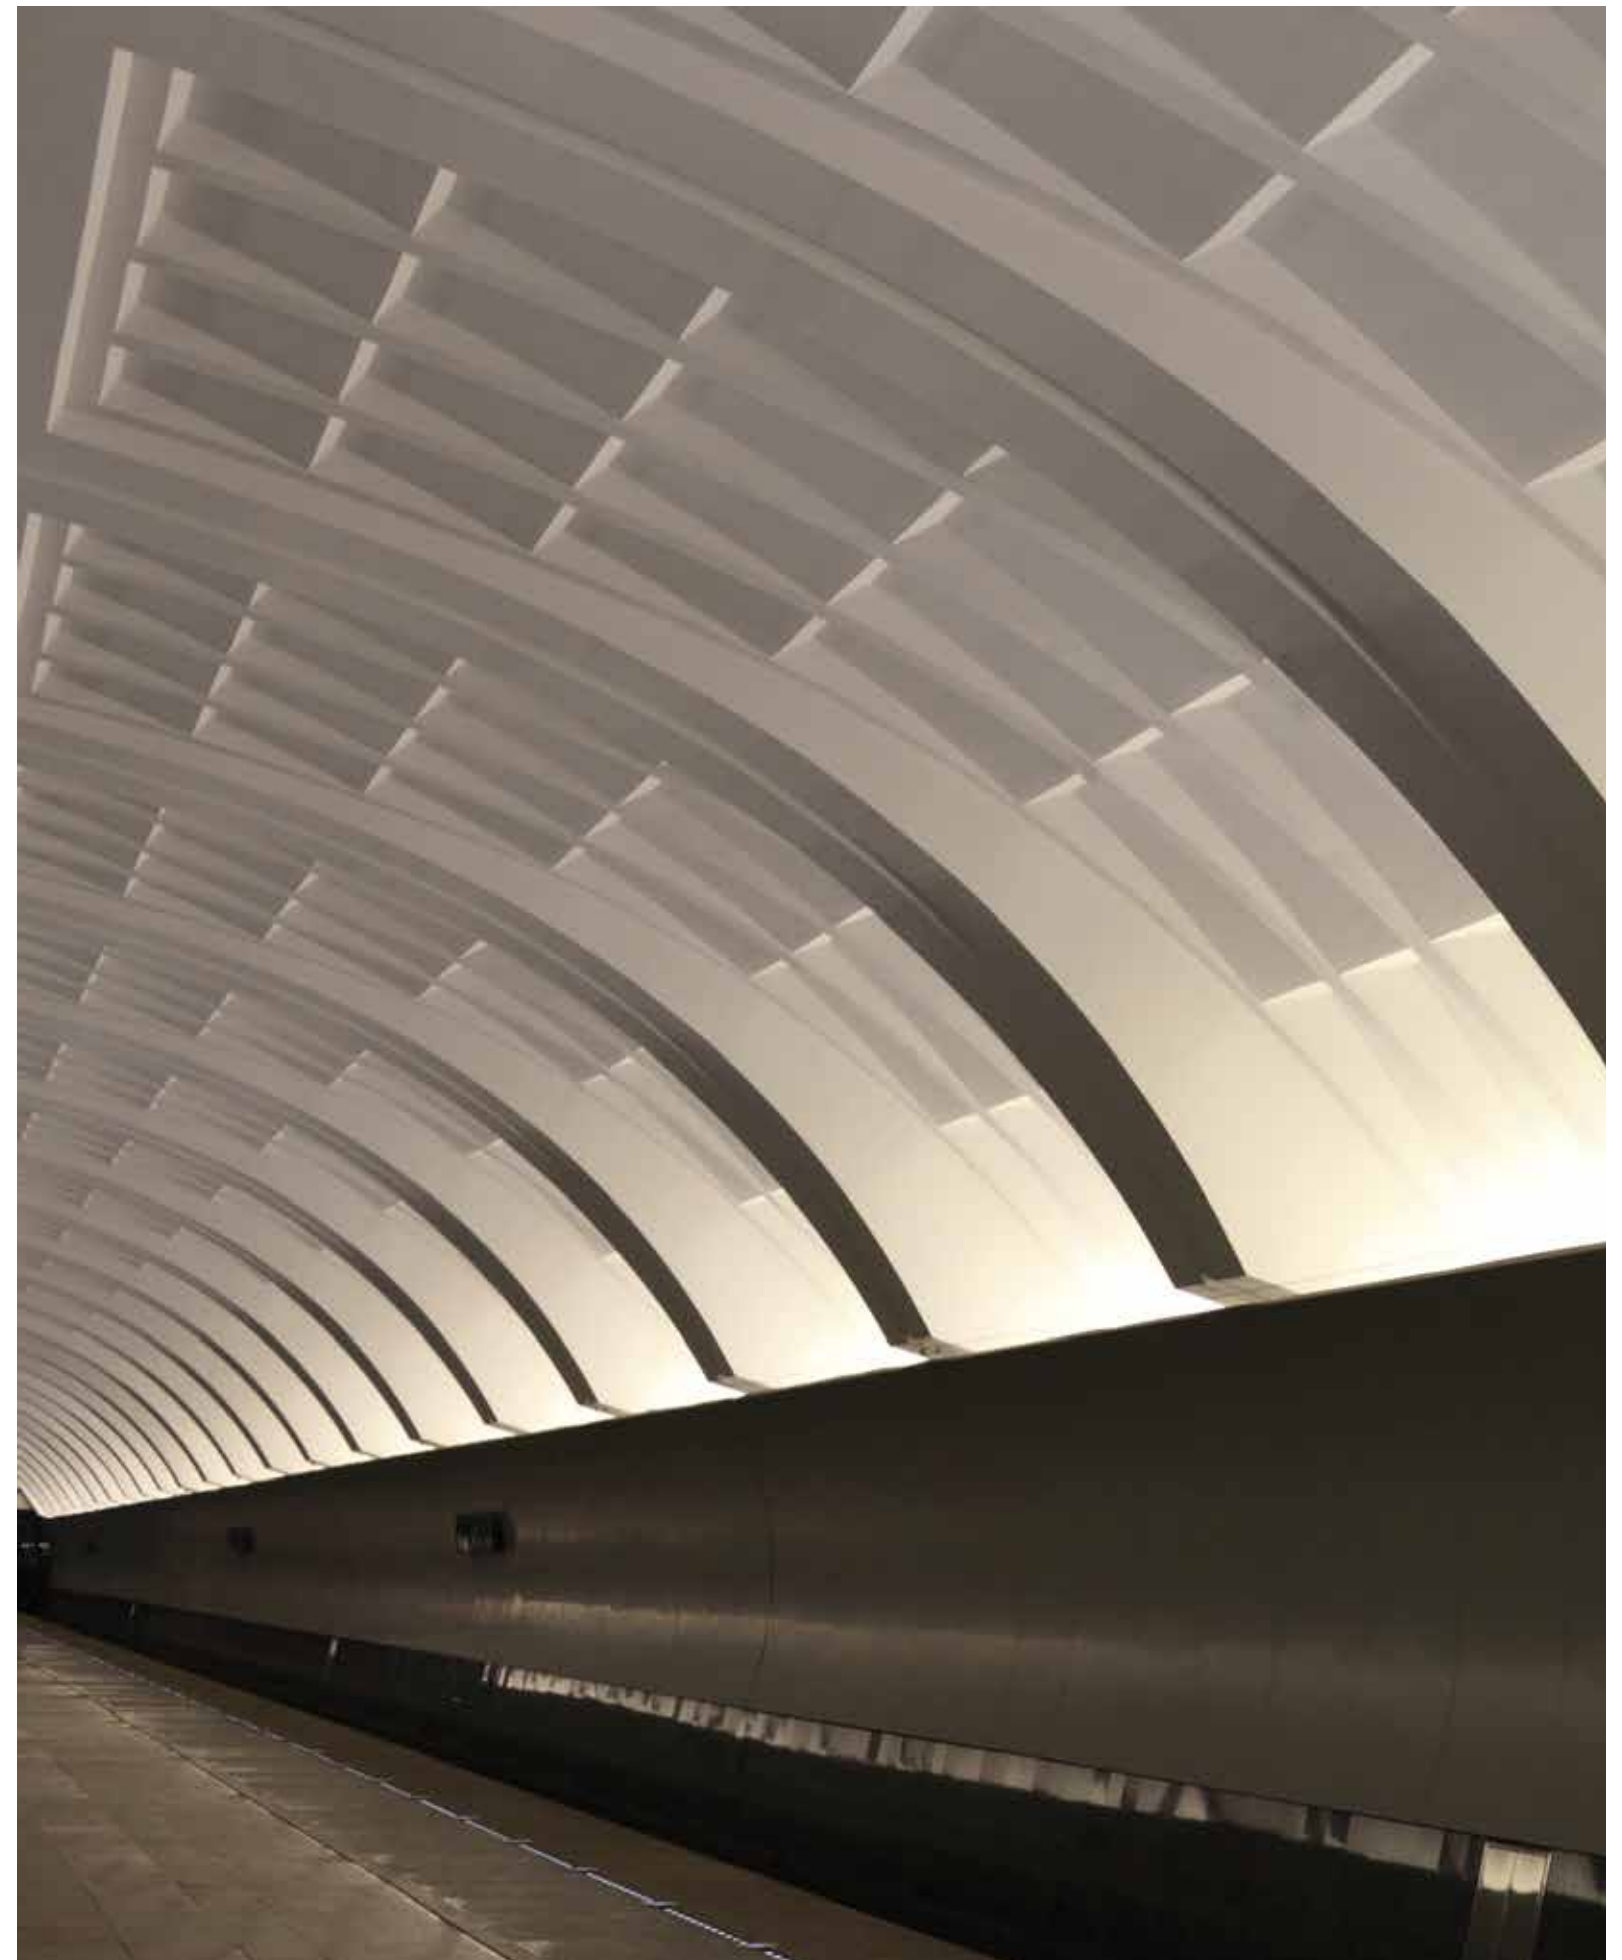



WALL WASHERS RGB & RGBW

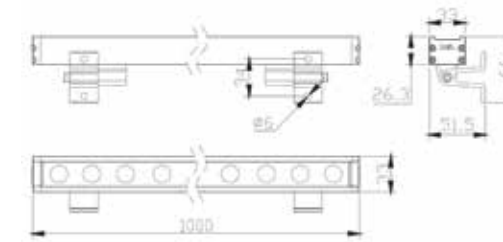


Code	Kelvin	Watt	Lumen
E380	RGB	12W	MAX 280
E381	RGBW 4000	12W	MAX 480

Power 12W  
 Input 24V  
 Cri 80  
 IP 66  
 Dimensions L: 100cm W: 3.3cm H: 2.6cm  
 Beam Angle 60° x 10°  
 Material Aluminium  
 Special Feature Honeycomb Included  
 Driver Not Included  
 Connect 6pcs MAX  
 Color Grey



- Dimming Options**  
 1. DALI Dimming : OTi DALI Driver 4CH (Page 396-397)  
 2. BLUETOOTH Dimming : On-Off Driver 24V + OT Wi DIM 5CH CA (CASAMBI App) (Page 396-397)

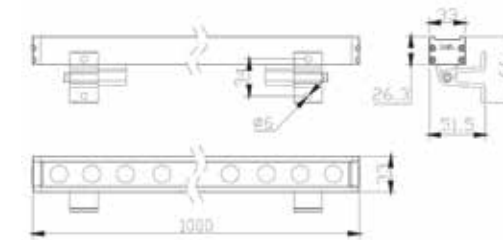

Code	Kelvin	Watt	Lumen
E378	RGB	24W	MAX 560
E379	RGBW 4000	24W	MAX 960

Power 24W  
 Input 24V  
 Cri 80  
 IP 66  
 Dimensions L: 100cm W: 3.3cm H: 2.6cm  
 Beam Angle 60° x 10°  
 Material Aluminium  
 Special Feature Honeycomb Included  
 Driver Not Included  
 Connect 6pcs MAX  
 Color Grey





- Dimming Options**  
 1. DALI Dimming : OTi DALI Driver 4CH (Page 396-397)  
 2. BLUETOOTH Dimming : On-Off Driver 24V + OT Wi DIM 5CH CA (CASAMBI App) (Page 396-397)



**Connectors Male & Female for E381 & E379**  
 Cable 25cm  
 Input 24V  
 IP 66  
 Color Black / Code CNCTR 2



**Connectors Male & Female for E380 & E378**  
 Cable 25cm  
 Input 24V  
 IP 66  
 Color Black / Code CNCTR 4

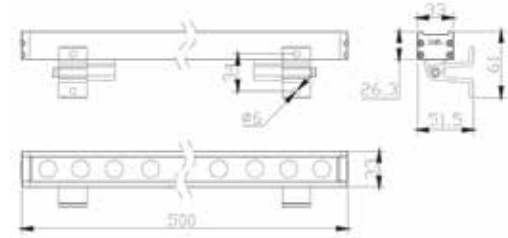

Power 12W  
 Input 24V  
 Cri 80  
 IP 66  
 Dimensions L: 50cm W: 3.3cm H: 2.6cm  
 Beam Angle 60° x 10°  
 Material Aluminium  
 Special Feature Honeycomb Included  
 Driver Not Included  
 Connect 12pcs MAX


Color Grey



**Dimming Options**

1. DALI Dimming : Dali Driver 24V Channel 1 + Switch Dali MCU (Page 396-397)
2. 1-10 Dimming : 1-10V Driver 24V (Page 396-397)
3. PUSH BUTTON Dimming : Dali Driver 24V Channel 1 (Page 396-397)
4. ON-OFF Dimming : ON-OFF Driver 24V (Page 396-397)

Code	Kelvin	Watt	Lumen
E376	3000	12W	MAX 850
E377	4000	12W	MAX 870

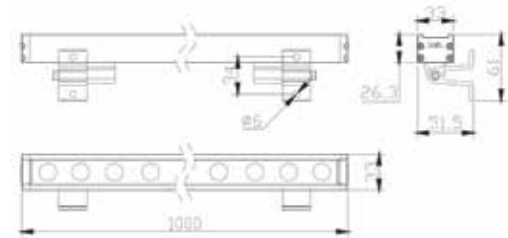

Power 24W  
 Input 24V  
 Cri 80  
 IP 66  
 Dimensions L: 100cm W: 3.3cm H: 2.6cm  
 Beam Angle 60° x 10°  
 Material Aluminium  
 Special Feature Honeycomb Included  
 Driver Not Included  
 Connect 6pcs MAX


Color Grey



**Dimming Options**

1. DALI Dimming : Dali Driver 24V Channel 1 + Switch Dali MCU (Page 396-397)
2. 1-10 Dimming : 1-10V Driver 24V (Page 396-397)
3. PUSH BUTTON Dimming : Dali Driver 24V Channel 1 (Page 396-397)
4. ON-OFF Dimming : ON-OFF Driver 24V (Page 396-397)

Code	Kelvin	Watt	Lumen
E374	3000	24W	MAX 1700
E375	4000	24W	MAX 1720



**Connectors Male & Female for E376, E377, E374 & E375**


Cable 25cm  
 Input 24V  
 IP 66  
 Color Black / Code CNCTR 1



Track The Light, Magnify The Possibilities.  
IP-protected outdoor lighting for modern  
spaces.




## 10. IP65 SURFACE LIGHTING SYSTEM

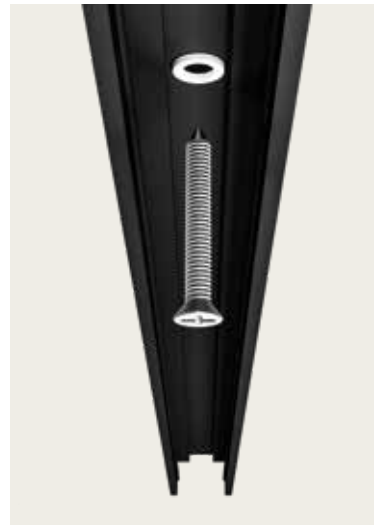


IP65 SURFACE OUTDOOR TRACK

Dimensions L: 300cm W: 2.6cm H: 2.5cm  
 Material Aluminium  
 Color Sandy Black / **Code E385**

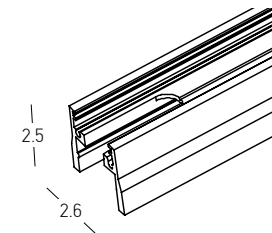


STRAIGHT MECHANICAL CONNECTOR

Dimensions L: 10cm W: 3cm H: 2.6cm  
 Material Aluminium  
 Color Sandy Black / **Code E389**

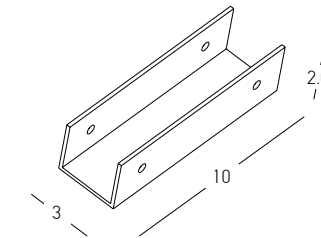


HORIZONTAL MECHANICAL CORNER

Dimensions L: 7cm W: 7cm H: 2.6cm  
 Material Aluminium  
 Color Sandy Black / **Code E390**

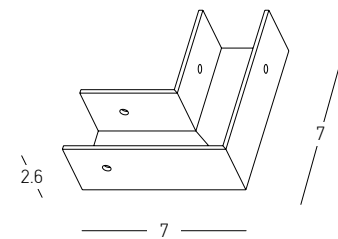


T MECHANICAL CONNECTOR

Dimensions L: 10cm W: 6.5cm H: 2.6cm  
 Material Aluminium  
 Color Sandy Black / **Code E393**

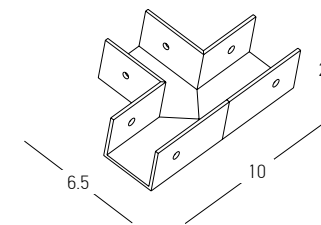


VERTICAL MECHANICAL CORNER

Dimensions L: 7cm W: 3cm H: 7cm  
 Material Aluminium  
 Color Sandy Black / **Code E392**




END CAP


Dimensions L: 6.2cm W: 3cm H: 2.6cm  
 Material Aluminium  
 Color Sandy Black / **Code E391**

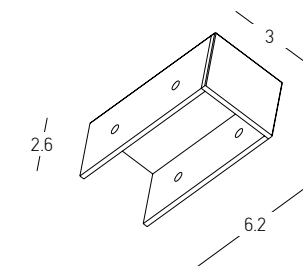



IP65 WATERPROOF RUBBER

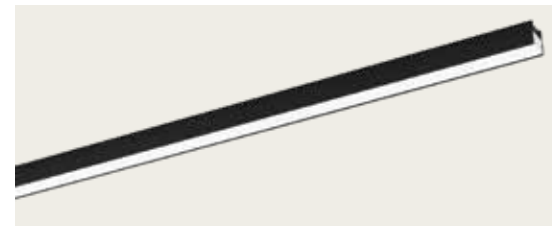




Power 10W  
 Input 48V  
 Color Temperature 3200K  
 Lumen 700Lm  
 Cri 90  
 IP 65  
 Beam Angle 100°  
 Dimmable DALI   
 Dimensions L: 100cm W: 2cm H: 1.4cm  
 Material Silicone Rubber  
 Special Feature 1m Can Load 144W MAX  
 Color White / **Code E386**

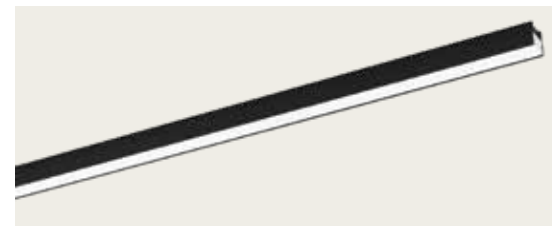


Power 20W  
 Input 48V  
 Color Temperature 3200K  
 Lumen 1400Lm  
 Cri 90  
 IP 65  
 Beam Angle 100°  
 Dimmable DALI   
 Dimensions L: 200cm W: 2cm H: 1.4cm  
 Material Silicone Rubber  
 Special Feature 2m Can Load 288W MAX  
 Color White / **Code E387**

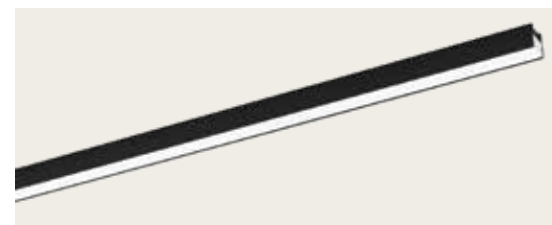


Power 30W  
 Input 48V  
 Color Temperature 3200K  
 Lumen 2100Lm  
 Cri 90  
 IP 65  
 Beam Angle 100°  
 Dimmable DALI   
 Dimensions L: 300cm W: 2cm H: 1.4cm  
 Material Silicone Rubber  
 Special Feature 3m Can Load 432W MAX  
 Color White / **Code E388**

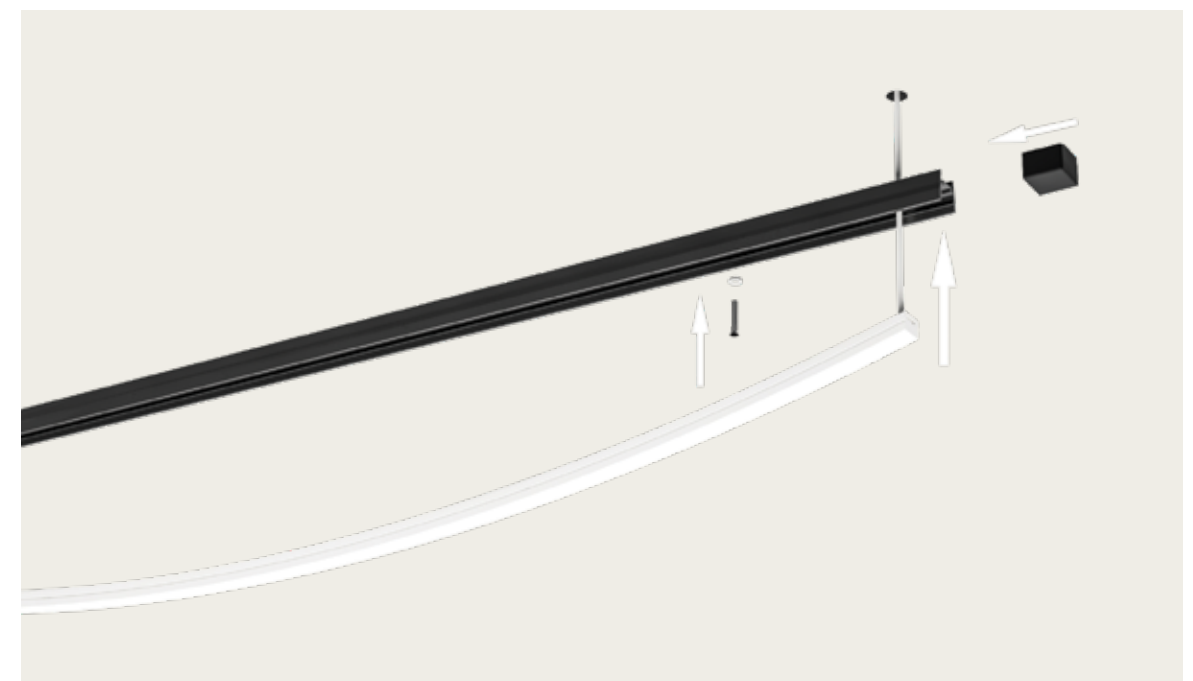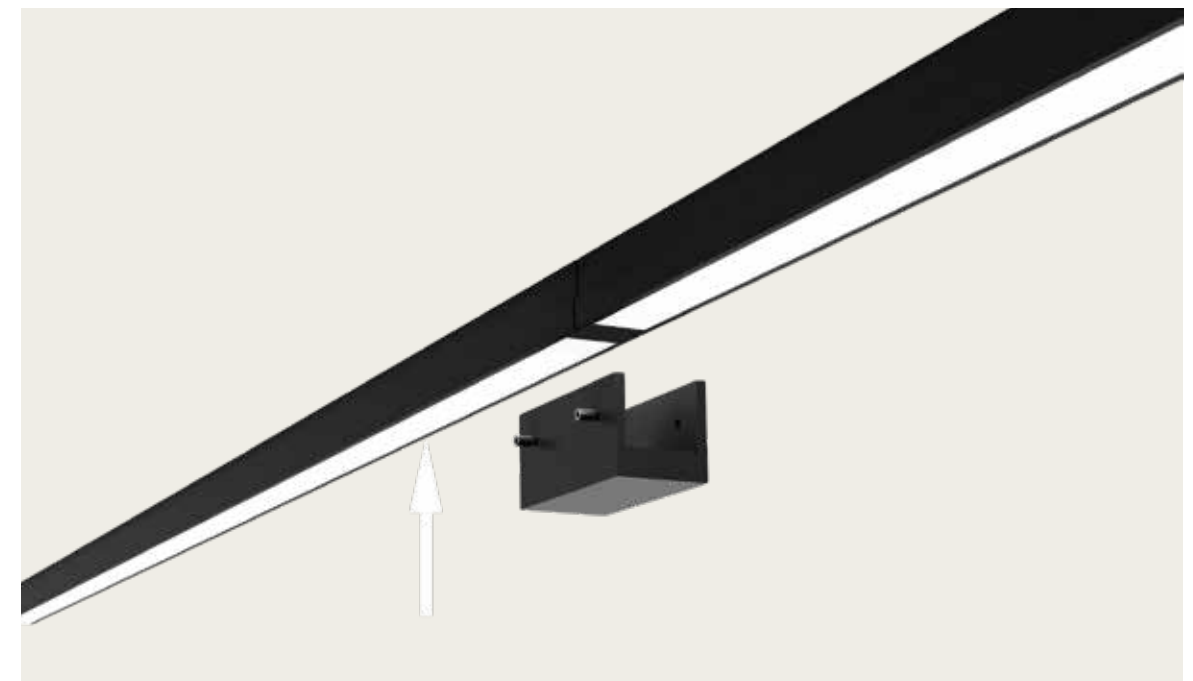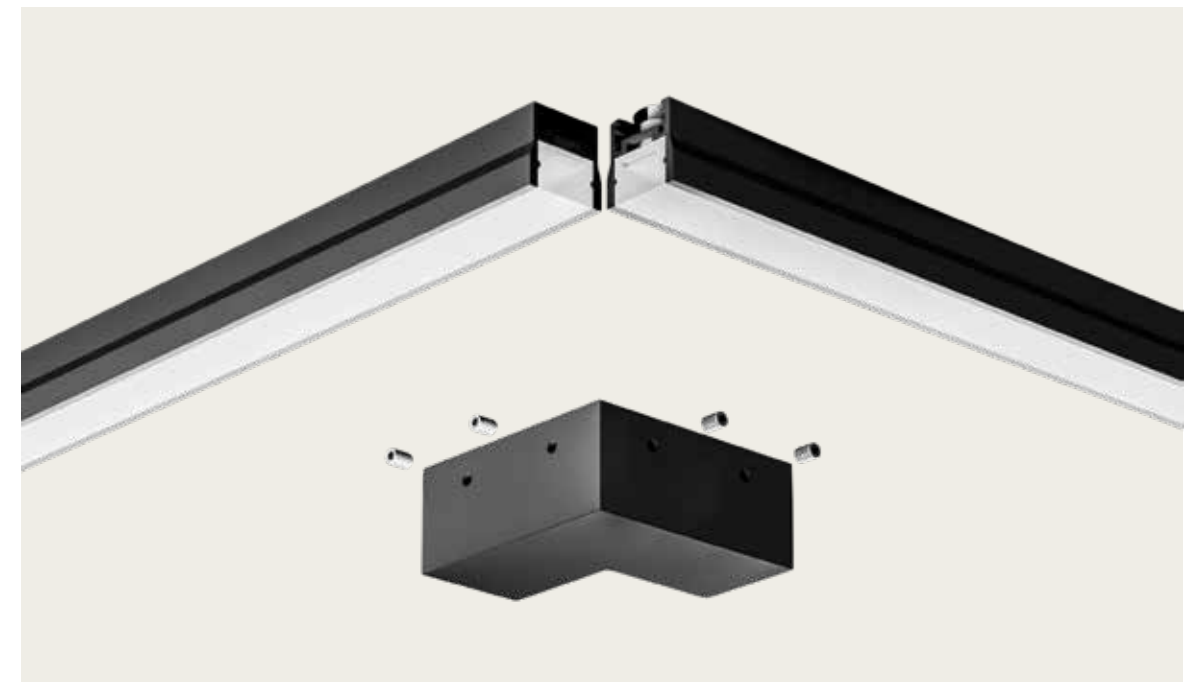

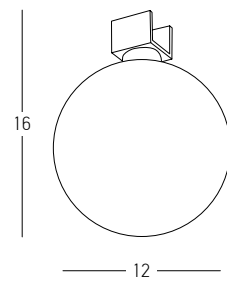


Power 9W  
 Input 48V  
 Color Temperature 3200K  
 Lumen 438Lm  
 Cri 80  
 IP 65  
 Dimmable DALI   
 Dimensions Ø: 12cm H: 16cm  
 Material Aluminium - Opal Diffuser  
 Special Feature Does Not Operate Independently, Must Be Mounted On E386, E387 & E388  
 Color Opal-Sandy Black Adaptor / **Code E501**

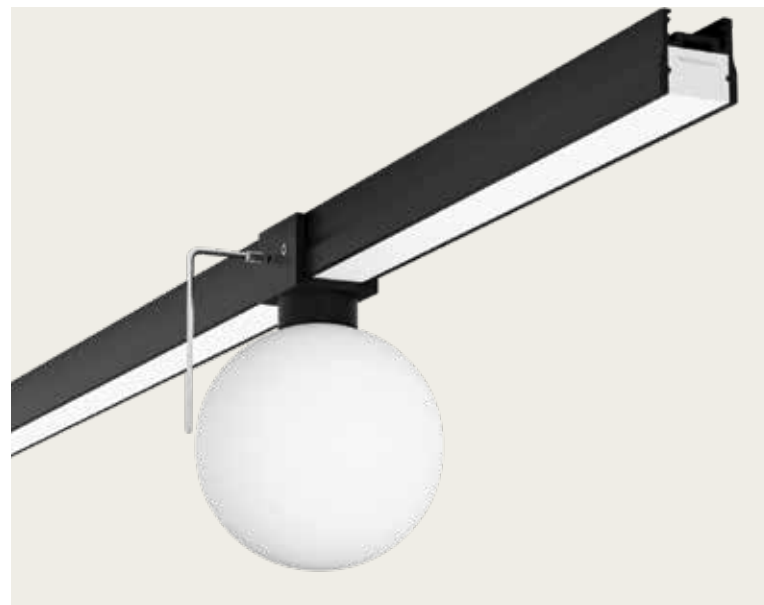

SURFACE MOUNT BOX FOR 48V IP65 LIGHTING SYSTEM





Dimensions L: 39cm W: 14cm H: 5.5cm  
 Material Metal  
 Special Feature Driver Not Included  
 Color Black / **E397**

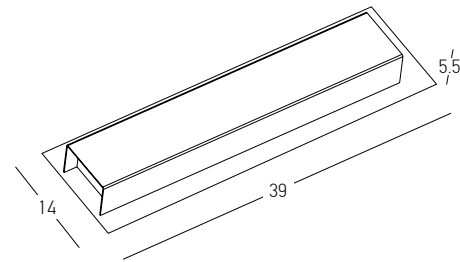

Power 160W  
 Input 220-240V, 50/60Hz  
 Output 48V  
 IP 67  
 Dimensions L: 33.5 W: 3cm H: 2.1cm  
 Dimmable DALI   
 Material Metal  
 Special Feature Fits Into E397  
**Code XSV160W48**



Power 240W  
 Input 220-240V, 50/60Hz  
 Output 48V  
 IP 67  
 Dimensions L: 38.5 W: 3cm H: 2.1cm  
 Dimmable DALI   
 Material Metal  
 Special Feature External Application  
**Code XSV240W48**

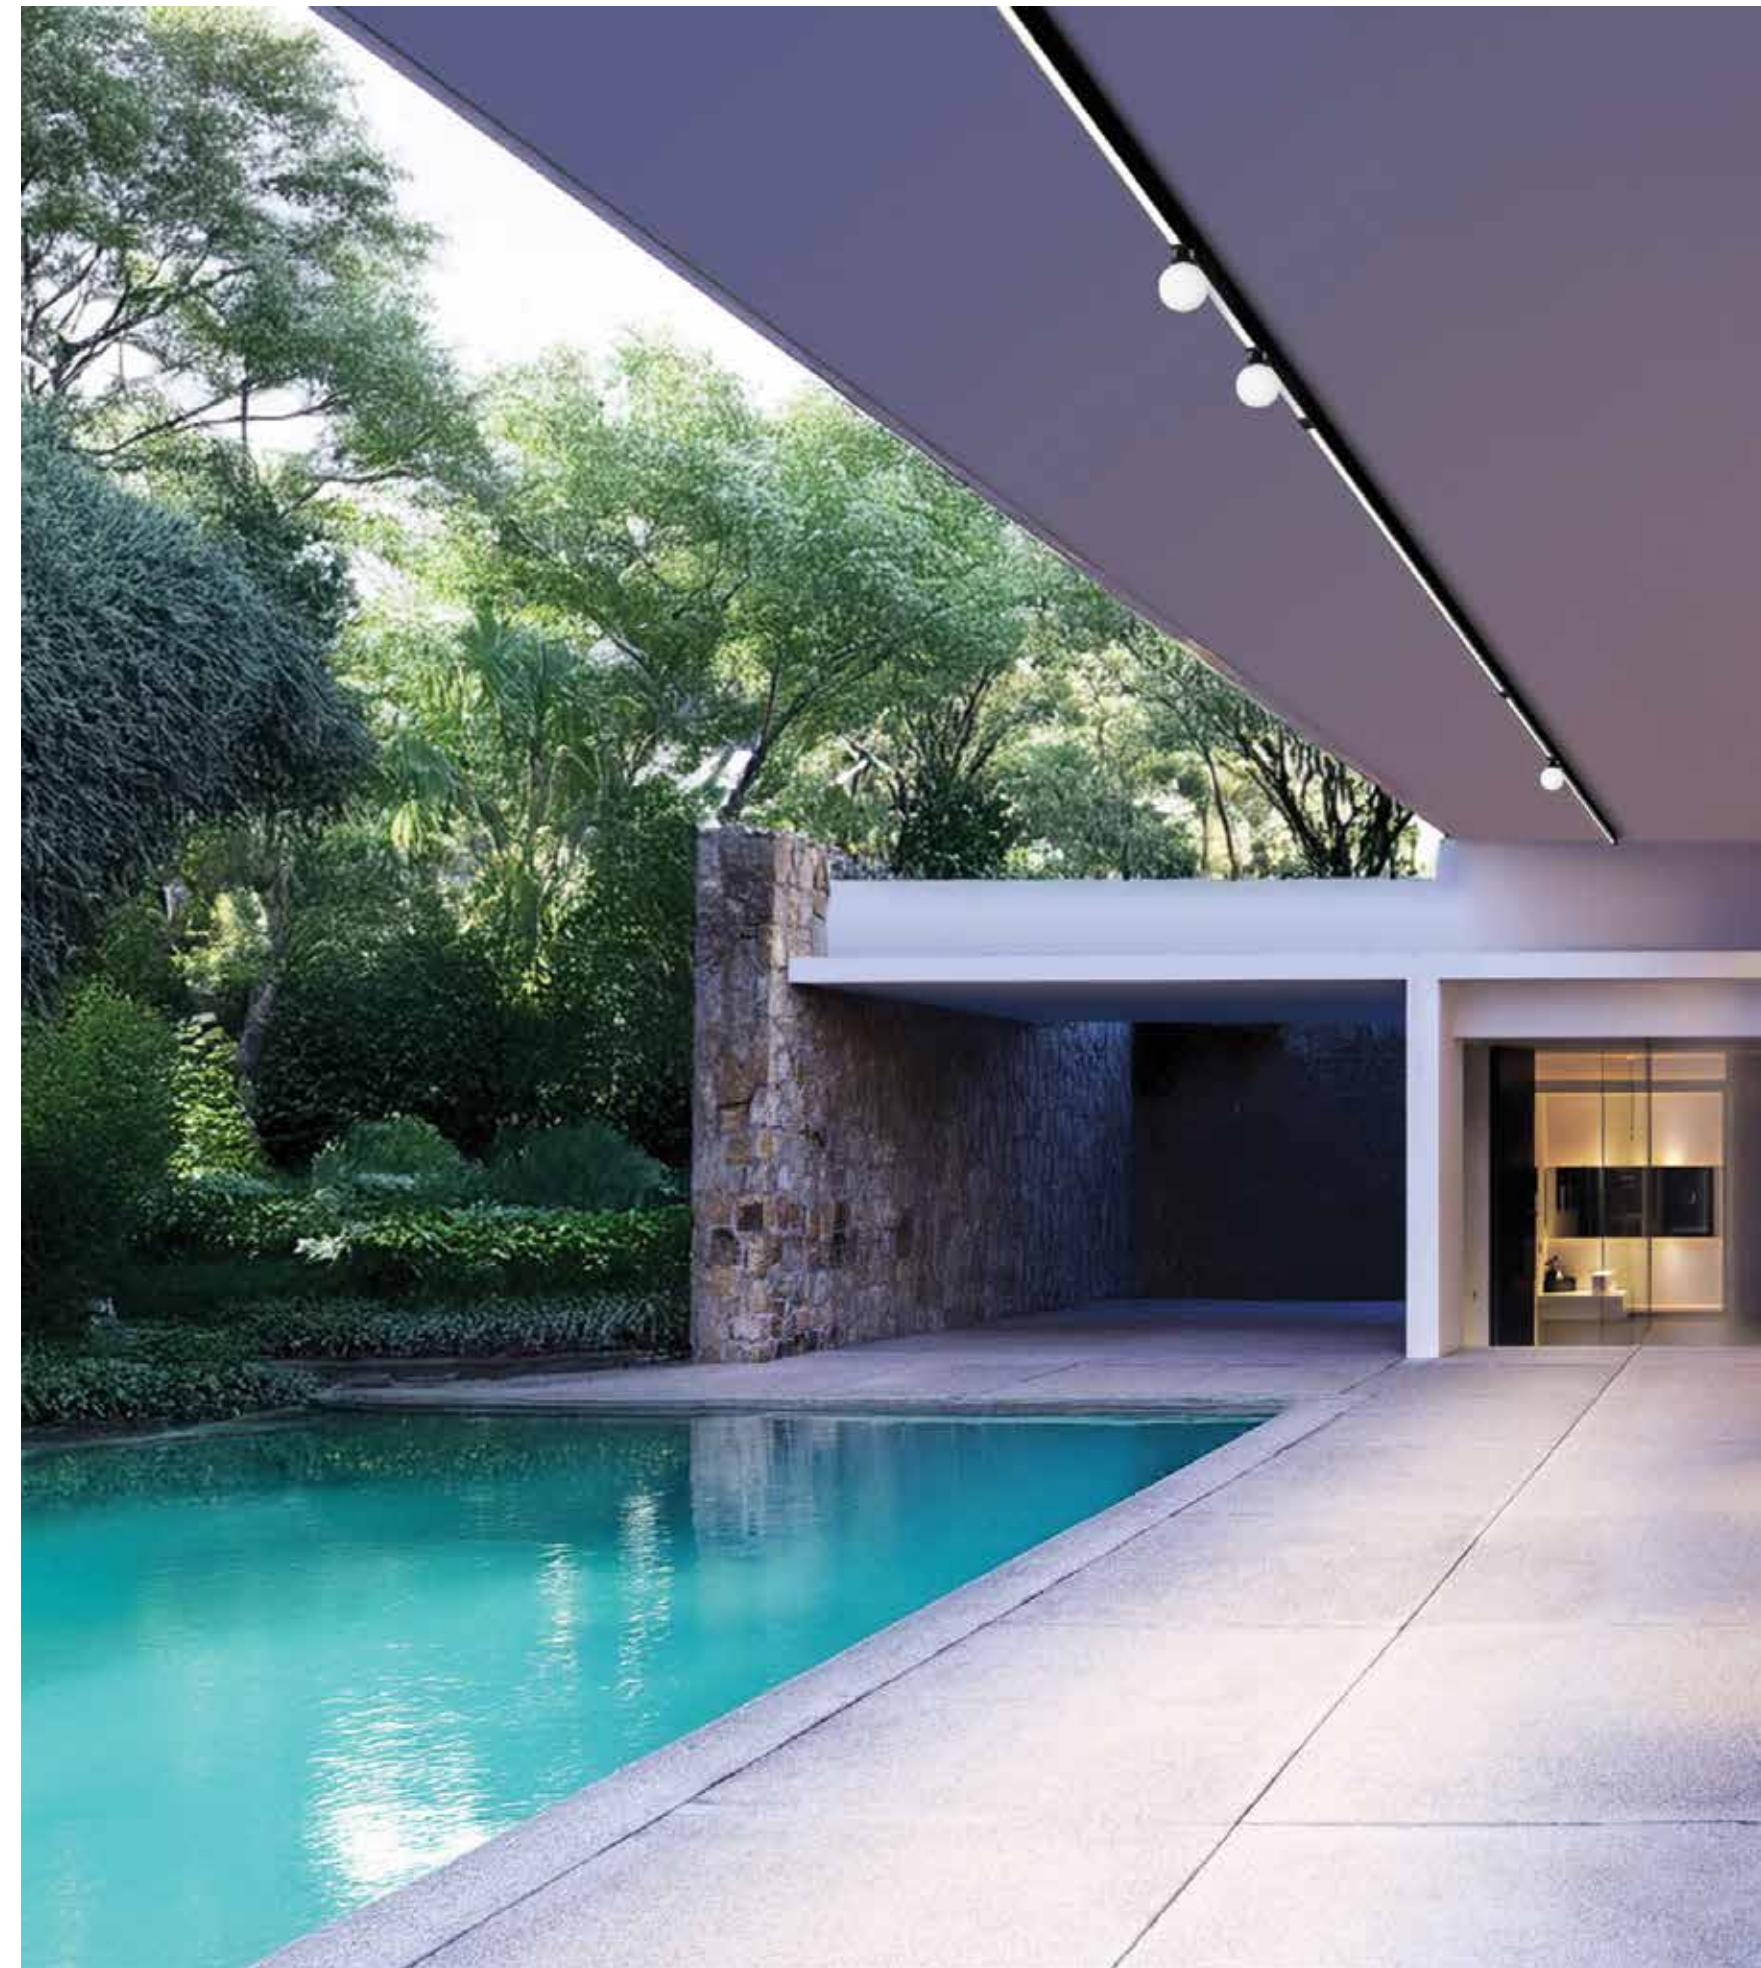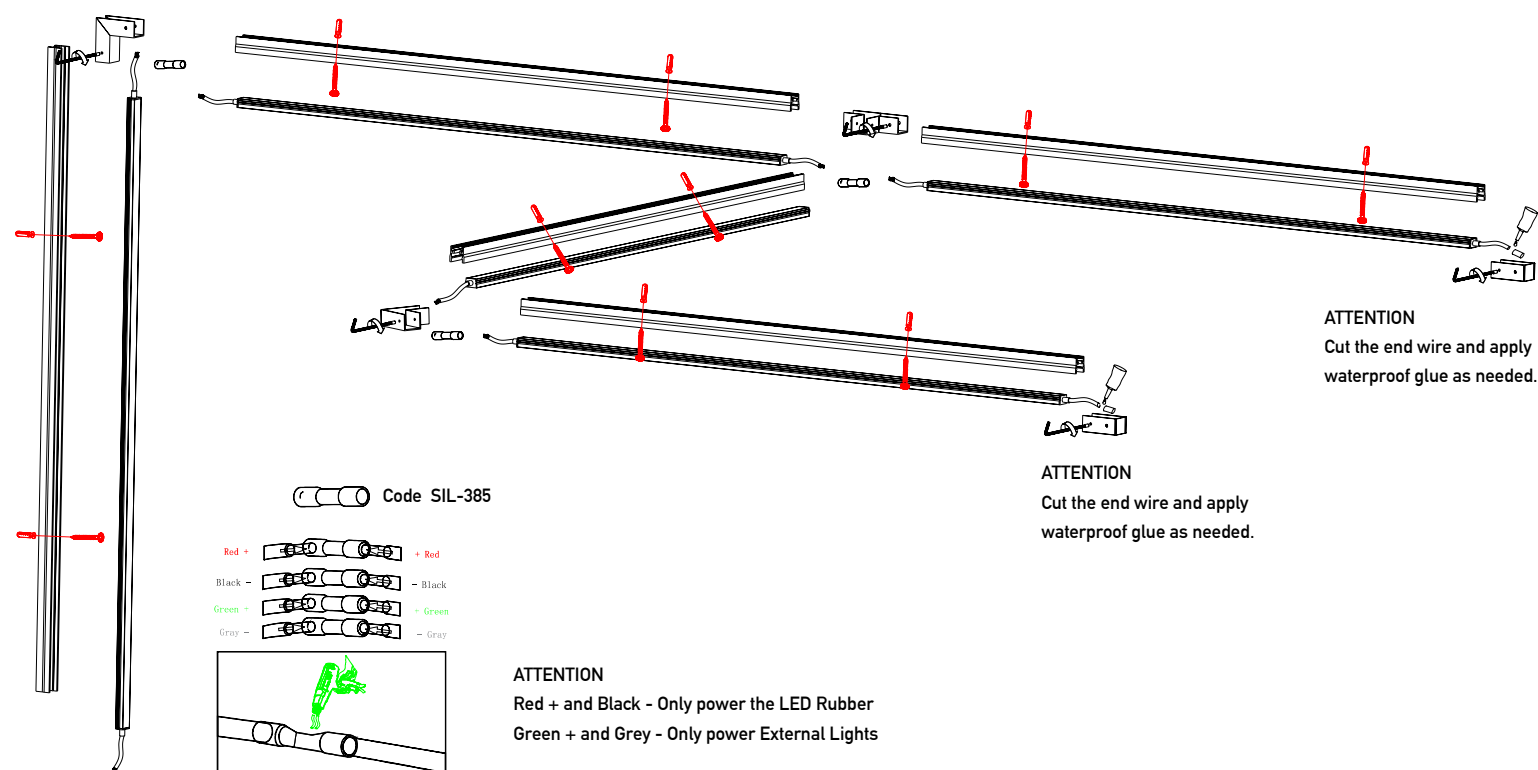

Power 30W  
 Input 220-240V, 50/60Hz  
 Output 24V  
 Dimensions W: 4.1cm H: 2.7cm L: 14.5cm  
 Non Dimmable ☒ On-Off  
 ELEMENT 30/220-240/24 G2  
 Material Plastic  
 Special Feature IP 20  
 Color White / **Code 4052899605503**



Power 60W  
 Input 220-240V, 50/60Hz  
 Output 24V  
 Dimensions W: 4.1cm H: 3.1cm L: 20.1cm  
 Non Dimmable ☒ On-Off  
 ELEMENT 60/220-240/24 G2  
 Material Plastic  
 Special Feature IP 20  
 Color White / **Code 4052899605527**



Power 180W  
 Input 220-240V, 50/60Hz  
 Output 24V  
 Dimensions W: 4cm H: 3.1cm L: 30cm  
 Non Dimmable ☒ On-Off  
 ELEMENT 180/220-240/24 G2  
 Material Plastic  
 Special Feature IP 20  
 Color White / **Code 4052899605565**



Power 30W  
 Input 220-240V, 50/60Hz  
 Output 24V  
 Dimensions W: 6.7cm H: 3cm L: 10.3cm  
 DALI Dimming ○ Push Button - DALI2  
 1 CHANNEL  
 Material Plastic  
 Special Feature IP 20  
 Color White / **Code 4062172329767**



Power 50W  
 Input 220-240V, 50/60Hz  
 Output 24V  
 Dimensions W: 3.2cm H: 2.2cm L: 34.6cm  
 DALI Dimming ○ Push Button - DALI2  
 1 CHANNEL  
 Material Plastic  
 Special Feature IP 20  
 Color White / **Code 4062172274340**



Power 80W  
 Input 220-240V, 50/60Hz  
 Output 24V  
 Dimensions W: 3.2cm H: 2.2cm L: 34.6cm  
 DALI Dimming ○ Push Button - DALI2  
 1 CHANNEL  
 Material Plastic  
 Special Feature IP 20  
 Color White / **Code 4062172274364**



Power 200W  
 Input 220-240V, 50/60Hz  
 Output 24V  
 Dimensions W: 6.3cm H: 3.6cm L: 20cm  
 Non Dimmable ☒ On-Off  
 Material Metal  
 Special Feature IP 67  
 Color White / **Code XLG-200**



Power 80W  
 Input 220-240V, 50/60Hz  
 Output 24V  
 Dimensions W: 3.2cm H: 2.2cm L: 34.6cm  
 DALI Dimming ○ Push Button - DALI2  
 4 CHANNEL  
 Material Plastic  
 Special Feature IP 20  
 Color White / **Code 4062172274302**




Power 100W  
 Input 220-240V, 50/60Hz  
 Output 24V  
 Dimensions W: 5cm H: 3cm L: 23cm  
 Dimmable Triac , 1-10 ○  
 Material Metal  
 Special Feature IP 20  
 Color Metal / **Code Z89100VND**



Power 288W @ 24V  
 Input 220-240V, 50/60Hz  
 Dimensions W: 2.9cm H: 2.2cm L: 18.6cm  
 Bluetooth Dimming ○  
 OT Wi DIM 5 CHANNEL CA  
 RGB, RGBW and RGBTW  
 Material Plastic  
 Special Feature IP 20  
 Color White / **Code 6937186115232**



Power 150W  
 Input 220-240V, 50/60Hz  
 Output 24V  
 Dimensions W: 5cm H: 3.1cm L: 26.2cm  
 DALI Dimming ○ Push Button - DALI2  
 1 CHANNEL  
 Material Metal  
 Special Feature IP 67  
 Color White / **Code AC-MS-150**

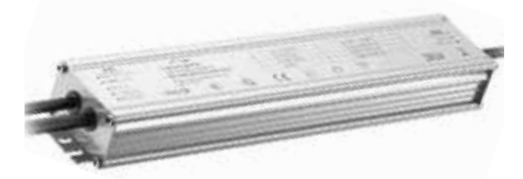

Input 220-240V, 50/60Hz  
 Dimensions W: 5cm H: 8cm L: 8cm  
 DALI Dimming ○  
 DALI MCU Tunable White Switch  
 Material Plastic  
 Special Feature IP 20  
 Color White / **Code 4052899465916**



Power 200W  
 Input 220-240V, 50/60Hz  
 Output 24V  
 Dimensions W: 5cm H: 3cm L: 28.7cm  
 Dimmable Triac , 1-10 ○  
 Material Metal  
 Special Feature IP 20  
 Color Metal / **Code Z89200VND**



Power 288W @ 24V  
 Input 220-240V, 50/60Hz  
 Dimensions W: 4.2cm H: 2cm L: 17.2cm  
 DMX Dimming ○  
 OT DMX DIM 5 CHANNEL  
 RGB, RGBW and RGBTW  
 Material Plastic  
 Special Feature IP 20  
 Color White / **Code 6977078993838**



E099	16	E238-W	164	E309	334	E367	147	E431	185	E490	20
E109	171	E239	164	E310	290	E368	108	E432	185	E494	253
E121	232	E239-W	164	E311	288	E369	24	E433	162	E495	368
E122	232	E240	164	E312	288	E370	24	E434	191	E496	366
E123	232	E240-W	164	E313	26	E371	24	E435	222	E497	367
E124	232	E241-G	313	E314	26	E374	376	E436	222	E498	370
E127	210	E241-W	313	E315	215	E375	376	E437	194	E499	370
E128	210	E242-G	312	E316	172	E376	376	E438	194	E500	211
E132	132	E242-W	314	E317	172	E377	376	E439	168	E501	384
E133	132	E243	214	E318	224	E378	375	E440	168	E502	342
E135	170	E246-G	317	E319	305	E379	375	E441	294	E503	342
E146	229	E246-W	317	E320	302	E380	375	E442	294	E504	344
E149	210	E247-G	316	E321	304	E381	375	E443	115	E505	344
E150	234	E247-W	316	E322	303	E382	372	E444	116	E506	345
E151	234	E249	138	E323	308	E383	51	E445	68	E507	345
E152	276	E253	48	E324	308	E384	51	E446	106	E508	348
E153	277	E254	48	E325	134	E385	380	E447	106	E509	348
E156	170	E261	228	E326	338	E386	382	E448	72	E510	347
E159	171	E262	228	E327	338	E387	382	E449	261	E511	347
E168	240	E265	230	E328	258	E388	382	E450	296	E518	102
E177-A	278	E266	230	E329	258	E389	381	E451	296	S112	332
E177-B	278	E267	202	E330	258	E390	380	E452	296	S113	332
E178	351	E268	200	E331	258	E391	381	E453	299	S131	330
E179	351	E269	336	E332	326	E392	380	E454	299	S131-4K	330
E180	351	E270	336	E333	326	E393	381	E455	299	S132	330
E181	320	E271	200	E334	113	E397	386	E456	254	S132-4K	330
E182	320	E272	221	E335	112	E398	30	E457	248	S133	331
E183	320	E273	219	E336	113	E399	30	E458	248	S134	331
E184	320	E274	218	E337	150	E400	30	E459	249	AC-MS-150	389
E185	238	E275	197	E338	74	E401	32	E460	249	SIL-385	386
E186	238	E276	122	E339	74	E402	32	E461	356	CNCTR 1	376
E187	322	E277	122	E340	332	E403	270	E462	356	CNCTR 2	375
E189	363	E278	220	E341	201	E404	270	E463	78	CNCTR 3	376
E190	56	E279	284	E342	197	E405	66	E464	206	CNCTR 4	379
E191	56	E280	286	E343	188	E406	65	E465	256	CNCTR 6	368
E192	56	E281	281	E344	125	E407	80	E466	87	CNCTR 7	370
E193	34	E282	281	E345	125	E408	83	E467	98	LPH-18-24	259
E194	34	E282-SP	281	E346	300	E409	84	E468	266	LPV-35-24	80
E195	214	E283	282	E347	300	E410	54	E469	266	V350-1050	270
E197	216	E284	275	E348	76	E411	54	E470	266	XLG-200	389
E199	217	E285	272	E349	268	E412	181	E471	266	XSV160W48	386
E201	192	E286	272	E350	268	E413	174	E472	264	XSV240W48	386
E202	192	E287	186	E351	143	E414	177	E473	264	Z0800-BA	279
E203	118	E289	29	E352	142	E415	178	E474	41	Z89100VND	389
E204	118	E290	29	E353	108	E416	206	E475	44	Z89200VND	389
E208	148	E291	29	E354	126	E417	206	E476	46	25280	20
E216	240	E294	310	E355	147	E418	100	E477	41	4052899465916	389
E217	290	E296	292	E356	144	E419	156	E478	40	4052899605503	388
E219	334	E297	104	E357	128	E420	156	E479	58	4052899605527	388
E220	334	E298	140	E358	130	E421	158	E480	53	4052899605565	388
E227	226	E300	306	E359	363	E422	158	E482	22	4062172166010	372
E229	318	E301	306	E360	360	E423	88	E483	22	4062172274302	389
E230	319	E302	121	E361	360	E424	92	E484	22	4062172274340	389
E235	152	E304	243	E362	358	E425	91	E485	16	4062172274364	388
E235-12D	152	E305	243	E363	358	E426	94	E486	16	4062172329767	388
E236	152	E306	237	E364	357	E428	160	E487	16	6937186115232	389
E237	138	E307	237	E365	352	E429	182	E488	20	6977078993838	389
E238	164	E308	334	E366	355	E430	182	E489	20		